

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: HALO

Report Number: P328504

Luminaire Tested: **L815SML05FL935MB**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P328504  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1905-290-5)  
Test Lab: INNOVATION CENTER(G3)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO  
Catalog Number: L815SML05FL935MB  
Description: Small, 500lm, 45D, 3500K, black finish  
Light Source: (1) 3500K CCT, 90 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 647.0 lumens  
Efficiency: N/A  
Efficacy: 95.1 lumens/watt  
Spacing Criteria (0/90/45): 0.71 / 0.71 / 0.68  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct


Input Watts (W): 6.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P328504

CATALOG NUMBER: L815SML05FL935MB

### Luminous Intensity Polar Plot

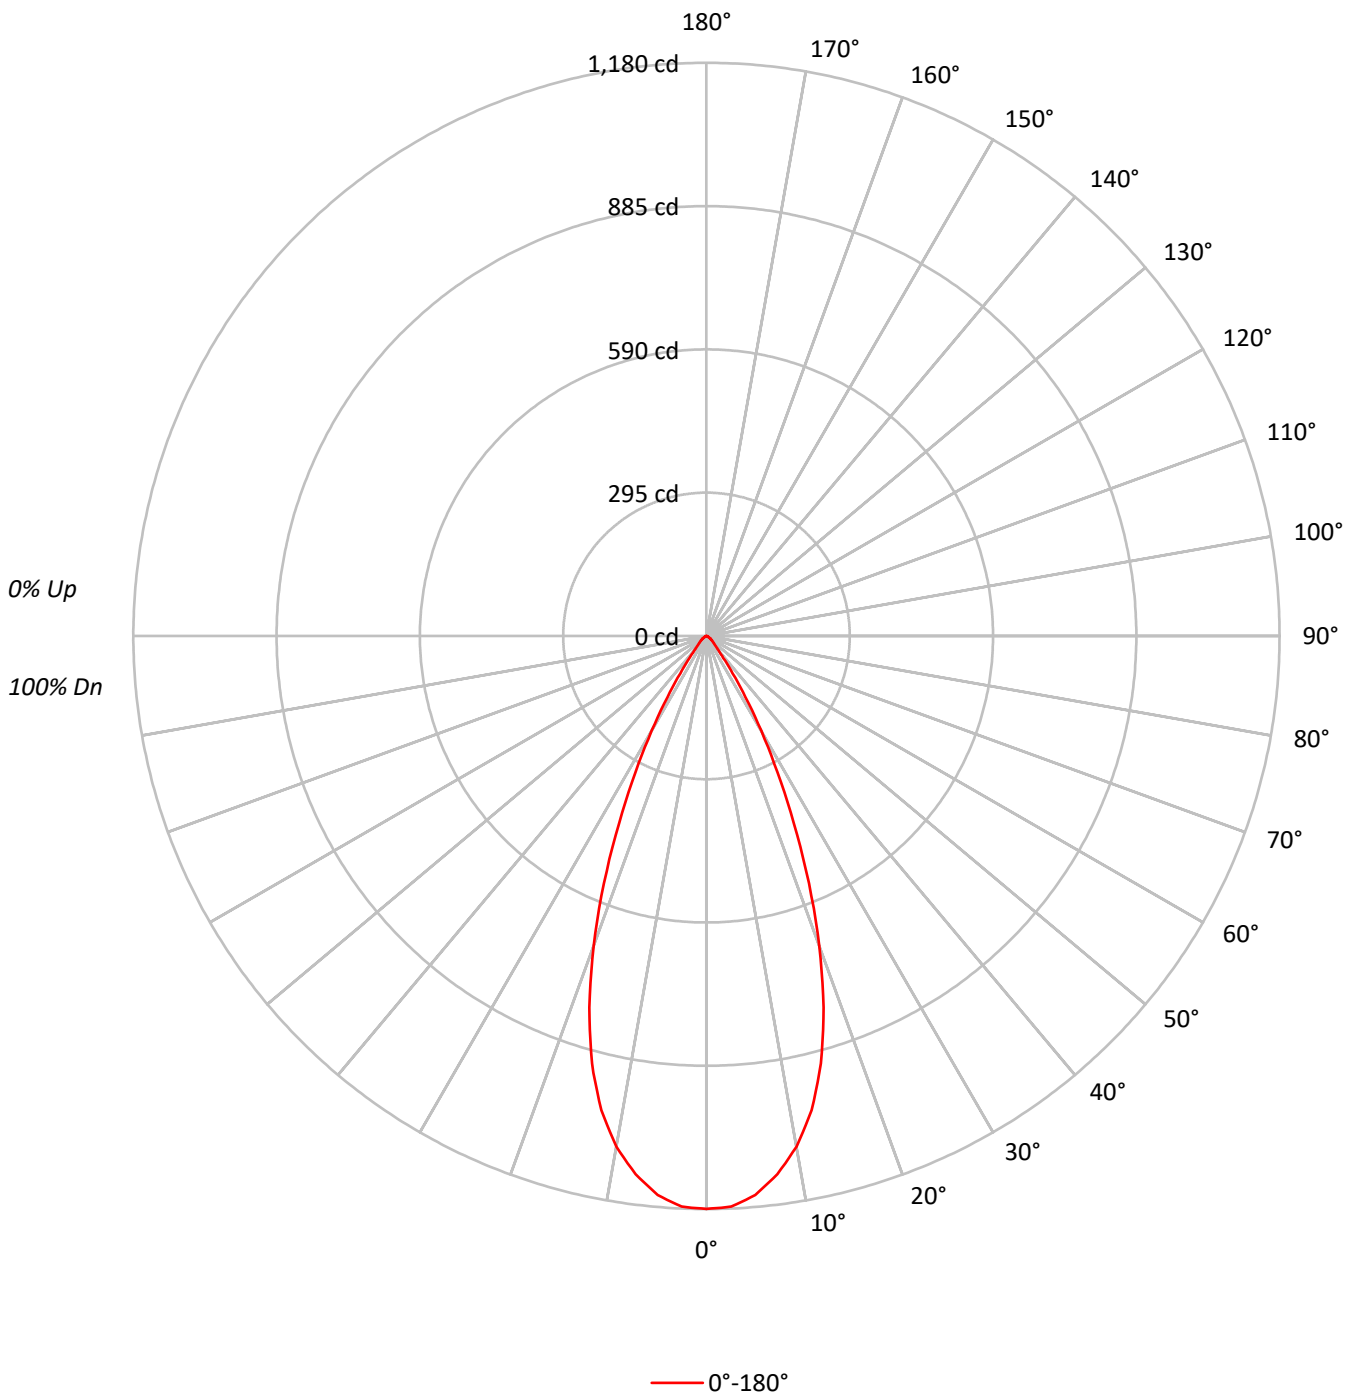



TEST NUMBER: P328504

CATALOG NUMBER: L815SML05FL935MB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	112	109	107	112	109	107	106	105	104	102		102	100	99		98	97	96	95
2	109	105	101	98	107	103	100	97	100	97	95		97	95	93		94	93	91	89
3	105	99	94	91	103	97	93	90	95	91	89		93	90	87		90	88	86	85
4	100	93	88	85	98	92	88	84	90	86	83		88	85	82		86	84	81	80
5	96	88	83	80	94	88	83	79	86	82	78		84	81	78		83	80	77	76
6	92	84	79	75	90	83	78	75	82	77	74		81	77	74		79	76	73	72
7	88	80	75	71	87	79	74	71	78	74	70		77	73	70		76	72	70	68
8	85	76	71	67	83	76	71	67	75	70	67		74	70	67		73	69	66	65
9	81	73	68	64	80	72	67	64	71	67	64		71	67	64		70	66	63	62
10	78	70	65	61	77	69	64	61	69	64	61		68	64	61		67	63	61	59

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	258663
5°	254259
10°	237738
15°	206834
20°	158494
25°	102756
30°	57072
35°	25163
40°	10677
45°	6853
50°	5185
55°	3708
60°	2368
65°	1401
70°	769
75°	339
80°	0
85°	0



TEST NUMBER: P328504

CATALOG NUMBER: L815SML05FL935MB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	107.4	16.6
10°-20°	248.5	38.4
20°-30°	195.5	30.2
30°-40°	65.4	10.1
40°-50°	18.1	2.8
50°-60°	8.7	1.3
60°-70°	2.9	0.4
70°-80°	0.5	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	551.5	85.2
0°-40°	616.9	95.3
0°-60°	643.6	99.5
0°-90°	647.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	647.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1180	
5°	1155	107
15°	911	249
25°	425	196
35°	94	65
45°	22	18
55°	10	9
65°	3	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P328504

CATALOG NUMBER: L815SML05FL935MB

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1179.6
2.5°	1176.1
5°	1155.1
7.5°	1117.5
10°	1067.7
12.5°	1000.1
15°	911.1
17.5°	802.0
20°	679.2
22.5°	551.3
25°	424.7
27.5°	315.5
30°	225.4
32.5°	149.2
35°	94.0
37.5°	56.3
40°	37.3
42.5°	28.0
45°	22.1
47.5°	18.3
50°	15.2
52.5°	12.0
55°	9.7
57.5°	7.0
60°	5.4
62.5°	3.9
65°	2.7
67.5°	1.9
70°	1.2
72.5°	0.8
75°	0.4
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)