

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: HALO

Report Number: P328537

Luminaire Tested: **L815SML10SP940MB**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P328537
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1905-290-7)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO
Catalog Number: L815SML10SP940MB
Description: Small, 1000lm, 15D, 4000K, black finish
Light Source: (1) 4000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1317.0 lumens
Efficiency: N/A
Efficacy: 103.7 lumens/watt
Spacing Criteria (0/90/45): 0.26 / 0.26 / 0.26
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P328537
CATALOG NUMBER: L815SML10SP940MB

Luminous Intensity Polar Plot

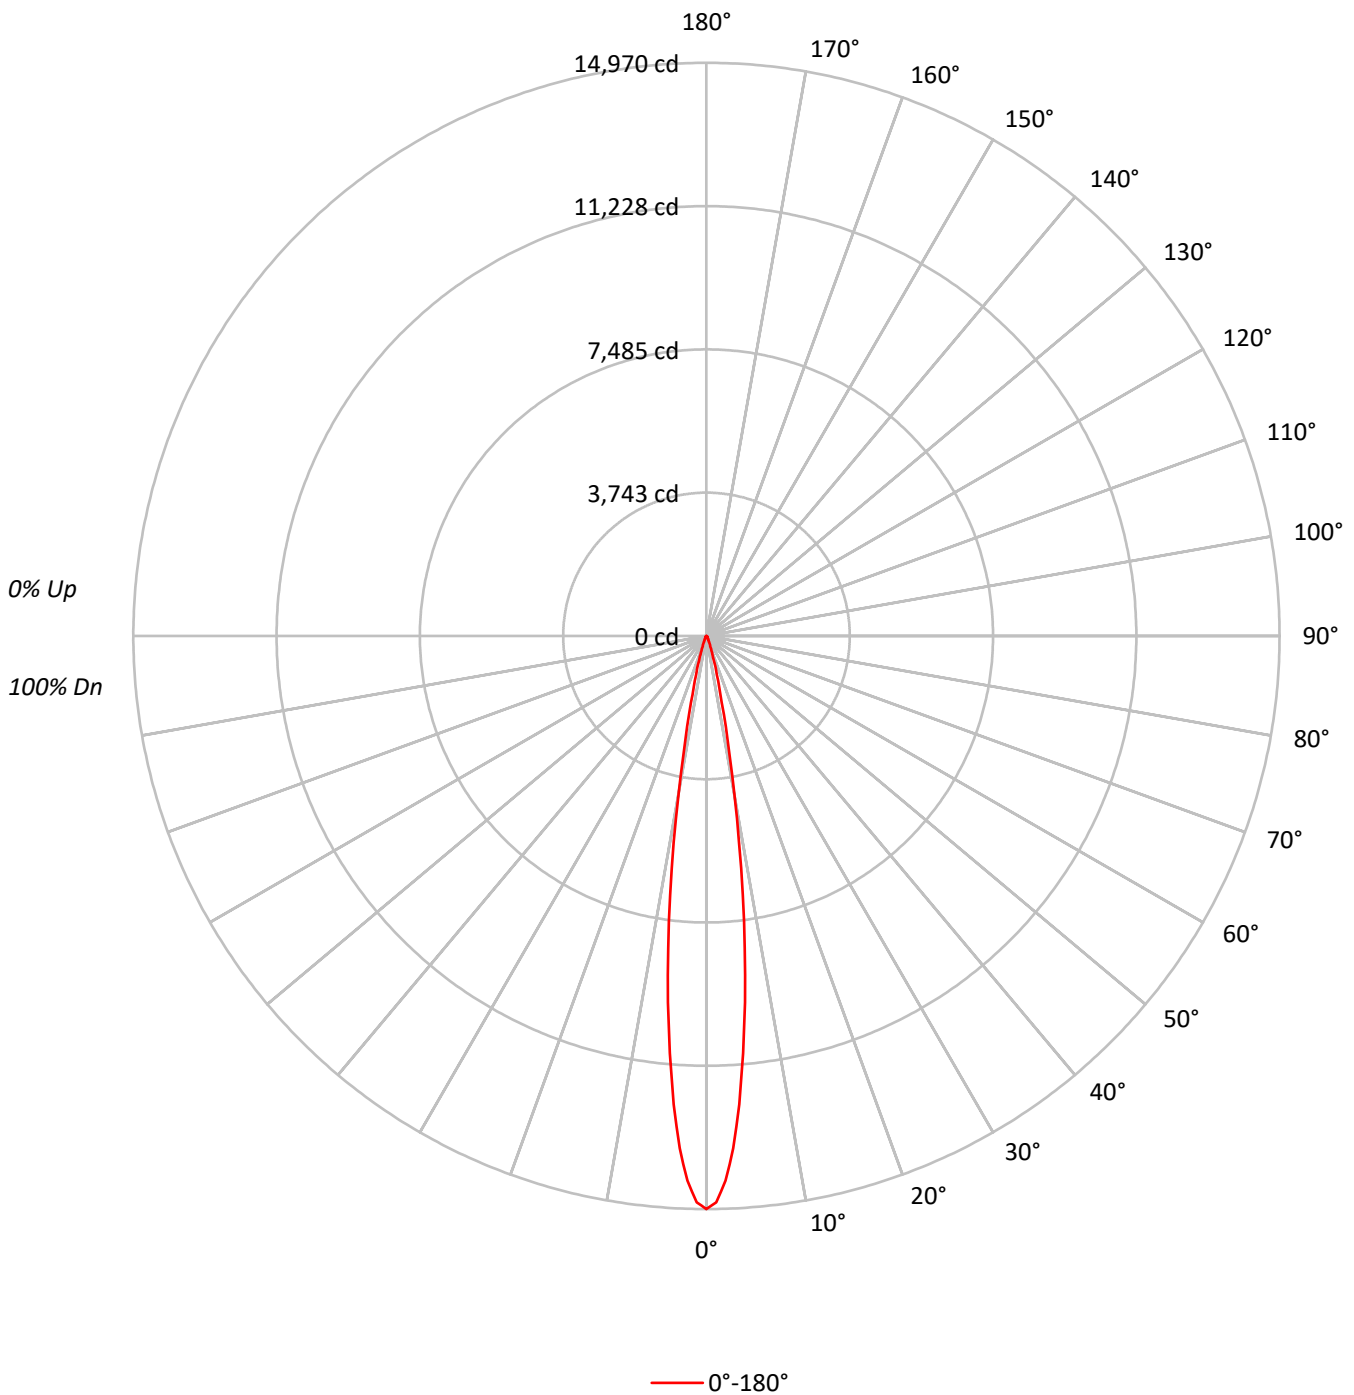



TEST NUMBER: P328537

CATALOG NUMBER: L815SML10SP940MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20							
RC	80				70				50				30				10							
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10				
RCR																								
0	119	119	119	119	116	116	116	116	111	111	111	111	106	106	106	106	102	102	102	102	100	100	100	100
1	116	114	112	111	113	112	110	109	108	107	106	106	104	103	102	102	101	100	99	99	98	98	98	98
2	112	109	107	105	110	108	105	103	105	103	101	101	102	100	99	99	99	98	97	97	96	96	96	96
3	110	106	103	100	108	104	102	99	102	100	98	98	100	98	96	96	98	96	95	95	94	94	94	94
4	107	103	99	97	106	102	98	96	100	97	95	95	98	96	94	94	96	94	93	93	92	92	92	92
5	105	100	96	94	103	99	96	94	98	95	93	93	96	94	92	92	95	93	91	91	90	90	90	90
6	103	98	94	92	102	97	94	91	96	93	91	91	94	92	90	90	93	91	90	90	89	89	89	89
7	101	95	92	90	100	95	92	89	94	91	89	89	93	90	89	89	92	90	88	88	87	87	87	87
8	99	94	90	88	98	93	90	88	92	90	88	88	92	89	87	87	91	89	87	87	86	86	86	86
9	97	92	89	87	97	92	89	86	91	88	86	86	90	88	86	86	90	87	86	86	85	85	85	85
10	96	90	87	85	95	90	87	85	90	87	85	85	89	87	85	85	88	86	85	85	84	84	84	84

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	3282588
5°	2408468
10°	939818
15°	238798
20°	72340
25°	29469
30°	17370
35°	12448
40°	10133
45°	8931
50°	8324
55°	7608
60°	2895
65°	2283
70°	1410
75°	0
80°	0
85°	0



TEST NUMBER: P328537

CATALOG NUMBER: L815SML10SP940MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	821.3	62.4
10°-20°	358.4	27.2
20°-30°	64.6	4.9
30°-40°	30.0	2.3
40°-50°	22.4	1.7
50°-60°	16.2	1.2
60°-70°	3.8	0.3
70°-80°	0.3	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1244.2	94.5
0°-40°	1274.2	96.8
0°-60°	1312.9	99.7
0°-90°	1317.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1317.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	14970	
5°	10942	821
15°	1052	358
25°	122	65
35°	46	30
45°	29	22
55°	20	16
65°	4	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P328537

CATALOG NUMBER: L815SML10SP940MB

CANDELA DISTRIBUTION (FULL):

	0°
0°	14969.8
1°	14792.6
2°	14236.8
3°	13397.5
4°	12270.3
5°	10941.7
6°	9626.3
7°	8211.2
8°	6829.4
9°	5449.8
10°	4220.8
11°	3191.0
12°	2416.0
13°	1782.6
14°	1361.9
15°	1051.9
17.5°	555.8
20°	310.0
22.5°	181.6
25°	121.8
27.5°	90.8
30°	68.6
32.5°	55.4
35°	46.5
37.5°	39.9
40°	35.4
42.5°	31.0
45°	28.8
47.5°	26.6
50°	24.4
52.5°	22.1
55°	19.9
57.5°	15.5
60°	6.6
62.5°	4.4
65°	4.4
67.5°	2.2
70°	2.2
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P328537

CATALOG NUMBER: L815SML10SP940MB

CANDELA DISTRIBUTION (continued):

90° | $\frac{0^\circ}{0.0}$

(END OF REPORT)