

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO

Report Number: P553833

Luminaire Tested: **L80925WF930MB**

Issue Date: 7/16/2021

Test Information

Test Method: LM-41-14
Report Number: P553833
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-226-5)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 7/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO
Catalog Number: L80925WF930MB
Description: WIDE FLOOD OPTIC
Light Source: 2500 LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2322.8 lumens
Efficiency: N/A
Efficacy: 105.6 lumens/watt
Spacing Criteria (0/90/45): 0.57 / 0.57 / 0.57
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct


Input Watts (W): 22
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P553833

CATALOG NUMBER: L80925WF930MB

Luminous Intensity Polar Plot

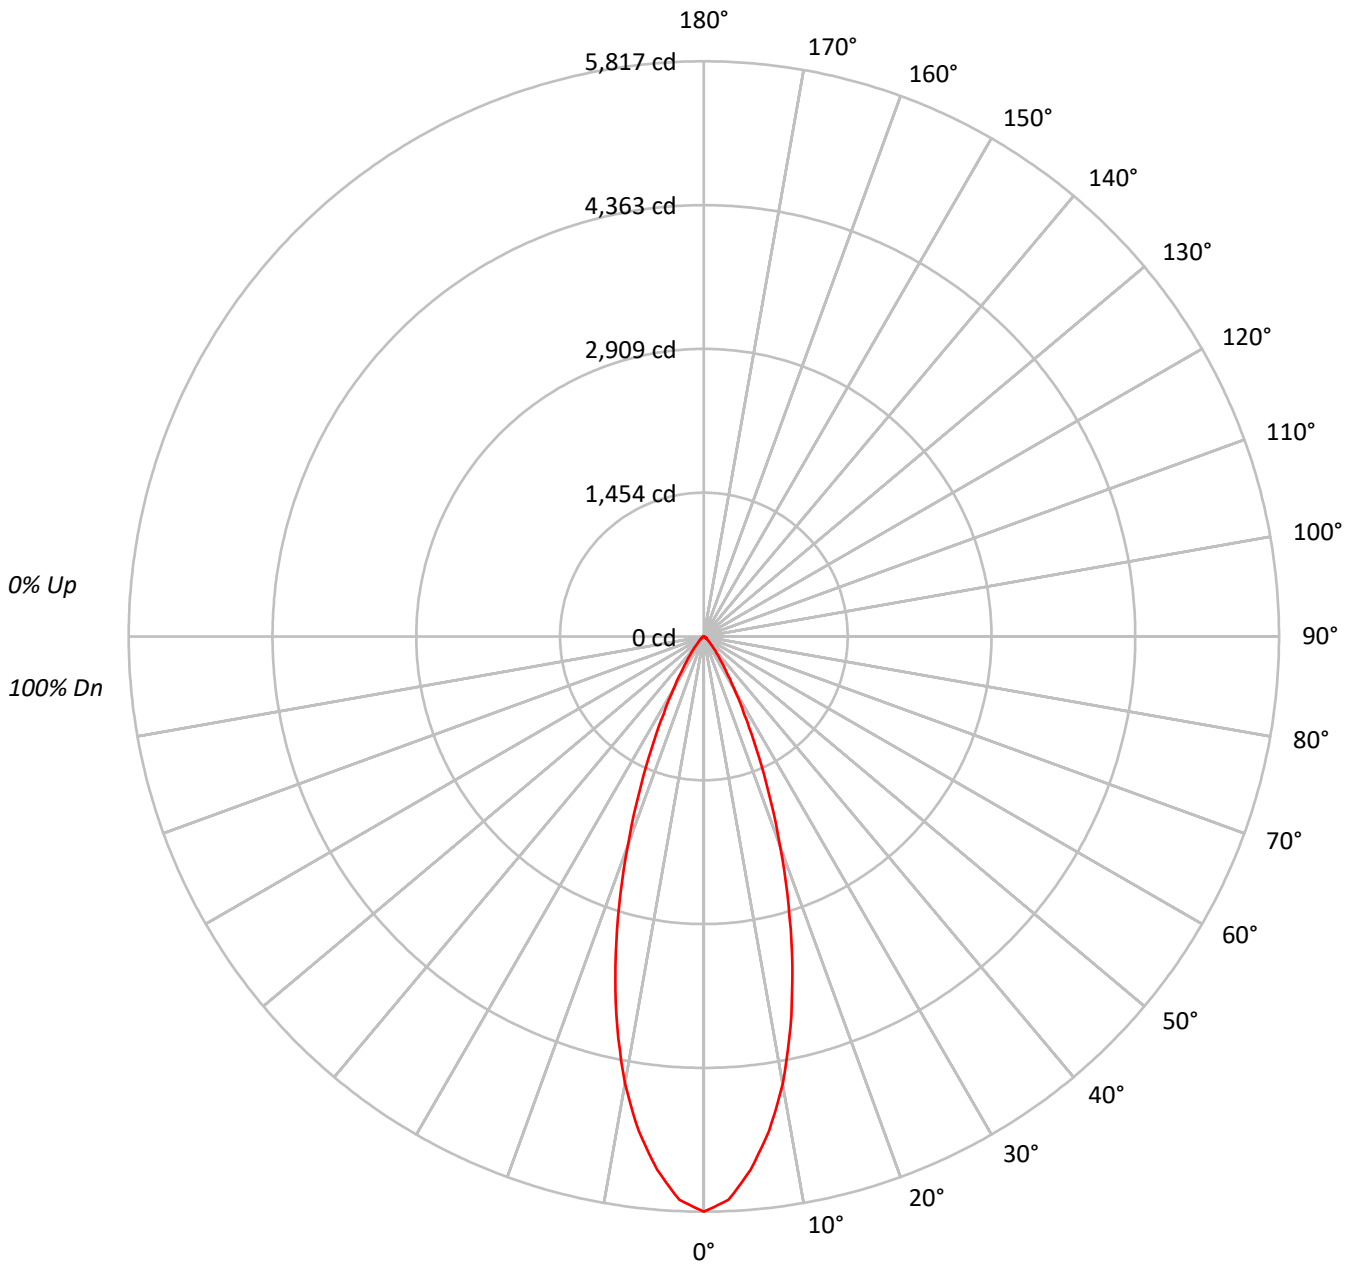



TEST NUMBER: P553833

CATALOG NUMBER: L80925WF930MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95			95
2	110	105	102	99	108	104	101	98	101	98	96	98	96	94	95	93	92	90			90
3	105	100	96	92	103	98	95	91	96	93	90	94	91	89	91	89	87	86			86
4	101	95	90	86	99	94	89	86	92	88	85	90	86	84	88	85	83	82			82
5	97	90	85	82	96	89	85	81	87	84	80	86	82	80	84	82	79	78			78
6	93	86	81	77	92	85	80	77	84	80	77	82	79	76	81	78	76	74			74
7	90	82	77	74	89	82	77	73	80	76	73	79	75	73	78	75	72	71			71
8	87	79	74	70	86	78	73	70	77	73	70	76	72	70	75	72	69	68			68
9	83	75	71	67	83	75	70	67	74	70	67	73	69	67	73	69	66	65			65
10	81	73	68	64	80	72	68	64	71	67	64	71	67	64	70	66	64	63			63

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1275512
5°	1191919
10°	1022626
15°	784681
20°	524812
25°	303017
30°	156024
35°	79157
40°	41850
45°	23165
50°	14157
55°	10169
60°	8026
65°	6901
70°	3206
75°	1440
80°	0
85°	0



TEST NUMBER: P553833

CATALOG NUMBER: L80925WF930MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	491.1	21.1
10°-20°	941.7	40.5
20°-30°	588.6	25.3
30°-40°	200.3	8.6
40°-50°	62.4	2.7
50°-60°	24.8	1.1
60°-70°	12.3	0.5
70°-80°	1.5	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2021.5	87.0
0°-40°	2221.8	95.7
0°-60°	2309.0	99.4
0°-90°	2322.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2322.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5817	
5°	5415	491
15°	3456	942
25°	1252	589
35°	296	200
45°	75	62
55°	27	25
65°	13	12
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P553833

CATALOG NUMBER: L80925WF930MB

CANDELA DISTRIBUTION (FULL):

	0°
0°	5816.8
2.5°	5702.2
5°	5414.9
7.5°	5044.5
10°	4592.7
12.5°	4047.9
15°	3456.5
17.5°	2845.3
20°	2249.0
22.5°	1712.5
25°	1252.4
27.5°	882.0
30°	616.2
32.5°	426.9
35°	295.7
37.5°	207.6
40°	146.2
42.5°	104.6
45°	74.7
47.5°	54.8
50°	41.5
52.5°	33.2
55°	26.6
57.5°	21.6
60°	18.3
62.5°	14.9
65°	13.3
67.5°	10.0
70°	5.0
72.5°	1.7
75°	1.7
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)