

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: HALO

Report Number: P22185-R2

Luminaire Tested: **L805MEDFL840**

Issue Date: 3/3/2020



**Test Information**

Test Method: LM-79-08  
Report Number: P22185-R2  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO  
Catalog Number: L805MEDFL840  
Description: \*\*\*THIS IS A REVISION OF P22185 TO UPDATE CATALOG  
NUMBER\*\*\*STASIS LED WITH (7) LEDS AND FLOOD OPTICS.  
Light Source: (7) 4000K SMT LEDS  
Ballast/Driver: -  
ELECTRONIC DRIVER


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1113.9 lumens  
Efficiency: N/A  
Efficacy: 64.8 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.58  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct

Input Watts (W): 17.2  
Input Voltage (V): NR  
Input Current (Ain): 0.14458  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: 3 HR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P22185-R2  
CATALOG NUMBER: L805MEDFL840

### Luminous Intensity Polar Plot

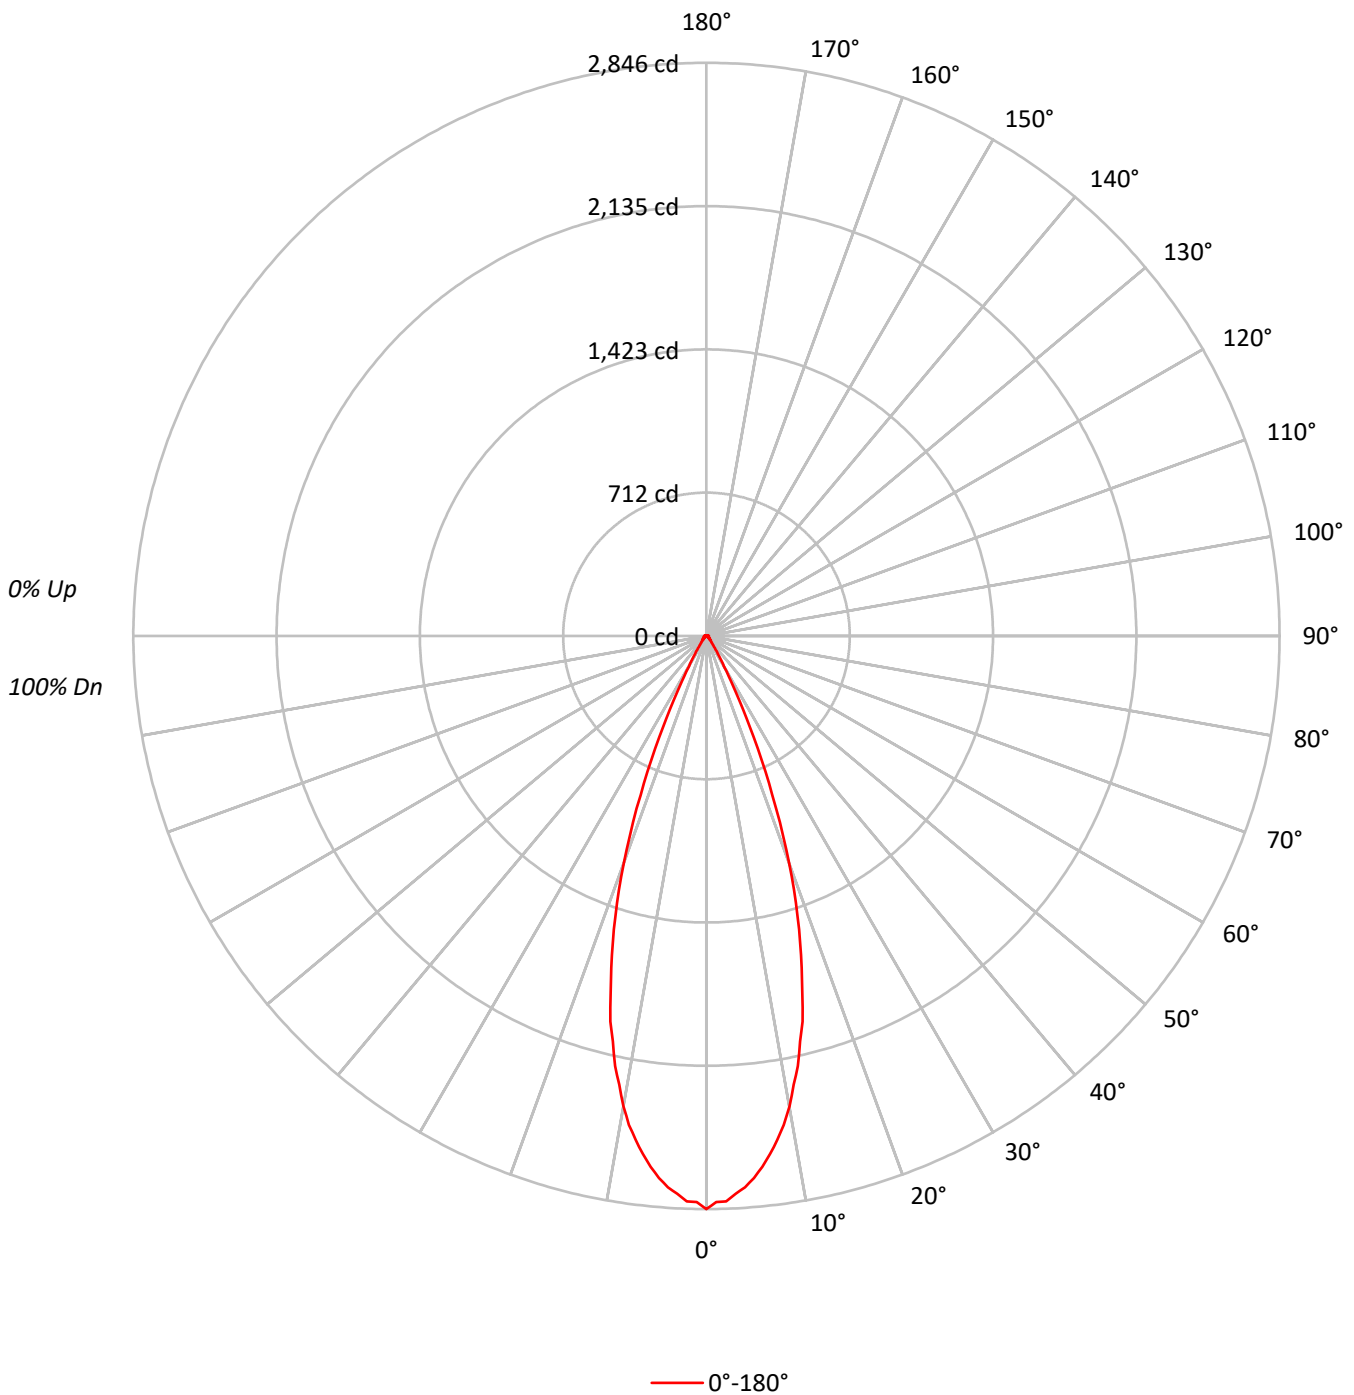



TEST NUMBER: P22185-R2

CATALOG NUMBER: L805MEDFL840

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	112	109	107	105	105	104	102		102	100	99		98	97	96	95
2	109	105	102	99	107	103	100	98	100	98	95		97	95	93		95	93	91	90
3	105	100	95	92	103	98	94	91	96	93	90		93	91	89		91	89	87	86
4	101	95	90	87	100	94	90	86	92	88	85		90	87	84		88	85	83	82
5	98	91	86	82	96	90	85	82	88	84	81		86	83	80		85	82	80	79
6	94	87	82	78	93	86	81	78	85	81	78		83	80	77		82	79	77	75
7	91	83	78	75	90	83	78	75	81	77	74		80	77	74		79	76	74	72
8	88	80	75	72	87	79	75	72	78	74	71		77	74	71		77	73	71	70
9	85	77	72	69	84	76	72	69	76	72	69		75	71	68		74	71	68	67
10	82	74	69	66	81	74	69	66	73	69	66		72	69	66		72	68	66	65

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	351042
5°	334553
10°	297089
15°	234834
20°	157908
25°	75398
30°	24782
35°	9938
40°	5797
45°	5233
50°	2303
55°	1505
60°	2960
65°	4086
70°	3246
75°	5242
80°	5683
85°	5661



TEST NUMBER: P22185-R2  
 CATALOG NUMBER: L805MEDFL840

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	247.4	22.2
10°-20°	499.0	44.8
20°-30°	264.3	23.7
30°-40°	48.6	4.4
40°-50°	16.4	1.5
50°-60°	12.3	1.1
60°-70°	9.3	0.8
70°-80°	8.1	0.7
80°-90°	8.5	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1010.8	90.7
0°-40°	1059.4	95.1
0°-60°	1088.1	97.7
0°-90°	1113.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1113.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2846	
5°	2702	247
15°	1839	499
25°	554	264
35°	66	49
45°	30	16
55°	7	12
65°	14	9
75°	11	8
85°	4	8
90°	0	



TEST NUMBER: P22185-R2

CATALOG NUMBER: L805MEDFL840

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2846
1°	2811
2°	2809
3°	2773
4°	2744
5°	2702
6°	2650
7°	2592
8°	2526
9°	2458
10°	2372
11°	2270
12°	2184
13°	2067
14°	1973
15°	1839
17.5°	1528
20°	1203
22.5°	855
25°	554
27.5°	310
30°	174
32.5°	105
35°	66
37.5°	44
40°	36
42.5°	21
45°	30
47.5°	11
50°	12
52.5°	22
55°	7
57.5°	14
60°	12
62.5°	7
65°	14
67.5°	6
70°	9
72.5°	1
75°	11
77.5°	10
80°	8
82.5°	11
85°	4
87.5°	12



TEST NUMBER: P22185-R2  
CATALOG NUMBER: L805MEDFL840

CANDELA DISTRIBUTION (continued):

90° |  $\frac{0^\circ}{0}$

(END OF REPORT)