

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: INVUE

Report Number: P147690

Luminaire Tested: **VXS-E02-LED-E1-5WQ**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P147690
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (P33675)
Test Lab: INNOVATION CENTER-P3
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: INVUE
Catalog Number: VXS-E02-LED-E1-5WQ
Description: VISION SITE SMALL LED LUMINAIRE
(2) LIGHTBARS WITH AccuLED OPTICS - TYPE 5 SQUARE WIDE
Light Source: (42) 4000K CCT, 70 CRI LEDs
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6367.6 lumens
Efficiency: N/A
Efficacy: 122.2 lumens/watt
Luminous Opening: Rectangular (W 0.33' x L: 1' x H: 0')
IES Classification: Type V - Short - Semi-Cutoff
BUG Rating: B3 - U0 - G1

Input Watts (W): 52.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT




REPORT NUMBER: P147690

CATALOG NUMBER: VXS-E02-LED-E1-5WQ

Iso-Footcandle Lines of Horizontal Illumination

× Max cd

--- 1/2 Max cd

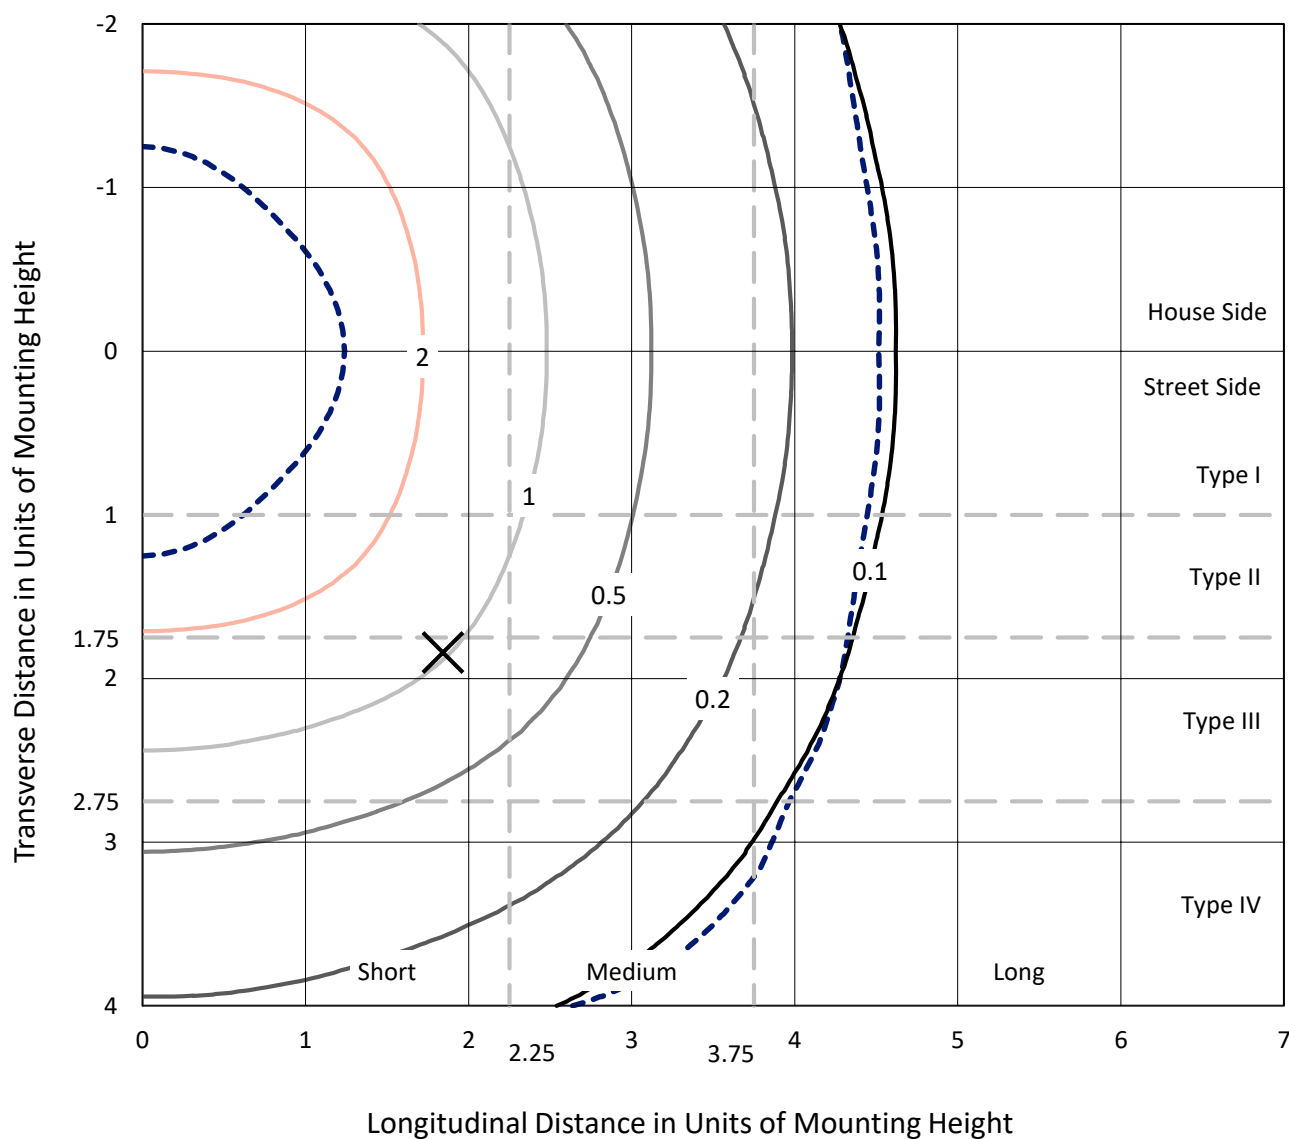


Based on 10 foot mounting height. Maximum calculated value = 3.8 fc
 Type V - Short - Semi-Cutoff

REPORT NUMBER: P147690

CATALOG NUMBER: VXS-E02-LED-E1-5WQ

Luminous Intensity Polar Plot

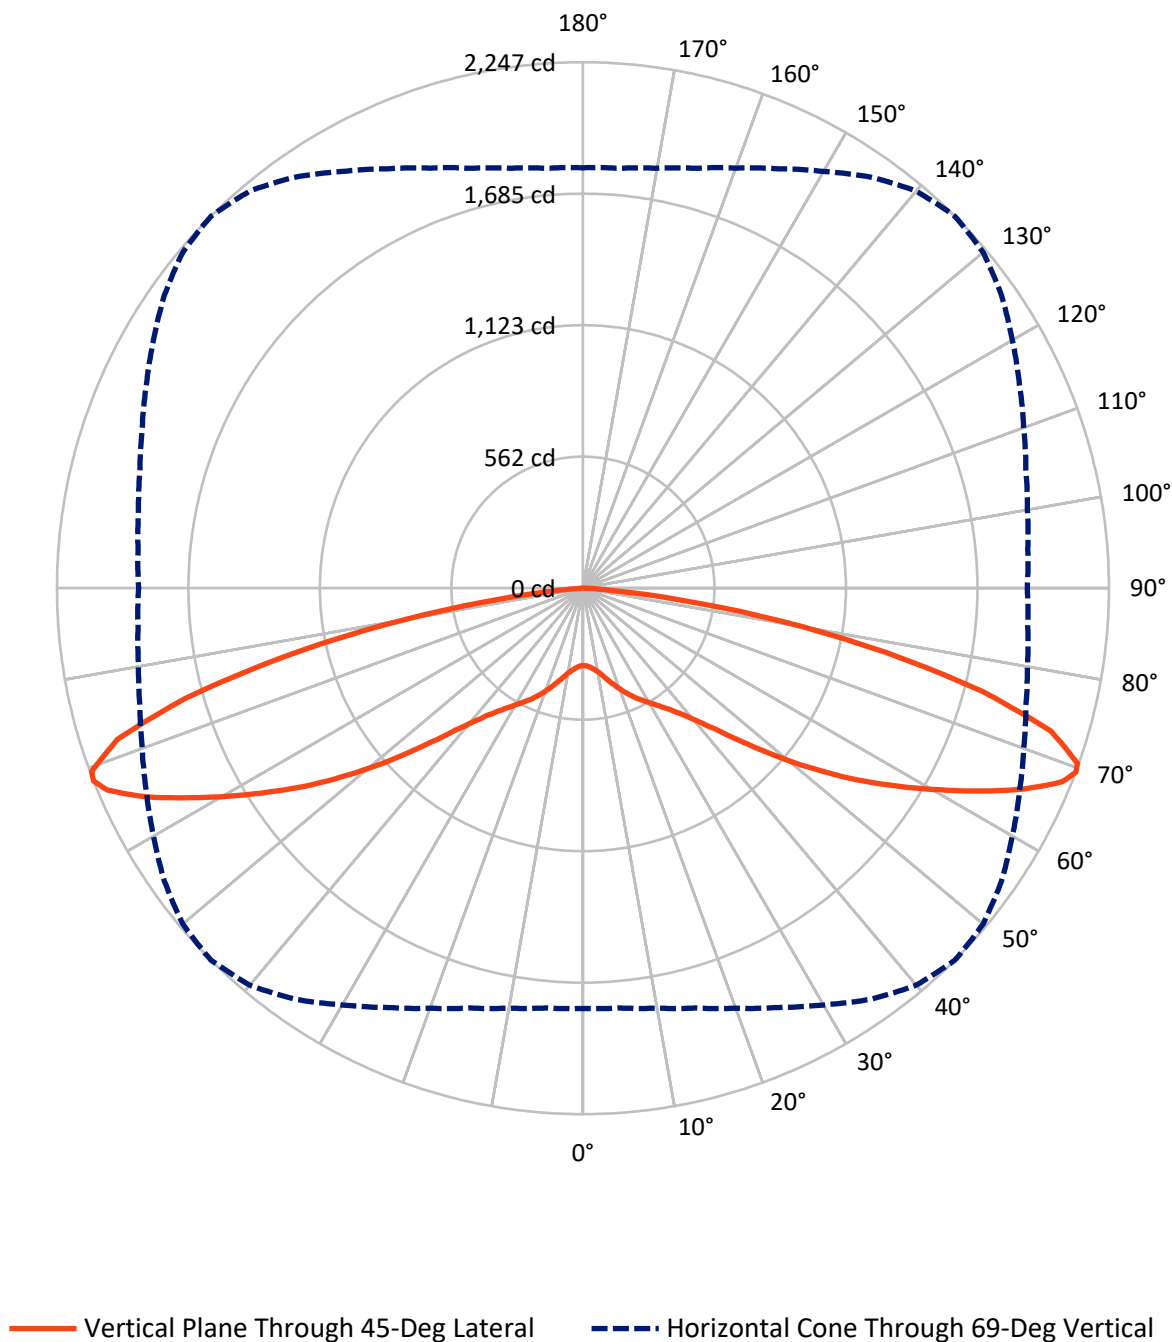

REPORT NUMBER: P147690

CATALOG NUMBER: VXS-E02-LED-E1-5WQ


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	3183.8	0.0	3183.8
	% Fixture	50.0	0.0	50.0
Street Side	Lumens	3183.8	0.0	3183.8
	% Fixture	50.0	0.0	50.0
Total	Lumens	6367.6	0.0	6367.6
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	33.2	0.5
10°-20°	117.2	1.8
20°-30°	237.4	3.7
30°-40°	398.0	6.3
40°-50°	702.1	11.0
50°-60°	1238.1	19.4
60°-70°	1890.3	29.7
70°-80°	1579.5	24.8
80°-90°	171.6	2.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	6367.6	100.0
0°-180°	6367.6	100.0

Coefficient of Utilization

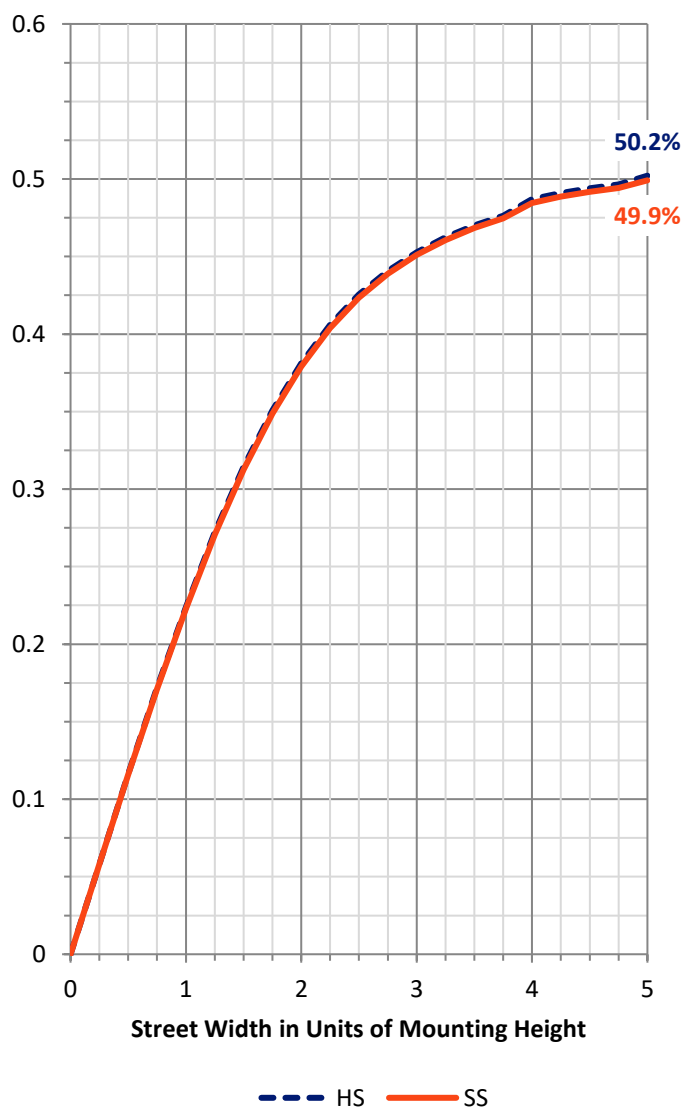

REPORT NUMBER: P147690


CATALOG NUMBER: VXS-E02-LED-E1-5WQ

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	193.9	3.0			
FM	(30°-60°)	1169.1	18.4			
FH	(60°-80°)	1734.9	27.2			G1/1800
FVH	(80°-90°)	85.8	1.3			G1/100
BL	(0°-30°)	193.9	3.0	B1/500		
BM	(30°-60°)	1169.1	18.4	B2/2500		
BH	(60°-80°)	1734.9	27.2	B3/2500		G1/1800
BVH	(80°-90°)	85.8	1.3			G1/100
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B3-U0-G1

Type V Short

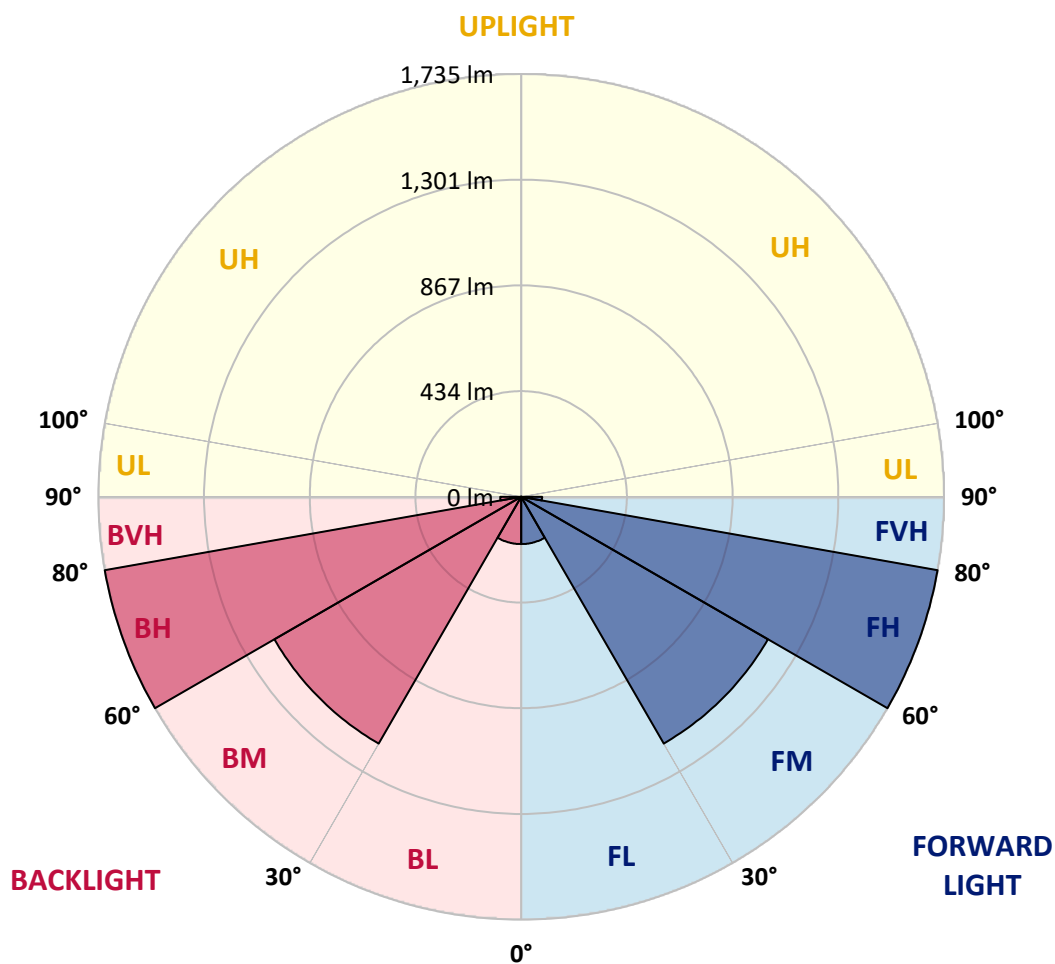

REPORT NUMBER: P147690

CATALOG NUMBER: VXS-E02-LED-E1-5WQ

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	330.7	330.7	330.7	330.7	330.7	330.7	330.7	330.7	330.7	330.7	330.7
2.5°	333.4	334.0	333.4	333.4	333.4	333.4	333.4	332.6	332.6	332.6	333.4
5°	340.0	340.6	340.0	340.6	340.6	340.6	340.6	340.0	340.0	340.0	340.0
7.5°	350.7	350.7	350.7	351.3	350.7	350.7	351.3	350.7	350.7	350.7	350.7
10°	366.0	365.3	365.3	365.3	365.3	365.3	366.0	366.0	366.0	365.3	365.3
12.5°	384.7	384.0	384.7	384.7	385.3	385.3	385.3	385.3	385.3	385.3	384.7
15°	407.4	407.4	407.4	408.0	409.3	409.3	408.7	409.3	409.3	409.3	409.3
17.5°	432.6	434.0	432.6	433.4	434.0	433.4	434.7	435.3	436.0	435.3	433.4
20°	458.7	459.4	459.4	459.4	459.4	460.6	461.3	461.3	463.3	462.7	462.0
22.5°	483.3	484.7	484.7	485.3	485.3	487.4	487.4	487.4	488.7	489.9	488.7
25°	509.3	508.7	508.7	510.1	510.7	513.4	513.4	514.7	516.7	517.3	516.0
27.5°	532.6	532.0	532.0	534.0	534.7	538.0	538.0	540.6	542.0	542.7	541.3
30°	557.3	557.3	556.7	558.7	560.6	563.3	564.7	567.4	569.3	569.9	568.7
32.5°	586.6	585.3	586.0	587.4	588.7	591.3	593.4	596.7	599.4	600.0	598.7
35°	620.0	618.0	618.7	620.0	622.0	626.0	629.3	631.3	635.3	636.7	634.0
37.5°	656.7	657.3	656.7	660.0	663.3	668.0	672.0	674.7	678.7	680.6	678.7
40°	708.7	706.6	708.7	712.0	717.3	723.3	731.3	733.4	737.3	741.3	736.7
42.5°	776.0	774.7	779.4	782.0	788.0	794.7	804.7	809.9	816.0	818.7	814.7
45°	864.0	864.0	869.3	870.1	879.4	888.0	902.0	908.7	920.0	920.0	920.0
47.5°	961.3	965.3	968.7	975.3	982.0	998.0	1012.0	1026.6	1037.3	1038.7	1036.7
50°	1062.0	1066.0	1076.0	1085.3	1100.0	1120.0	1135.3	1154.7	1164.0	1172.0	1169.3
52.5°	1173.4	1174.0	1186.0	1198.0	1219.4	1241.3	1266.0	1286.0	1302.7	1309.9	1304.0
55°	1295.3	1296.7	1307.4	1320.0	1344.0	1369.3	1400.0	1420.6	1442.0	1455.3	1445.3
57.5°	1427.4	1428.0	1438.7	1454.0	1482.7	1508.0	1537.3	1566.6	1586.6	1598.7	1592.0
60°	1573.4	1576.7	1584.7	1604.0	1631.3	1658.0	1687.4	1713.4	1736.7	1749.3	1742.7
62.5°	1729.3	1732.6	1744.0	1759.4	1783.3	1812.6	1840.6	1874.0	1893.4	1907.4	1897.3
65°	1834.0	1840.0	1858.0	1878.7	1914.0	1952.0	1984.7	2030.1	2053.4	2070.1	2060.6
67.5°	1840.6	1844.0	1866.0	1897.3	1944.7	2002.0	2068.7	2139.4	2185.3	2207.4	2191.3
69°	1795.3	1800.0	1821.3	1856.7	1909.3	1976.0	2055.3	2143.3	2214.0	2246.6	2231.3
70°	1744.0	1754.0	1777.3	1816.0	1867.4	1937.3	2019.4	2113.4	2196.0	2240.6	2229.3
72.5°	1636.0	1638.7	1654.0	1684.7	1724.0	1782.0	1859.4	1948.0	2026.6	2090.7	2100.0
75°	1452.0	1460.6	1472.0	1492.6	1512.6	1554.7	1606.6	1667.4	1713.4	1762.7	1764.7
77.5°	1097.3	1123.3	1132.0	1136.7	1145.3	1178.7	1224.0	1276.7	1314.7	1322.7	1321.3
80°	492.6	527.4	535.3	573.4	596.7	652.0	721.3	802.0	856.0	862.0	847.4
82.5°	96.7	103.3	120.6	150.7	205.3	238.0	283.3	340.0	392.0	422.0	404.0
85°	32.0	34.0	39.4	43.3	49.9	56.7	68.7	85.3	106.0	117.3	104.7
87.5°	12.6	12.6	14.7	16.0	17.3	17.3	17.3	16.0	15.3	12.6	11.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P147690

CATALOG NUMBER: VXS-E02-LED-E1-5WQ

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	330.7	330.7	330.7	330.7	330.7	330.7	330.7	330.7
2.5°	332.6	332.6	332.6	332.6	332.6	332.6	332.6	332.6
5°	340.0	339.4	339.4	338.7	338.7	338.7	338.7	338.7
7.5°	350.1	349.3	348.7	349.3	348.7	348.7	348.7	348.7
10°	365.3	364.0	363.3	362.7	362.7	362.7	362.0	362.0
12.5°	383.3	383.3	382.7	382.0	380.6	381.3	380.6	379.4
15°	408.0	406.6	406.0	405.3	404.0	404.0	404.0	403.3
17.5°	432.6	431.3	431.3	429.3	428.7	428.7	428.7	429.3
20°	460.0	458.0	456.7	455.3	454.0	454.7	453.4	454.7
22.5°	487.4	484.7	483.3	481.3	479.4	479.4	478.7	477.3
25°	514.0	510.7	509.3	507.4	504.7	504.7	503.3	502.0
27.5°	539.4	536.0	534.7	530.7	528.0	527.4	526.0	525.3
30°	567.4	563.3	561.3	557.3	553.4	552.6	550.7	550.7
32.5°	596.7	592.6	591.3	585.3	582.0	582.0	580.6	579.4
35°	633.4	627.4	626.0	620.0	615.3	615.3	614.0	614.7
37.5°	676.7	672.0	667.4	662.7	657.3	656.7	655.3	654.0
40°	734.7	729.3	724.0	717.3	712.6	711.3	709.3	708.7
42.5°	812.0	806.6	796.0	790.7	786.0	782.0	781.3	780.6
45°	910.7	904.0	896.7	886.6	880.6	872.0	870.7	867.4
47.5°	1029.3	1016.7	1004.0	995.3	986.0	976.0	974.0	968.7
50°	1155.3	1145.3	1124.0	1109.9	1095.3	1085.3	1078.7	1076.7
52.5°	1290.7	1272.0	1250.7	1232.0	1210.7	1197.3	1185.3	1182.0
55°	1432.0	1405.3	1378.7	1356.7	1335.3	1319.4	1308.0	1302.7
57.5°	1573.4	1544.0	1514.7	1490.7	1472.6	1452.0	1440.6	1438.0
60°	1720.6	1692.6	1662.7	1638.7	1616.7	1598.7	1592.0	1579.4
62.5°	1876.7	1847.4	1819.4	1796.0	1768.0	1755.3	1744.0	1736.7
65°	2030.1	1996.0	1960.6	1936.0	1908.0	1889.9	1876.0	1866.0
67.5°	2148.7	2097.3	2049.9	2008.7	1970.7	1942.7	1924.7	1915.3
69°	2182.0	2118.0	2057.3	2003.3	1958.7	1927.4	1907.4	1898.0
70°	2178.0	2107.4	2040.6	1981.3	1932.6	1899.4	1880.0	1862.7
72.5°	2054.7	1990.1	1916.0	1851.3	1807.4	1775.3	1756.0	1746.6
75°	1753.4	1710.1	1656.7	1606.6	1574.7	1556.0	1532.0	1532.6
77.5°	1276.7	1278.0	1242.0	1190.7	1154.7	1148.0	1137.3	1126.6
80°	792.0	728.7	687.4	632.0	591.3	556.0	540.6	507.4
82.5°	365.3	285.3	221.3	167.4	128.7	100.6	88.0	72.0
85°	81.3	62.0	51.3	41.3	35.3	32.6	26.6	24.7
87.5°	11.3	9.9	9.3	8.7	7.4	5.3	4.0	3.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)