

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: INVUE

Report Number: P869187

Luminaire Tested: **EMM2-HTN-SA2A-AMB-U-T1**

Issue Date: 08/22/2024



**Test Information**

Test Method: LM-79-08  
Report Number: P869187  
Test Lab: INNOVATION CENTER(G3)  
Issue Date: 08/22/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: INVUE  
Catalog Number: EMM2-HTN-SA2A-AMB-U-T1  
Description: EPIC MODERN TALL HOUSING DISCRETE LED ARRAYS 30W 0CRI 1540K FIXTURE  
w/ TYPE 1 DISTRIBUTION OPTIC  
Light Source: (20) 1540K CCT, 0 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1128.4 lumens  
Efficiency: N/A  
Efficacy: 37.6 lumens/watt  
Luminous Opening: Rectangular (W 0.67' x L: 0.33' x H: 0')  
IES Classification: Type I - Short  
BUG Rating: B1 - U0 - G1

Input Watts (W): 30  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: 0.98  
Total Harmonic Distortion (THDi): 9.04%  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

REPORT NUMBER: P869187  
 CATALOG NUMBER: EMM2-HTN-SA2A-AMB-U-T1

### Iso-Footcandle Lines of Horizontal Illumination


× Max cd  
 - - - 1/2 Max cd

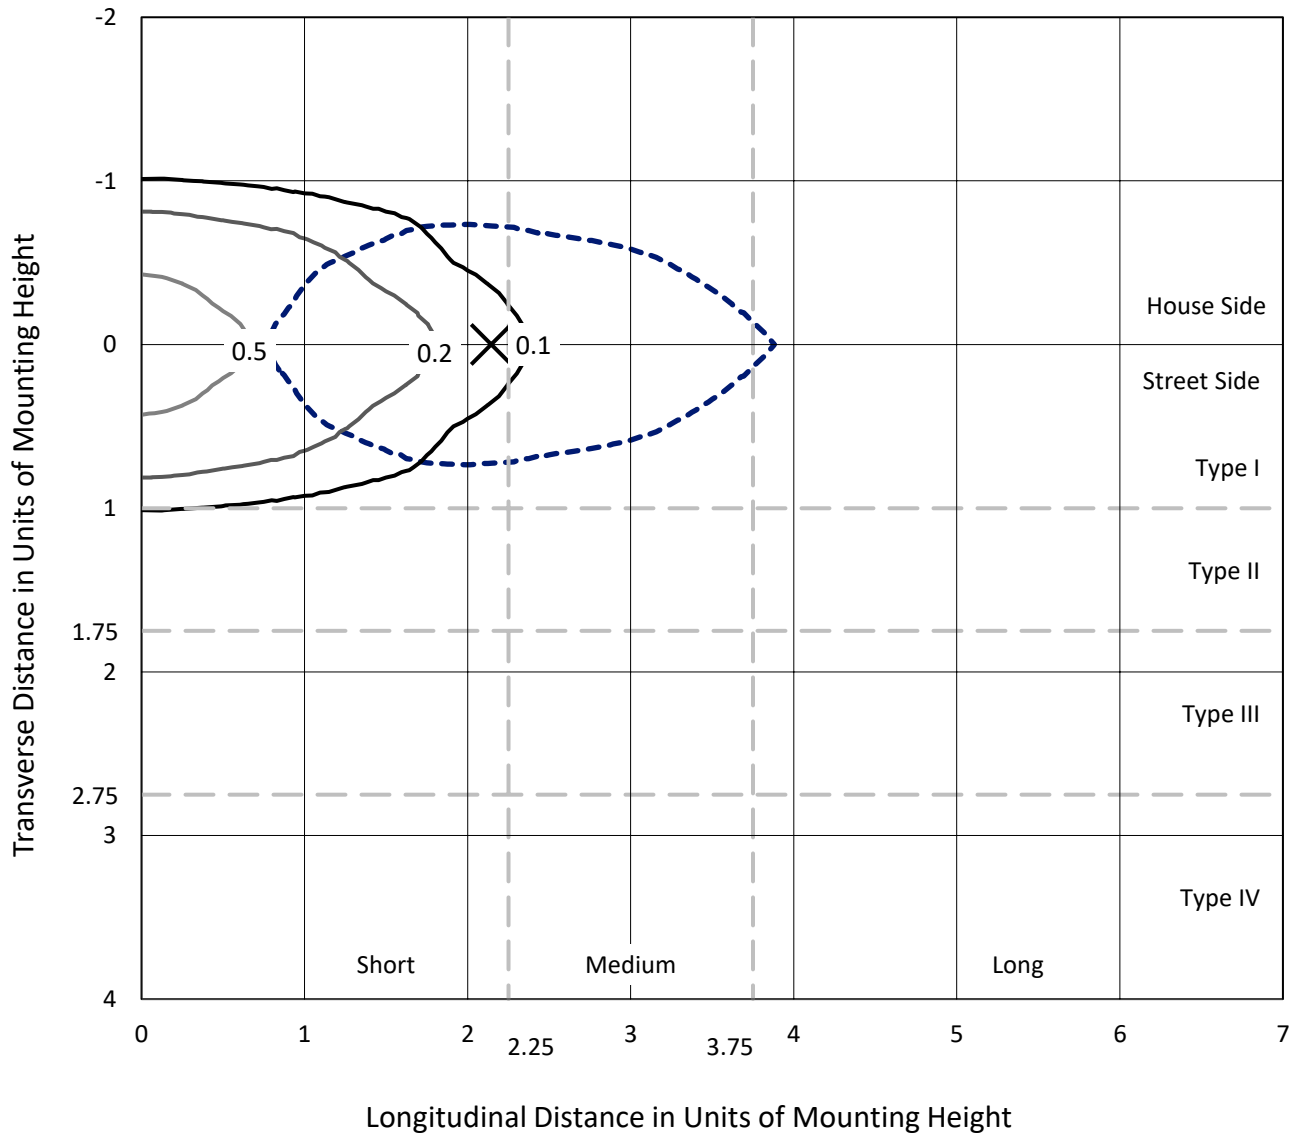

Based on 20 foot mounting height. Maximum calculated value = 0.7 fc  
 Type I - Short - N/A

REPORT NUMBER: P869187  
CATALOG NUMBER: EMM2-HTN-SA2A-AMB-U-T1

### Luminous Intensity Polar Plot

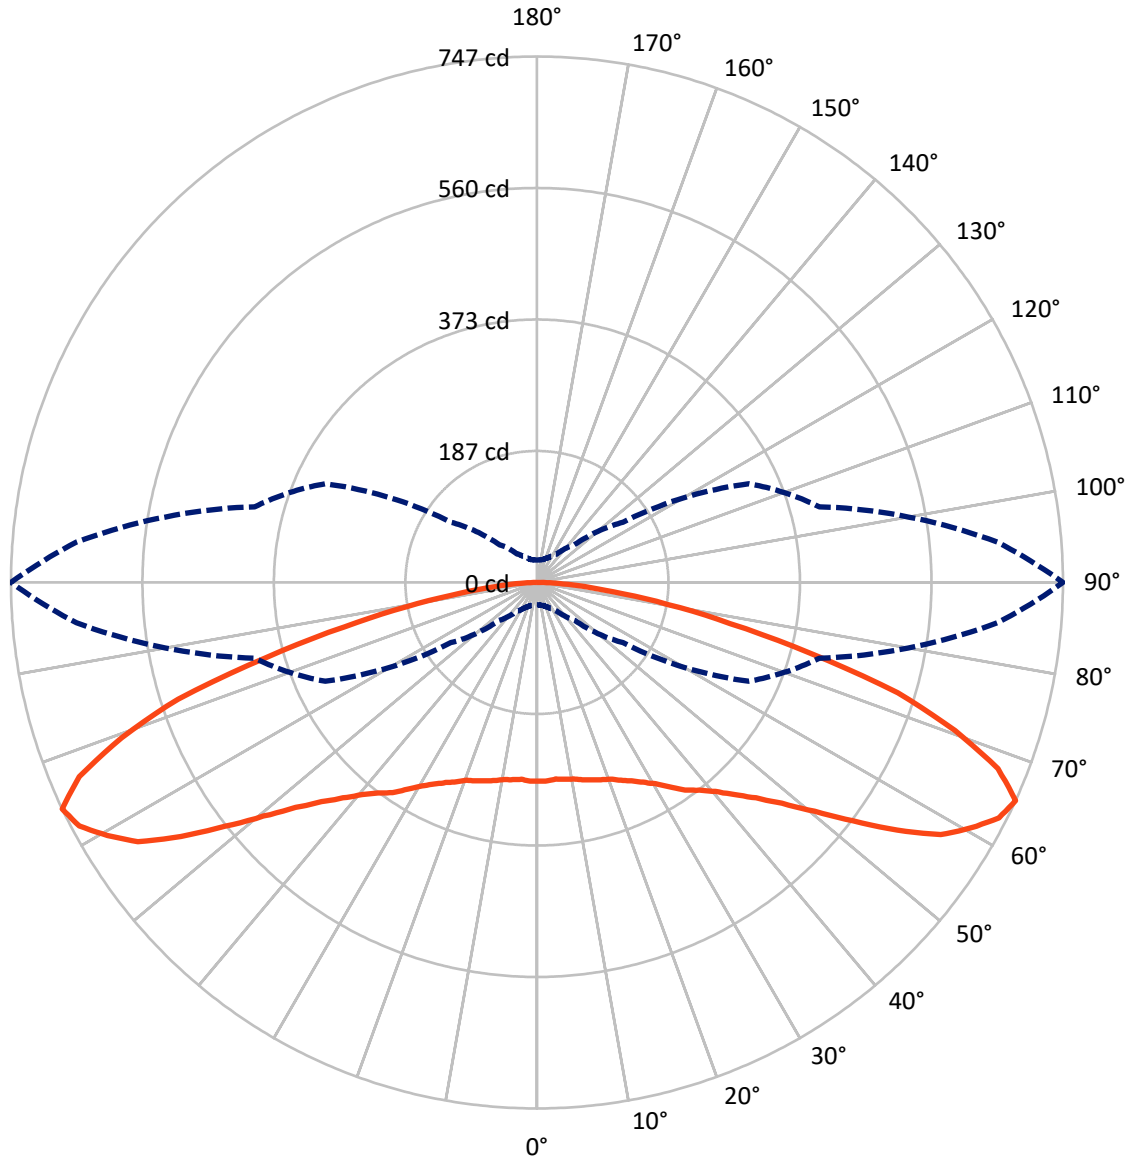

— Vertical Plane Through 90-Deg Lateral      - - - Horizontal Cone Through 65-Deg Vertical

REPORT NUMBER: P869187  
 CATALOG NUMBER: EMM2-HTN-SA2A-AMB-U-T1


**FLUX DISTRIBUTION:**

		Downward	Upward	Total
<b>House Side</b>	Lumens	564.2	0.0	564.2
	% Fixture	50.0	0.0	50.0
<b>Street Side</b>	Lumens	564.2	0.0	564.2
	% Fixture	50.0	0.0	50.0
<b>Total</b>	Lumens	1128.4	0.0	1128.4
	% Fixture	100.0	0.0	100.0

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	26.6	2.4
10°-20°	77.9	6.9
20°-30°	127.5	11.3
30°-40°	170.0	15.1
40°-50°	195.8	17.3
50°-60°	209.8	18.6
60°-70°	193.6	17.2
70°-80°	104.2	9.2
80°-90°	23.1	2.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	1128.4	100.0
0°-180°	1128.4	100.0

**Coefficient of Utilization**

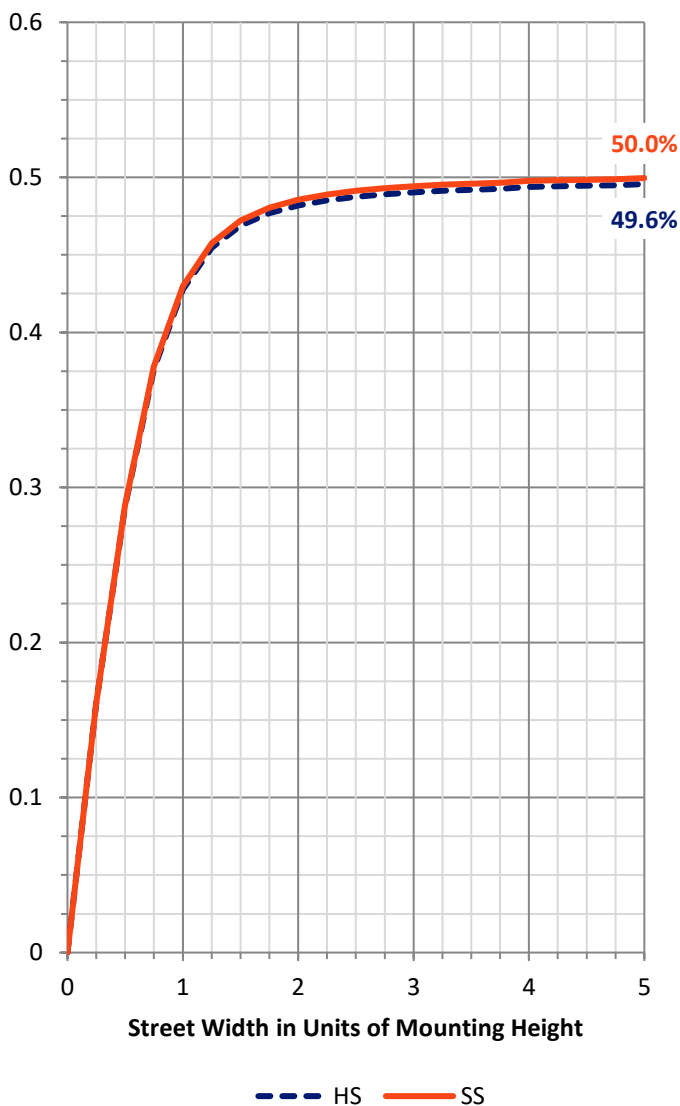


REPORT NUMBER: P869187  
 CATALOG NUMBER: EMM2-HTN-SA2A-AMB-U-T1

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	116.0	10.3			
FM (30°-60°)	287.8	25.5			
FH (60°-80°)	148.9	13.2			G0/660
FVH (80°-90°)	11.5	1.0			G1/100
BL (0°-30°)	116.0	10.3	B1/500		
BM (30°-60°)	287.8	25.5	B1/1000		
BH (60°-80°)	148.9	13.2	B1/500		G1/500
BVH (80°-90°)	11.5	1.0			G1/100
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

**BUG Rating: B1-U0-G1**

Type I Short

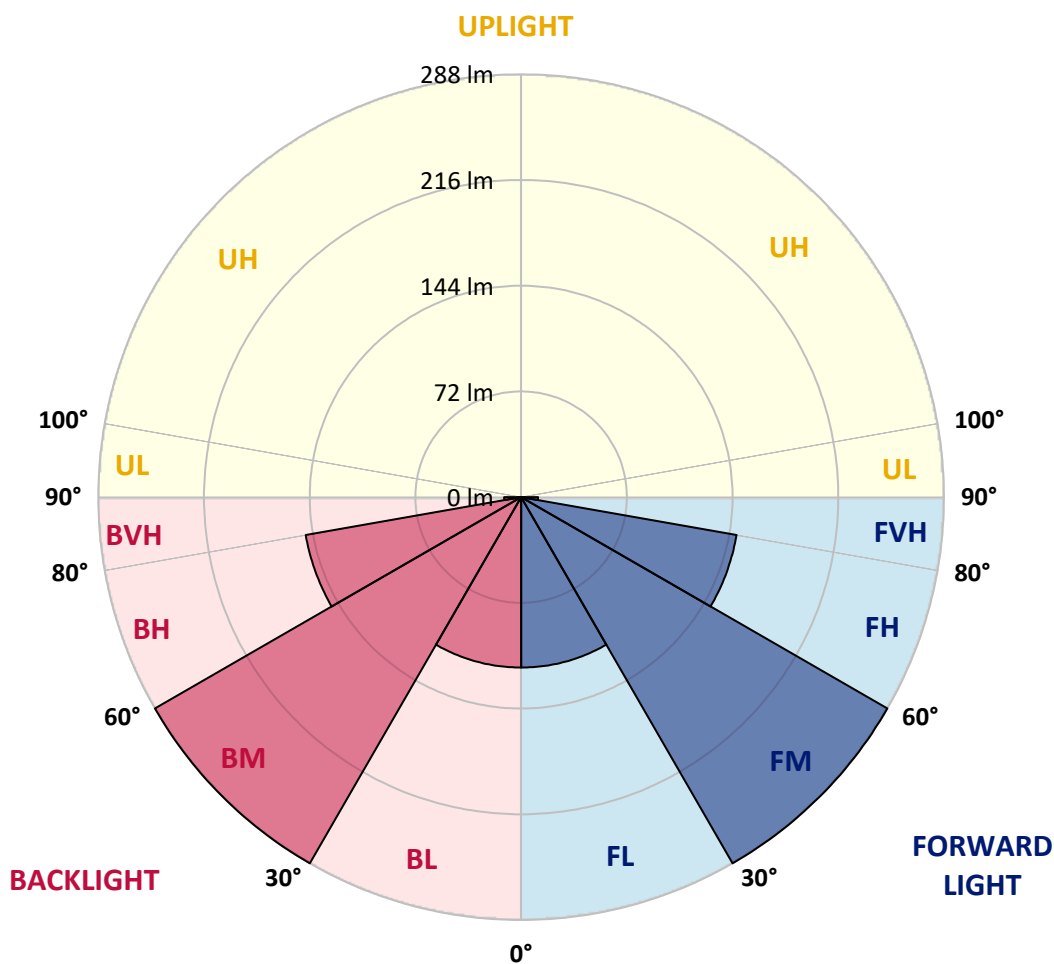



REPORT NUMBER: P869187  
 CATALOG NUMBER: EMM2-HTN-SA2A-AMB-U-T1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	15°	25°	35°	45°	55°	65°	75°	85°	90°
0°	282.0	282.0	282.0	282.0	282.0	282.0	282.0	282.0	282.0	282.0	282.0
2.5°	280.2	280.2	280.2	280.2	280.2	280.2	280.2	282.0	282.0	282.0	282.0
5°	278.4	278.4	278.4	278.4	278.4	278.4	280.2	280.2	280.2	280.2	280.2
7.5°	274.9	274.9	274.9	276.6	276.6	278.4	280.2	282.0	282.0	282.0	282.0
10°	271.3	271.3	271.3	273.1	274.9	278.4	280.2	282.0	282.0	283.7	283.7
12.5°	269.5	267.8	269.5	269.5	271.3	274.9	278.4	282.0	283.7	287.3	287.3
15°	264.2	264.2	264.2	266.0	267.8	271.3	276.6	283.7	287.3	289.1	290.8
17.5°	262.5	260.7	262.5	262.5	264.2	269.5	274.9	283.7	289.1	292.6	294.4
20°	260.7	260.7	260.7	262.5	262.5	267.8	274.9	285.5	292.6	297.9	297.9
22.5°	260.7	260.7	260.7	260.7	262.5	267.8	273.1	285.5	297.9	305.0	305.0
25°	258.9	258.9	257.1	260.7	264.2	267.8	273.1	285.5	301.5	312.1	312.1
27.5°	251.8	251.8	251.8	257.1	264.2	271.3	274.9	287.3	306.8	319.2	321.0
30°	237.6	237.6	241.2	250.0	264.2	274.9	278.4	289.1	312.1	329.8	331.6
32.5°	223.4	223.4	227.0	239.4	258.9	278.4	285.5	296.1	321.0	342.3	345.8
35°	202.2	202.2	207.5	223.4	248.3	280.2	294.4	301.5	329.8	356.4	361.8
37.5°	182.7	182.7	189.7	205.7	234.1	274.9	303.2	310.3	340.5	370.6	374.2
40°	161.4	161.4	170.2	186.2	218.1	264.2	308.6	321.0	351.1	386.6	390.1
42.5°	138.3	140.1	149.0	168.5	200.4	251.8	310.3	331.6	363.5	406.1	411.4
45°	117.0	118.8	127.7	147.2	180.9	235.9	305.0	345.8	379.5	432.7	436.2
47.5°	97.5	99.3	108.2	127.7	163.1	219.9	297.9	356.4	397.2	462.8	468.2
50°	81.6	83.3	90.4	109.9	143.6	200.4	285.5	361.8	415.0	500.1	510.7
52.5°	67.4	69.2	74.5	92.2	124.1	180.9	271.3	363.5	430.9	542.6	562.1
55°	56.7	56.7	62.1	76.3	104.6	157.8	253.6	361.8	441.6	587.0	620.7
57.5°	47.9	47.9	51.4	63.8	86.9	136.5	234.1	360.0	445.1	627.8	675.6
60°	40.8	40.8	44.3	53.2	72.7	113.5	207.5	360.0	441.6	650.8	707.6
62.5°	37.2	37.2	39.0	44.3	60.3	94.0	179.1	351.1	430.9	657.9	735.9
65°	31.9	31.9	33.7	39.0	49.7	76.3	149.0	331.6	415.0	656.1	746.6
67.5°	26.6	26.6	30.1	33.7	40.8	60.3	117.0	301.5	393.7	599.4	705.8
70°	21.3	21.3	24.8	28.4	33.7	47.9	88.7	239.4	349.3	519.6	629.5
72.5°	19.5	19.5	21.3	24.8	28.4	39.0	65.6	175.6	305.0	438.0	535.5
75°	16.0	16.0	17.7	21.3	23.1	30.1	46.1	117.0	246.5	344.0	399.0
77.5°	16.0	16.0	16.0	17.7	19.5	23.1	31.9	70.9	179.1	251.8	280.2
80°	16.0	16.0	14.2	14.2	16.0	17.7	21.3	40.8	117.0	175.6	188.0
82.5°	14.2	14.2	12.4	12.4	12.4	14.2	16.0	24.8	70.9	109.9	108.2
85°	8.9	8.9	10.6	8.9	8.9	10.6	10.6	14.2	39.0	65.6	58.5
87.5°	3.5	5.3	5.3	5.3	5.3	5.3	5.3	7.1	19.5	26.6	23.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Streetworks

Report Number: SP1-2407-157-1

Test Date: 08/06/2024

Luminaire Tested: MEM2-HTN-SA-45-AMB-U-5WQ-2

Data in this report applies to families of products including MEM2-HTN-SA-45-AMB-U-5WQ-2




**Test Information**

Test Method: LM-79-2019  
 Report Number: SP1-2407-157-1  
 Test Lab: COOPER LIGHTING SOLUTIONS  
 Photometer: SP1 - 76IN SPHERE  
 Measurement Geometry:  $4\pi$   
 Issue Date: 08/20/2024  
 Manufacturer: COOPER LIGHTING SOLUTIONS  
 Product Line: Streetworks  
 Catalog Number: **MEM2-HTN-SA-45-AMB-U-5WQ-2**  
 Description: Epic Modern Light Square 45W 5WQ Optic and Flare Trim AMBER LED

**Spectral Parameters**

CCT (K): 1538  
 CIE u': 0.3530  
 CIE v': 0.5469  
 Duv: 0.0116  
 CIE x: 0.5918  
 CIE y: 0.4076  
 CIE z: 0.0006  
 Peak Wavelength (nm): 597  
 Dominant Wavelength (nm): 592  
 Purity: 99.98881  
 Rf: 1.1  
 Rg: 0

CRI (Ra):	-21.8		
R1:	-34.3	R9:	-386.6
R2:	52.3	R10:	28.9
R3:	17.0	R11:	-95.5
R4:	-68.4	R12:	-10.5
R5:	-40.8	R13:	-15.5
R6:	41.5	R14:	45.9
R7:	-7.2	R15:	-67.7
R8:	-134.5		

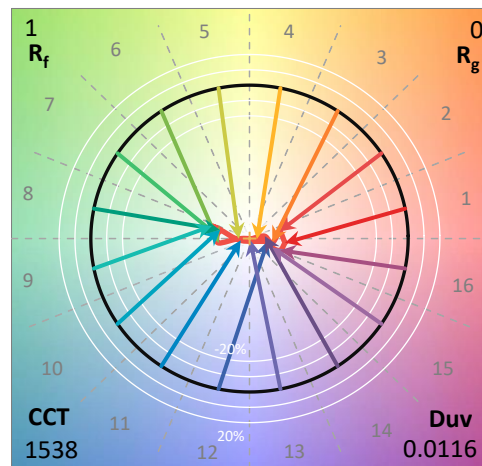

**Test Conditions**


Stabilization Time: 20M  
 Operation Time: 1H 20M  
 Sphere Temperature (°C): 24.2

REPORT NUMBER: SP1-2407-157-1


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	6/18/2024	12/18/2024
Power Meter	INXT2011004	2/8/2024	2/8/2025
AC Power Source	IN0063	10/24/2023	10/24/2024
DC Power Source	IN0208	10/24/2023	10/24/2024
Sphere Thermometer	IN0085	10/24/2023	10/24/2024
Room Thermometer	IN0046	10/24/2023	10/24/2024

REPORT NUMBER: SP1-2407-157-1

CIE 1931 Chromaticity Diagram

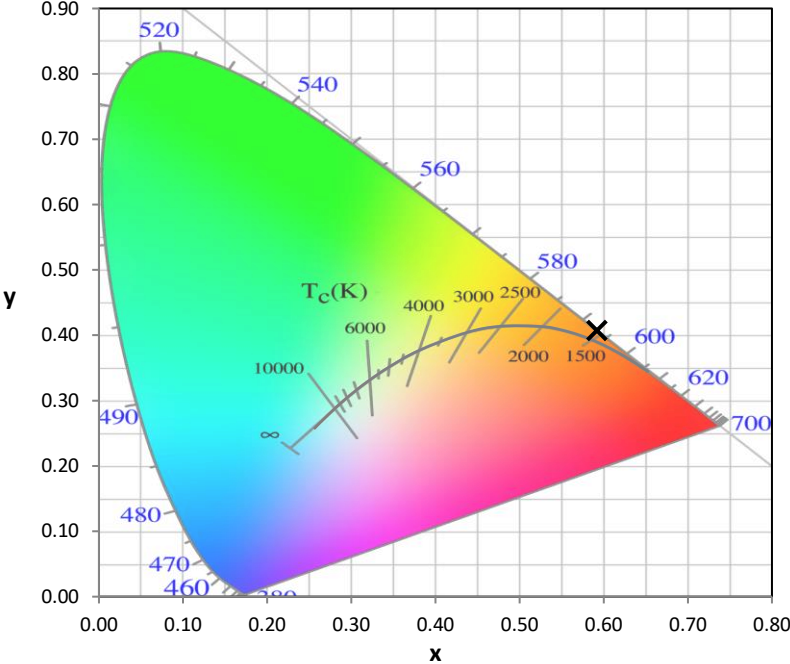


CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

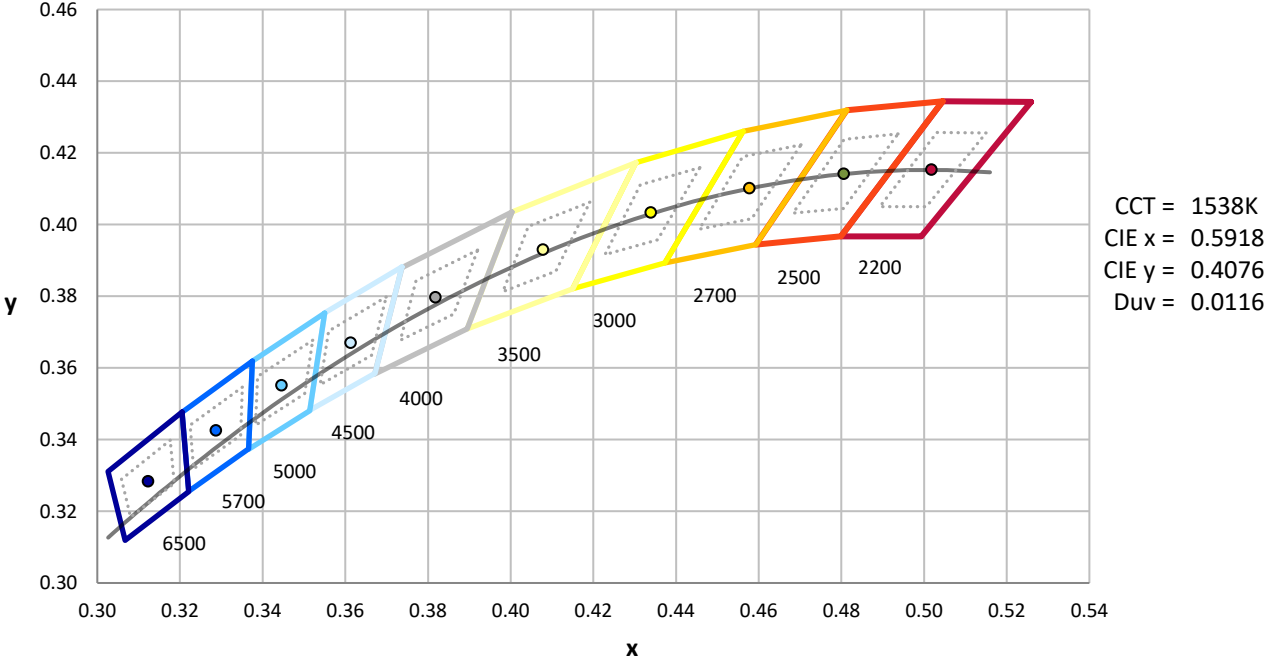

Point lies outside the range

REPORT NUMBER: SP1-2407-157-1

**Photopic Flux vs. Wavelength**

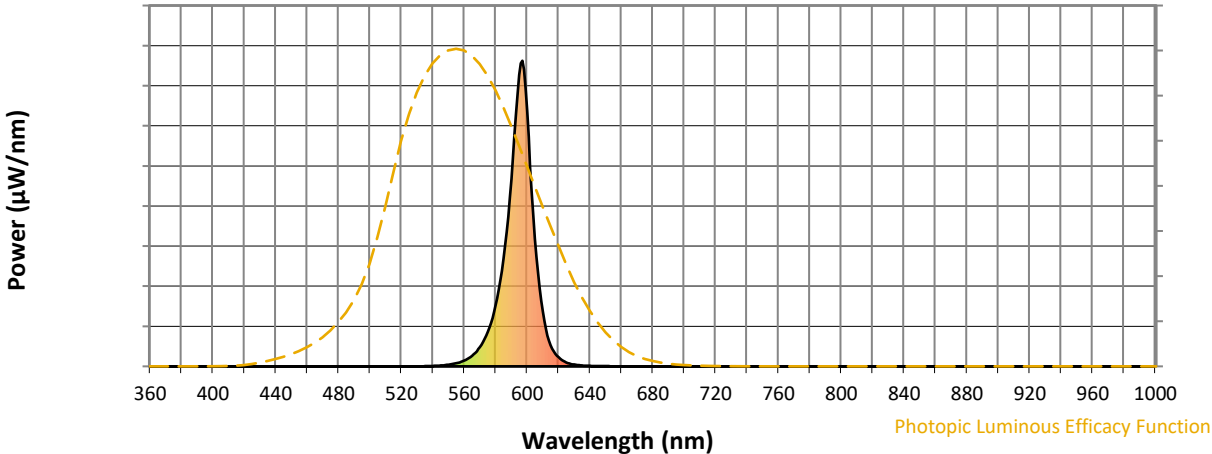


**Photopic Lumens: NR**

λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)
360	0	NR	490	0	NR	620	30	NR	750	0	NR	880	0	NR
365	0	NR	495	0	NR	625	13	NR	755	0	NR	885	0	NR
370	0	NR	500	0	NR	630	6	NR	760	0	NR	890	0	NR
375	0	NR	505	0	NR	635	3	NR	765	0	NR	895	0	NR
380	0	NR	510	0	NR	640	2	NR	770	0	NR	900	0	NR
385	0	NR	515	0	NR	645	1	NR	775	0	NR	905	0	NR
390	0	NR	520	0	NR	650	1	NR	780	0	NR	910	0	NR
395	0	NR	525	0	NR	655	0	NR	785	0	NR	915	0	NR
400	0	NR	530	0	NR	660	0	NR	790	0	NR	920	0	NR
405	0	NR	535	1	NR	665	0	NR	795	0	NR	925	0	NR
410	0	NR	540	1	NR	670	0	NR	800	0	NR	930	0	NR
415	0	NR	545	3	NR	675	0	NR	805	0	NR	935	0	NR
420	0	NR	550	5	NR	680	0	NR	810	0	NR	940	0	NR
425	0	NR	555	10	NR	685	0	NR	815	0	NR	945	0	NR
430	0	NR	560	19	NR	690	0	NR	820	0	NR	950	0	NR
435	0	NR	565	34	NR	695	0	NR	825	0	NR	955	0	NR
440	0	NR	570	63	NR	700	0	NR	830	0	NR	960	0	NR
445	0	NR	575	113	NR	705	0	NR	835	0	NR	965	0	NR
450	0	NR	580	199	NR	710	0	NR	840	0	NR	970	0	NR
455	0	NR	585	352	NR	715	0	NR	845	0	NR	975	0	NR
460	0	NR	590	614	NR	720	0	NR	850	0	NR	980	0	NR
465	0	NR	595	954	NR	725	0	NR	855	0	NR	985	0	NR
470	0	NR	600	837	NR	730	0	NR	860	0	NR	990	0	NR
475	0	NR	605	417	NR	735	0	NR	865	0	NR	995	0	NR
480	0	NR	610	179	NR	740	0	NR	870	0	NR	1000	0	NR
485	0	NR	615	69	NR	745	0	NR	875	0	NR			

REPORT NUMBER: SP1-2407-157-1

**Scotopic Flux vs. Wavelength**

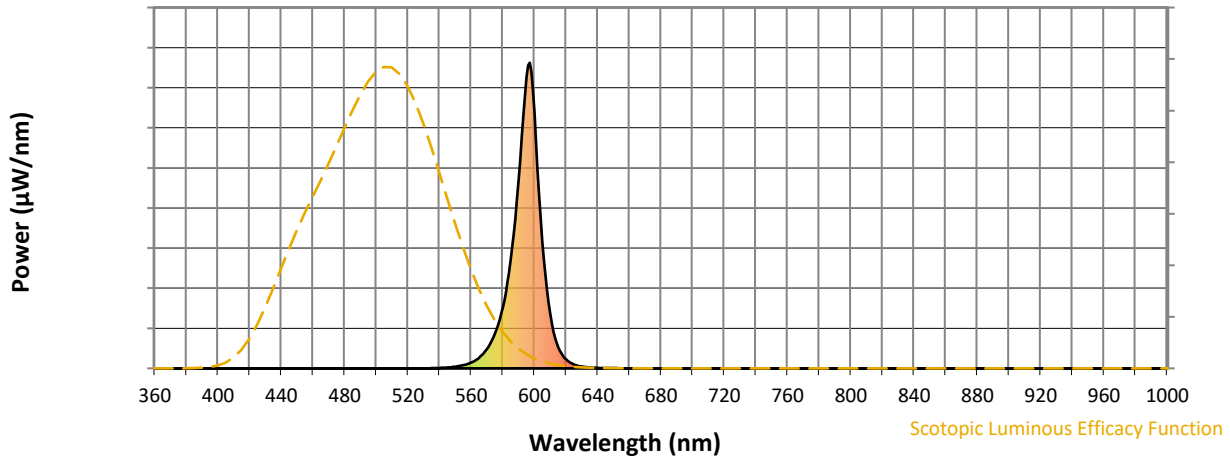


**Scotopic Lumens: NR**

**S/P: 0.22**

λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)
360	0	NR	490	0	NR	620	30	NR	750	0	NR	880	0	NR
365	0	NR	495	0	NR	625	13	NR	755	0	NR	885	0	NR
370	0	NR	500	0	NR	630	6	NR	760	0	NR	890	0	NR
375	0	NR	505	0	NR	635	3	NR	765	0	NR	895	0	NR
380	0	NR	510	0	NR	640	2	NR	770	0	NR	900	0	NR
385	0	NR	515	0	NR	645	1	NR	775	0	NR	905	0	NR
390	0	NR	520	0	NR	650	1	NR	780	0	NR	910	0	NR
395	0	NR	525	0	NR	655	0	NR	785	0	NR	915	0	NR
400	0	NR	530	0	NR	660	0	NR	790	0	NR	920	0	NR
405	0	NR	535	1	NR	665	0	NR	795	0	NR	925	0	NR
410	0	NR	540	1	NR	670	0	NR	800	0	NR	930	0	NR
415	0	NR	545	3	NR	675	0	NR	805	0	NR	935	0	NR
420	0	NR	550	5	NR	680	0	NR	810	0	NR	940	0	NR
425	0	NR	555	10	NR	685	0	NR	815	0	NR	945	0	NR
430	0	NR	560	19	NR	690	0	NR	820	0	NR	950	0	NR
435	0	NR	565	34	NR	695	0	NR	825	0	NR	955	0	NR
440	0	NR	570	63	NR	700	0	NR	830	0	NR	960	0	NR
445	0	NR	575	113	NR	705	0	NR	835	0	NR	965	0	NR
450	0	NR	580	199	NR	710	0	NR	840	0	NR	970	0	NR
455	0	NR	585	352	NR	715	0	NR	845	0	NR	975	0	NR
460	0	NR	590	614	NR	720	0	NR	850	0	NR	980	0	NR
465	0	NR	595	954	NR	725	0	NR	855	0	NR	985	0	NR
470	0	NR	600	837	NR	730	0	NR	860	0	NR	990	0	NR
475	0	NR	605	417	NR	735	0	NR	865	0	NR	995	0	NR
480	0	NR	610	179	NR	740	0	NR	870	0	NR	1000	0	NR
485	0	NR	615	69	NR	745	0	NR	875	0	NR			

REPORT NUMBER: SP1-2407-157-1

**Melanopic Flux vs. Wavelength**

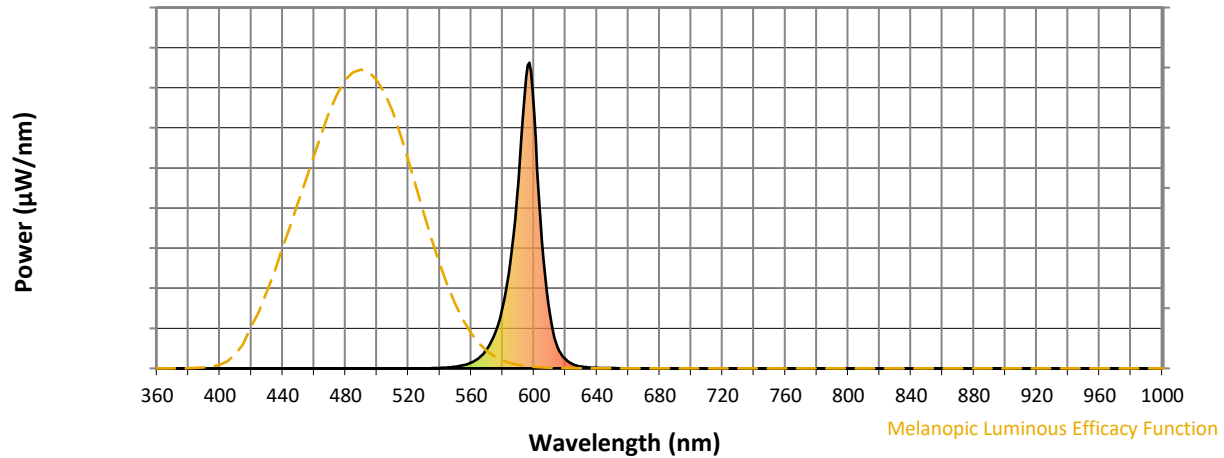


**Melanopic Lumens: NR**

**M/P: 0.12**





λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)
360	0	NR	490	0	NR	620	30	NR	750	0	NR	880	0	NR
365	0	NR	495	0	NR	625	13	NR	755	0	NR	885	0	NR
370	0	NR	500	0	NR	630	6	NR	760	0	NR	890	0	NR
375	0	NR	505	0	NR	635	3	NR	765	0	NR	895	0	NR
380	0	NR	510	0	NR	640	2	NR	770	0	NR	900	0	NR
385	0	NR	515	0	NR	645	1	NR	775	0	NR	905	0	NR
390	0	NR	520	0	NR	650	1	NR	780	0	NR	910	0	NR
395	0	NR	525	0	NR	655	0	NR	785	0	NR	915	0	NR
400	0	NR	530	0	NR	660	0	NR	790	0	NR	920	0	NR
405	0	NR	535	1	NR	665	0	NR	795	0	NR	925	0	NR
410	0	NR	540	1	NR	670	0	NR	800	0	NR	930	0	NR
415	0	NR	545	3	NR	675	0	NR	805	0	NR	935	0	NR
420	0	NR	550	5	NR	680	0	NR	810	0	NR	940	0	NR
425	0	NR	555	10	NR	685	0	NR	815	0	NR	945	0	NR
430	0	NR	560	19	NR	690	0	NR	820	0	NR	950	0	NR
435	0	NR	565	34	NR	695	0	NR	825	0	NR	955	0	NR
440	0	NR	570	63	NR	700	0	NR	830	0	NR	960	0	NR
445	0	NR	575	113	NR	705	0	NR	835	0	NR	965	0	NR
450	0	NR	580	199	NR	710	0	NR	840	0	NR	970	0	NR
455	0	NR	585	352	NR	715	0	NR	845	0	NR	975	0	NR
460	0	NR	590	614	NR	720	0	NR	850	0	NR	980	0	NR
465	0	NR	595	954	NR	725	0	NR	855	0	NR	985	0	NR
470	0	NR	600	837	NR	730	0	NR	860	0	NR	990	0	NR
475	0	NR	605	417	NR	735	0	NR	865	0	NR	995	0	NR
480	0	NR	610	179	NR	740	0	NR	870	0	NR	1000	0	NR
485	0	NR	615	69	NR	745	0	NR	875	0	NR			

**Summary**

$R_f = 1.1$   
 $R_g = 0$   
 $CIE R_a = -21.8$   
 $R_g = -386.6$

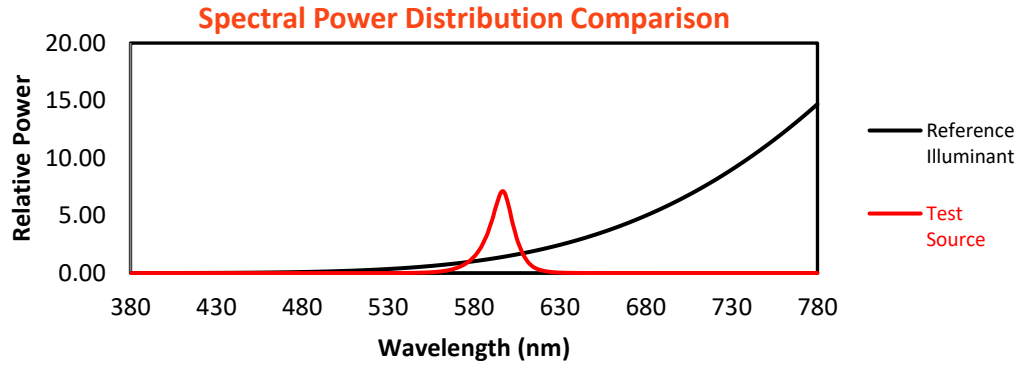


**Color Vector Graphics**

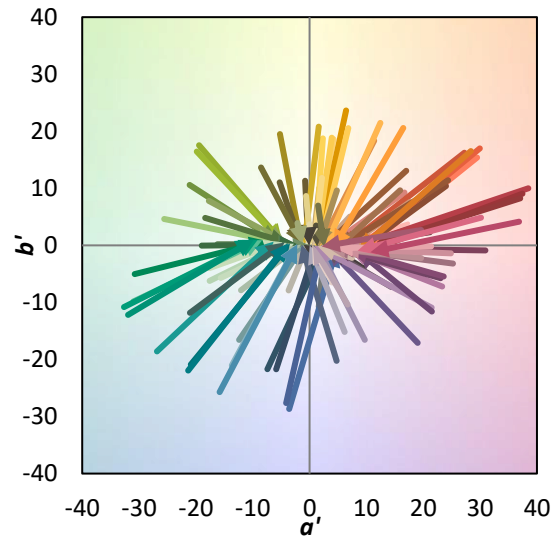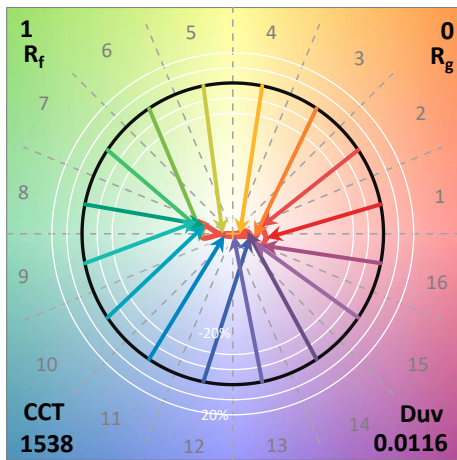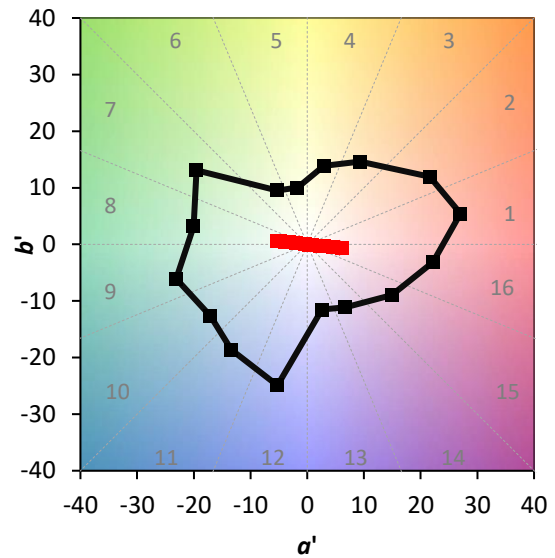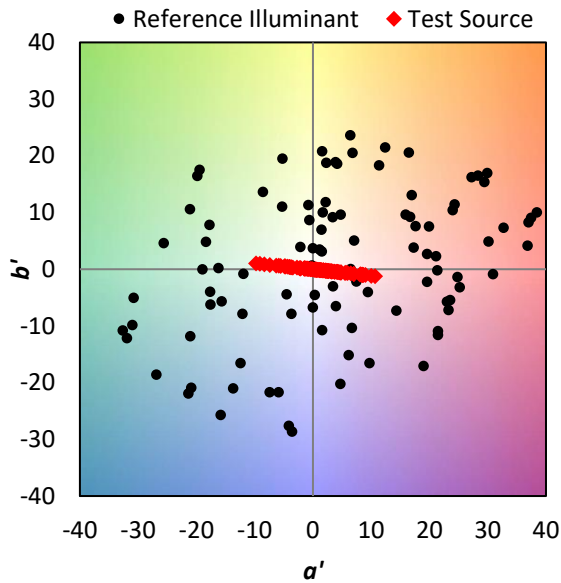




**Individual Sample Fidelity Index ( $R_{f,i}$ )**

CES01 = 90	CES26 = 0	CES51 = 17	CES76 = 0
CES02 = 70	CES27 = 32	CES52 = 2	CES77 = 0
CES03 = 31	CES28 = 24	CES53 = 0	CES78 = 0
CES04 = 77	CES29 = 1	CES54 = 12	CES79 = 2
CES05 = 52	CES30 = 31	CES55 = 6	CES80 = 1
CES06 = 56	CES31 = 1	CES56 = 0	CES81 = 0
CES07 = 41	CES32 = 0	CES57 = 0	CES82 = 50
CES08 = 38	CES33 = 21	CES58 = 0	CES83 = 21
CES09 = 29	CES34 = 0	CES59 = 9	CES84 = 54
CES10 = 87	CES35 = 23	CES60 = 60	CES85 = 9
CES11 = 70	CES36 = 77	CES61 = 13	CES86 = 0
CES12 = 76	CES37 = 5	CES62 = 53	CES87 = 2
CES13 = 47	CES38 = 41	CES63 = 68	CES88 = 1
CES14 = 77	CES39 = 75	CES64 = 0	CES89 = 0
CES15 = 74	CES40 = 49	CES65 = 0	CES90 = 2
CES16 = 49	CES41 = 75	CES66 = 0	CES91 = 57
CES17 = 56	CES42 = 0	CES67 = 0	CES92 = 0
CES18 = 60	CES43 = 0	CES68 = 0	CES93 = 2
CES19 = 80	CES44 = 95	CES69 = 27	CES94 = 0
CES20 = 71	CES45 = 1	CES70 = 0	CES95 = 0
CES21 = 94	CES46 = 5	CES71 = 0	CES96 = 2
CES22 = 87	CES47 = 70	CES72 = 42	CES97 = 1
CES23 = 94	CES48 = 0	CES73 = 0	CES98 = 0
CES24 = 95	CES49 = 5	CES74 = 62	CES99 = 0
CES25 = 79	CES50 = 9	CES75 = 0	


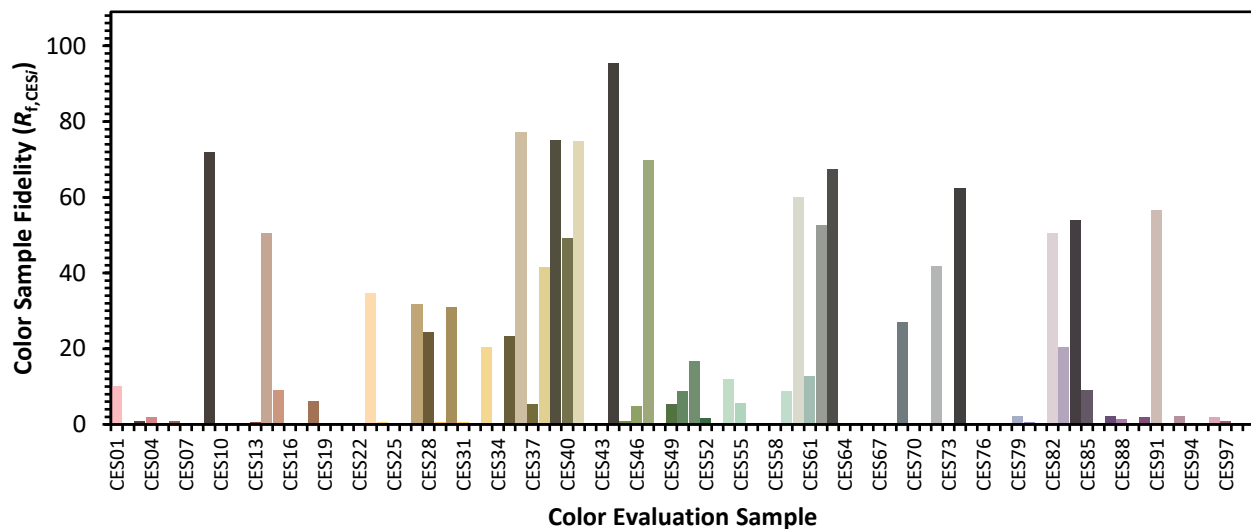




Color Rendition by Hue-Angle Bin

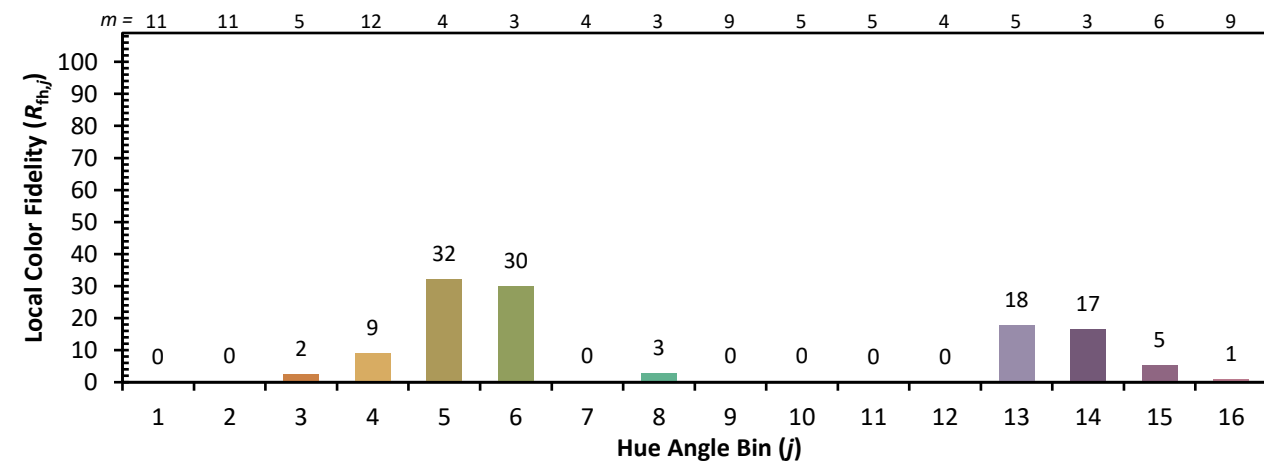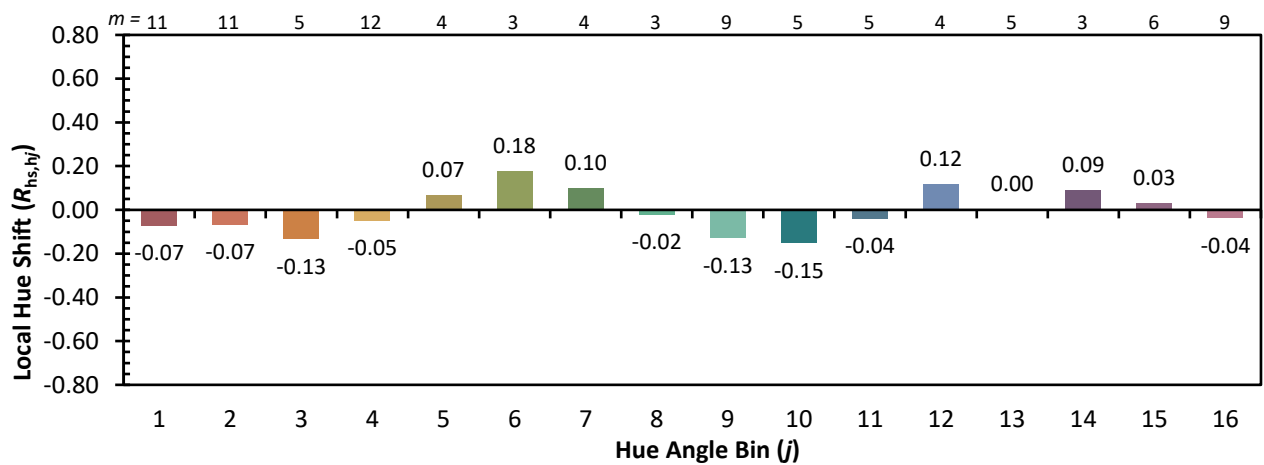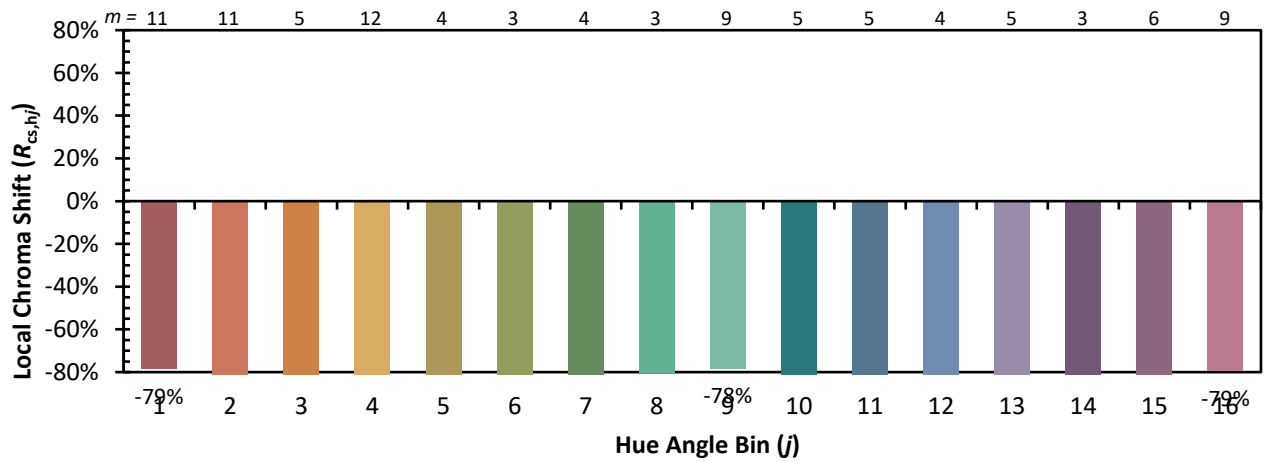

Measure Comparisons

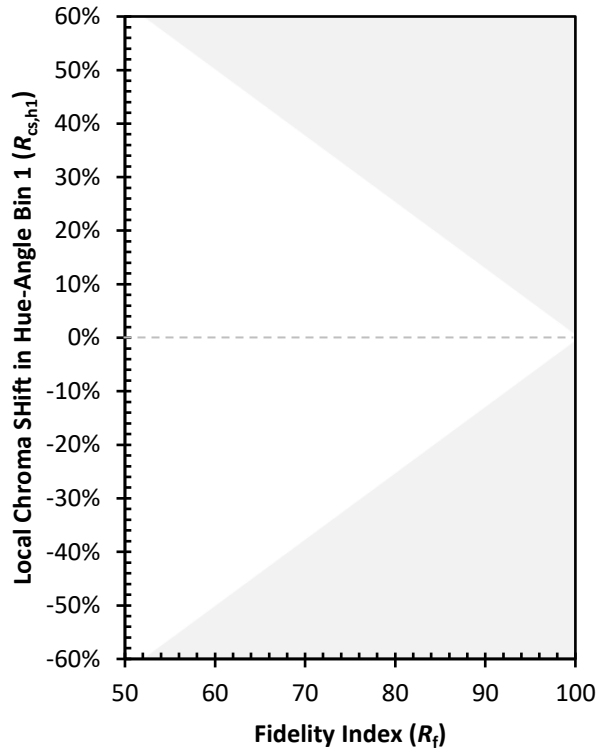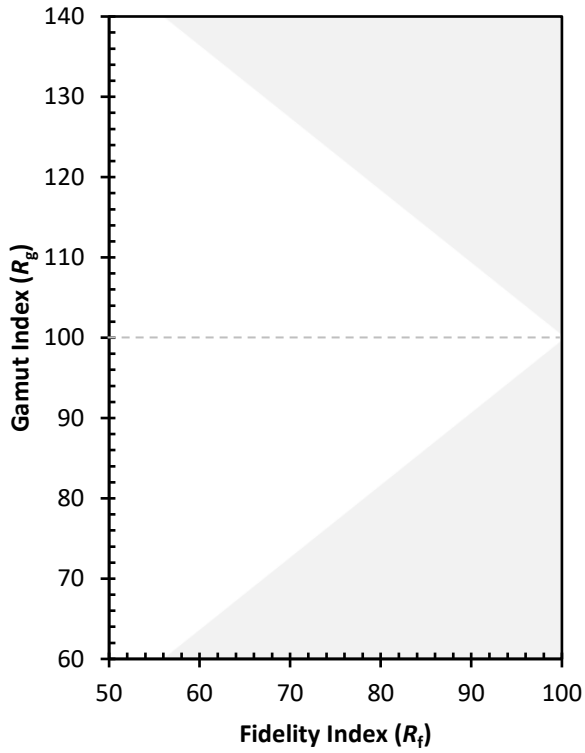

(END OF REPORT)