

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: INVUE

Report Number: P95392

Luminaire Tested: **VFS-K-B40-5-LED-E1-NSR**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P95392
REPORT SCALED FROM IESNA LM79-08 TEST DATA (P22802)
Test Lab: INNOVATION CENTER
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: INVUE
Catalog Number: VFS-K-B40-5-LED-E1-NSR
Description: ARCHITECTURAL FLOOD LUMINAIRE
NARROW SYMMETRIC ROUND DISTRIBUTION
WITH 40 LED'S, 525mA DRIVE CURRENT
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp:	N/A	NEMA Type:	3H x 3V
Luminaire Lumens:	5496 lumens	Max Intensity:	20767 candela
Efficiency:	N/A	Max Intensity Angle:	0°H x -1°V
Efficacy:	83.0 lumens/watt		
Luminous Opening:	(L: 0.83 ' x W: 0 ' x H: 0.5 ')		
Beam Angle (50%):	32°H x 31.7°V	Field Angle (10%):	42.5°H x 43.3°V
Beam Lumens:	3897.6 lumens	Field Lumens:	5100.1 lumens
Beam Efficiency:	70.9%	Field Efficiency:	92.8%
Input Watts (W):	66.2		
Input Voltage (V):	NR		
Input Current (Ain):	NR		
Voltage Rise (V):	NR		
Power Factor:	NR		
Total Harmonic Distortion (THDi):	NR		
Frequency (hertz):	60		
Stabilization Time:	NR		
Operation Time:	NR		
Ambient Temperature (°C):	NR		
Test Distance:	25 FT		



REPORT NUMBER: P95392

CATALOG NUMBER: VFS-K-B40-5-LED-E1-NSR

Iso-Candela Plot

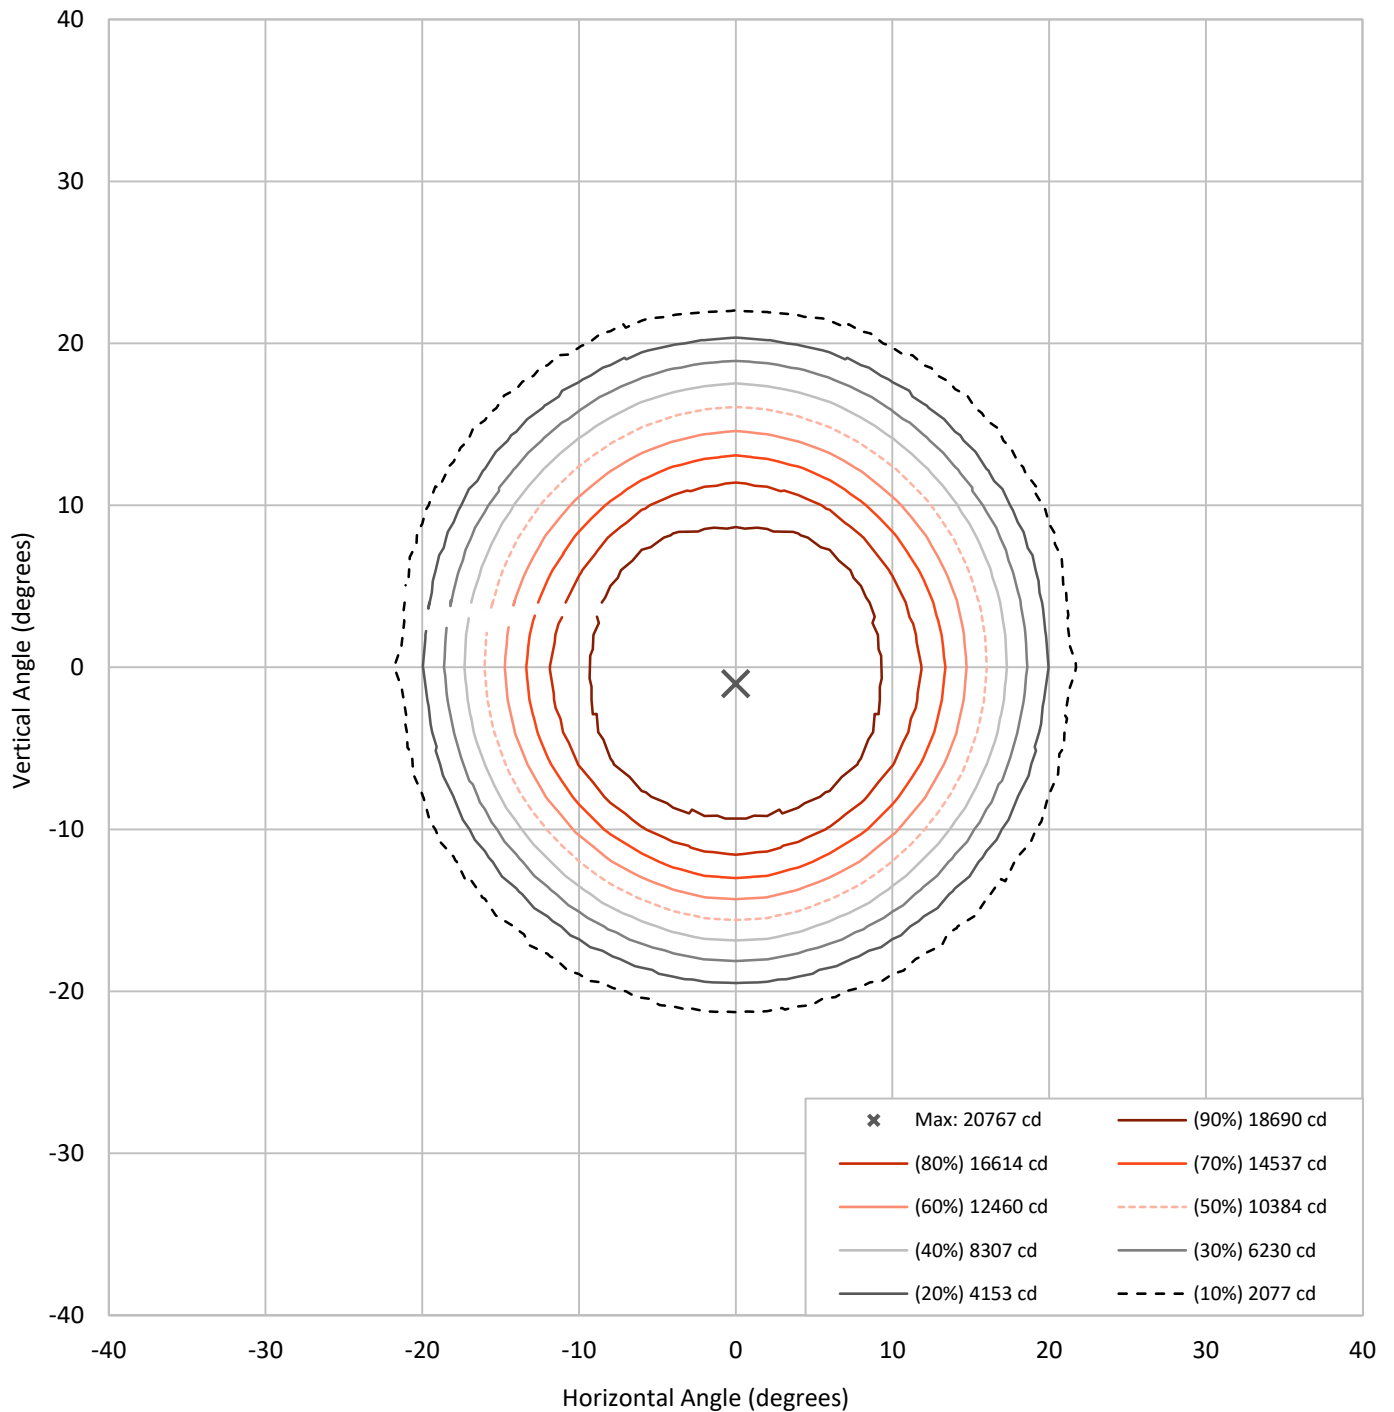



REPORT NUMBER: P95392
 CATALOG NUMBER: VFS-K-B40-5-LED-E1-NSR


Lumen Table

90	2.5	6.8		7.3		4.6		1.9		4.6		7.3		6.8		2.5			
80	2.5	6.8		7.3		4.6		1.9		4.6		7.3		6.8		2.5			
70	2.6	1.4	1.2	0.7	0.5	0.5	0.7	0.6	0.6	0.7	0.5	0.5	0.7	1.2	1.4	2.6			
60		1.0	0.6	0.3	0.4	0.6	0.8	0.6	0.6	0.8	0.6	0.4	0.3	0.6	1.0				
50	2.2	0.7	0.3	0.3	0.5	0.7	0.9	0.7	0.7	0.9	0.7	0.5	0.3	0.3	0.7	2.2			
40		0.5	0.2	0.3	0.5	0.8	1.1	1.2	1.2	1.1	0.8	0.5	0.3	0.2	0.5				
30	1.8	0.3	0.1	0.2	0.4	1.0	5.9	26.2	26.2	5.9	1.0	0.4	0.2	0.1	0.3	1.8			
20		0.2	0.0	0.1	0.4	4.7	102.9	309.5	309.5	102.9	4.7	0.4	0.1	0.0	0.2				
10	1.6	0.1	0.0	0.0	0.4	16.6	301.3	578.5	578.5	301.3	16.6	0.4	0.0	0.0	0.1	1.6			
0		0.1	0.0	0.0	0.3	15.5	295.6	585.1	585.1	295.6	15.5	0.3	0.0	0.0	0.1				
-10	1.8	0.1	0.0	0.1	0.3	3.8	86.8	291.2	291.2	86.8	3.8	0.3	0.1	0.0	0.1	1.8			
-20		0.3	0.1	0.2	0.4	0.9	4.1	17.7	17.7	4.1	0.9	0.4	0.2	0.1	0.3				
-30	2.3	0.5	0.2	0.3	0.5	0.8	1.0	1.0	1.0	1.0	0.8	0.5	0.3	0.2	0.5	2.3			
-40		0.7	0.3	0.3	0.5	0.7	0.9	0.7	0.7	0.9	0.7	0.5	0.3	0.3	0.7				
-50	2.6	1.1	0.6	0.3	0.4	0.6	0.8	0.6	0.6	0.8	0.6	0.4	0.3	0.6	1.1	2.6			
-60		1.4	1.3	0.7	0.5	0.5	0.7	0.6	0.6	0.7	0.5	0.5	0.7	1.3	1.4				
-70	2.5	6.8		7.3		4.6		1.9		4.6		7.3		6.8		2.5			
-80		6.8		7.3		4.6		1.9		4.6		7.3		6.8					
-90	2.5	6.8		7.3		4.6		1.9		4.6		7.3		6.8		2.5			
	-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90

REPORT NUMBER: P95392

CATALOG NUMBER: VFS-K-B40-5-LED-E1-NSR


Luminous Intensity Polar Plot

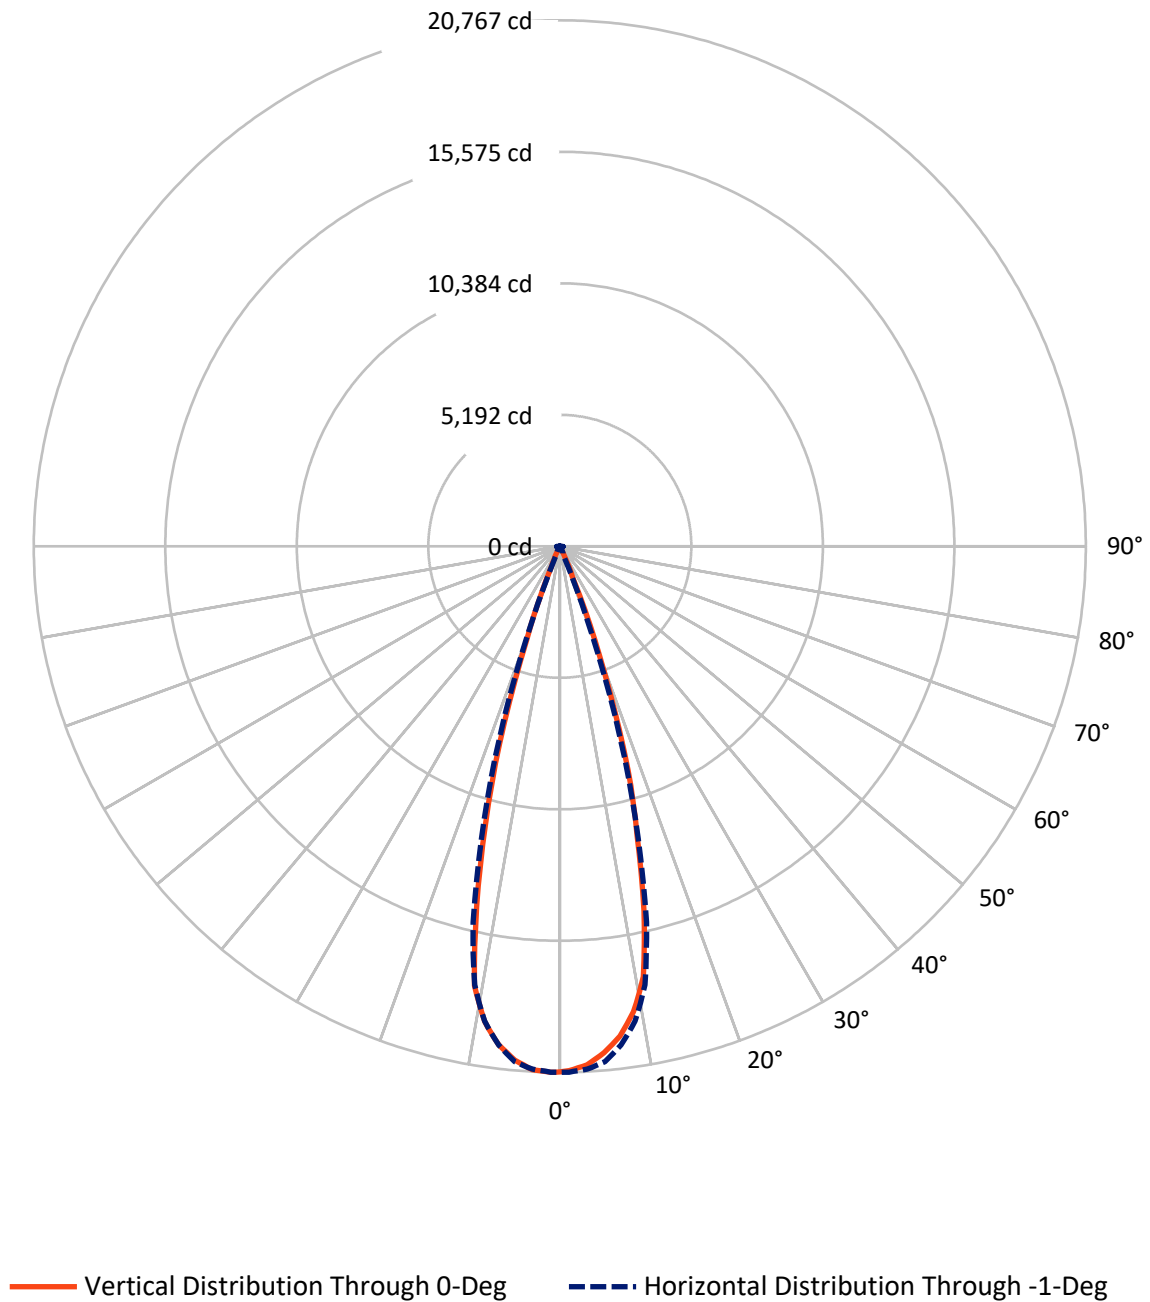

REPORT NUMBER: P95392

CATALOG NUMBER: VFS-K-B40-5-LED-E1-NSR

Luminous Intensity Plot

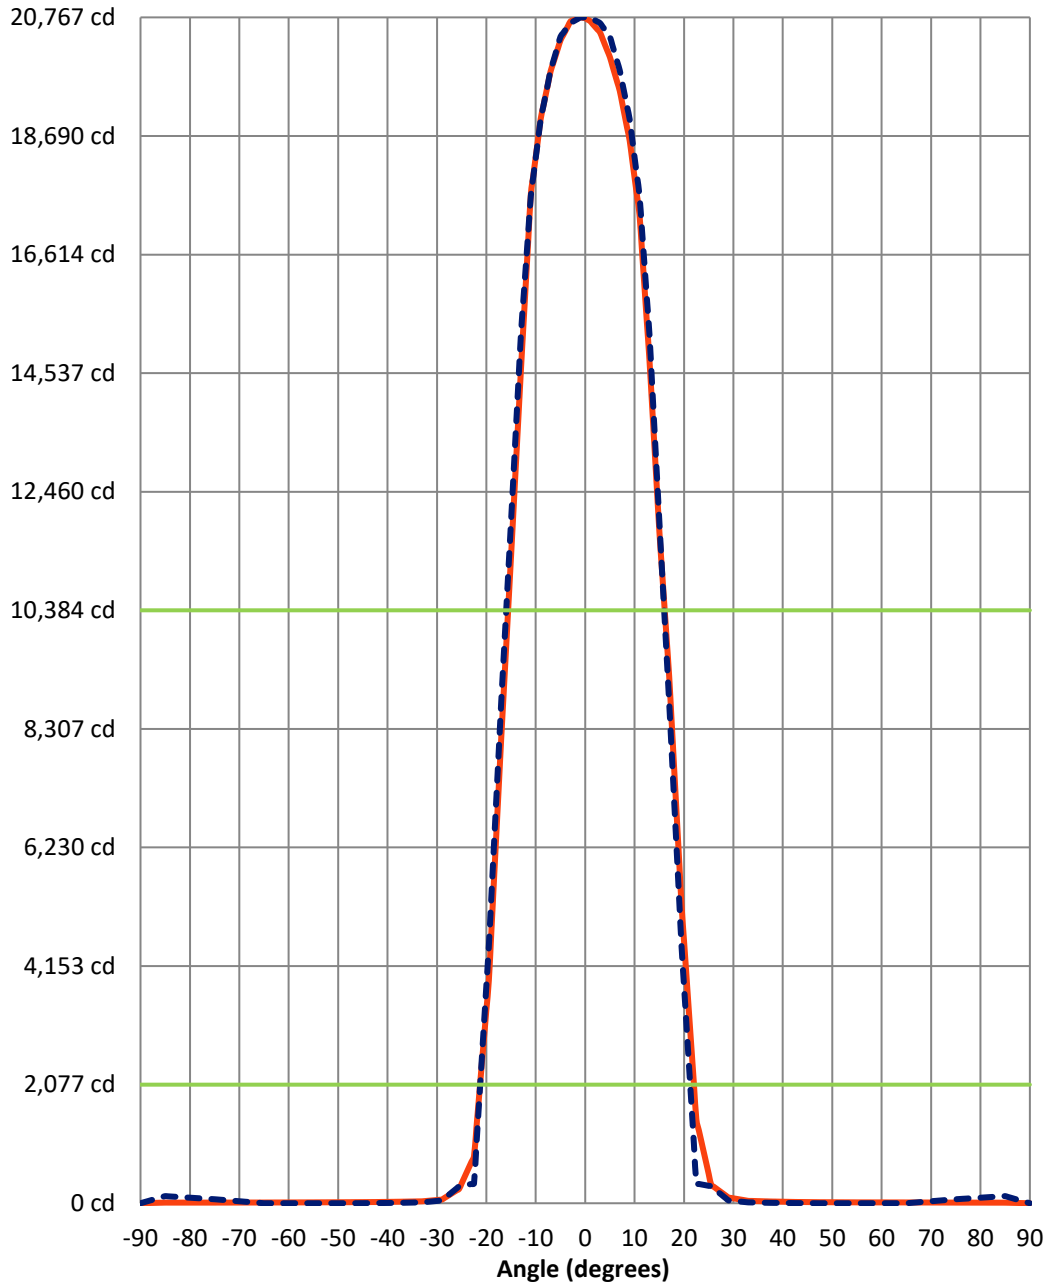

Beam:
H Angle: 32°
V Angle: 31.7°
Lumens: 3897.6
Efficiency: 70.9%

Field:
H Angle: 42.5°
V Angle: 43.3°
Lumens: 5100.1
Efficiency: 92.8%

Spill:
Lumens: 395.9
Efficiency: 7.2%

— Vertical Distribution through 0-Deg
- - Horizontal Distribution through -1-Deg



REPORT NUMBER: P95392

CATALOG NUMBER: VFS-K-B40-5-LED-E1-NSR

FIELD
BEAM

CANDELA DISTRIBUTION:

	0°	1°	3°	5°	7°	9°	11°	13°	15°	17°	19.5°
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	9.8	15.4	22.4	16.8	15.4	14.0	18.2	36.3	57.3	78.2	95.0
75°	11.2	12.6	16.8	22.4	23.8	22.4	21.0	18.2	18.2	16.8	15.4
65°	14.0	14.0	15.4	18.2	22.4	25.2	25.2	25.2	23.8	22.4	21.0
55°	15.4	15.4	16.8	18.2	21.0	23.8	26.5	27.9	27.9	26.5	26.5
47.5°	18.2	18.2	19.6	21.0	22.4	25.2	26.5	27.9	29.3	29.3	29.3
42.5°	22.4	22.4	23.8	23.8	25.2	27.9	29.3	29.3	30.7	30.7	30.7
37.5°	30.7	29.3	30.7	30.7	32.1	32.1	33.5	33.5	33.5	32.1	32.1
33°	41.9	41.9	40.5	40.5	40.5	40.5	40.5	39.1	37.7	36.3	33.5
29°	100.6	102.0	95.0	89.4	78.2	68.5	58.7	53.1	47.5	43.3	39.1
25.5°	321.4	322.8	322.8	320.0	280.8	223.6	159.3	117.4	86.6	65.7	48.9
22.5°	1468.5	1488.0	1293.8	1148.5	887.2	695.8	440.1	303.2	226.4	155.1	86.6
19.5°	5224.2	5225.6	4778.5	4339.8	3456.7	2536.0	1652.9	972.5	572.9	313.0	194.2
17°	9225.9	9241.3	8697.7	8057.8	6877.1	5503.7	4039.4	2608.6	1467.1	760.1	304.6
15°	11780.0	11806.6	11339.9	10793.6	9621.3	8164.0	6417.5	4555.0	2811.2	1481.1	333.9
13°	14775.7	14767.3	14056.1	13343.5	12144.7	10656.6	8778.8	6674.6	4522.8	2586.3	719.6
11°	17308.8	17290.7	16811.4	16006.6	14573.1	12999.8	11089.8	8798.3	6364.4	3910.8	1594.2
9°	18609.7	18632.0	18475.5	18112.2	16726.2	14986.7	13113.0	10765.6	8131.9	5333.2	2364.1
7°	19480.1	19495.5	19469.0	19496.9	18558.0	16741.6	14705.8	12382.2	9635.3	6646.6	3156.3
5°	20071.2	20108.9	20181.5	20231.8	19647.8	18197.5	16054.1	13625.8	10848.1	7747.6	3828.4
3°	20504.3	20516.9	20488.9	20317.1	19776.3	18847.2	17113.2	14582.9	11645.9	8510.5	4364.9
1°	20701.3	20697.1	20589.5	20333.8	19795.9	18946.4	17603.7	15187.9	11975.6	8831.9	4687.7
0°	20753.0	20744.6	20616.1	20366.0	19812.7	18974.3	17665.1	15296.8	12010.6	8847.2	4668.1
-1°	20767.0	20764.2	20667.8	20428.8	19837.8	18982.7	17641.4	15227.0	11954.7	8764.8	4501.9
-3°	20694.3	20688.7	20753.0	20575.6	19883.9	18911.5	17329.8	14637.3	11559.3	8292.5	4095.3
-5°	20366.0	20367.4	20522.5	20593.7	19843.4	18486.7	16325.2	13634.1	10646.9	7335.4	3472.1
-7°	19822.5	19812.7	19870.0	19808.5	18809.5	17061.5	14841.3	12277.4	9225.9	6059.8	2752.5
-9°	18993.9	18972.9	18985.5	18270.1	16902.2	15211.6	13023.5	10329.7	7436.0	4654.2	1967.3
-11°	17666.5	17655.4	17093.7	15980.1	14668.1	12962.1	10549.1	8011.7	5555.4	3263.9	1258.9
-13°	14605.2	14675.1	14113.4	13094.8	11803.8	10047.5	7901.3	5790.1	3708.2	2017.6	342.3
-15°	11339.9	11394.4	10927.7	9991.6	8770.4	7237.6	5382.1	3631.4	2112.6	1078.7	321.4
-17°	8129.1	8169.6	7693.1	6776.5	5667.2	4450.2	3047.4	1872.3	1015.8	466.7	272.5
-19.5°	3896.9	3945.8	3606.2	3030.6	2371.1	1727.0	1075.9	652.5	335.3	262.7	139.7
-22.5°	823.0	843.9	779.7	670.7	572.9	480.6	297.6	231.9	166.3	107.6	64.3
-25.5°	252.9	257.1	243.1	215.2	178.8	145.3	100.6	79.6	62.9	50.3	41.9
-29°	64.3	65.7	64.3	60.1	54.5	51.7	47.5	43.3	40.5	37.7	34.9
-33°	33.5	33.5	33.5	34.9	34.9	34.9	34.9	34.9	34.9	33.5	32.1
-37.5°	26.5	26.5	26.5	27.9	27.9	29.3	30.7	32.1	32.1	32.1	32.1
-42.5°	21.0	21.0	22.4	22.4	25.2	26.5	27.9	29.3	30.7	30.7	30.7
-47.5°	18.2	18.2	18.2	19.6	22.4	25.2	26.5	27.9	29.3	29.3	29.3
-55°	15.4	15.4	16.8	18.2	21.0	23.8	25.2	26.5	27.9	26.5	26.5
-65°	12.6	14.0	15.4	18.2	22.4	25.2	25.2	25.2	23.8	22.4	21.0
-75°	11.2	12.6	16.8	22.4	23.8	22.4	21.0	18.2	18.2	16.8	15.4
-85°	11.2	15.4	22.4	16.8	15.4	14.0	18.2	36.3	57.3	78.2	95.0
-90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P95392

CATALOG NUMBER: VFS-K-B40-5-LED-E1-NSR

CANDELA DISTRIBUTION (continued):

	22.5°	25.5°	29°	33°	37.5°	42.5°	47.5°	55°	65°	75°	85°
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	110.4	121.6	127.1	129.9	132.7	135.5	136.9	138.3	138.3	139.7	139.7
75°	15.4	14.0	14.0	30.7	51.7	78.2	97.8	121.6	131.3	136.9	139.7
65°	19.6	18.2	16.8	15.4	14.0	15.4	32.1	71.3	114.6	132.7	138.3
55°	23.8	21.0	19.6	16.8	15.4	14.0	12.6	27.9	83.8	125.8	138.3
47.5°	26.5	25.2	22.4	18.2	16.8	14.0	12.6	11.2	60.1	120.2	138.3
42.5°	27.9	26.5	22.4	19.6	16.8	14.0	12.6	11.2	46.1	113.2	136.9
37.5°	29.3	26.5	23.8	19.6	16.8	14.0	12.6	9.8	33.5	107.6	136.9
33°	30.7	27.9	23.8	19.6	16.8	14.0	11.2	8.4	27.9	100.6	135.5
29°	33.5	29.3	23.8	19.6	16.8	12.6	9.8	7.0	22.4	95.0	134.1
25.5°	37.7	30.7	25.2	19.6	15.4	11.2	8.4	5.6	16.8	90.8	134.1
22.5°	47.5	34.9	26.5	19.6	14.0	9.8	7.0	4.2	12.6	86.6	132.7
19.5°	72.7	40.5	27.9	19.6	12.6	8.4	5.6	2.8	8.4	82.4	131.3
17°	142.5	50.3	29.3	18.2	11.2	7.0	4.2	1.4	5.6	81.0	129.9
15°	223.6	67.1	30.7	18.2	11.2	7.0	4.2	1.4	2.8	78.2	129.9
13°	301.8	99.2	32.1	18.2	9.8	5.6	2.8	0.0	1.4	76.8	128.5
11°	327.0	139.7	34.9	16.8	8.4	5.6	2.8	0.0	0.0	75.5	128.5
9°	336.7	183.0	37.7	16.8	8.4	4.2	1.4	0.0	0.0	74.1	127.1
7°	343.7	225.0	40.5	15.4	7.0	4.2	1.4	0.0	0.0	72.7	127.1
5°	345.1	261.3	44.7	15.4	7.0	2.8	0.0	0.0	0.0	71.3	125.8
3°	346.5	287.8	47.5	15.4	7.0	2.8	0.0	0.0	0.0	71.3	125.8
1°	346.5	301.8	50.3	15.4	7.0	2.8	0.0	0.0	0.0	69.9	125.8
0°	1169.5	301.8	50.3	15.4	7.0	2.8	0.0	0.0	0.0	69.9	125.8
-1°	346.5	296.2	48.9	15.4	7.0	2.8	0.0	0.0	0.0	69.9	124.4
-3°	345.1	276.7	44.7	15.4	7.0	2.8	0.0	0.0	0.0	69.9	125.8
-5°	343.7	245.9	40.5	14.0	7.0	2.8	0.0	0.0	0.0	71.3	125.8
-7°	340.9	204.0	36.3	14.0	7.0	2.8	0.0	0.0	0.0	71.3	125.8
-9°	332.5	157.9	33.5	14.0	7.0	4.2	1.4	0.0	0.0	72.7	125.8
-11°	320.0	114.6	30.7	15.4	8.4	4.2	1.4	0.0	0.0	74.1	127.1
-13°	272.5	78.2	27.9	15.4	8.4	5.6	2.8	0.0	0.0	75.5	127.1
-15°	180.2	54.5	26.5	15.4	8.4	5.6	2.8	0.0	1.4	76.8	128.5
-17°	107.6	41.9	25.2	15.4	9.8	5.6	4.2	1.4	2.8	78.2	128.5
-19.5°	57.3	33.5	23.8	15.4	9.8	7.0	4.2	1.4	5.6	81.0	129.9
-22.5°	39.1	29.3	22.4	16.8	12.6	8.4	5.6	2.8	9.8	85.2	131.3
-25.5°	33.5	27.9	22.4	18.2	14.0	9.8	7.0	5.6	15.4	89.4	132.7
-29°	30.7	26.5	22.4	19.6	15.4	11.2	9.8	7.0	21.0	95.0	134.1
-33°	30.7	27.9	23.8	19.6	16.8	14.0	11.2	8.4	27.9	100.6	135.5
-37.5°	29.3	27.9	23.8	21.0	16.8	14.0	12.6	11.2	36.3	107.6	136.9
-42.5°	29.3	26.5	23.8	19.6	16.8	15.4	12.6	12.6	47.5	114.6	136.9
-47.5°	27.9	25.2	22.4	19.6	16.8	15.4	12.6	12.6	61.5	121.6	138.3
-55°	23.8	22.4	19.6	18.2	16.8	14.0	14.0	29.3	86.6	127.1	138.3
-65°	19.6	18.2	16.8	15.4	14.0	15.4	33.5	72.7	116.0	132.7	138.3
-75°	15.4	14.0	15.4	30.7	51.7	79.6	99.2	123.0	132.7	138.3	139.7
-85°	110.4	121.6	127.1	129.9	134.1	135.5	136.9	138.3	138.3	139.7	139.7
-90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P95392

CATALOG NUMBER: VFS-K-B40-5-LED-E1-NSR

CANDELA DISTRIBUTION (continued):

	90°
90°	0.0
85°	0.0
75°	0.0
65°	0.0
55°	0.0
47.5°	0.0
42.5°	0.0
37.5°	0.0
33°	0.0
29°	0.0
25.5°	0.0
22.5°	0.0
19.5°	0.0
17°	0.0
15°	0.0
13°	0.0
11°	0.0
9°	0.0
7°	0.0
5°	0.0
3°	0.0
1°	0.0
0°	0.0
-1°	0.0
-3°	0.0
-5°	0.0
-7°	0.0
-9°	0.0
-11°	0.0
-13°	0.0
-15°	0.0
-17°	0.0
-19.5°	0.0
-22.5°	0.0
-25.5°	0.0
-29°	0.0
-33°	0.0
-37.5°	0.0
-42.5°	0.0
-47.5°	0.0
-55°	0.0
-65°	0.0
-75°	0.0
-85°	0.0
-90°	0.0

(END OF REPORT)