

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: INVUE

Report Number: P95411

Luminaire Tested: **VFS-K-B40-7-LED-E1-TS-SG**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P95411  
REPORT SCALED FROM IESNA LM79-08 TEST DATA (P22798)  
Test Lab: INNOVATION CENTER  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: INVUE  
Catalog Number: VFS-K-B40-7-LED-E1-TS-SG  
Description: ARCHITECTURAL FLOOD LUMINAIRE  
TIGHT SPOT WITH SOFTENING GLASS DISTRIBUTION  
WITH 40 LED'S, 700mA DRIVE CURRENT  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp:	N/A	NEMA Type:	3H x 3V
Luminaire Lumens:	6277.5 lumens	Max Intensity:	44356.5 candela
Efficiency:	N/A	Max Intensity Angle:	0°H x 0°V
Efficacy:	66.9 lumens/watt		
Luminous Opening:	(L: 0.83 ' x W: 0 ' x H: 0.5 ')		
Beam Angle (50%):	17°H x 17.9°V	Field Angle (10%):	36.5°H x 38.1°V
Beam Lumens:	2388 lumens	Field Lumens:	4859.4 lumens
Beam Efficiency:	38.0%	Field Efficiency:	77.4%
Input Watts (W):	93.8		
Input Voltage (V):	NR		
Input Current (A <sub>in</sub> ):	NR		
Voltage Rise (V):	NR		
Power Factor:	NR		
Total Harmonic Distortion (THDi):	NR		
Frequency (hertz):	60		
Stabilization Time:	NR		
Operation Time:	NR		
Ambient Temperature (°C):	NR		
Test Distance:	25 FT		



REPORT NUMBER: P95411

CATALOG NUMBER: VFS-K-B40-7-LED-E1-TS-SG

### Iso-Candela Plot

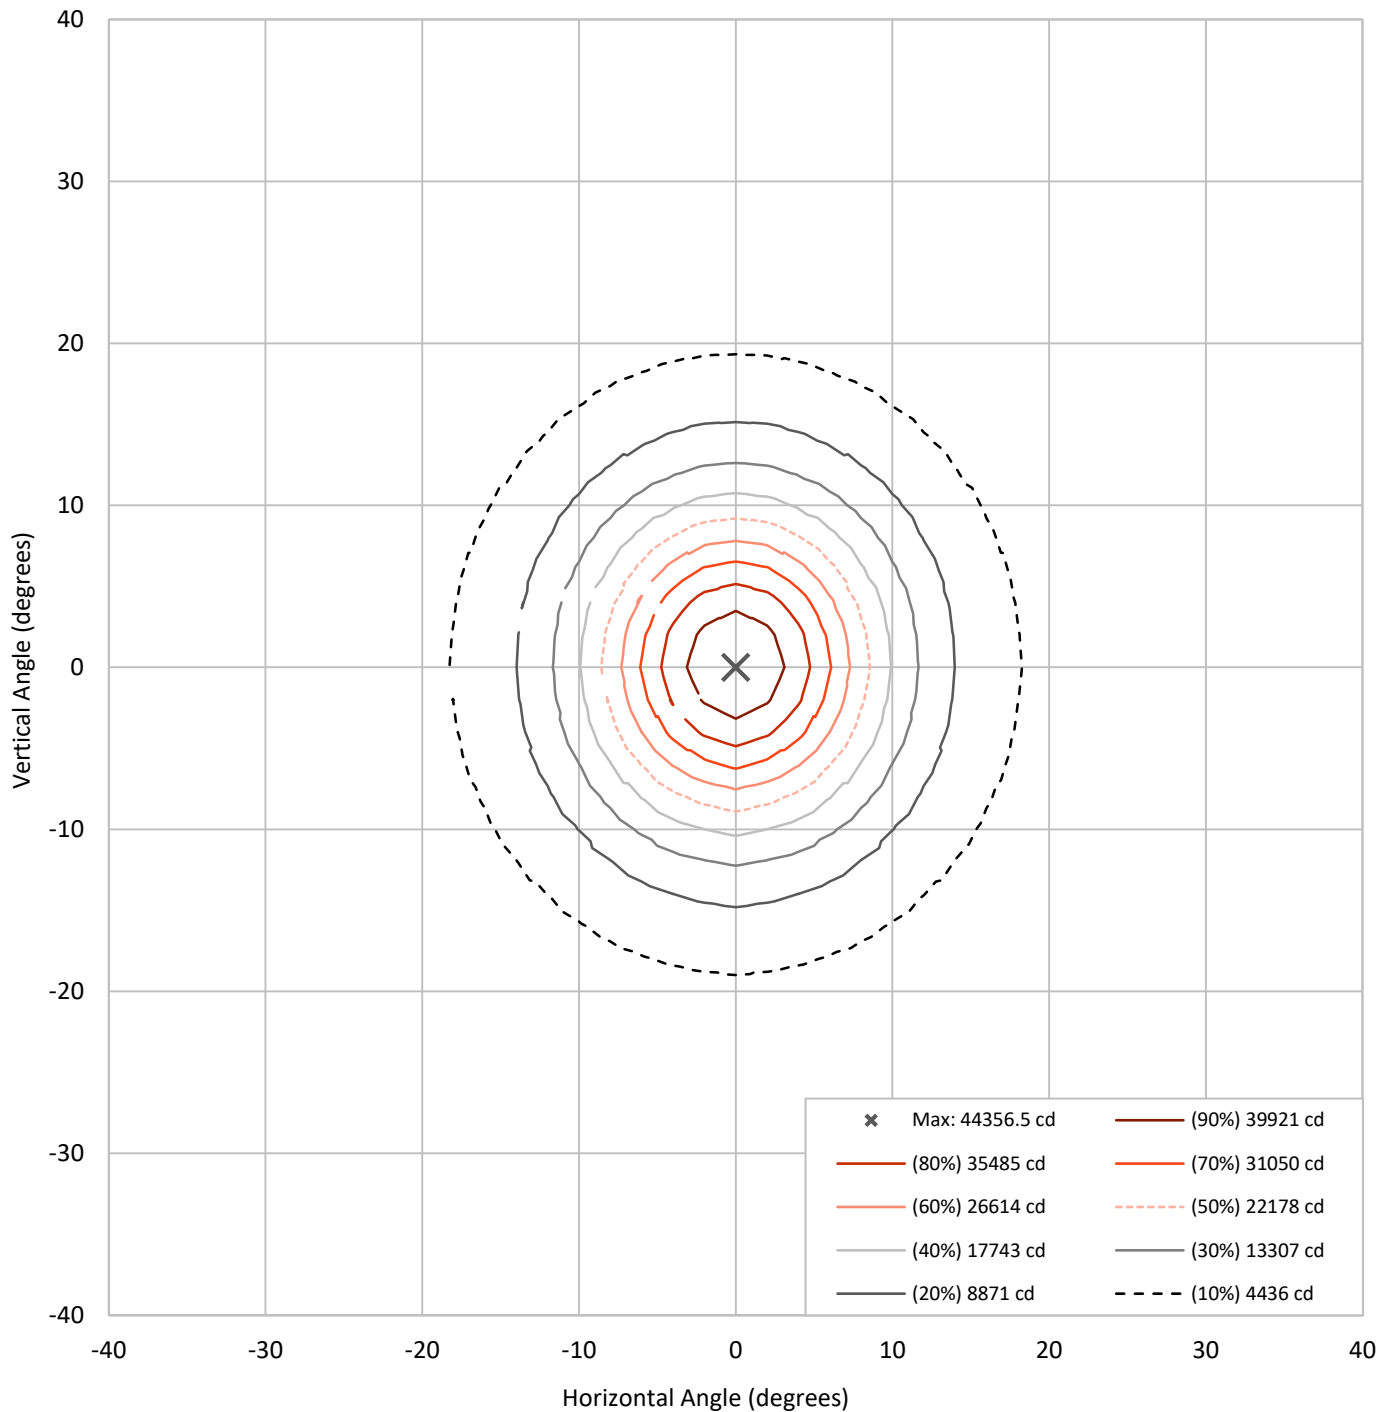



REPORT NUMBER: P95411  
 CATALOG NUMBER: VFS-K-B40-7-LED-E1-TS-SG


### Lumen Table

90	4.8	10.5		9.9		6.0		3.6		6.0		9.9		10.5		4.8			
80	4.8	10.5		9.9		6.0		3.6		6.0		9.9		10.5		4.8			
70	4.4	1.7	1.3	1.1	1.4	1.5	1.7	1.7	1.7	1.7	1.5	1.4	1.1	1.3	1.7	4.4			
60		1.2	0.9	1.1	1.6	1.9	2.2	2.1	2.1	2.2	1.9	1.6	1.1	0.9	1.2				
50	3.1	0.8	0.8	1.2	1.6	2.0	2.5	2.7	2.7	2.5	2.0	1.6	1.2	0.8	0.8	3.1			
40		0.5	0.5	1.0	1.6	2.6	4.6	7.4	7.4	4.6	2.6	1.6	1.0	0.5	0.5				
30	2.2	0.3	0.5	1.1	2.0	5.8	22.1	48.0	48.0	22.1	5.8	2.0	1.1	0.5	0.3	2.2			
20		0.3	0.5	1.2	3.3	19.2	93.4	248.1	248.1	93.4	19.2	3.3	1.2	0.5	0.3				
10	2.2	0.4	0.6	1.5	4.8	38.0	212.5	801.4	801.4	212.5	38.0	4.8	1.5	0.6	0.4	2.2			
0		0.3	0.6	1.4	4.7	37.4	207.3	775.5	775.5	207.3	37.4	4.7	1.4	0.6	0.3				
-10	2.4	0.3	0.5	1.2	3.2	18.4	89.1	230.9	230.9	89.1	18.4	3.2	1.2	0.5	0.3	2.4			
-20		0.5	0.7	1.2	2.2	5.9	21.3	45.2	45.2	21.3	5.9	2.2	1.2	0.7	0.5				
-30	2.9	0.5	0.5	1.0	1.5	2.4	4.3	6.7	6.7	4.3	2.4	1.5	1.0	0.5	0.5	2.9			
-40		0.6	0.5	0.8	1.1	1.5	2.1	2.2	2.2	2.1	1.5	1.1	0.8	0.5	0.6				
-50	4.3	1.3	1.0	1.2	1.6	1.8	2.1	2.1	2.1	2.1	1.8	1.6	1.2	1.0	1.3	4.3			
-60		1.8	1.4	1.0	1.1	1.4	1.6	1.5	1.5	1.6	1.4	1.1	1.0	1.4	1.8				
-70	4.8	10.6		10.3		5.6		3.3		5.6		10.3		10.6		4.8			
-80		10.6		10.3		5.6		3.3		5.6		10.3		10.6					
-90	4.8	10.6		10.3		5.6		3.3		5.6		10.3		10.6		4.8			
	-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90

REPORT NUMBER: P95411

CATALOG NUMBER: VFS-K-B40-7-LED-E1-TS-SG

### Luminous Intensity Polar Plot

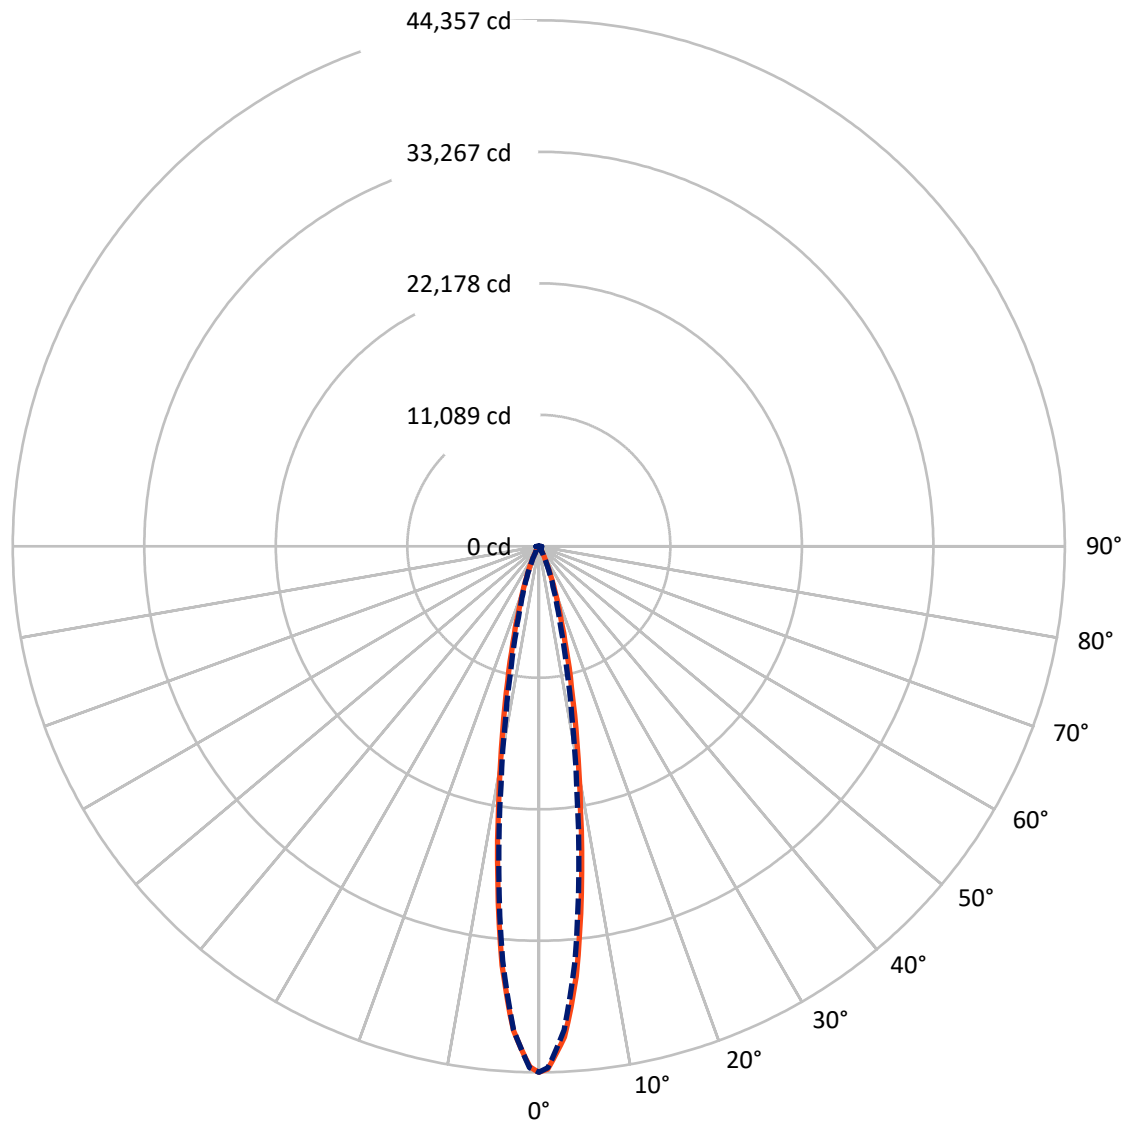


— Vertical Distribution Through 0-Deg      - - - Horizontal Distribution Through 0-Deg

REPORT NUMBER: P95411

CATALOG NUMBER: VFS-K-B40-7-LED-E1-TS-SG

### Luminous Intensity Plot

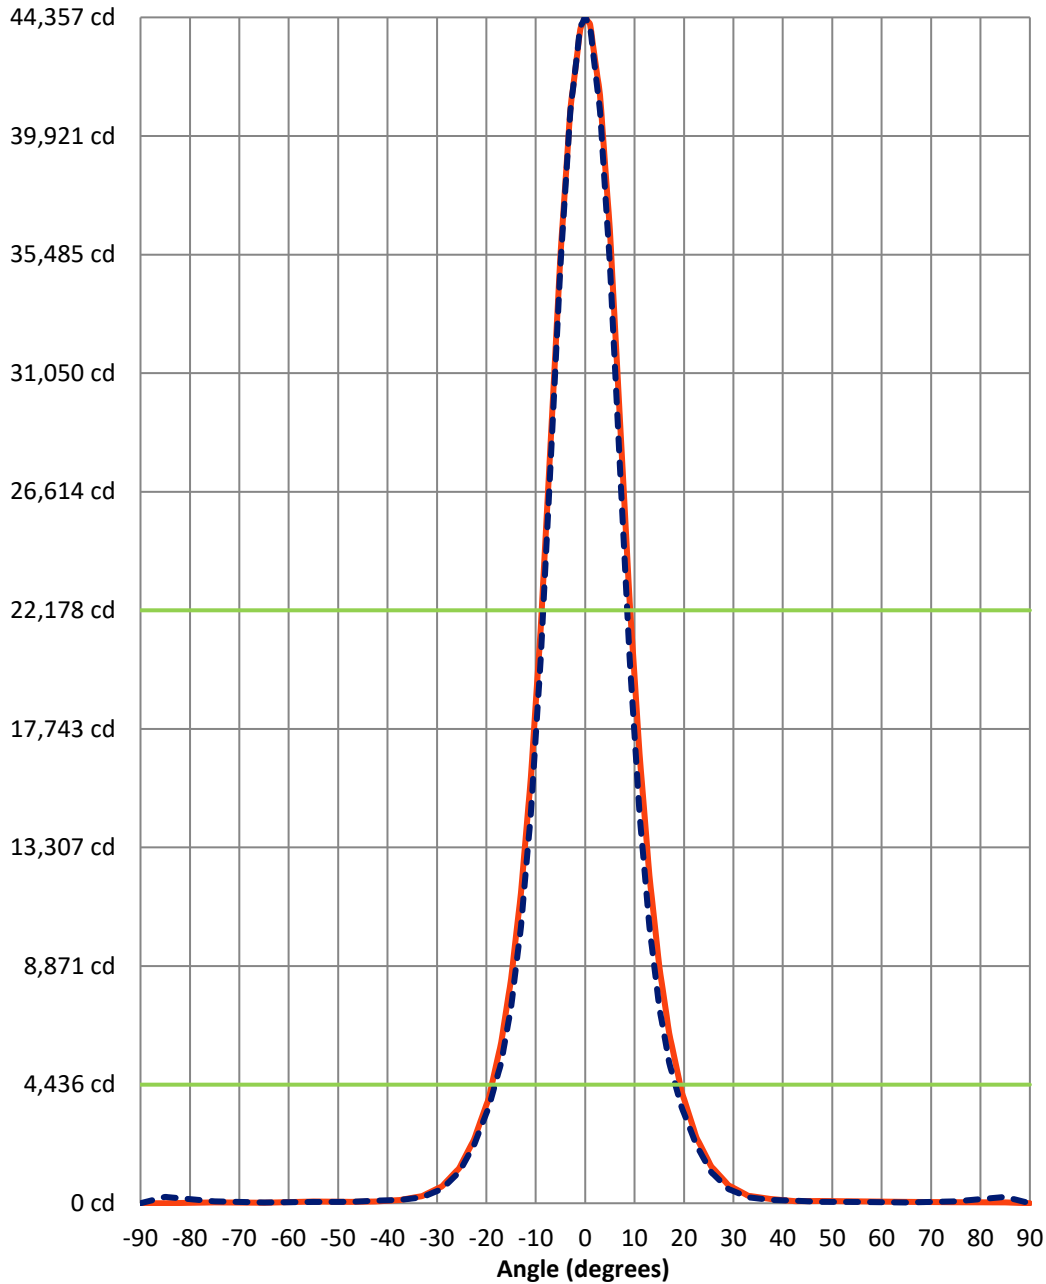

**Beam:**  
 H Angle: 17°  
 V Angle: 17.9°  
 Lumens: 2388  
 Efficiency: 38.0%

**Field:**  
 H Angle: 36.5°  
 V Angle: 38.1°  
 Lumens: 4859.4  
 Efficiency: 77.4%

**Spill:**  
 Lumens: 1418  
 Efficiency: 22.6%

— Vertical Distribution through 0-Deg  
 - - Horizontal Distribution through 0-Deg



REPORT NUMBER: P95411

CATALOG NUMBER: VFS-K-B40-7-LED-E1-TS-SG

FIELD  
BEAM

**CANDELA DISTRIBUTION:**

	0°	1°	3°	5°	7°	9°	11°	13°	15°	17°	19.5°
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	31.3	21.9	28.2	34.4	31.3	25.0	34.4	48.5	57.9	67.3	92.4
75°	37.6	34.4	34.4	31.3	31.3	40.7	43.8	37.6	34.4	40.7	40.7
65°	51.7	61.1	64.2	51.7	48.5	70.4	67.3	48.5	61.1	57.9	61.1
55°	70.4	73.6	57.9	67.3	73.6	67.3	70.4	79.8	73.6	79.8	76.7
47.5°	83.0	70.4	79.8	86.1	79.8	67.3	76.7	83.0	92.4	76.7	76.7
42.5°	76.7	92.4	104.9	89.2	89.2	89.2	83.0	92.4	89.2	86.1	67.3
37.5°	159.7	153.4	169.1	136.2	144.0	144.0	120.5	123.7	123.7	123.7	111.2
33°	280.2	277.1	289.6	274.0	248.9	228.6	197.3	169.1	159.7	140.9	120.5
29°	674.7	681.0	659.1	621.5	573.0	522.9	439.9	375.7	311.5	245.8	194.1
25.5°	1382.4	1391.8	1337.0	1254.0	1136.6	1000.4	847.0	710.8	579.3	471.2	347.6
22.5°	2465.7	2484.5	2392.2	2235.6	2019.6	1767.5	1499.8	1213.3	973.8	757.7	532.3
19.5°	4191.0	4219.1	4051.6	3741.6	3372.2	2958.9	2487.6	2019.6	1610.9	1232.1	856.4
17°	6362.4	6401.5	6096.2	5592.1	4926.8	4248.9	3556.9	2922.9	2331.1	1783.2	1207.0
15°	8859.4	8942.4	8483.7	7675.9	6639.5	5623.4	4594.9	3710.3	2943.2	2270.0	1554.6
13°	12255.1	12369.4	11658.6	10426.5	8904.8	7381.5	5844.2	4576.1	3608.6	2774.1	1927.2
11°	16821.8	16914.1	15812.0	14003.8	11760.4	9582.7	7464.5	5675.1	4391.3	3372.2	2340.5
9°	22503.1	22620.5	20939.1	18305.9	15098.1	12015.5	9181.9	6838.3	5136.5	3860.6	2659.9
7°	29426.0	29563.7	27174.7	23372.0	18814.7	14653.5	10952.5	8051.6	5884.9	4350.6	2999.6
5°	36387.9	36356.6	33499.5	28615.0	22681.6	17203.8	12630.8	9136.5	6573.7	4773.3	3270.4
3°	41446.2	41289.6	38213.3	32787.2	25850.3	19239.0	13905.2	9911.5	7076.3	5089.6	3461.4
1°	44082.6	43789.8	40636.8	34936.7	27512.9	20292.6	14558.0	10296.6	7331.4	5244.6	3575.7
0°	44356.5	43980.8	40843.5	35091.7	27655.3	20372.4	14576.8	10340.4	7328.3	5258.7	3602.3
-1°	43897.8	43429.7	40356.6	34620.4	27279.6	20073.4	14423.4	10235.5	7254.7	5207.0	3547.5
-3°	40910.8	40340.9	37443.1	31990.3	25241.3	18684.8	13598.3	9729.9	6946.3	5028.5	3420.7
-5°	35470.5	34780.1	32168.8	27458.1	21850.3	16436.6	12206.5	8878.2	6392.1	4674.7	3226.6
-7°	28427.1	27732.0	25703.1	22185.3	17958.3	13815.9	10487.6	7790.1	5703.3	4239.5	2943.2
-9°	21509.0	20993.9	19633.5	17225.7	14266.8	11226.5	8690.3	6531.4	4939.3	3747.9	2617.6
-11°	15916.9	15547.4	14716.1	13062.9	11015.2	8846.9	7002.7	5455.9	4200.4	3214.1	2251.3
-13°	11611.6	11353.3	10789.7	9684.5	8295.8	6838.3	5554.5	4413.3	3461.4	2672.4	1863.0
-15°	8388.2	8356.9	7805.8	7121.7	6201.1	5228.9	4372.6	3535.0	2792.9	2168.3	1474.7
-17°	6013.3	5878.6	5634.4	5203.9	4621.5	3990.6	3391.0	2771.0	2188.6	1703.3	1166.3
-19.5°	3935.8	3945.2	3738.5	3503.7	3168.7	2786.7	2382.8	1936.6	1535.8	1197.6	828.2
-22.5°	2382.8	2379.6	2257.5	2133.8	1914.7	1687.7	1462.2	1194.5	961.2	764.0	547.9
-25.5°	1311.9	1321.3	1235.2	1169.5	1053.6	917.4	803.1	662.2	541.7	430.5	314.7
-29°	630.9	646.6	615.3	576.1	538.5	477.5	416.4	341.3	299.0	239.5	178.5
-33°	267.7	264.6	264.6	245.8	236.4	209.8	181.6	162.8	147.2	140.9	114.3
-37.5°	120.5	126.8	136.2	114.3	133.1	129.9	111.2	101.8	104.9	108.0	111.2
-42.5°	64.2	70.4	70.4	67.3	76.7	73.6	79.8	76.7	83.0	67.3	70.4
-47.5°	51.7	61.1	67.3	73.6	67.3	61.1	64.2	70.4	67.3	61.1	57.9
-55°	64.2	70.4	73.6	86.1	70.4	73.6	73.6	86.1	73.6	70.4	79.8
-65°	18.8	21.9	51.7	43.8	51.7	54.8	54.8	51.7	54.8	57.9	43.8
-75°	31.3	40.7	37.6	51.7	43.8	34.4	51.7	34.4	43.8	54.8	43.8
-85°	0.0	12.5	25.0	15.7	21.9	9.4	18.8	21.9	37.6	54.8	76.7
-90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P95411

CATALOG NUMBER: VFS-K-B40-7-LED-E1-TS-SG

**CANDELA DISTRIBUTION (continued):**

	22.5°	25.5°	29°	33°	37.5°	42.5°	47.5°	55°	65°	75°	85°
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	114.3	123.7	144.0	184.7	203.5	231.7	239.5	258.3	277.1	286.5	317.8
75°	37.6	25.0	25.0	40.7	40.7	64.2	83.0	133.1	191.0	245.8	295.9
65°	48.5	57.9	61.1	57.9	51.7	40.7	48.5	70.4	123.7	212.9	292.8
55°	73.6	73.6	67.3	64.2	67.3	57.9	51.7	43.8	83.0	178.5	292.8
47.5°	76.7	70.4	70.4	73.6	64.2	51.7	43.8	43.8	67.3	156.6	270.8
42.5°	76.7	64.2	67.3	61.1	57.9	67.3	48.5	40.7	37.6	126.8	258.3
37.5°	111.2	98.6	92.4	83.0	67.3	64.2	57.9	37.6	43.8	126.8	267.7
33°	89.2	79.8	67.3	64.2	43.8	28.2	37.6	12.5	15.7	79.8	236.4
29°	150.3	108.0	86.1	70.4	70.4	48.5	48.5	34.4	15.7	79.8	239.5
25.5°	225.4	159.7	114.3	86.1	70.4	48.5	61.1	31.3	25.0	73.6	236.4
22.5°	328.8	206.7	123.7	83.0	57.9	37.6	54.8	15.7	6.3	61.1	222.3
19.5°	526.0	317.8	184.7	108.0	89.2	61.1	51.7	25.0	18.8	70.4	239.5
17°	720.1	410.2	209.8	126.8	89.2	57.9	43.8	21.9	12.5	64.2	233.3
15°	904.9	513.5	252.1	123.7	83.0	54.8	37.6	18.8	12.5	54.8	219.2
13°	1114.7	612.1	286.5	140.9	89.2	48.5	34.4	21.9	9.4	51.7	216.0
11°	1404.3	770.2	382.0	200.4	136.2	92.4	83.0	57.9	37.6	86.1	245.8
9°	1595.3	856.4	388.3	191.0	95.5	64.2	51.7	21.9	15.7	70.4	225.4
7°	1805.1	955.0	439.9	191.0	117.4	73.6	48.5	37.6	18.8	64.2	231.7
5°	1964.8	1070.8	480.6	212.9	123.7	92.4	57.9	28.2	18.8	64.2	239.5
3°	2093.1	1127.2	502.5	216.0	120.5	83.0	64.2	37.6	21.9	73.6	236.4
1°	2162.0	1166.3	529.2	225.4	120.5	86.1	57.9	37.6	31.3	79.8	239.5
0°	2174.5	1166.3	532.3	222.3	123.7	95.5	51.7	48.5	28.2	70.4	236.4
-1°	2155.8	1142.8	499.4	219.2	114.3	79.8	43.8	28.2	12.5	67.3	228.6
-3°	2066.5	1108.4	499.4	222.3	123.7	83.0	54.8	28.2	15.7	67.3	231.7
-5°	1936.6	1034.8	468.1	200.4	111.2	76.7	51.7	40.7	12.5	51.7	225.4
-7°	1761.2	939.3	430.5	184.7	114.3	79.8	43.8	43.8	18.8	54.8	225.4
-9°	1554.6	850.1	394.5	184.7	101.8	76.7	43.8	37.6	18.8	64.2	228.6
-11°	1330.7	732.7	344.4	162.8	108.0	70.4	43.8	37.6	28.2	61.1	228.6
-13°	1095.9	594.9	283.4	140.9	79.8	57.9	31.3	18.8	9.4	57.9	222.3
-15°	868.9	477.5	242.7	129.9	86.1	61.1	28.2	12.5	12.5	61.1	225.4
-17°	687.3	400.8	225.4	129.9	101.8	73.6	57.9	28.2	18.8	79.8	239.5
-19.5°	508.8	302.1	169.1	120.5	89.2	61.1	64.2	21.9	34.4	86.1	239.5
-22.5°	360.1	242.7	165.9	133.1	101.8	89.2	70.4	61.1	51.7	114.3	255.2
-25.5°	212.9	147.2	104.9	79.8	61.1	43.8	48.5	28.2	15.7	76.7	228.6
-29°	144.0	111.2	92.4	64.2	48.5	37.6	40.7	25.0	21.9	79.8	236.4
-33°	92.4	76.7	73.6	54.8	61.1	37.6	40.7	15.7	21.9	86.1	239.5
-37.5°	92.4	79.8	70.4	64.2	54.8	64.2	48.5	40.7	37.6	108.0	245.8
-42.5°	54.8	64.2	48.5	31.3	40.7	40.7	28.2	21.9	31.3	108.0	239.5
-47.5°	48.5	48.5	37.6	40.7	43.8	40.7	28.2	15.7	51.7	133.1	245.8
-55°	83.0	70.4	67.3	76.7	67.3	73.6	54.8	61.1	108.0	184.7	289.6
-65°	43.8	51.7	54.8	40.7	34.4	21.9	48.5	67.3	133.1	209.8	283.4
-75°	31.3	37.6	40.7	48.5	67.3	79.8	92.4	133.1	200.4	261.4	292.8
-85°	89.2	111.2	136.2	172.2	203.5	225.4	248.9	261.4	264.6	280.2	292.8
-90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0





REPORT NUMBER: P95411

CATALOG NUMBER: VFS-K-B40-7-LED-E1-TS-SG

**CANDELA DISTRIBUTION (continued):**

	90°
90°	0.0
85°	0.0
75°	0.0
65°	0.0
55°	0.0
47.5°	0.0
42.5°	0.0
37.5°	0.0
33°	0.0
29°	0.0
25.5°	0.0
22.5°	0.0
19.5°	0.0
17°	0.0
15°	0.0
13°	0.0
11°	0.0
9°	0.0
7°	0.0
5°	0.0
3°	0.0
1°	0.0
0°	0.0
-1°	0.0
-3°	0.0
-5°	0.0
-7°	0.0
-9°	0.0
-11°	0.0
-13°	0.0
-15°	0.0
-17°	0.0
-19.5°	0.0
-22.5°	0.0
-25.5°	0.0
-29°	0.0
-33°	0.0
-37.5°	0.0
-42.5°	0.0
-47.5°	0.0
-55°	0.0
-65°	0.0
-75°	0.0
-85°	0.0
-90°	0.0

(END OF REPORT)