

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: INVUE

Report Number: P95405

Luminaire Tested: **VFS-K-B40-7-LED-E1-TS**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P95405
REPORT SCALED FROM IESNA LM79-08 TEST DATA (P22640)
Test Lab: INNOVATION CENTER
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: INVUE
Catalog Number: VFS-K-B40-7-LED-E1-TS
Description: ARCHITECTURAL FLOOD LUMINAIRE
TIGHT SPOT DISTRIBUTION
WITH 40 LED'S, 700mA DRIVE CURRENT
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A	NEMA Type: 3H x 2V
Luminaire Lumens: 6070.4 lumens	Max Intensity: 68840.1 candela
Efficiency: N/A	Max Intensity Angle: 0°H x 0°V
Efficacy: 64.7 lumens/watt	
Luminous Opening: (L: 0.83 ' x W: 0 ' x H: 0.5 ')	
Beam Angle (50%): 14°H x 13.9°V	Field Angle (10%): 29.1°H x 28.7°V
Beam Lumens: 2263.6 lumens	Field Lumens: 4552 lumens
Beam Efficiency: 37.3%	Field Efficiency: 75.0%


Input Watts (W): 93.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



REPORT NUMBER: P95405

CATALOG NUMBER: VFS-K-B40-7-LED-E1-TS

Iso-Candela Plot

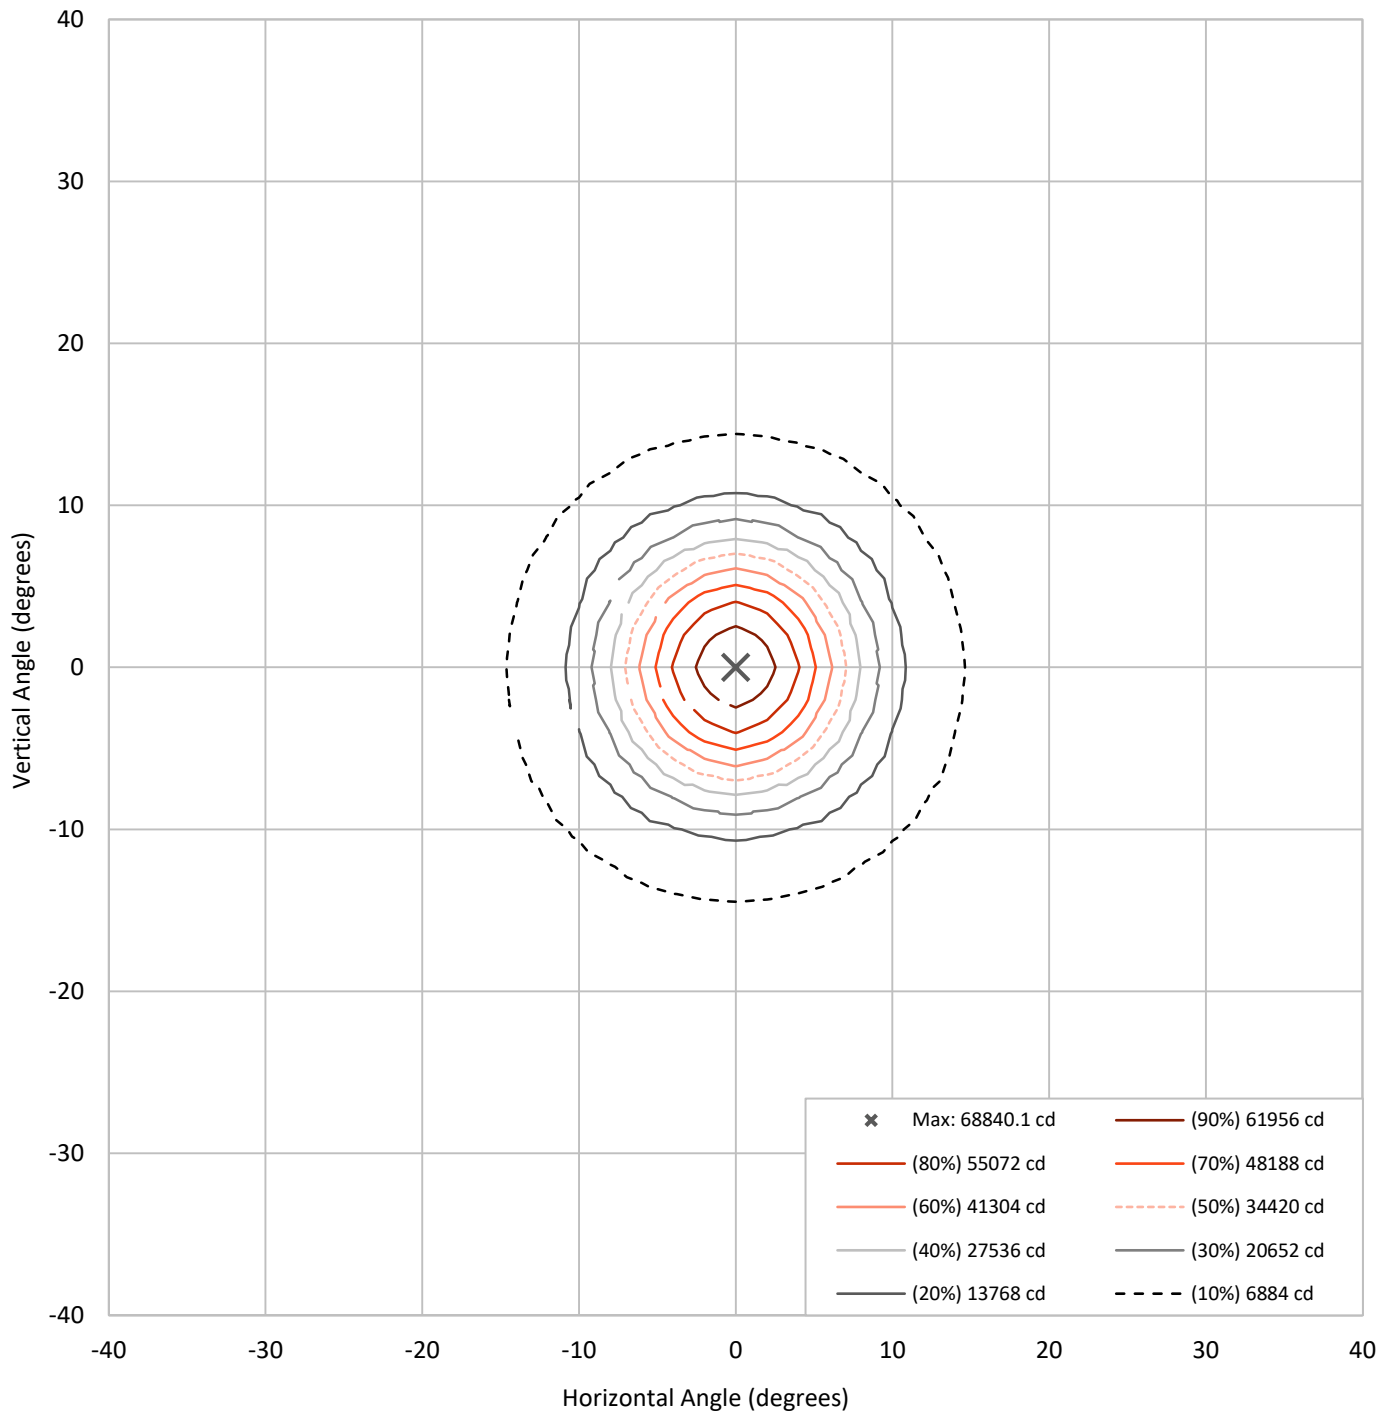



REPORT NUMBER: P95405
 CATALOG NUMBER: VFS-K-B40-7-LED-E1-TS


Lumen Table

90	5.7	10.4		8.0		2.0		0.8		2.0		8.0		10.4		5.7			
80	5.7	10.4		8.0		2.0		0.8		2.0		8.0		10.4		5.7			
70	4.0	0.9	0.5	0.1	0.1	0.1	0.2	0.4	0.4	0.2	0.1	0.1	0.1	0.5	0.9	4.0			
60		0.5	0.2	0.1	0.1	0.3	0.5	0.4	0.4	0.5	0.3	0.1	0.1	0.2	0.5				
50	2.7	0.4	0.2	0.2	0.3	0.8	0.9	0.7	0.7	0.9	0.8	0.3	0.2	0.2	0.4	2.7			
40		0.2	0.1	0.2	0.3	0.8	1.1	1.1	1.1	1.1	0.8	0.3	0.2	0.1	0.2				
30	2.1	0.1	0.0	0.0	0.2	1.1	8.2	28.9	28.9	8.2	1.1	0.2	0.0	0.0	0.1	2.1			
20		0.0	0.0	0.0	0.3	7.7	76.9	183.5	183.5	76.9	7.7	0.3	0.0	0.0	0.0				
10	1.8	0.0	0.0	0.0	0.7	27.8	181.6	949.0	949.0	181.6	27.8	0.7	0.0	0.0	0.0	1.8			
0		0.0	0.0	0.1	0.6	27.9	183.6	946.7	946.7	183.6	27.9	0.6	0.1	0.0	0.0				
-10	1.9	0.0	0.0	0.0	0.1	7.8	79.6	186.4	186.4	79.6	7.8	0.1	0.0	0.0	0.0	1.9			
-20		0.1	0.1	0.0	0.2	1.2	9.0	31.1	31.1	9.0	1.2	0.2	0.0	0.1	0.1				
-30	2.5	0.2	0.1	0.0	0.2	0.5	1.0	1.0	1.0	1.0	0.5	0.2	0.0	0.1	0.2	2.5			
-40		0.2	0.1	0.1	0.1	0.4	0.6	0.4	0.4	0.6	0.4	0.1	0.1	0.1	0.2				
-50	4.1	0.5	0.2	0.1	0.1	0.2	0.5	0.3	0.3	0.5	0.2	0.1	0.1	0.2	0.5	4.1			
-60		1.0	0.5	0.2	0.2	0.1	0.3	0.4	0.4	0.3	0.1	0.2	0.2	0.5	1.0				
-70	5.8	10.6		8.3		2.0		1.1		2.0		8.3		10.6		5.8			
-80		10.6		8.3		2.0		1.1		2.0		8.3		10.6					
-90	5.8	10.6		8.3		2.0		1.1		2.0		8.3		10.6		5.8			
	-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90

REPORT NUMBER: P95405

CATALOG NUMBER: VFS-K-B40-7-LED-E1-TS

Luminous Intensity Polar Plot

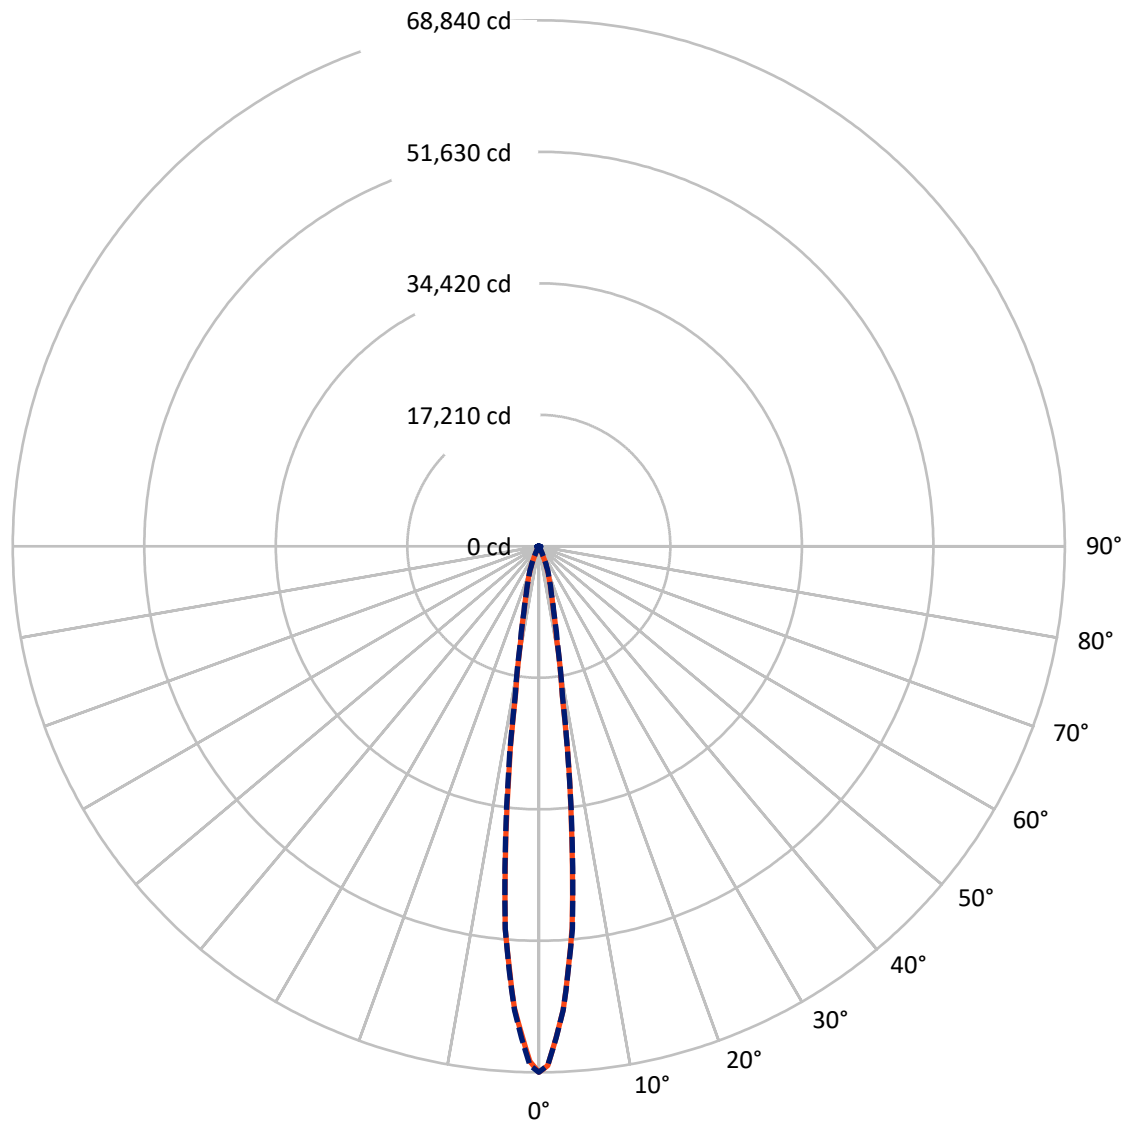


— Vertical Distribution Through 0-Deg - - - Horizontal Distribution Through 0-Deg

REPORT NUMBER: P95405

CATALOG NUMBER: VFS-K-B40-7-LED-E1-TS

Luminous Intensity Plot

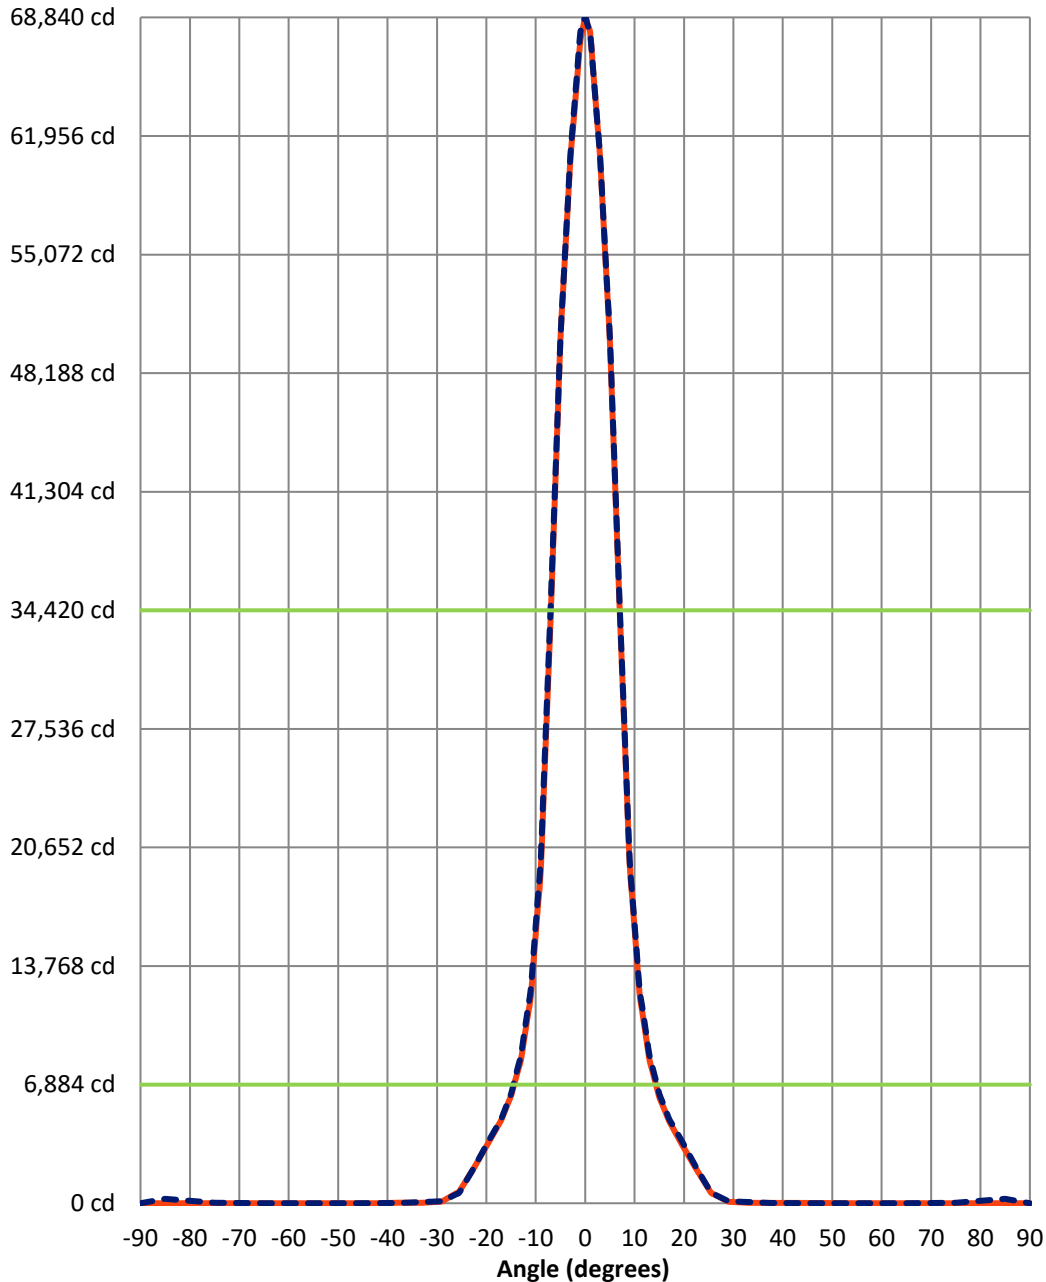

Beam:
 H Angle: 14°
 V Angle: 13.9°
 Lumens: 2263.6
 Efficiency: 37.3%

Field:
 H Angle: 29.1°
 V Angle: 28.7°
 Lumens: 4552
 Efficiency: 75.0%

Spill:
 Lumens: 1518.4
 Efficiency: 25.0%

— Vertical Distribution through 0-Deg
 - - Horizontal Distribution through 0-Deg



REPORT NUMBER: P95405

CATALOG NUMBER: VFS-K-B40-7-LED-E1-TS

FIELD
BEAM

CANDELA DISTRIBUTION:

	0°	1°	3°	5°	7°	9°	11°	13°	15°	17°	19.5°
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	18.8	6.3	0.0	0.0	0.0	3.1	3.1	6.3	18.8	28.2
75°	0.0	0.0	9.4	15.7	15.7	12.5	3.1	0.0	0.0	9.4	0.0
65°	0.0	0.0	9.4	12.5	25.0	21.9	6.3	12.5	9.4	3.1	3.1
55°	0.0	0.0	0.0	18.8	15.7	15.7	21.9	25.0	21.9	6.3	9.4
47.5°	12.5	12.5	18.8	12.5	21.9	31.3	28.2	31.3	31.3	25.0	25.0
42.5°	18.8	9.4	15.7	25.0	31.3	34.4	25.0	34.4	40.7	28.2	37.6
37.5°	18.8	21.9	37.6	37.6	43.8	31.3	37.6	34.4	48.5	43.8	37.6
33°	25.0	21.9	31.3	28.2	43.8	34.4	43.8	21.9	34.4	34.4	28.2
29°	89.2	79.8	86.1	70.4	70.4	67.3	73.6	54.8	51.7	40.7	31.3
25.5°	598.0	624.7	513.5	416.4	311.5	206.7	147.2	120.5	83.0	73.6	54.8
22.5°	1974.2	2003.9	1881.8	1687.7	1452.8	1114.7	812.5	519.8	314.7	197.3	111.2
19.5°	3445.8	3442.6	3356.5	3165.5	2916.6	2525.2	2050.9	1474.7	967.5	554.2	225.4
17°	4763.9	4785.9	4535.4	4277.1	3926.4	3519.3	3118.6	2611.3	1964.8	1280.6	588.6
15°	6152.6	6177.6	5942.8	5527.9	5012.9	4382.0	3827.8	3286.1	2713.1	1971.0	1025.4
13°	8338.1	8360.0	7935.7	7242.2	6445.3	5509.1	4687.2	3938.9	3306.4	2620.7	1585.9
11°	12178.4	12261.3	11384.6	10010.1	8579.2	7026.2	5745.5	4659.1	3840.3	3113.9	2105.7
9°	19688.3	19735.2	17480.9	14496.9	11747.8	9105.2	7121.7	5551.4	4443.0	3572.6	2576.9
7°	34324.5	34216.5	28907.8	21853.4	16143.9	11682.1	8640.2	6564.3	5056.7	3978.0	2930.7
5°	50006.6	49831.2	44525.6	33238.1	22210.4	14678.5	10177.6	7420.7	5672.0	4385.1	3232.8
3°	60771.3	60328.2	54588.9	44245.4	29175.5	17610.8	11491.1	8120.5	6096.2	4665.3	3439.5
1°	67961.8	67111.7	60190.4	49563.5	33961.3	19586.5	12298.9	8525.9	6315.4	4843.8	3627.4
0°	68840.1	67939.9	60812.0	50274.3	34567.2	19913.7	12461.7	8598.0	6353.0	4886.1	3643.0
-1°	67420.1	66509.0	60015.1	49655.9	33853.3	19652.3	12378.8	8538.5	6337.3	4862.6	3592.9
-3°	60586.5	59700.4	54811.2	44312.7	29050.2	17726.6	11639.8	8203.4	6118.1	4710.7	3452.0
-5°	50247.7	49273.9	44060.7	33512.0	21967.7	14817.9	10296.6	7519.3	5665.7	4397.6	3210.9
-7°	33955.1	32942.2	29529.3	22060.1	16070.3	11916.9	8809.3	6669.2	5142.8	4021.9	2965.1
-9°	19292.2	18827.2	17354.0	14666.0	11815.2	9366.6	7276.6	5745.5	4563.6	3646.2	2639.5
-11°	12024.9	11846.5	11292.3	10133.8	8655.9	7235.9	5878.6	4837.5	3932.6	3184.3	2158.9
-13°	8331.8	8233.2	8120.5	7408.2	6531.4	5643.8	4800.0	4054.8	3381.6	2663.0	1617.2
-15°	6248.1	6168.2	6152.6	5690.7	5124.0	4541.6	3956.1	3401.9	2814.8	2054.0	1102.1
-17°	4821.9	4809.3	4790.6	4443.0	4034.4	3652.4	3217.2	2728.7	2050.9	1321.3	630.9
-19.5°	3560.0	3538.1	3528.7	3306.4	3026.2	2675.5	2198.0	1643.8	1050.5	591.8	255.2
-22.5°	2057.1	2072.8	2025.8	1767.5	1515.4	1210.2	904.9	582.4	335.0	197.3	104.9
-25.5°	674.7	671.6	659.1	502.5	382.0	255.2	187.9	147.2	117.4	89.2	67.3
-29°	101.8	76.7	104.9	95.5	86.1	89.2	70.4	40.7	54.8	54.8	37.6
-33°	25.0	15.7	34.4	40.7	40.7	51.7	48.5	31.3	43.8	40.7	31.3
-37.5°	31.3	3.1	6.3	6.3	18.8	21.9	12.5	21.9	28.2	25.0	15.7
-42.5°	0.0	6.3	9.4	21.9	25.0	31.3	18.8	31.3	34.4	25.0	28.2
-47.5°	0.0	0.0	0.0	0.0	15.7	18.8	12.5	15.7	21.9	15.7	9.4
-55°	0.0	6.3	3.1	12.5	15.7	12.5	25.0	21.9	21.9	18.8	15.7
-65°	0.0	0.0	12.5	21.9	18.8	18.8	15.7	3.1	15.7	12.5	3.1
-75°	0.0	0.0	31.3	28.2	18.8	9.4	18.8	15.7	12.5	3.1	9.4
-85°	0.0	9.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	12.5	28.2
-90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P95405

CATALOG NUMBER: VFS-K-B40-7-LED-E1-TS

CANDELA DISTRIBUTION (continued):

	22.5°	25.5°	29°	33°	37.5°	42.5°	47.5°	55°	65°	75°	85°
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	51.7	67.3	108.0	153.4	203.5	239.5	270.8	305.3	335.0	360.1	385.1
75°	3.1	12.5	3.1	0.0	9.4	18.8	34.4	64.2	178.5	283.4	363.2
65°	3.1	6.3	3.1	3.1	3.1	3.1	3.1	21.9	48.5	200.4	347.6
55°	9.4	3.1	3.1	3.1	6.3	3.1	3.1	3.1	25.0	111.2	320.9
47.5°	37.6	31.3	12.5	9.4	6.3	12.5	15.7	12.5	31.3	76.7	320.9
42.5°	31.3	43.8	15.7	12.5	12.5	6.3	6.3	9.4	28.2	73.6	314.7
37.5°	37.6	43.8	31.3	18.8	15.7	12.5	18.8	6.3	21.9	67.3	305.3
33°	21.9	15.7	18.8	6.3	0.0	0.0	3.1	0.0	6.3	57.9	286.5
29°	18.8	15.7	31.3	0.0	0.0	0.0	0.0	0.0	0.0	51.7	280.2
25.5°	37.6	34.4	28.2	3.1	0.0	0.0	0.0	0.0	0.0	43.8	277.1
22.5°	67.3	43.8	31.3	25.0	9.4	12.5	0.0	3.1	18.8	48.5	286.5
19.5°	64.2	21.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	31.3	258.3
17°	172.2	61.1	28.2	15.7	0.0	0.0	0.0	0.0	0.0	37.6	267.7
15°	314.7	73.6	28.2	12.5	0.0	0.0	0.0	0.0	0.0	28.2	261.4
13°	547.9	117.4	34.4	31.3	3.1	0.0	0.0	0.0	0.0	25.0	258.3
11°	840.7	162.8	40.7	18.8	0.0	0.0	0.0	0.0	3.1	21.9	255.2
9°	1166.3	255.2	61.1	25.0	3.1	0.0	0.0	0.0	0.0	28.2	258.3
7°	1481.0	338.2	70.4	18.8	0.0	0.0	0.0	0.0	0.0	21.9	248.9
5°	1755.0	471.2	117.4	48.5	15.7	6.3	6.3	0.0	0.0	31.3	261.4
3°	1930.3	551.1	111.2	31.3	18.8	3.1	0.0	0.0	0.0	28.2	255.2
1°	2038.3	594.9	101.8	37.6	9.4	0.0	0.0	0.0	0.0	25.0	248.9
0°	2063.4	605.9	114.3	70.4	15.7	6.3	0.0	0.0	0.0	28.2	255.2
-1°	2035.2	598.0	98.6	48.5	9.4	3.1	0.0	0.0	0.0	18.8	248.9
-3°	1946.0	557.3	108.0	40.7	18.8	9.4	0.0	0.0	0.0	25.0	255.2
-5°	1729.9	449.3	64.2	9.4	0.0	0.0	0.0	0.0	0.0	12.5	236.4
-7°	1499.8	356.9	70.4	21.9	0.0	0.0	0.0	0.0	0.0	18.8	245.8
-9°	1225.8	277.1	76.7	31.3	6.3	12.5	0.0	6.3	3.1	28.2	261.4
-11°	872.0	169.1	34.4	6.3	0.0	0.0	0.0	0.0	0.0	15.7	252.1
-13°	554.2	98.6	6.3	3.1	0.0	0.0	0.0	0.0	0.0	12.5	245.8
-15°	328.8	86.1	21.9	12.5	0.0	0.0	0.0	0.0	0.0	21.9	255.2
-17°	159.7	43.8	3.1	6.3	0.0	0.0	0.0	0.0	0.0	18.8	252.1
-19.5°	86.1	28.2	9.4	9.4	0.0	0.0	0.0	0.0	0.0	25.0	258.3
-22.5°	54.8	37.6	25.0	9.4	0.0	0.0	0.0	0.0	0.0	37.6	267.7
-25.5°	51.7	37.6	34.4	18.8	0.0	0.0	0.0	12.5	9.4	48.5	277.1
-29°	31.3	18.8	31.3	6.3	6.3	0.0	0.0	3.1	6.3	40.7	280.2
-33°	25.0	21.9	25.0	12.5	15.7	0.0	3.1	6.3	15.7	54.8	289.6
-37.5°	9.4	12.5	6.3	3.1	0.0	0.0	0.0	3.1	9.4	57.9	289.6
-42.5°	25.0	18.8	18.8	15.7	6.3	18.8	0.0	9.4	15.7	70.4	308.4
-47.5°	12.5	6.3	0.0	0.0	0.0	0.0	0.0	3.1	12.5	61.1	302.1
-55°	9.4	9.4	9.4	12.5	3.1	3.1	6.3	6.3	34.4	117.4	324.1
-65°	3.1	0.0	0.0	0.0	6.3	3.1	6.3	21.9	54.8	209.8	341.3
-75°	12.5	12.5	12.5	18.8	34.4	28.2	43.8	83.0	194.1	299.0	378.9
-85°	43.8	54.8	95.5	147.2	184.7	236.4	264.6	292.8	317.8	356.9	378.9
-90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P95405

CATALOG NUMBER: VFS-K-B40-7-LED-E1-TS

CANDELA DISTRIBUTION (continued):

	90°
90°	0.0
85°	0.0
75°	0.0
65°	0.0
55°	0.0
47.5°	0.0
42.5°	0.0
37.5°	0.0
33°	0.0
29°	0.0
25.5°	0.0
22.5°	0.0
19.5°	0.0
17°	0.0
15°	0.0
13°	0.0
11°	0.0
9°	0.0
7°	0.0
5°	0.0
3°	0.0
1°	0.0
0°	0.0
-1°	0.0
-3°	0.0
-5°	0.0
-7°	0.0
-9°	0.0
-11°	0.0
-13°	0.0
-15°	0.0
-17°	0.0
-19.5°	0.0
-22.5°	0.0
-25.5°	0.0
-29°	0.0
-33°	0.0
-37.5°	0.0
-42.5°	0.0
-47.5°	0.0
-55°	0.0
-65°	0.0
-75°	0.0
-85°	0.0
-90°	0.0

(END OF REPORT)