

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: INVUE

Report Number: P678124

Luminaire Tested: **CCW-SA-1-AMB-U-SLL**

Issue Date: 04/26/2023



Test Information

Test Method: LM-79-08
Report Number: P678124
Test Lab: INNOVATION CENTER(G1)
Issue Date: 04/26/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: INVUE
Catalog Number: CCW-SA-1-AMB-U-SLL
Description: INVUE CLEAR CURVE Wall Pack MOUNT LIGHT SQUARE LUMINAIRE @500mA w/
SLL distribution lens
Light Source: (16) 1620 CCT, 0 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1081.7 lumens
Efficiency: N/A
Efficacy: 47.9 lumens/watt
Luminous Opening: Rectangular (W 1' x L: 0.5' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B0 - U0 - G1

Input Watts (W): 22.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

REPORT NUMBER: P678124
 CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 - - - 1/2 Max cd

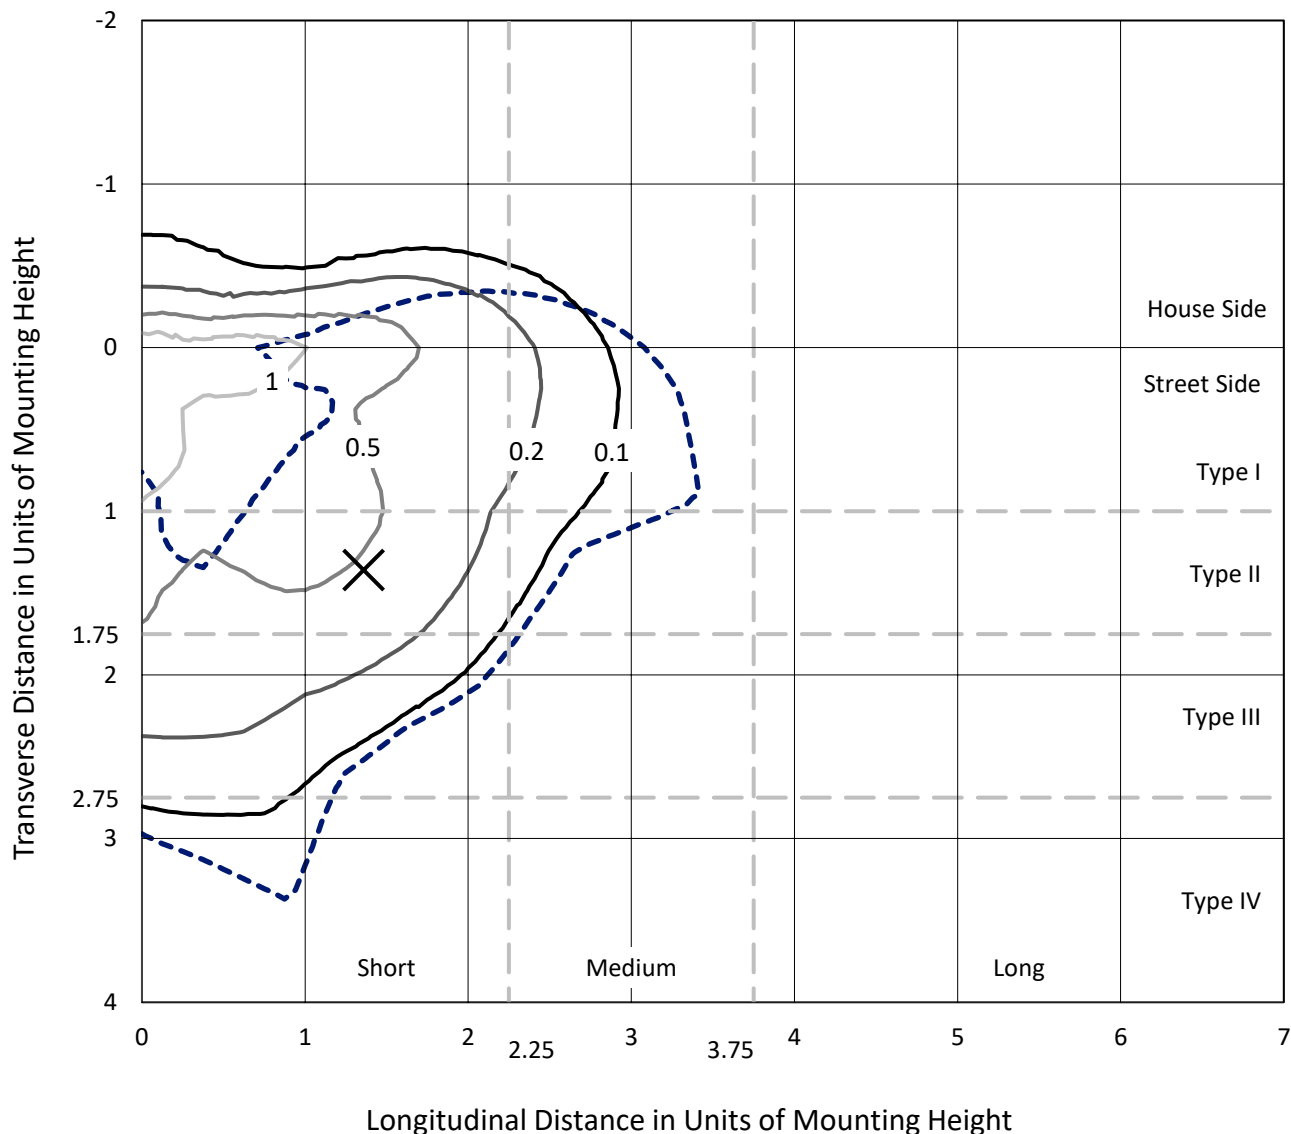

Based on 15 foot mounting height. Maximum calculated value = 1.8 fc
 Type IV - Short - N/A

REPORT NUMBER: P678124
CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

Luminous Intensity Polar Plot

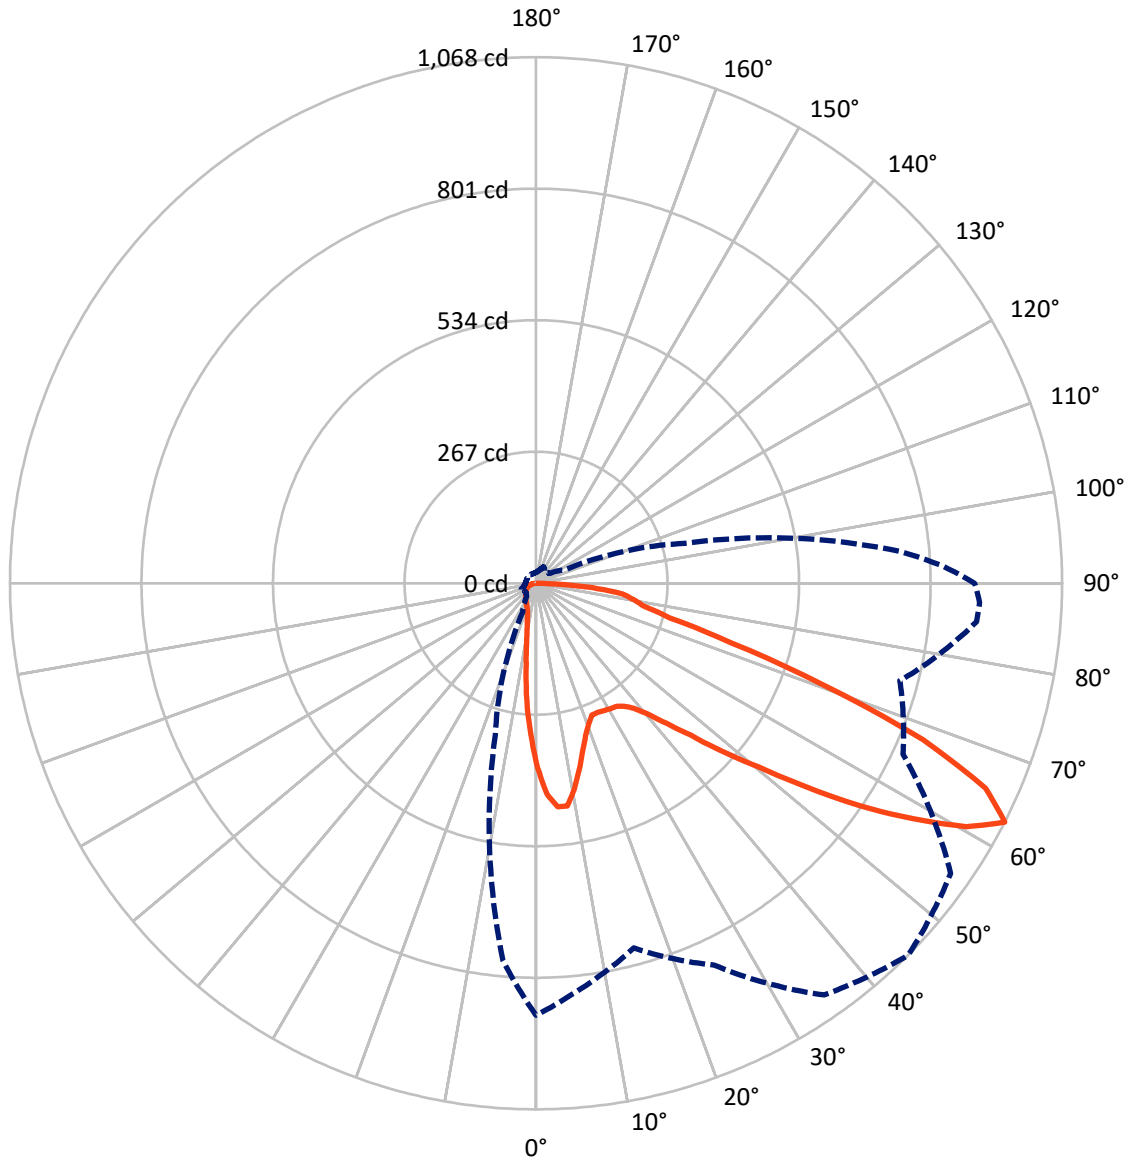

— Vertical Plane Through 45-Deg Lateral - - - Horizontal Cone Through 62.5-Deg Vertical

REPORT NUMBER: P678124

CATALOG NUMBER: CCW-SA-1-AMB-U-SLL


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	201.3	0.0	201.3
	% Fixture	18.6	0.0	18.6
Street Side	Lumens	880.4	0.0	880.4
	% Fixture	81.4	0.0	81.4
Total	Lumens	1081.7	0.0	1081.7
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	26.6	2.5
10°-20°	50.7	4.7
20°-30°	73.4	6.8
30°-40°	106.6	9.9
40°-50°	145.9	13.5
50°-60°	219.8	20.3
60°-70°	278.4	25.7
70°-80°	141.7	13.1
80°-90°	38.7	3.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	1081.7	100.0
0°-180°	1081.7	100.0

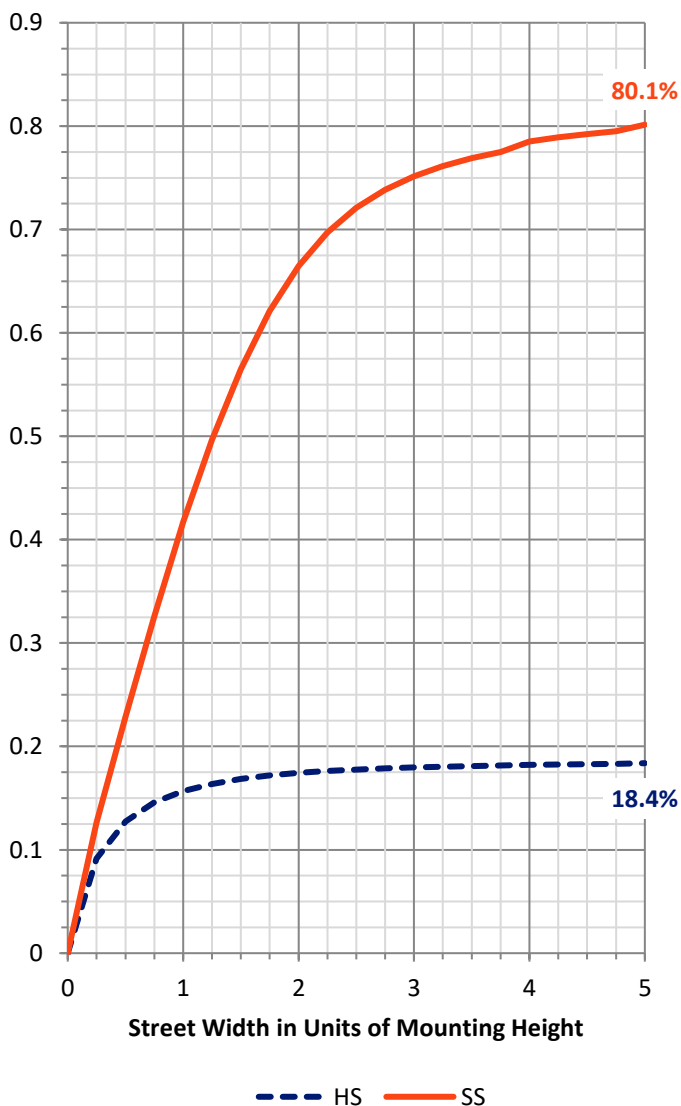

REPORT NUMBER: P678124


CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	105.1	9.7			
FM (30°-60°)	383.6	35.5			
FH (60°-80°)	358.6	33.2			G0/660
FVH (80°-90°)	33.1	3.1			G1/100
BL (0°-30°)	45.5	4.2	B0/110		
BM (30°-60°)	88.6	8.2	B0/220		
BH (60°-80°)	61.5	5.7	B0/110		G0/110
BVH (80°-90°)	5.6	0.5			G0/10
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B0-U0-G1

Type IV Short

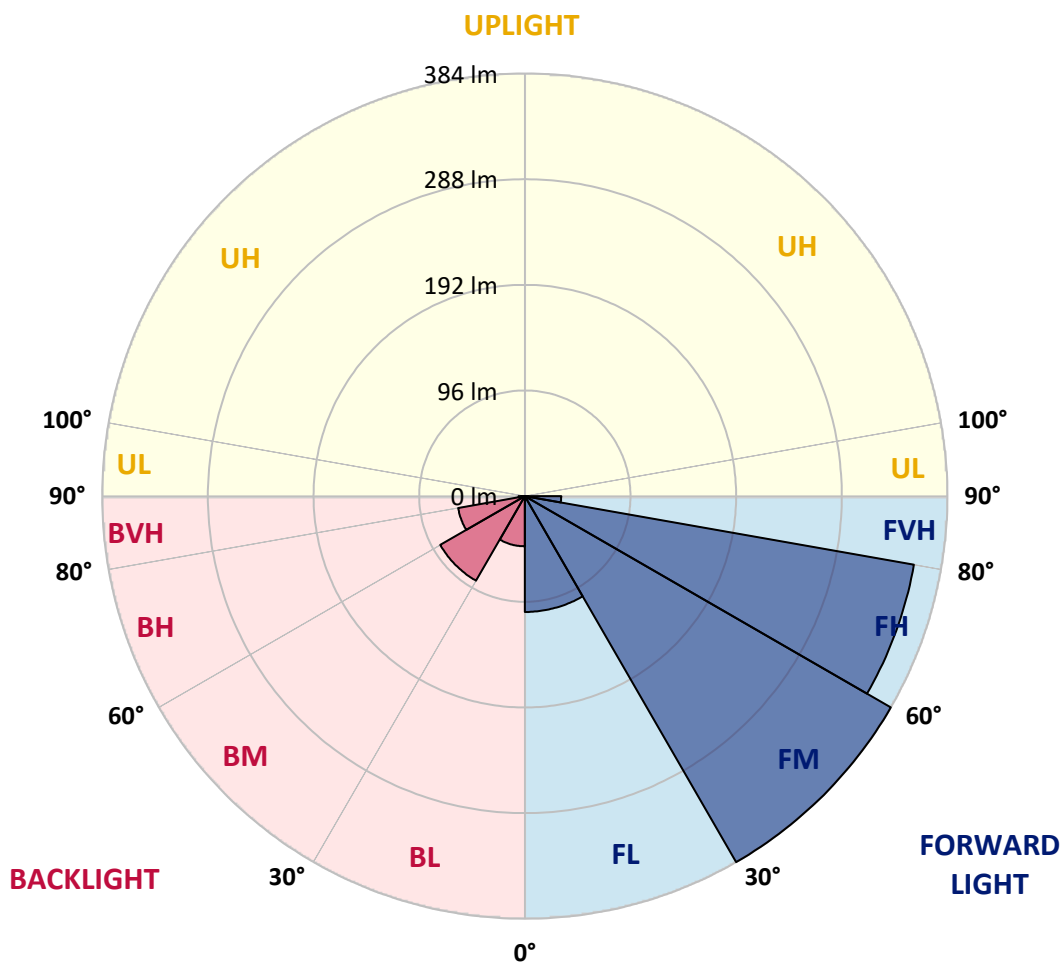



REPORT NUMBER: P678124

CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (FULL):

	0°	2.5°	5°	7.5°	10°	12.5°	15°	17.5°	20°	22.5°	25°
0°	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3
2.5°	398.5	398.5	397.7	401.5	406.0	409.8	413.5	415.1	416.6	417.3	418.8
5°	372.0	378.1	383.4	391.7	400.0	407.5	415.8	421.9	427.1	433.2	438.5
7.5°	329.8	336.6	342.6	353.2	363.7	374.3	384.9	393.2	401.5	409.0	417.3
10°	287.5	298.1	307.9	317.7	326.8	336.6	345.6	355.4	365.3	374.3	384.1
12.5°	267.9	280.0	292.1	300.4	308.7	316.2	324.5	332.0	338.8	346.4	353.2
15°	267.9	278.5	288.3	295.8	303.4	310.2	317.7	322.2	327.5	332.0	336.6
17.5°	287.5	299.6	311.7	315.4	318.5	322.2	325.3	325.3	325.3	325.3	325.3
20°	310.2	325.3	340.3	341.9	342.6	344.1	344.9	337.3	329.0	321.5	313.2
22.5°	348.6	361.5	374.3	370.5	366.0	362.2	357.7	347.1	336.6	326.0	315.4
25°	387.1	393.9	400.7	395.4	390.9	385.6	380.3	366.8	352.4	338.8	324.5
27.5°	443.0	442.2	440.7	432.4	423.4	415.1	406.0	390.2	373.6	357.7	341.1
30°	470.1	460.3	449.8	443.0	436.2	429.4	422.6	403.7	385.6	366.8	347.9
32.5°	501.8	485.2	467.9	461.8	456.6	450.5	444.5	424.9	406.0	386.4	366.8
35°	523.0	504.9	486.8	480.7	473.9	467.9	461.1	440.7	420.3	400.0	379.6
37.5°	529.0	513.9	498.8	490.5	481.5	473.2	464.1	446.8	428.6	411.3	393.2
40°	552.4	536.6	520.7	508.6	497.3	485.2	473.2	455.1	436.9	418.8	400.7
42.5°	570.5	555.4	540.3	524.5	507.9	492.0	475.4	460.3	446.0	430.9	415.8
45°	594.7	567.5	540.3	520.0	499.6	479.2	458.8	452.8	446.8	440.0	433.9
47.5°	623.3	578.8	533.5	512.4	491.3	470.1	449.0	449.0	449.8	449.8	449.8
50°	634.7	590.9	547.1	522.2	498.1	473.2	448.3	460.3	471.7	483.7	495.1
52.5°	658.8	615.8	572.0	550.1	528.3	506.4	484.5	499.6	513.9	529.0	543.3
55°	702.6	658.8	615.0	596.9	578.1	560.0	541.1	560.7	580.3	599.2	618.8
57.5°	790.1	735.0	679.9	661.1	643.0	624.9	606.7	631.6	656.5	681.5	706.4
60°	866.3	824.8	782.6	758.4	735.0	710.9	686.7	717.7	747.9	778.8	809.0
62.5°	876.9	857.3	837.7	819.6	801.4	784.1	766.0	788.6	810.5	833.1	855.0
65°	852.8	842.9	833.1	829.4	825.6	821.8	818.0	821.8	825.6	829.4	833.1
67.5°	756.2	769.0	781.1	791.6	802.2	812.0	822.6	795.4	769.0	741.8	714.7
70°	610.5	639.2	667.1	686.0	704.8	723.7	742.6	702.6	661.8	621.8	581.1
72.5°	466.4	485.2	504.1	530.5	556.9	583.3	609.8	566.7	523.7	480.0	436.9
75°	312.4	333.6	354.7	387.1	419.6	451.3	483.7	443.7	403.0	363.0	322.2
77.5°	208.3	221.9	234.7	270.9	307.1	343.4	379.6	345.6	311.7	277.0	243.0
80°	150.2	160.7	170.6	194.7	218.8	242.2	266.4	248.3	230.2	211.3	193.2
82.5°	91.3	101.9	112.4	128.3	144.1	159.2	175.1	168.3	161.5	153.9	147.2
85°	41.5	54.3	66.4	81.5	96.6	111.7	126.8	120.7	114.0	107.9	101.1
87.5°	6.0	9.8	12.8	31.7	51.3	70.2	89.0	81.5	74.0	65.7	58.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124
 CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	0°	2.5°	5°	7.5°	10°	12.5°	15°	17.5°	20°	22.5°	25°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124

CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	27.5°	30°	32.5°	35°	37.5°	40°	42.5°	45°	47.5°	50°	52.5°
0°	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3
2.5°	421.1	423.4	425.6	427.9	427.9	428.6	428.6	428.6	429.4	430.2	430.2
5°	440.7	443.0	445.2	447.5	449.8	452.0	453.5	453.5	455.1	454.3	452.8
7.5°	423.4	428.6	434.7	440.0	444.5	448.3	452.8	452.8	451.3	446.8	441.5
10°	393.2	403.0	412.0	421.1	421.9	423.4	424.1	424.1	422.6	421.1	418.8
12.5°	360.0	366.8	372.8	379.6	381.9	384.1	386.4	386.4	389.4	390.2	390.9
15°	338.8	341.1	343.4	345.6	347.9	349.4	351.7	351.7	354.7	356.2	357.7
17.5°	323.7	323.0	321.5	320.0	321.5	323.0	323.7	323.7	327.5	329.0	331.3
20°	311.7	309.4	307.9	305.6	305.6	305.6	304.9	304.9	307.9	310.9	313.2
22.5°	309.4	304.1	298.1	292.1	292.1	291.3	291.3	291.3	294.3	298.1	301.9
25°	316.2	308.7	300.4	292.1	292.1	291.3	291.3	291.3	295.1	300.4	304.9
27.5°	330.5	319.2	308.7	297.3	296.6	295.1	294.3	294.3	298.8	304.1	310.2
30°	337.3	326.8	316.2	305.6	303.4	301.1	298.1	298.1	302.6	310.2	317.0
32.5°	353.2	340.3	326.8	313.2	309.4	305.6	301.9	301.9	307.1	316.2	325.3
35°	364.5	350.2	335.1	320.0	317.0	313.2	310.2	310.2	314.7	323.7	332.0
37.5°	379.6	365.3	351.7	337.3	333.6	329.8	325.3	325.3	332.0	341.9	352.4
40°	388.6	376.6	364.5	352.4	351.7	350.9	349.4	349.4	358.5	367.5	377.3
42.5°	407.5	400.0	391.7	383.4	384.9	386.4	387.1	387.1	395.4	402.2	409.0
45°	433.2	431.7	430.9	429.4	432.4	434.7	437.7	437.7	445.2	451.3	456.6
47.5°	458.8	467.1	476.2	484.5	491.3	498.1	504.1	504.1	510.9	511.7	511.7
50°	508.6	522.2	535.0	548.6	558.4	567.5	577.3	577.3	587.1	587.9	588.6
52.5°	566.7	589.4	612.8	635.4	648.2	661.1	673.9	673.9	683.0	679.2	674.7
55°	651.3	684.5	716.9	749.4	761.4	773.5	785.6	785.6	787.1	777.3	766.7
57.5°	744.1	781.1	818.8	856.5	867.1	878.4	889.7	889.7	891.2	881.4	871.6
60°	849.7	889.7	930.5	970.5	978.8	987.1	995.4	995.4	995.4	987.1	978.8
62.5°	896.5	937.3	978.8	1020.3	1031.6	1043.7	1055.8	1055.8	1067.8	1058.0	1047.5
65°	864.1	895.8	926.7	957.7	969.0	980.3	991.6	991.6	999.9	997.7	994.6
67.5°	729.7	744.8	759.9	775.0	793.1	811.3	828.6	828.6	839.2	832.4	824.8
70°	578.1	575.0	571.3	568.3	581.1	593.2	606.0	606.0	615.0	612.8	609.8
72.5°	422.6	408.3	393.9	379.6	388.6	396.9	406.0	406.0	412.0	410.5	408.3
75°	312.4	302.6	292.8	283.0	282.2	281.5	280.7	280.7	282.2	283.7	286.0
77.5°	239.2	235.5	230.9	227.2	226.4	225.6	224.1	224.1	226.4	229.4	231.7
80°	196.2	199.2	202.2	205.3	203.8	203.0	201.5	201.5	203.0	205.3	208.3
82.5°	155.5	163.8	171.3	179.6	178.9	178.1	177.3	177.3	178.1	178.9	180.4
85°	105.7	110.9	115.5	120.0	118.5	117.0	115.5	115.5	117.7	122.3	126.0
87.5°	54.3	51.3	47.5	43.8	38.5	33.2	27.2	27.2	29.4	37.0	44.5
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124
 CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	27.5°	30°	32.5°	35°	37.5°	40°	42.5°	45°	47.5°	50°	52.5°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124
 CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	55°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°	75°	77.5°	80°
0°	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3
2.5°	430.9	427.9	424.1	421.1	417.3	415.1	412.8	409.8	407.5	404.5	402.2
5°	452.0	448.3	444.5	440.7	436.9	428.6	421.1	412.8	404.5	399.2	393.2
7.5°	436.2	430.2	423.4	417.3	410.5	403.7	396.9	389.4	382.6	375.1	367.5
10°	416.6	409.8	403.7	396.9	390.2	383.4	375.8	369.0	361.5	353.2	344.1
12.5°	391.7	387.1	381.9	377.3	372.0	364.5	356.2	348.6	340.3	333.6	326.8
15°	359.2	357.0	354.7	351.7	349.4	347.1	344.9	341.9	339.6	332.8	326.8
17.5°	332.8	333.6	334.3	335.1	335.8	340.3	344.9	349.4	353.9	350.9	347.1
20°	316.2	321.5	326.8	332.0	337.3	344.1	351.7	358.5	365.3	365.3	365.3
22.5°	305.6	313.2	320.7	327.5	335.1	345.6	357.0	367.5	378.1	382.6	386.4
25°	309.4	320.0	330.5	340.3	350.9	362.2	374.3	385.6	396.9	403.0	409.0
27.5°	315.4	327.5	338.8	350.9	362.2	377.3	392.4	407.5	422.6	432.4	442.2
30°	323.7	335.8	347.1	359.2	370.5	385.6	400.7	415.8	430.9	443.0	454.3
32.5°	334.3	347.9	360.7	374.3	387.1	402.2	418.1	433.2	448.3	457.3	465.6
35°	340.3	353.9	368.3	381.9	395.4	412.8	429.4	446.8	463.4	471.7	480.0
37.5°	362.2	375.1	387.9	400.0	412.8	427.9	443.0	458.1	473.2	483.7	495.1
40°	386.4	398.5	410.5	422.6	434.7	448.3	462.6	476.2	489.8	504.9	520.0
42.5°	415.8	424.9	434.7	443.7	452.8	469.4	486.0	501.8	518.4	534.3	549.4
45°	461.8	465.6	468.6	472.4	475.4	488.3	500.3	513.2	525.2	544.9	564.5
47.5°	511.7	508.6	505.6	501.8	498.8	501.1	502.6	504.9	506.4	530.5	555.4
50°	589.4	575.0	560.7	546.4	532.0	526.0	519.2	513.2	506.4	532.8	559.2
52.5°	670.9	643.0	615.0	587.1	559.2	550.1	541.8	532.8	523.7	550.1	576.6
55°	756.2	723.7	691.3	658.1	625.6	606.7	588.6	569.8	550.9	585.6	619.6
57.5°	861.8	818.8	776.5	733.5	691.3	671.6	652.8	633.2	614.3	646.7	679.9
60°	970.5	919.2	867.1	815.8	763.7	746.4	729.0	711.6	694.3	729.7	764.5
62.5°	1027.1	975.8	924.4	873.1	821.8	807.5	793.1	778.8	764.5	797.7	830.9
65°	991.6	953.9	916.1	878.4	840.7	839.9	839.9	839.2	838.4	855.0	871.6
67.5°	817.3	797.7	778.8	759.2	739.6	763.7	787.9	811.3	835.4	841.4	847.5
70°	606.7	603.7	601.5	598.4	595.4	633.2	671.6	709.4	747.1	748.6	749.4
72.5°	406.0	418.1	429.4	441.5	452.8	495.8	538.1	581.1	623.3	611.3	599.2
75°	287.5	300.4	313.2	326.0	338.8	376.6	413.5	451.3	488.3	470.9	453.5
77.5°	234.7	239.2	243.8	247.5	252.1	285.3	318.5	350.9	384.1	360.0	335.1
80°	210.5	207.5	203.8	200.7	197.0	214.3	230.9	248.3	264.9	250.5	237.0
82.5°	181.1	174.3	168.3	161.5	154.7	165.3	175.8	185.6	196.2	184.9	173.6
85°	129.8	126.0	121.5	117.7	113.2	123.8	134.3	144.9	155.5	138.1	120.7
87.5°	52.1	55.8	58.9	62.6	65.7	77.0	89.0	100.4	111.7	87.5	63.4
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124
 CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	55°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°	75°	77.5°	80°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124

CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	82.5°	85°	87.5°	90°	92.5°	95°	97.5°	100°	102.5°	105°	107.5°
0°	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3
2.5°	399.2	396.2	393.9	396.9	390.9	393.9	388.6	383.4	378.1	372.8	372.0
5°	387.9	381.9	375.8	366.8	361.5	357.7	351.7	345.6	339.6	333.6	328.3
7.5°	359.2	351.7	343.4	337.3	329.8	323.7	315.4	307.1	298.1	289.8	281.5
10°	335.8	326.8	316.2	304.9	294.3	287.5	278.5	269.4	260.4	251.3	244.5
12.5°	320.0	313.2	301.9	289.0	280.0	267.9	258.8	249.8	240.0	230.9	225.6
15°	320.0	313.2	301.9	290.5	281.5	268.7	257.3	245.3	233.9	221.9	214.3
17.5°	344.1	340.3	326.0	312.4	296.6	280.0	264.1	247.5	231.7	215.1	205.3
20°	365.3	365.3	347.1	330.5	313.9	293.6	272.4	251.3	230.9	209.8	196.2
22.5°	390.9	394.7	378.8	362.2	338.1	309.4	283.0	257.3	231.7	205.3	187.9
25°	414.3	420.3	413.5	402.2	375.1	344.1	309.4	273.9	239.2	204.5	181.9
27.5°	452.0	461.8	457.3	445.2	419.6	384.1	340.3	296.6	253.6	209.8	182.6
30°	466.4	477.7	473.9	475.4	455.1	421.1	366.8	313.2	259.6	205.3	175.1
32.5°	474.7	483.0	492.8	502.6	483.0	447.5	386.4	324.5	263.4	202.2	170.6
35°	487.5	495.8	510.1	532.0	508.6	476.2	406.0	335.8	265.6	195.5	165.3
37.5°	505.6	516.2	536.6	550.1	526.0	490.5	413.5	335.8	258.8	181.9	156.2
40°	535.0	550.1	564.5	581.1	556.9	510.9	427.1	344.1	261.1	177.3	152.4
42.5°	565.2	580.3	599.2	618.8	576.6	526.7	438.5	350.2	261.9	173.6	149.4
45°	583.3	603.0	624.9	644.5	596.2	540.3	450.5	361.5	272.4	182.6	156.2
47.5°	579.6	603.7	637.7	660.3	624.1	570.5	477.7	384.9	292.8	200.0	169.0
50°	584.9	611.3	648.2	684.5	658.1	606.7	510.1	413.5	317.0	220.4	184.1
52.5°	603.0	629.4	676.9	723.0	692.0	643.0	544.1	446.0	347.9	249.0	205.3
55°	654.3	688.2	726.7	764.5	746.4	705.6	596.9	489.0	381.1	272.4	222.6
57.5°	712.4	745.6	786.3	821.1	785.6	734.3	625.6	516.2	407.5	298.8	241.5
60°	799.9	834.6	862.6	871.6	822.6	765.2	652.8	541.1	429.4	317.0	254.3
62.5°	864.1	897.3	901.1	890.5	824.1	741.1	633.9	526.7	419.6	312.4	250.5
65°	888.2	904.8	891.2	864.8	790.9	712.4	606.7	501.1	396.2	290.5	234.7
67.5°	852.8	858.8	833.9	799.2	718.4	633.2	538.1	442.2	347.1	252.1	207.5
70°	750.9	751.6	715.4	672.4	598.4	516.2	443.0	369.8	296.6	223.4	187.2
72.5°	587.1	575.0	541.8	495.8	430.9	378.1	330.5	283.0	236.2	188.7	160.7
75°	435.4	418.1	375.1	331.3	292.8	261.1	233.2	205.3	177.3	149.4	130.6
77.5°	310.9	286.0	254.3	221.1	202.2	184.1	165.3	146.4	126.8	107.9	95.1
80°	222.6	208.3	187.9	169.8	151.7	135.1	119.2	102.6	86.8	70.2	62.6
82.5°	162.3	150.9	126.8	113.2	101.1	94.3	82.3	70.2	57.4	45.3	40.0
85°	103.4	86.0	67.9	53.6	54.3	53.6	46.8	40.8	34.0	27.2	23.4
87.5°	38.5	14.3	10.6	8.3	9.8	12.8	12.8	13.6	13.6	13.6	11.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124
 CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	82.5°	85°	87.5°	90°	92.5°	95°	97.5°	100°	102.5°	105°	107.5°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124
 CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	110°	112.5°	115°	117.5°	120°	122.5°	125°	127.5°	130°	132.5°	135°
0°	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3
2.5°	371.3	369.8	369.0	365.3	361.5	357.7	353.9	350.2	347.1	343.4	339.6
5°	323.7	318.5	313.2	307.1	301.9	295.8	290.5	284.5	279.2	273.2	267.1
7.5°	272.4	264.1	255.1	250.5	246.0	241.5	237.0	231.7	226.4	221.1	215.8
10°	237.7	230.2	223.4	219.6	215.8	212.1	208.3	204.5	200.0	196.2	191.7
12.5°	219.6	214.3	208.3	203.8	199.2	193.9	189.4	184.1	178.9	172.8	167.5
15°	206.8	199.2	191.7	185.6	180.4	174.3	169.0	161.5	154.7	147.9	140.4
17.5°	194.7	184.9	174.3	166.0	157.7	149.4	141.1	132.8	125.3	117.7	109.4
20°	182.6	168.3	154.7	144.9	134.3	124.5	114.7	106.4	98.9	90.6	82.3
22.5°	170.6	153.2	135.8	124.5	114.0	102.6	92.1	85.3	79.2	72.4	65.7
25°	159.2	136.6	114.0	103.4	92.8	83.0	72.4	69.4	65.7	62.6	58.9
27.5°	154.7	127.5	99.6	91.3	82.3	74.0	65.7	63.4	61.9	59.6	57.4
30°	144.1	114.0	83.0	78.5	73.2	68.7	63.4	61.9	59.6	58.1	55.8
32.5°	139.6	107.9	76.2	71.7	67.2	61.9	57.4	55.8	53.6	52.1	49.8
35°	135.8	105.7	75.5	70.2	64.9	59.6	54.3	52.8	50.6	49.1	46.8
37.5°	130.6	104.1	78.5	71.7	64.9	58.9	52.1	50.6	48.3	46.8	44.5
40°	128.3	103.4	78.5	71.7	64.9	58.1	51.3	49.1	46.8	44.5	42.3
42.5°	126.0	101.9	77.7	70.9	63.4	56.6	49.8	47.5	46.0	43.8	41.5
45°	129.8	102.6	76.2	68.7	61.1	54.3	46.8	45.3	44.5	43.0	41.5
47.5°	137.3	106.4	74.7	67.2	59.6	52.1	44.5	43.8	42.3	41.5	40.0
50°	147.2	110.9	74.0	65.7	58.1	49.8	42.3	41.5	40.8	40.0	39.2
52.5°	160.7	117.0	72.4	64.1	56.6	48.3	40.8	40.0	40.0	39.2	38.5
55°	172.1	122.3	71.7	63.4	55.1	47.5	39.2	38.5	37.0	36.2	34.7
57.5°	183.4	126.0	68.7	61.1	53.6	46.0	38.5	37.0	35.5	34.0	33.2
60°	190.9	128.3	64.9	58.1	50.6	43.8	37.0	35.5	34.0	32.5	30.9
62.5°	187.9	126.0	64.1	56.6	49.1	42.3	34.7	33.2	32.5	30.9	29.4
65°	179.6	123.8	67.9	58.9	49.8	41.5	32.5	31.7	30.2	29.4	27.9
67.5°	163.0	117.7	73.2	62.6	52.1	41.5	30.9	30.2	28.7	27.9	26.4
70°	150.9	114.0	77.7	65.7	53.6	42.3	30.2	28.7	27.9	26.4	24.9
72.5°	133.6	105.7	77.7	65.7	53.6	41.5	29.4	27.9	25.7	24.1	21.9
75°	110.9	92.1	72.4	61.1	49.8	38.5	27.2	25.7	24.1	21.9	20.4
77.5°	82.3	69.4	56.6	48.3	39.2	30.9	22.6	21.1	20.4	18.9	17.4
80°	54.3	46.8	38.5	33.2	27.9	22.6	17.4	16.6	15.8	15.1	14.3
82.5°	34.0	28.7	22.6	20.4	18.1	15.1	12.8	12.8	12.1	12.1	11.3
85°	20.4	16.6	12.8	12.1	11.3	9.8	9.1	8.3	8.3	7.5	6.8
87.5°	9.8	7.5	5.3	5.3	5.3	4.5	4.5	3.8	3.8	3.0	2.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124
 CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	110°	112.5°	115°	117.5°	120°	122.5°	125°	127.5°	130°	132.5°	135°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124
 CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	137.5°	140°	142.5°	145°	147.5°	150°	152.5°	155°	157.5°	160°	162.5°
0°	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3
2.5°	338.1	335.8	334.3	332.0	329.8	327.5	324.5	322.2	322.2	321.5	321.5
5°	263.4	259.6	255.1	251.3	247.5	243.8	240.0	236.2	234.7	233.2	231.7
7.5°	212.8	209.0	206.0	202.2	198.5	193.9	190.2	185.6	182.6	179.6	176.6
10°	188.7	184.9	181.9	178.1	174.3	171.3	167.5	163.8	160.0	156.2	151.7
12.5°	163.8	160.0	155.5	151.7	147.2	142.6	138.1	133.6	129.0	124.5	120.0
15°	134.3	127.5	121.5	114.7	110.9	107.2	102.6	98.9	95.1	91.3	87.5
17.5°	103.4	98.1	92.1	86.0	82.3	78.5	74.7	70.9	69.4	67.9	65.7
20°	78.5	74.0	70.2	65.7	64.1	63.4	61.9	60.4	59.6	58.9	58.1
22.5°	64.1	61.9	60.4	58.1	57.4	56.6	55.8	55.1	54.3	53.6	52.8
25°	57.4	56.6	55.1	53.6	52.8	52.1	51.3	50.6	50.6	49.8	49.8
27.5°	55.8	54.3	52.8	51.3	50.6	49.8	48.3	47.5	47.5	46.8	46.8
30°	55.1	54.3	52.8	52.1	51.3	50.6	49.1	48.3	47.5	46.8	46.0
32.5°	49.8	49.1	49.1	48.3	48.3	48.3	48.3	48.3	47.5	46.8	46.0
35°	46.0	45.3	43.8	43.0	42.3	41.5	40.0	39.2	39.2	38.5	38.5
37.5°	43.8	43.0	42.3	41.5	40.8	40.0	38.5	37.7	37.0	37.0	36.2
40°	41.5	40.8	40.0	39.2	38.5	37.7	37.0	36.2	35.5	35.5	34.7
42.5°	40.8	40.0	39.2	38.5	37.7	37.0	35.5	34.7	34.7	34.0	34.0
45°	40.8	40.0	38.5	37.7	37.0	36.2	35.5	34.7	34.0	33.2	32.5
47.5°	39.2	39.2	38.5	37.7	37.0	36.2	34.7	34.0	33.2	32.5	31.7
50°	39.2	40.0	40.0	40.0	38.5	37.0	35.5	34.0	33.2	32.5	30.9
52.5°	39.2	39.2	40.0	40.0	38.5	37.0	35.5	34.0	33.2	31.7	30.9
55°	36.2	37.0	38.5	39.2	37.7	36.2	34.7	33.2	32.5	30.9	30.2
57.5°	34.0	34.7	35.5	36.2	35.5	34.7	34.0	33.2	31.7	30.9	29.4
60°	30.9	31.7	31.7	31.7	32.5	33.2	34.0	34.7	33.2	30.9	29.4
62.5°	29.4	29.4	29.4	30.2	31.7	33.2	34.7	37.0	34.0	31.7	29.4
65°	27.9	28.7	28.7	28.7	29.4	30.2	30.9	31.7	30.2	29.4	27.9
67.5°	26.4	27.2	27.2	27.2	27.2	27.9	27.9	27.9	27.2	26.4	25.7
70°	24.9	25.7	25.7	25.7	25.7	25.7	25.7	25.7	24.9	24.9	24.1
72.5°	22.6	22.6	23.4	23.4	23.4	24.1	24.1	24.1	23.4	23.4	22.6
75°	21.1	21.1	21.9	21.9	21.9	22.6	22.6	22.6	21.9	21.9	21.1
77.5°	18.1	18.9	18.9	19.6	19.6	20.4	20.4	20.4	20.4	19.6	19.6
80°	15.1	15.1	15.8	15.8	16.6	16.6	17.4	17.4	17.4	16.6	16.6
82.5°	11.3	12.1	12.1	12.1	12.8	12.8	13.6	13.6	13.6	12.8	12.8
85°	7.5	7.5	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3
87.5°	3.0	3.0	3.8	3.8	3.8	3.8	3.0	3.0	3.0	3.8	3.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124
 CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	137.5°	140°	142.5°	145°	147.5°	150°	152.5°	155°	157.5°	160°	162.5°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124
 CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	165°	167.5°	170°	172.5°	175°	177.5°	180°	182.5°	185°	187.5°	190°
0°	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3
2.5°	320.7	318.5	316.2	313.9	311.7	313.2	314.7	311.7	309.4	308.7	308.7
5°	230.2	227.9	224.9	221.9	219.6	219.6	219.6	220.4	221.1	221.1	220.4
7.5°	173.6	172.1	170.6	169.0	167.5	166.0	163.8	162.3	160.7	160.0	159.2
10°	147.9	144.9	141.9	138.1	135.1	134.3	132.8	128.3	124.5	123.8	122.3
12.5°	115.5	112.4	110.2	107.2	104.1	102.6	100.4	99.6	98.1	97.4	96.6
15°	83.8	82.3	80.0	78.5	76.2	75.5	74.7	74.7	74.0	73.2	73.2
17.5°	64.1	63.4	62.6	61.9	61.1	61.1	60.4	60.4	59.6	59.6	59.6
20°	57.4	57.4	56.6	56.6	55.8	55.8	55.1	54.3	53.6	53.6	53.6
22.5°	52.1	52.1	52.1	51.3	51.3	51.3	50.6	50.6	49.8	49.8	49.8
25°	49.1	49.1	48.3	48.3	47.5	47.5	47.5	48.3	48.3	48.3	47.5
27.5°	46.0	46.0	46.0	46.0	46.0	46.0	46.0	46.0	46.0	46.0	46.8
30°	45.3	45.3	45.3	45.3	45.3	45.3	45.3	45.3	45.3	45.3	45.3
32.5°	45.3	45.3	45.3	45.3	45.3	45.3	44.5	44.5	44.5	44.5	44.5
35°	37.7	37.7	37.7	37.0	37.0	37.7	38.5	38.5	38.5	38.5	38.5
37.5°	35.5	35.5	35.5	34.7	34.7	34.7	34.7	34.7	34.0	34.0	34.0
40°	34.0	34.0	33.2	33.2	32.5	32.5	31.7	31.7	31.7	31.7	31.7
42.5°	33.2	32.5	32.5	31.7	30.9	30.9	30.9	30.9	30.2	30.2	30.2
45°	31.7	31.7	30.9	30.9	30.2	30.2	29.4	29.4	28.7	28.7	28.7
47.5°	30.9	30.2	30.2	29.4	28.7	28.7	27.9	27.9	27.2	27.2	27.2
50°	30.2	29.4	28.7	27.9	27.2	27.2	26.4	26.4	26.4	26.4	25.7
52.5°	29.4	28.7	27.9	27.2	26.4	26.4	25.7	25.7	24.9	24.9	24.9
55°	28.7	27.9	27.2	25.7	24.9	24.9	24.9	24.9	24.1	24.1	24.1
57.5°	27.9	27.2	26.4	25.7	24.9	24.1	24.1	23.4	23.4	22.6	22.6
60°	27.2	26.4	25.7	24.1	23.4	23.4	22.6	22.6	21.9	21.9	21.9
62.5°	27.2	26.4	25.7	24.1	23.4	22.6	21.9	21.9	21.1	21.1	21.1
65°	26.4	25.7	24.9	23.4	22.6	21.9	21.1	21.1	20.4	20.4	20.4
67.5°	24.9	24.1	23.4	22.6	21.9	21.1	20.4	20.4	19.6	19.6	19.6
70°	23.4	22.6	22.6	21.9	21.1	20.4	19.6	19.6	18.9	18.9	18.9
72.5°	21.9	21.1	21.1	20.4	19.6	18.9	18.1	18.1	17.4	17.4	17.4
75°	20.4	19.6	18.9	18.1	17.4	17.4	16.6	16.6	15.8	15.8	15.8
77.5°	18.9	18.1	17.4	15.8	15.1	15.1	14.3	14.3	13.6	13.6	13.6
80°	15.8	15.1	14.3	12.8	12.1	12.1	11.3	11.3	11.3	11.3	10.6
82.5°	12.1	11.3	10.6	9.1	8.3	7.5	6.8	7.5	7.5	7.5	7.5
85°	8.3	7.5	6.0	5.3	3.8	3.8	3.0	3.8	3.8	3.8	4.5
87.5°	3.8	3.0	2.3	1.5	0.8	0.8	0.8	0.8	0.8	1.5	1.5
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124
 CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	165°	167.5°	170°	172.5°	175°	177.5°	180°	182.5°	185°	187.5°	190°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124
 CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	192.5°	195°	197.5°	200°	202.5°	205°	207.5°	210°	212.5°	215°	217.5°
0°	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3
2.5°	307.9	307.1	307.9	309.4	310.2	310.9	311.7	311.7	312.4	312.4	310.9
5°	220.4	219.6	221.1	221.9	223.4	224.1	226.4	228.7	230.2	232.4	233.9
7.5°	157.7	157.0	156.2	156.2	155.5	154.7	156.2	157.7	159.2	160.7	161.5
10°	121.5	120.0	118.5	117.7	116.2	114.7	114.7	114.7	114.0	114.0	114.0
12.5°	95.8	95.1	93.6	92.1	89.8	88.3	87.5	86.0	85.3	83.8	83.8
15°	72.4	71.7	71.7	71.7	71.7	71.7	70.9	69.4	68.7	67.2	67.9
17.5°	59.6	59.6	59.6	60.4	60.4	60.4	59.6	59.6	58.9	58.1	58.1
20°	53.6	53.6	53.6	53.6	52.8	52.8	52.8	53.6	53.6	53.6	53.6
22.5°	49.8	49.8	49.8	49.8	49.8	49.8	49.8	50.6	50.6	50.6	50.6
25°	47.5	46.8	46.8	46.8	46.0	46.0	46.0	46.8	46.8	46.8	46.8
27.5°	46.8	46.8	46.8	46.0	46.0	45.3	45.3	45.3	44.5	44.5	44.5
30°	44.5	44.5	44.5	43.8	43.8	43.0	43.0	43.0	42.3	42.3	42.3
32.5°	43.8	43.8	43.0	43.0	42.3	41.5	40.8	40.8	40.0	39.2	39.2
35°	38.5	38.5	38.5	37.7	37.7	37.0	37.0	37.0	37.0	37.0	37.0
37.5°	33.2	33.2	33.2	34.0	34.0	34.0	34.0	34.0	34.0	34.0	34.0
40°	30.9	30.9	30.9	30.9	30.2	30.2	30.9	31.7	31.7	32.5	32.5
42.5°	29.4	29.4	29.4	29.4	28.7	28.7	29.4	29.4	30.2	30.2	30.2
45°	27.9	27.9	27.9	27.9	27.9	27.9	27.9	28.7	28.7	28.7	29.4
47.5°	27.2	27.2	27.2	27.2	26.4	26.4	26.4	27.2	27.2	27.2	27.2
50°	25.7	24.9	24.9	24.9	24.9	24.9	24.9	25.7	25.7	25.7	25.7
52.5°	24.1	24.1	24.1	24.1	24.1	24.1	24.1	24.1	24.1	24.1	24.1
55°	23.4	23.4	23.4	23.4	23.4	23.4	23.4	23.4	23.4	23.4	23.4
57.5°	22.6	22.6	22.6	22.6	22.6	22.6	22.6	22.6	22.6	22.6	22.6
60°	21.1	21.1	21.1	21.1	21.1	21.1	21.1	21.9	21.9	21.9	21.9
62.5°	20.4	20.4	20.4	20.4	20.4	20.4	20.4	20.4	20.4	21.1	21.1
65°	19.6	19.6	19.6	19.6	18.9	18.9	18.9	18.9	18.9	18.9	18.9
67.5°	18.9	18.9	18.9	18.9	18.1	18.1	18.1	18.1	17.4	17.4	17.4
70°	18.1	18.1	18.1	17.4	17.4	16.6	16.6	16.6	15.8	15.8	15.8
72.5°	16.6	16.6	16.6	15.8	15.8	15.1	15.1	14.3	14.3	13.6	13.6
75°	15.1	15.1	14.3	14.3	13.6	12.8	12.8	12.8	12.1	12.1	12.1
77.5°	12.8	12.8	12.1	12.1	11.3	10.6	10.6	10.6	9.8	9.8	9.8
80°	10.6	9.8	9.8	9.1	9.1	8.3	8.3	8.3	7.5	7.5	7.5
82.5°	7.5	7.5	7.5	6.8	6.8	6.0	6.0	6.0	6.0	6.0	6.0
85°	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	3.8	3.8	3.8
87.5°	2.3	2.3	2.3	2.3	1.5	1.5	1.5	1.5	1.5	1.5	1.5
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124
 CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	192.5°	195°	197.5°	200°	202.5°	205°	207.5°	210°	212.5°	215°	217.5°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124
 CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	220°	222.5°	225°	227.5°	230°	232.5°	235°	237.5°	240°	242.5°	245°
0°	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3
2.5°	309.4	307.9	306.4	307.1	307.9	307.9	308.7	310.9	313.9	316.2	318.5
5°	236.2	237.7	239.2	238.5	237.0	236.2	234.7	236.2	237.7	238.5	240.0
7.5°	163.0	163.8	164.5	165.3	165.3	166.0	166.0	167.5	169.0	169.8	171.3
10°	114.0	114.0	114.0	115.5	116.2	117.7	118.5	119.2	120.0	120.7	121.5
12.5°	84.5	84.5	84.5	86.0	86.8	88.3	89.0	89.8	90.6	90.6	91.3
15°	67.9	68.7	68.7	69.4	70.2	70.2	70.9	71.7	72.4	72.4	73.2
17.5°	58.9	58.9	58.9	58.9	59.6	59.6	59.6	59.6	60.4	60.4	60.4
20°	54.3	54.3	54.3	54.3	54.3	53.6	53.6	53.6	53.6	53.6	53.6
22.5°	50.6	49.8	49.8	49.8	49.8	49.8	49.8	49.8	49.8	49.1	49.1
25°	46.8	46.8	46.8	46.8	46.8	46.8	46.8	46.8	46.0	46.0	45.3
27.5°	44.5	44.5	44.5	44.5	44.5	43.8	43.8	43.8	43.8	43.0	43.0
30°	42.3	41.5	41.5	41.5	41.5	40.8	40.8	41.5	41.5	42.3	42.3
32.5°	39.2	38.5	38.5	38.5	38.5	38.5	38.5	38.5	39.2	39.2	39.2
35°	37.0	37.0	37.0	37.0	36.2	36.2	35.5	35.5	36.2	36.2	36.2
37.5°	34.0	34.0	34.0	34.0	34.0	33.2	33.2	33.2	33.2	32.5	32.5
40°	33.2	33.2	33.2	33.2	33.2	32.5	32.5	31.7	31.7	30.9	30.2
42.5°	30.9	30.9	30.9	30.9	30.2	30.2	29.4	29.4	29.4	28.7	28.7
45°	29.4	30.2	30.2	29.4	29.4	28.7	27.9	27.9	27.9	27.2	27.2
47.5°	27.9	27.9	27.9	27.9	27.2	27.2	26.4	26.4	26.4	25.7	25.7
50°	25.7	25.7	25.7	25.7	25.7	25.7	25.7	25.7	24.9	24.9	24.1
52.5°	24.9	24.9	24.9	24.9	24.9	24.1	24.1	24.1	24.1	23.4	23.4
55°	24.1	24.1	24.1	24.1	24.1	23.4	23.4	23.4	23.4	22.6	22.6
57.5°	23.4	23.4	24.1	23.4	23.4	23.4	23.4	22.6	22.6	22.6	22.6
60°	22.6	22.6	22.6	22.6	21.9	21.9	21.1	21.1	21.1	21.1	21.1
62.5°	21.1	21.1	21.1	20.4	20.4	20.4	20.4	20.4	20.4	20.4	20.4
65°	19.6	19.6	19.6	19.6	19.6	18.9	18.9	18.9	18.9	18.9	18.9
67.5°	17.4	17.4	17.4	17.4	17.4	17.4	17.4	17.4	18.1	18.1	18.1
70°	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	16.6	16.6	16.6
72.5°	14.3	14.3	14.3	14.3	14.3	13.6	13.6	13.6	14.3	14.3	14.3
75°	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.1
77.5°	9.8	9.8	9.8	9.8	9.8	9.8	9.8	9.8	10.6	10.6	10.6
80°	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	8.3	8.3	8.3
82.5°	6.0	5.3	5.3	5.3	6.0	6.0	6.0	6.0	6.0	6.0	6.0
85°	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8
87.5°	1.5	0.8	0.8	0.8	1.5	1.5	1.5	1.5	1.5	0.8	0.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124
 CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	220°	222.5°	225°	227.5°	230°	232.5°	235°	237.5°	240°	242.5°	245°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124
 CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	247.5°	250°	252.5°	255°	257.5°	260°	262.5°	265°	267.5°	270°	272.5°
0°	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3
2.5°	318.5	319.2	319.2	319.2	319.2	318.5	318.5	317.7	318.5	319.2	323.0
5°	240.0	240.0	240.0	240.0	241.5	242.2	243.8	244.5	246.0	246.8	246.8
7.5°	171.3	171.3	171.3	171.3	172.8	173.6	175.1	175.8	174.3	172.8	175.1
10°	123.0	125.3	126.8	128.3	129.0	130.6	131.3	132.1	135.1	138.9	140.4
12.5°	93.6	95.8	97.4	99.6	101.1	102.6	104.1	105.7	107.9	110.9	112.4
15°	74.0	74.0	74.7	74.7	75.5	77.0	77.7	78.5	79.2	80.0	81.5
17.5°	60.4	60.4	59.6	59.6	59.6	59.6	58.9	58.9	59.6	59.6	60.4
20°	53.6	52.8	52.8	52.1	52.1	52.1	52.1	52.1	52.8	52.8	53.6
22.5°	49.1	49.1	48.3	48.3	48.3	49.1	49.1	49.1	49.1	49.1	49.1
25°	45.3	45.3	45.3	45.3	45.3	45.3	45.3	45.3	45.3	44.5	45.3
27.5°	43.0	43.8	43.8	43.8	43.8	43.8	43.8	43.8	43.8	43.0	43.0
30°	42.3	42.3	42.3	42.3	43.0	43.0	43.8	43.8	43.0	42.3	42.3
32.5°	40.0	40.0	40.8	40.8	40.8	41.5	41.5	41.5	41.5	41.5	42.3
35°	36.2	36.2	35.5	35.5	35.5	35.5	35.5	35.5	35.5	35.5	34.7
37.5°	32.5	31.7	31.7	30.9	30.9	31.7	31.7	31.7	31.7	31.7	31.7
40°	30.2	30.2	30.2	30.2	30.2	30.2	30.2	30.2	30.2	30.2	30.2
42.5°	28.7	28.7	27.9	27.9	27.9	27.9	27.9	27.9	27.9	27.9	28.7
45°	27.2	27.2	27.2	27.2	27.2	27.2	27.2	27.2	27.2	27.2	27.9
47.5°	25.7	25.7	25.7	25.7	25.7	26.4	26.4	26.4	26.4	26.4	26.4
50°	24.1	24.9	24.9	24.9	24.9	24.9	24.9	24.9	25.7	25.7	25.7
52.5°	23.4	24.1	24.1	24.1	24.1	24.1	24.1	24.1	24.9	24.9	24.9
55°	22.6	23.4	23.4	23.4	23.4	23.4	23.4	23.4	24.1	24.1	24.9
57.5°	22.6	22.6	22.6	22.6	22.6	22.6	22.6	22.6	23.4	23.4	23.4
60°	21.1	21.1	21.1	21.1	21.1	21.9	21.9	21.9	22.6	22.6	23.4
62.5°	20.4	20.4	20.4	20.4	20.4	20.4	20.4	21.1	21.1	21.9	21.9
65°	18.9	19.6	19.6	19.6	19.6	20.4	20.4	20.4	21.1	21.1	21.9
67.5°	18.1	18.1	18.1	18.1	18.1	18.9	18.9	18.9	19.6	20.4	21.1
70°	16.6	17.4	17.4	17.4	18.1	18.1	18.9	18.9	19.6	19.6	20.4
72.5°	15.1	15.1	15.8	15.8	15.8	16.6	16.6	16.6	17.4	17.4	18.1
75°	12.8	12.8	13.6	13.6	14.3	14.3	15.1	15.1	15.8	15.8	16.6
77.5°	10.6	11.3	11.3	11.3	12.1	12.1	12.8	12.8	13.6	13.6	14.3
80°	8.3	9.1	9.1	9.1	9.8	9.8	10.6	10.6	11.3	11.3	12.1
82.5°	6.0	6.8	6.8	6.8	6.8	7.5	7.5	7.5	7.5	6.8	7.5
85°	3.8	3.8	3.8	3.8	3.8	3.8	3.0	3.0	3.0	2.3	3.0
87.5°	0.8	0.8	0.8	0.8	0.8	0.8	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124
 CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	247.5°	250°	252.5°	255°	257.5°	260°	262.5°	265°	267.5°	270°	272.5°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124
 CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	275°	277.5°	280°	282.5°	285°	287.5°	290°	292.5°	295°	297.5°	300°
0°	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3
2.5°	327.5	328.3	329.8	330.5	331.3	332.8	334.3	335.1	336.6	338.1	339.6
5°	246.8	249.0	251.3	253.6	255.8	256.6	257.3	258.1	258.8	261.9	264.9
7.5°	178.1	180.4	183.4	185.6	187.9	190.2	193.2	195.5	197.7	199.2	201.5
10°	142.6	145.6	148.7	151.7	154.7	158.5	161.5	165.3	168.3	171.3	175.1
12.5°	114.7	118.5	122.3	126.0	129.8	133.6	137.3	140.4	144.1	147.2	150.9
15°	82.3	85.3	88.3	91.3	94.3	98.1	101.9	105.7	109.4	114.0	119.2
17.5°	60.4	61.9	63.4	64.1	65.7	68.7	70.9	74.0	76.2	80.7	86.0
20°	53.6	54.3	54.3	55.1	55.1	56.6	57.4	58.9	59.6	61.9	64.1
22.5°	49.1	49.1	49.8	49.8	49.8	50.6	52.1	52.8	53.6	54.3	55.8
25°	46.0	46.0	46.8	46.8	46.8	47.5	47.5	48.3	48.3	49.8	50.6
27.5°	43.0	43.0	43.8	43.8	43.8	44.5	44.5	45.3	45.3	46.0	47.5
30°	42.3	43.0	43.0	43.8	43.8	44.5	45.3	45.3	46.0	47.5	48.3
32.5°	43.0	43.0	43.8	43.8	43.8	43.8	43.8	43.8	43.8	43.8	44.5
35°	34.0	34.0	34.7	34.7	34.7	35.5	35.5	36.2	36.2	37.0	37.7
37.5°	31.7	32.5	32.5	33.2	33.2	33.2	34.0	34.0	34.0	34.7	36.2
40°	30.2	30.9	30.9	31.7	31.7	32.5	32.5	33.2	33.2	34.0	34.7
42.5°	28.7	29.4	29.4	30.2	30.2	30.9	30.9	31.7	31.7	32.5	33.2
45°	27.9	27.9	28.7	28.7	28.7	29.4	30.2	30.2	30.9	31.7	32.5
47.5°	26.4	27.2	27.2	27.9	27.9	28.7	29.4	29.4	30.2	30.9	31.7
50°	25.7	26.4	27.2	27.2	27.9	28.7	29.4	29.4	30.2	31.7	33.2
52.5°	24.9	25.7	26.4	26.4	27.2	27.9	29.4	30.2	30.9	32.5	34.7
55°	24.9	25.7	26.4	26.4	27.2	27.9	29.4	30.2	30.9	32.5	34.0
57.5°	24.1	24.1	24.9	25.7	26.4	27.9	29.4	30.2	31.7	32.5	34.0
60°	23.4	24.1	24.9	25.7	26.4	27.9	30.2	31.7	33.2	32.5	32.5
62.5°	22.6	23.4	24.1	24.9	25.7	27.9	30.2	32.5	35.5	33.2	31.7
65°	21.9	22.6	24.1	24.9	25.7	27.2	28.7	29.4	30.9	30.2	28.7
67.5°	21.1	21.9	22.6	23.4	24.1	24.9	25.7	25.7	26.4	26.4	25.7
70°	20.4	21.1	21.9	22.6	23.4	24.1	24.1	24.9	24.9	24.9	24.1
72.5°	18.9	19.6	20.4	21.1	21.9	21.9	22.6	22.6	22.6	22.6	22.6
75°	17.4	18.1	18.9	18.9	19.6	19.6	20.4	20.4	20.4	20.4	20.4
77.5°	14.3	15.1	15.8	16.6	17.4	17.4	18.1	18.1	18.1	18.1	17.4
80°	12.1	12.8	13.6	13.6	14.3	14.3	14.3	14.3	14.3	14.3	13.6
82.5°	8.3	9.1	9.8	9.8	10.6	10.6	10.6	10.6	10.6	10.6	9.8
85°	3.0	3.8	4.5	4.5	5.3	5.3	5.3	4.5	4.5	4.5	4.5
87.5°	0.0	0.8	0.8	1.5	1.5	1.5	1.5	0.8	0.8	0.8	0.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124
 CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	275°	277.5°	280°	282.5°	285°	287.5°	290°	292.5°	295°	297.5°	300°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124
 CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	302.5°	305°	307.5°	310°	312.5°	315°	317.5°	320°	322.5°	325°	327.5°
0°	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3
2.5°	341.1	342.6	344.9	347.1	348.6	350.9	354.7	357.7	361.5	364.5	366.8
5°	267.1	270.2	274.7	280.0	284.5	289.0	292.8	296.6	300.4	304.1	309.4
7.5°	203.0	204.5	208.3	212.8	216.6	220.4	225.6	230.9	235.5	240.7	245.3
10°	178.1	181.1	184.9	187.9	191.7	194.7	196.2	198.5	200.0	201.5	204.5
12.5°	153.9	157.0	160.0	163.0	165.3	168.3	172.1	175.1	178.9	181.9	184.9
15°	123.8	128.3	132.8	137.3	141.9	146.4	150.9	155.5	160.0	164.5	169.0
17.5°	90.6	95.1	101.9	108.7	115.5	122.3	128.3	134.3	140.4	146.4	152.4
20°	65.7	67.9	74.7	80.7	87.5	93.6	101.1	108.7	116.2	123.8	132.1
22.5°	56.6	57.4	60.4	63.4	66.4	69.4	78.5	87.5	95.8	104.9	114.0
25°	52.1	52.8	54.3	56.6	58.1	59.6	64.9	70.9	76.2	81.5	92.8
27.5°	48.3	49.1	50.6	52.8	54.3	55.8	58.9	62.6	65.7	68.7	80.0
30°	49.8	50.6	52.1	52.8	54.3	55.1	57.4	59.6	61.9	64.1	71.7
32.5°	44.5	44.5	45.3	46.0	46.8	47.5	49.8	52.8	55.1	57.4	64.1
35°	38.5	39.2	40.8	41.5	43.0	43.8	46.8	49.8	52.1	55.1	61.9
37.5°	37.0	37.7	38.5	39.2	40.0	40.8	43.8	47.5	50.6	53.6	61.9
40°	35.5	36.2	37.0	37.7	37.7	38.5	41.5	45.3	48.3	51.3	60.4
42.5°	33.2	34.0	34.7	36.2	37.0	37.7	40.8	43.8	46.0	49.1	58.9
45°	33.2	34.0	35.5	36.2	37.7	38.5	40.8	43.0	44.5	46.8	56.6
47.5°	32.5	33.2	34.0	35.5	36.2	37.0	39.2	40.8	43.0	44.5	54.3
50°	34.7	36.2	36.2	36.2	36.2	36.2	37.7	39.2	40.0	41.5	51.3
52.5°	36.2	37.7	37.0	37.0	36.2	35.5	37.0	37.7	39.2	40.0	49.8
55°	34.7	36.2	35.5	34.7	34.0	33.2	34.7	35.5	37.0	37.7	47.5
57.5°	34.7	35.5	34.7	33.2	31.7	30.9	31.7	33.2	34.7	36.2	44.5
60°	31.7	30.9	30.9	30.2	30.2	29.4	30.9	32.5	33.2	34.7	43.0
62.5°	29.4	27.9	27.9	27.9	27.9	28.7	29.4	30.9	31.7	33.2	40.8
65°	27.9	26.4	26.4	26.4	26.4	26.4	27.9	28.7	30.2	30.9	40.0
67.5°	25.7	24.9	24.9	24.9	24.9	24.9	26.4	27.9	28.7	30.2	39.2
70°	24.1	23.4	23.4	23.4	22.6	22.6	24.1	25.7	27.2	28.7	37.7
72.5°	21.9	21.9	21.9	21.1	21.1	20.4	21.9	24.1	25.7	27.2	37.0
75°	19.6	19.6	18.9	18.9	18.1	17.4	19.6	21.1	23.4	24.9	34.7
77.5°	17.4	16.6	16.6	15.8	15.8	15.1	16.6	18.1	19.6	21.1	28.7
80°	13.6	12.8	12.8	12.1	12.1	11.3	12.8	13.6	15.1	15.8	21.1
82.5°	9.8	9.1	9.1	8.3	8.3	7.5	8.3	9.8	10.6	11.3	13.6
85°	4.5	4.5	4.5	4.5	4.5	4.5	5.3	6.0	6.0	6.8	8.3
87.5°	0.8	0.8	0.8	0.8	0.8	0.8	1.5	2.3	2.3	3.0	3.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124
 CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	302.5°	305°	307.5°	310°	312.5°	315°	317.5°	320°	322.5°	325°	327.5°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124
 CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	330°	332.5°	335°	337.5°	340°	342.5°	345°	347.5°	350°	352.5°	355°
0°	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3	374.3
2.5°	369.0	371.3	373.6	375.8	378.1	381.1	383.4	384.9	386.4	387.1	388.6
5°	313.9	319.2	324.5	329.8	334.3	339.6	344.1	350.2	355.4	361.5	366.8
7.5°	249.0	253.6	257.3	263.4	269.4	276.2	282.2	291.3	299.6	308.7	317.0
10°	207.5	210.5	213.6	218.8	224.1	229.4	234.7	244.5	254.3	263.4	273.2
12.5°	187.9	191.7	194.7	198.5	202.2	206.0	209.8	218.8	228.7	237.7	246.8
15°	173.6	178.9	183.4	188.7	193.9	199.2	204.5	215.1	224.9	235.5	245.3
17.5°	157.7	163.8	169.8	178.9	187.9	197.0	206.0	220.4	233.9	248.3	261.9
20°	140.4	148.7	157.0	169.0	180.4	192.4	204.5	224.1	243.8	262.6	282.2
22.5°	122.3	131.3	139.6	156.2	172.1	188.7	205.3	228.7	252.8	276.2	299.6
25°	104.1	115.5	126.8	149.4	172.1	194.7	217.3	247.5	277.7	307.9	338.1
27.5°	91.3	102.6	114.0	142.6	171.3	200.0	228.7	268.7	308.7	348.6	388.6
30°	79.2	87.5	95.1	131.3	167.5	203.8	240.0	286.8	332.8	379.6	425.6
32.5°	70.2	77.0	83.8	124.5	165.3	206.0	246.8	298.8	350.9	402.2	454.3
35°	68.7	76.2	83.0	124.5	165.3	206.8	247.5	304.9	362.2	419.6	476.9
37.5°	69.4	77.7	85.3	123.8	162.3	200.7	239.2	300.4	362.2	423.4	484.5
40°	68.7	77.7	86.8	120.7	154.7	189.4	223.4	291.3	359.2	427.1	495.1
42.5°	67.9	77.7	86.8	117.7	147.9	178.9	209.8	280.7	350.9	421.9	492.0
45°	65.7	75.5	84.5	115.5	145.6	176.6	207.5	283.0	359.2	434.7	510.1
47.5°	63.4	73.2	82.3	114.7	147.2	179.6	212.1	298.1	384.1	469.4	555.4
50°	61.1	71.7	81.5	120.0	157.7	196.2	234.7	324.5	415.1	504.9	594.7
52.5°	58.9	68.7	78.5	125.3	172.1	218.8	265.6	357.7	449.8	541.1	633.2
55°	56.6	66.4	75.5	129.0	182.6	237.0	290.5	388.6	487.5	585.6	683.7
57.5°	52.8	61.9	70.2	132.1	193.9	255.8	318.5	425.6	532.8	639.9	747.1
60°	51.3	59.6	67.9	133.6	198.5	264.1	329.0	444.5	560.0	674.7	790.1
62.5°	48.3	56.6	64.1	128.3	191.7	255.8	320.0	431.7	544.1	656.5	769.0
65°	48.3	57.4	65.7	120.7	175.8	230.9	286.0	387.1	488.3	588.6	689.8
67.5°	47.5	56.6	64.9	108.7	152.4	197.0	240.7	326.8	412.8	498.8	584.9
70°	46.8	55.8	64.9	101.1	137.3	173.6	209.8	275.4	341.1	406.0	471.7
72.5°	46.8	57.4	67.2	95.1	122.3	150.2	177.3	216.6	255.1	294.3	332.8
75°	43.8	53.6	62.6	83.0	102.6	123.0	142.6	166.0	189.4	212.8	236.2
77.5°	36.2	44.5	52.1	65.7	78.5	92.1	104.9	119.2	133.6	147.9	162.3
80°	25.7	30.9	35.5	42.3	49.1	56.6	63.4	76.2	89.0	101.9	114.7
82.5°	15.8	18.9	21.1	25.7	29.4	34.0	38.5	49.1	58.9	69.4	79.2
85°	9.1	10.6	12.1	15.1	17.4	20.4	23.4	30.2	36.2	43.0	49.1
87.5°	3.8	4.5	4.5	6.8	8.3	10.6	12.1	12.1	12.8	12.8	12.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124
 CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	330°	332.5°	335°	337.5°	340°	342.5°	345°	347.5°	350°	352.5°	355°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P678124
 CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	357.5°	360°
0°	374.3	374.3
2.5°	393.9	398.5
5°	369.8	372.0
7.5°	323.7	329.8
10°	280.7	287.5
12.5°	257.3	267.9
15°	256.6	267.9
17.5°	274.7	287.5
20°	296.6	310.2
22.5°	324.5	348.6
25°	363.0	387.1
27.5°	415.8	443.0
30°	448.3	470.1
32.5°	478.4	501.8
35°	500.3	523.0
37.5°	507.1	529.0
40°	523.7	552.4
42.5°	531.3	570.5
45°	552.4	594.7
47.5°	589.4	623.3
50°	615.0	634.7
52.5°	646.0	658.8
55°	693.5	702.6
57.5°	768.2	790.1
60°	828.6	866.3
62.5°	822.6	876.9
65°	771.3	852.8
67.5°	670.9	756.2
70°	541.1	610.5
72.5°	400.0	466.4
75°	274.7	312.4
77.5°	185.6	208.3
80°	132.8	150.2
82.5°	85.3	91.3
85°	45.3	41.5
87.5°	9.8	6.0
90°	0.0	0.0
92.5°	0.0	0.0
95°	0.0	0.0
97.5°	0.0	0.0
100°	0.0	0.0
102.5°	0.0	0.0
105°	0.0	0.0
107.5°	0.0	0.0
110°	0.0	0.0



REPORT NUMBER: P678124
CATALOG NUMBER: CCW-SA-1-AMB-U-SLL

CANDELA DISTRIBUTION (continued):

	357.5°	360°
112.5°	0.0	0.0
115°	0.0	0.0
117.5°	0.0	0.0
120°	0.0	0.0
122.5°	0.0	0.0
125°	0.0	0.0
127.5°	0.0	0.0
130°	0.0	0.0
132.5°	0.0	0.0
135°	0.0	0.0
137.5°	0.0	0.0
140°	0.0	0.0
142.5°	0.0	0.0
145°	0.0	0.0
147.5°	0.0	0.0
150°	0.0	0.0
152.5°	0.0	0.0
155°	0.0	0.0
157.5°	0.0	0.0
160°	0.0	0.0
162.5°	0.0	0.0
165°	0.0	0.0
167.5°	0.0	0.0
170°	0.0	0.0
172.5°	0.0	0.0
175°	0.0	0.0
177.5°	0.0	0.0
180°	0.0	0.0

(END OF REPORT)