

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: INVUE

Report Number: P160052

Luminaire Tested: **ENT-F01-LED-E1-SLL-ULG**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P160052
REPORT IS FROM IESNA LM-79-08 TEST DATA - UPLIGHT (P20107) AND SCALED
Test Lab: INNOVATION CENTER-P3
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: INVUE
Catalog Number: ENT-F01-LED-E1-SLL-ULG
Description: ENTRI LED LUMINAIRE WITH UPLIGHT
(1) LIGHTBARS WITH AccuLED OPTICS - 90° SPILL LIGHT ELIMINATOR LEFT
Light Source: (7) 4000K CCT, 70 CRI LEDs
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2325.3 lumens
Efficiency: N/A
Efficacy: 68.6 lumens/watt
Luminous Opening: Rectangular (W 0.17' x L: 1' x H: 0')
IES Classification: Type IV - Short - Non-Cutoff
BUG Rating: B1 - U3 - G1

Input Watts (W): 33.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT




REPORT NUMBER: P160052

CATALOG NUMBER: ENT-F01-LED-E1-SLL-ULG

Iso-Footcandle Lines of Horizontal Illumination

✕ Max cd
 - - - 1/2 Max cd

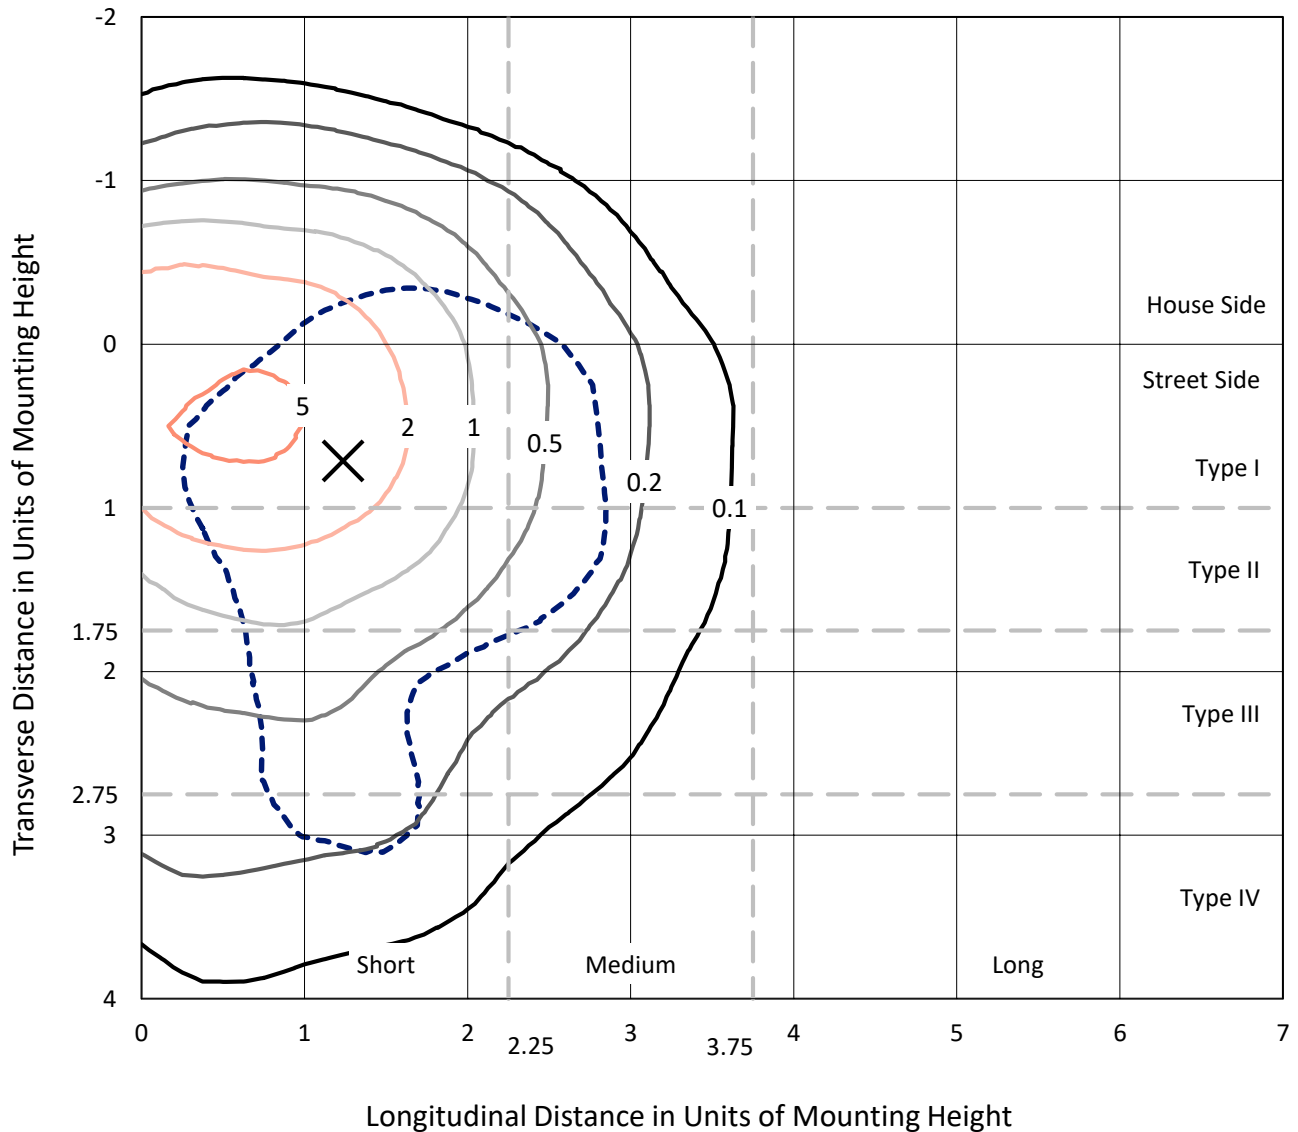


Based on 10 foot mounting height. Maximum calculated value = 6.5 fc
 Type IV - Short - Non-Cutoff

REPORT NUMBER: P160052

CATALOG NUMBER: ENT-F01-LED-E1-SLL-ULG

Luminous Intensity Polar Plot

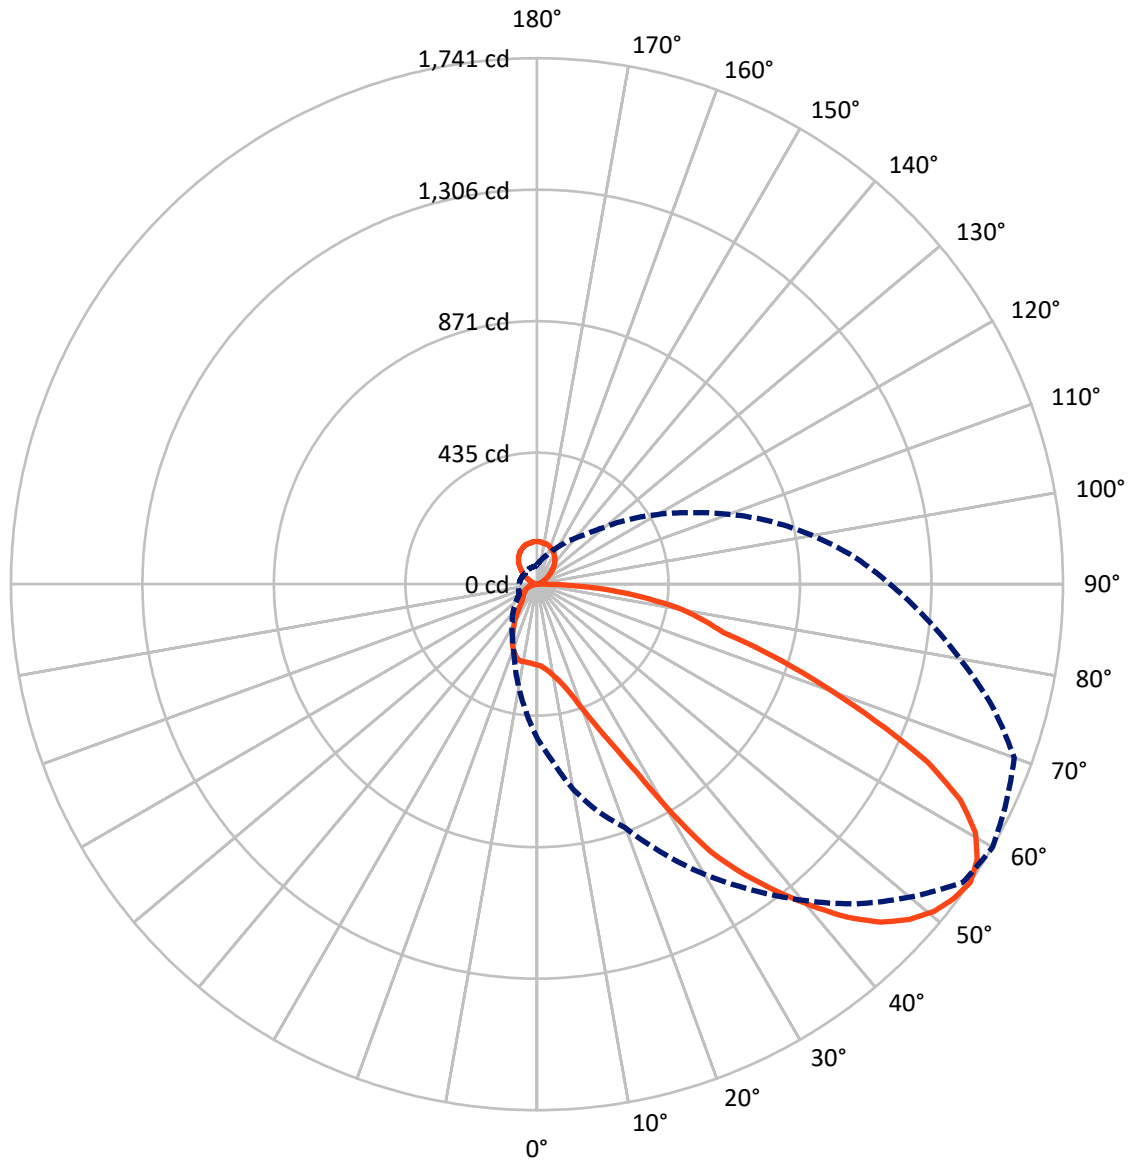

— Vertical Plane Through 60-Deg Lateral - - - Horizontal Cone Through 55-Deg Vertical

REPORT NUMBER: P160052

CATALOG NUMBER: ENT-F01-LED-E1-SLL-ULG


FLUX DISTRIBUTION:

| | | Downward | Upward | Total |
|--------------------|-----------|----------|--------|--------|
| House Side | Lumens | 502.4 | 157.7 | 660.1 |
| | % Fixture | 21.6 | 6.8 | 28.4 |
| Street Side | Lumens | 1507.5 | 157.7 | 1665.2 |
| | % Fixture | 64.8 | 6.8 | 71.6 |
| Total | Lumens | 2009.8 | 315.5 | 2325.3 |
| | % Fixture | 86.4 | 13.6 | 100.0 |

Coefficient of Utilization

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 26.4 | 1.1 |
| 10°-20° | 86.7 | 3.7 |
| 20°-30° | 168.3 | 7.2 |
| 30°-40° | 264.5 | 11.4 |
| 40°-50° | 353.6 | 15.2 |
| 50°-60° | 414.8 | 17.8 |
| 60°-70° | 393.6 | 16.9 |
| 70°-80° | 237.5 | 10.2 |
| 80°-90° | 64.4 | 2.8 |
| 90°-100° | 1.3 | 0.1 |
| 100°-110° | 12.3 | 0.5 |
| 110°-120° | 25.2 | 1.1 |
| 120°-130° | 43.0 | 1.9 |
| 130°-140° | 60.0 | 2.6 |
| 140°-150° | 65.4 | 2.8 |
| 150°-160° | 56.9 | 2.4 |
| 160°-170° | 38.2 | 1.6 |
| 170°-180° | 13.3 | 0.6 |
| 0°-90° | 2009.8 | 86.4 |
| 0°-180° | 2325.3 | 100.0 |

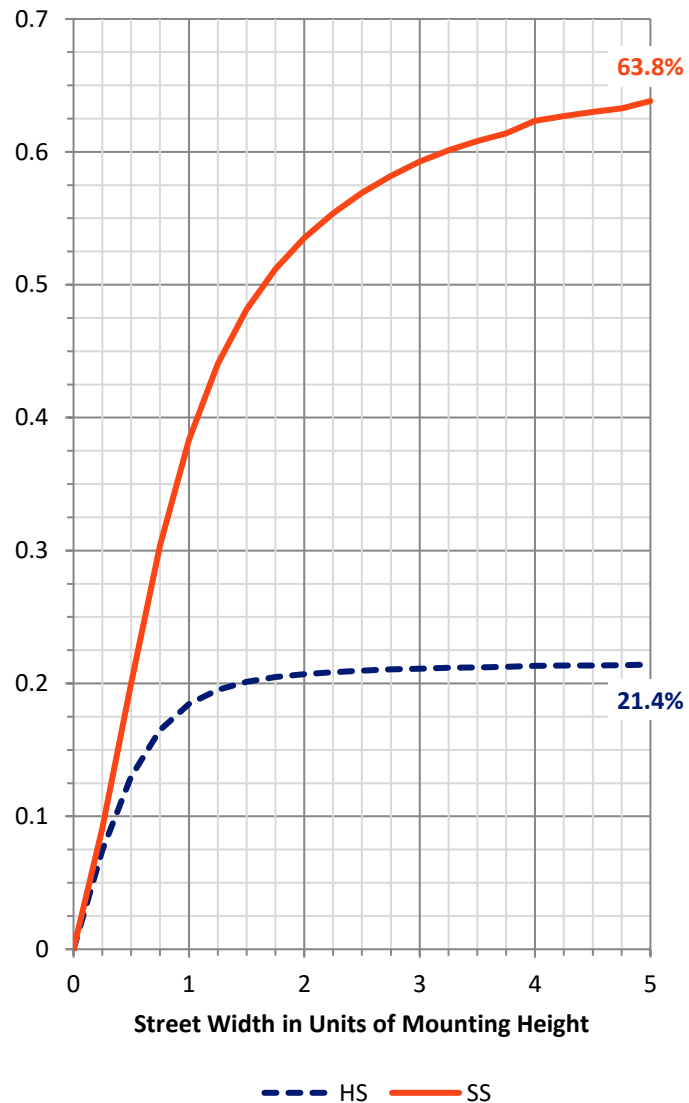

REPORT NUMBER: P160052


CATALOG NUMBER: ENT-F01-LED-E1-SLL-ULG

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

| Zone | | Lumens | % Fixture | Zone Rating/Lumen Limit | | |
|------|-------------|--------|-----------|-------------------------|--------|--------|
| | | | | B | U | G |
| FL | (0°-30°) | 165.2 | 7.1 | | | |
| FM | (30°-60°) | 763.0 | 32.8 | | | |
| FH | (60°-80°) | 520.8 | 22.4 | | | G0/660 |
| FVH | (80°-90°) | 58.5 | 2.5 | | | G1/100 |
| BL | (0°-30°) | 116.3 | 5.0 | B1/500 | | |
| BM | (30°-60°) | 270.0 | 11.6 | B1/1000 | | |
| BH | (60°-80°) | 110.3 | 4.7 | B1/500 | | G1/500 |
| BVH | (80°-90°) | 5.8 | 0.3 | | | G0/10 |
| UL | (90°-100°) | 1.3 | 0.1 | | U1/10 | |
| UH | (100°-180°) | 157.7 | 6.8 | | U3/500 | |

BUG Rating: B1-U3-G1

Type IV Short

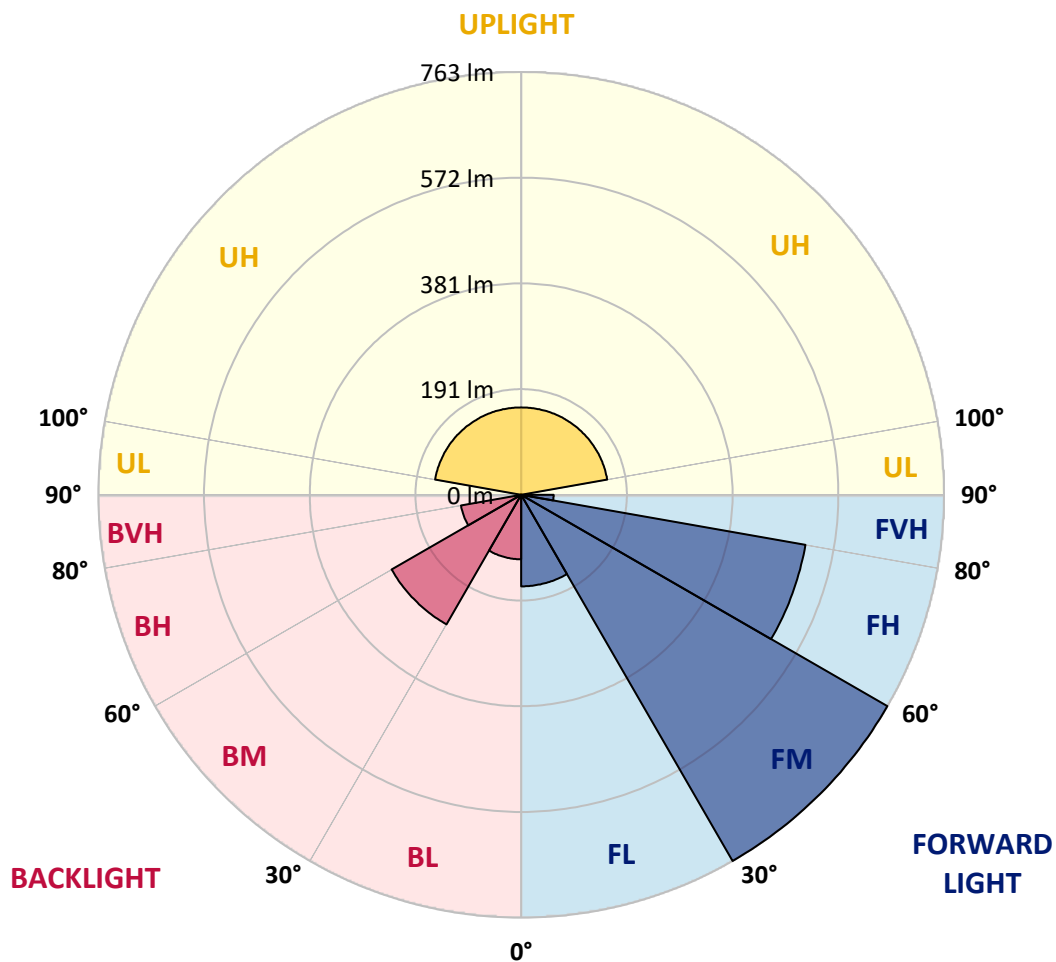



REPORT NUMBER: P160052

CATALOG NUMBER: ENT-F01-LED-E1-SLL-ULG

CANDELA DISTRIBUTION (FULL):

| | 0° | 5° | 10° | 15° | 20° | 25° | 30° | 35° | 40° | 45° | 50° |
|--------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|
| 0° | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 |
| 2.5° | 273.7 | 273.2 | 273.7 | 273.2 | 273.2 | 273.2 | 273.7 | 273.2 | 272.0 | 272.0 | 272.4 |
| 5° | 280.3 | 280.3 | 280.3 | 280.7 | 280.7 | 281.1 | 281.9 | 281.1 | 280.7 | 282.7 | 281.1 |
| 7.5° | 288.1 | 288.1 | 289.3 | 289.8 | 291.0 | 291.0 | 292.6 | 292.2 | 293.9 | 295.1 | 293.9 |
| 10° | 300.1 | 298.8 | 301.7 | 301.7 | 305.0 | 305.4 | 307.1 | 307.5 | 310.4 | 312.9 | 310.8 |
| 12.5° | 317.4 | 318.2 | 323.2 | 324.0 | 328.1 | 328.1 | 328.1 | 329.8 | 331.9 | 333.5 | 331.4 |
| 15° | 348.4 | 350.0 | 356.6 | 357.0 | 364.1 | 361.2 | 364.5 | 364.9 | 364.5 | 365.7 | 362.8 |
| 17.5° | 388.4 | 392.9 | 402.4 | 404.5 | 407.8 | 413.6 | 413.6 | 412.8 | 414.8 | 416.1 | 408.2 |
| 20° | 437.5 | 445.4 | 456.1 | 460.2 | 469.3 | 479.2 | 478.8 | 477.2 | 477.6 | 474.3 | 465.6 |
| 22.5° | 492.8 | 510.6 | 528.3 | 534.9 | 541.5 | 553.9 | 561.8 | 559.3 | 561.4 | 553.9 | 546.1 |
| 25° | 556.0 | 584.9 | 611.7 | 621.6 | 645.6 | 667.4 | 670.7 | 669.1 | 660.0 | 653.0 | 645.1 |
| 27.5° | 594.8 | 632.8 | 669.5 | 694.7 | 735.5 | 770.6 | 777.6 | 789.2 | 792.1 | 797.9 | 778.9 |
| 30° | 603.0 | 650.5 | 696.3 | 734.7 | 783.8 | 825.5 | 871.8 | 906.0 | 929.1 | 947.3 | 934.9 |
| 32.5° | 608.8 | 662.5 | 713.3 | 761.5 | 802.0 | 862.7 | 920.9 | 971.6 | 1039.3 | 1064.1 | 1087.6 |
| 35° | 610.5 | 672.0 | 729.4 | 783.8 | 836.3 | 896.5 | 958.8 | 1014.6 | 1106.2 | 1179.7 | 1230.0 |
| 37.5° | 608.0 | 679.0 | 746.3 | 812.7 | 875.1 | 941.5 | 1007.1 | 1061.6 | 1150.8 | 1245.7 | 1313.4 |
| 40° | 598.1 | 676.5 | 753.3 | 828.0 | 903.5 | 985.7 | 1060.8 | 1119.8 | 1203.2 | 1315.5 | 1405.5 |
| 42.5° | 585.3 | 666.2 | 750.8 | 833.0 | 918.0 | 1014.6 | 1105.4 | 1177.2 | 1269.2 | 1382.8 | 1485.1 |
| 45° | 569.2 | 653.4 | 740.9 | 827.6 | 919.2 | 1026.5 | 1130.1 | 1222.2 | 1320.0 | 1446.3 | 1545.0 |
| 47.5° | 549.4 | 635.2 | 727.7 | 815.6 | 911.0 | 1027.0 | 1141.7 | 1247.0 | 1354.3 | 1490.1 | 1596.6 |
| 50° | 530.8 | 616.3 | 712.8 | 799.5 | 895.3 | 1016.6 | 1140.5 | 1258.1 | 1375.3 | 1515.7 | 1627.5 |
| 52.5° | 516.4 | 600.2 | 700.0 | 786.7 | 877.1 | 999.7 | 1128.1 | 1252.7 | 1378.6 | 1519.0 | 1633.3 |
| 55° | 507.3 | 586.9 | 689.3 | 778.1 | 859.0 | 981.5 | 1109.1 | 1234.2 | 1366.2 | 1497.1 | 1611.8 |
| 57.5° | 508.5 | 584.5 | 683.1 | 776.4 | 845.8 | 965.9 | 1087.6 | 1207.7 | 1327.9 | 1452.5 | 1571.0 |
| 60° | 521.3 | 589.8 | 679.8 | 764.8 | 854.0 | 967.5 | 1078.1 | 1178.4 | 1274.6 | 1389.4 | 1500.0 |
| 62.5° | 553.5 | 612.5 | 685.2 | 772.7 | 870.9 | 983.2 | 1071.9 | 1133.0 | 1190.4 | 1305.2 | 1417.8 |
| 65° | 614.6 | 665.8 | 724.0 | 800.8 | 896.9 | 1005.1 | 1046.8 | 1059.1 | 1095.9 | 1205.3 | 1317.1 |
| 67.5° | 674.5 | 735.1 | 768.2 | 817.3 | 907.3 | 1011.3 | 1016.6 | 963.4 | 962.6 | 1069.1 | 1150.0 |
| 70° | 732.2 | 820.2 | 833.4 | 860.6 | 922.1 | 1004.7 | 985.3 | 882.5 | 835.8 | 850.3 | 897.3 |
| 72.5° | 694.3 | 825.9 | 835.4 | 843.7 | 880.4 | 957.2 | 934.9 | 796.2 | 691.8 | 673.2 | 726.5 |
| 75° | 530.0 | 697.2 | 719.4 | 705.0 | 725.2 | 783.8 | 779.7 | 671.2 | 635.7 | 648.0 | 668.7 |
| 77.5° | 381.4 | 537.4 | 585.7 | 538.7 | 533.3 | 571.3 | 560.5 | 569.6 | 636.9 | 655.1 | 650.1 |
| 80° | 221.2 | 341.4 | 410.3 | 365.3 | 349.2 | 373.1 | 415.2 | 478.8 | 552.3 | 591.5 | 598.9 |
| 82.5° | 138.3 | 201.4 | 274.1 | 256.7 | 234.9 | 277.0 | 342.2 | 386.8 | 423.1 | 459.0 | 461.1 |
| 85° | 59.9 | 86.3 | 133.7 | 140.3 | 173.8 | 211.3 | 263.3 | 276.1 | 315.8 | 343.4 | 319.5 |
| 87.5° | 2.1 | 2.1 | 32.2 | 47.9 | 85.0 | 152.7 | 206.8 | 184.9 | 187.4 | 164.3 | 153.1 |
| 90° | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 |
| 92.5° | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 |
| 95° | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| 97.5° | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 |
| 100° | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 |
| 102.5° | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 |
| 105° | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 |
| 107.5° | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 |
| 110° | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 |



REPORT NUMBER: P160052

CATALOG NUMBER: ENT-F01-LED-E1-SLL-ULG

CANDELA DISTRIBUTION (continued):

| | 0° | 5° | 10° | 15° | 20° | 25° | 30° | 35° | 40° | 45° | 50° |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 112.5° | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 |
| 115° | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 |
| 117.5° | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 |
| 120° | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 |
| 122.5° | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 |
| 125° | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 |
| 127.5° | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 |
| 130° | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 |
| 132.5° | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 |
| 135° | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 |
| 137.5° | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 |
| 140° | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 |
| 142.5° | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 |
| 145° | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 |
| 147.5° | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 |
| 150° | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 |
| 152.5° | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 |
| 155° | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 |
| 157.5° | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 |
| 160° | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 |
| 162.5° | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 |
| 165° | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 |
| 167.5° | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 |
| 170° | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 |
| 172.5° | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 |
| 175° | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 |
| 177.5° | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 |
| 180° | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 |



REPORT NUMBER: P160052

CATALOG NUMBER: ENT-F01-LED-E1-SLL-ULG

CANDELA DISTRIBUTION (continued):

| | 55° | 60° | 65° | 70° | 75° | 80° | 85° | 90° | 95° | 100° | 105° |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-------|-------|
| 0° | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 |
| 2.5° | 272.4 | 271.6 | 272.0 | 270.8 | 270.8 | 271.2 | 271.2 | 269.9 | 269.9 | 269.9 | 269.5 |
| 5° | 281.9 | 281.1 | 280.7 | 279.9 | 278.6 | 279.4 | 278.2 | 277.4 | 276.1 | 275.7 | 274.5 |
| 7.5° | 294.3 | 293.1 | 292.6 | 290.6 | 288.9 | 288.1 | 287.3 | 284.4 | 283.2 | 282.3 | 280.7 |
| 10° | 308.7 | 308.7 | 307.9 | 303.8 | 302.6 | 299.7 | 296.8 | 293.5 | 291.0 | 287.3 | 285.2 |
| 12.5° | 327.3 | 328.6 | 325.7 | 322.0 | 319.1 | 313.3 | 307.9 | 303.4 | 298.4 | 293.1 | 289.8 |
| 15° | 355.0 | 355.8 | 350.0 | 346.7 | 342.2 | 335.6 | 327.3 | 319.9 | 312.5 | 305.0 | 298.8 |
| 17.5° | 395.8 | 394.6 | 386.3 | 383.0 | 375.2 | 364.1 | 352.9 | 343.0 | 331.9 | 321.5 | 313.7 |
| 20° | 454.9 | 449.9 | 428.4 | 427.2 | 417.3 | 401.6 | 385.5 | 371.1 | 356.2 | 343.0 | 329.8 |
| 22.5° | 526.7 | 515.5 | 499.9 | 482.1 | 463.1 | 445.8 | 426.8 | 406.6 | 388.0 | 371.5 | 357.0 |
| 25° | 620.4 | 595.6 | 581.2 | 557.2 | 540.7 | 510.2 | 483.8 | 467.7 | 442.5 | 423.5 | 404.9 |
| 27.5° | 745.4 | 706.2 | 685.2 | 659.2 | 622.4 | 601.0 | 565.1 | 534.1 | 507.3 | 475.9 | 455.3 |
| 30° | 907.7 | 878.8 | 825.9 | 789.6 | 738.8 | 686.8 | 642.7 | 602.2 | 567.1 | 529.6 | 499.0 |
| 32.5° | 1074.4 | 1056.3 | 994.3 | 926.7 | 849.5 | 773.1 | 708.3 | 658.4 | 612.5 | 570.4 | 535.4 |
| 35° | 1216.0 | 1178.4 | 1117.8 | 1046.8 | 947.7 | 859.4 | 777.2 | 713.7 | 656.7 | 604.3 | 560.1 |
| 37.5° | 1307.2 | 1290.7 | 1229.2 | 1148.7 | 1040.2 | 944.8 | 859.8 | 784.7 | 713.7 | 645.1 | 588.2 |
| 40° | 1408.8 | 1399.3 | 1347.7 | 1249.0 | 1148.7 | 1031.9 | 934.9 | 855.7 | 779.3 | 697.6 | 622.9 |
| 42.5° | 1499.6 | 1508.2 | 1455.4 | 1368.7 | 1252.7 | 1121.1 | 1017.9 | 930.0 | 842.9 | 759.5 | 673.2 |
| 45° | 1580.9 | 1596.6 | 1557.8 | 1477.3 | 1350.1 | 1206.1 | 1098.4 | 1002.6 | 907.7 | 816.4 | 720.3 |
| 47.5° | 1642.0 | 1658.9 | 1626.3 | 1563.1 | 1430.6 | 1277.1 | 1168.9 | 1061.6 | 962.1 | 857.3 | 755.4 |
| 50° | 1693.2 | 1703.1 | 1678.3 | 1623.0 | 1495.9 | 1346.0 | 1225.5 | 1112.8 | 1002.6 | 889.5 | 778.1 |
| 52.5° | 1722.9 | 1728.6 | 1704.3 | 1664.3 | 1545.4 | 1397.2 | 1269.7 | 1148.3 | 1031.1 | 911.8 | 792.9 |
| 55° | 1721.2 | 1741.4 | 1713.8 | 1681.6 | 1560.7 | 1421.6 | 1292.8 | 1168.5 | 1052.1 | 926.2 | 801.6 |
| 57.5° | 1689.0 | 1718.7 | 1705.9 | 1665.9 | 1547.9 | 1419.9 | 1296.1 | 1180.1 | 1065.8 | 931.2 | 797.5 |
| 60° | 1627.1 | 1668.0 | 1677.1 | 1620.1 | 1496.7 | 1374.5 | 1264.7 | 1166.9 | 1053.0 | 909.3 | 772.3 |
| 62.5° | 1539.6 | 1572.6 | 1596.2 | 1518.6 | 1396.4 | 1280.4 | 1194.5 | 1117.3 | 1001.4 | 844.5 | 720.3 |
| 65° | 1407.5 | 1422.8 | 1429.4 | 1357.6 | 1237.9 | 1160.7 | 1104.6 | 1038.1 | 909.3 | 752.5 | 639.8 |
| 67.5° | 1211.0 | 1209.0 | 1215.6 | 1182.2 | 1093.8 | 1053.4 | 1016.2 | 944.0 | 793.7 | 647.2 | 534.9 |
| 70° | 963.0 | 1005.9 | 1042.2 | 1006.7 | 951.8 | 911.4 | 880.4 | 795.0 | 634.0 | 499.9 | 406.6 |
| 72.5° | 783.8 | 818.9 | 838.7 | 807.8 | 754.5 | 725.6 | 684.8 | 599.7 | 446.2 | 355.4 | 279.0 |
| 75° | 662.1 | 636.5 | 648.4 | 629.0 | 579.9 | 538.2 | 514.7 | 421.0 | 292.6 | 235.3 | 173.8 |
| 77.5° | 598.1 | 557.2 | 531.2 | 489.5 | 433.4 | 385.9 | 362.0 | 261.7 | 184.5 | 138.7 | 100.3 |
| 80° | 528.7 | 472.2 | 404.5 | 337.2 | 288.9 | 259.6 | 243.1 | 149.4 | 101.5 | 80.5 | 57.8 |
| 82.5° | 402.0 | 348.8 | 283.2 | 234.4 | 192.8 | 168.0 | 149.0 | 85.4 | 57.4 | 42.5 | 33.0 |
| 85° | 257.6 | 237.3 | 216.7 | 192.8 | 161.4 | 129.6 | 99.9 | 62.3 | 42.1 | 24.4 | 18.2 |
| 87.5° | 124.2 | 103.2 | 102.4 | 94.5 | 90.0 | 71.0 | 42.1 | 14.4 | 9.1 | 7.8 | 5.0 |
| 90° | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 |
| 92.5° | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 |
| 95° | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| 97.5° | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 |
| 100° | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 |
| 102.5° | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 |
| 105° | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 |
| 107.5° | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 |
| 110° | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 |



REPORT NUMBER: P160052

CATALOG NUMBER: ENT-F01-LED-E1-SLL-ULG

CANDELA DISTRIBUTION (continued):

| | 55° | 60° | 65° | 70° | 75° | 80° | 85° | 90° | 95° | 100° | 105° |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 112.5° | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 |
| 115° | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 |
| 117.5° | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 |
| 120° | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 |
| 122.5° | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 |
| 125° | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 |
| 127.5° | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 |
| 130° | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 |
| 132.5° | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 |
| 135° | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 |
| 137.5° | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 |
| 140° | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 |
| 142.5° | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 |
| 145° | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 |
| 147.5° | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 |
| 150° | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 |
| 152.5° | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 |
| 155° | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 |
| 157.5° | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 |
| 160° | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 |
| 162.5° | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 |
| 165° | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 |
| 167.5° | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 |
| 170° | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 |
| 172.5° | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 |
| 175° | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 |
| 177.5° | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 |
| 180° | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 |



REPORT NUMBER: P160052

CATALOG NUMBER: ENT-F01-LED-E1-SLL-ULG

CANDELA DISTRIBUTION (continued):

| | 110° | 115° | 120° | 125° | 130° | 135° | 140° | 145° | 150° | 155° | 160° |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 0° | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 |
| 2.5° | 268.7 | 268.3 | 267.5 | 267.5 | 267.1 | 266.6 | 266.2 | 266.2 | 266.6 | 265.8 | 265.4 |
| 5° | 273.2 | 272.8 | 271.6 | 271.2 | 270.8 | 269.9 | 269.9 | 269.5 | 269.5 | 268.7 | 268.3 |
| 7.5° | 278.6 | 277.8 | 277.0 | 276.6 | 275.3 | 275.3 | 275.3 | 276.1 | 276.1 | 276.1 | 276.6 |
| 10° | 284.0 | 281.9 | 281.1 | 281.1 | 280.7 | 281.1 | 282.3 | 283.2 | 284.4 | 285.2 | 286.0 |
| 12.5° | 286.9 | 284.8 | 284.0 | 283.2 | 284.4 | 284.4 | 286.5 | 288.9 | 291.0 | 293.1 | 293.9 |
| 15° | 294.3 | 290.6 | 288.9 | 286.9 | 286.9 | 286.9 | 288.9 | 291.0 | 293.5 | 296.0 | 296.4 |
| 17.5° | 307.1 | 300.5 | 297.2 | 292.6 | 291.4 | 289.8 | 289.8 | 290.6 | 292.2 | 294.3 | 294.3 |
| 20° | 319.9 | 313.3 | 307.9 | 303.0 | 299.7 | 295.1 | 291.8 | 288.9 | 287.7 | 288.5 | 288.5 |
| 22.5° | 343.0 | 335.2 | 328.6 | 320.3 | 312.9 | 307.1 | 298.8 | 291.8 | 286.5 | 284.8 | 283.6 |
| 25° | 384.7 | 373.6 | 362.4 | 350.0 | 341.8 | 331.0 | 319.5 | 307.9 | 297.2 | 289.8 | 283.2 |
| 27.5° | 430.9 | 415.7 | 399.6 | 380.2 | 366.9 | 350.8 | 335.6 | 319.1 | 305.9 | 294.7 | 282.7 |
| 30° | 475.1 | 446.6 | 423.5 | 399.1 | 377.7 | 355.8 | 336.8 | 317.4 | 303.0 | 289.8 | 275.3 |
| 32.5° | 497.0 | 463.1 | 431.7 | 401.2 | 375.2 | 350.0 | 329.4 | 307.5 | 292.2 | 277.4 | 260.0 |
| 35° | 512.2 | 471.8 | 434.2 | 398.7 | 369.4 | 341.8 | 318.2 | 295.5 | 277.4 | 260.5 | 240.6 |
| 37.5° | 531.2 | 480.5 | 436.3 | 396.7 | 362.4 | 331.0 | 304.6 | 279.0 | 258.4 | 240.2 | 219.6 |
| 40° | 556.0 | 493.7 | 438.8 | 390.9 | 351.7 | 316.2 | 288.9 | 261.3 | 239.4 | 220.0 | 201.0 |
| 42.5° | 590.3 | 511.8 | 441.7 | 383.9 | 339.7 | 302.6 | 274.5 | 247.7 | 224.5 | 203.9 | 184.9 |
| 45° | 624.1 | 532.9 | 449.1 | 381.8 | 331.9 | 293.9 | 264.2 | 235.7 | 211.3 | 189.5 | 167.6 |
| 47.5° | 649.3 | 548.6 | 456.9 | 383.0 | 327.3 | 284.8 | 253.0 | 221.2 | 194.0 | 170.1 | 147.8 |
| 50° | 665.4 | 558.5 | 463.9 | 386.3 | 323.2 | 272.8 | 235.3 | 203.1 | 175.0 | 151.5 | 129.2 |
| 52.5° | 673.6 | 561.4 | 466.4 | 385.1 | 312.5 | 253.8 | 216.3 | 185.3 | 158.5 | 135.4 | 115.6 |
| 55° | 676.1 | 558.5 | 461.1 | 373.6 | 293.9 | 234.9 | 199.0 | 169.6 | 143.6 | 121.8 | 104.0 |
| 57.5° | 667.4 | 546.1 | 442.1 | 350.0 | 269.1 | 216.7 | 180.4 | 151.9 | 127.1 | 107.7 | 91.6 |
| 60° | 639.4 | 517.6 | 408.6 | 313.3 | 241.5 | 192.3 | 156.0 | 128.0 | 107.7 | 90.8 | 79.7 |
| 62.5° | 588.2 | 469.3 | 363.2 | 267.5 | 203.5 | 158.9 | 124.7 | 100.3 | 83.8 | 71.8 | 66.0 |
| 65° | 524.2 | 403.3 | 295.1 | 212.6 | 155.6 | 118.5 | 89.6 | 73.5 | 61.9 | 54.9 | 52.0 |
| 67.5° | 428.4 | 315.4 | 220.8 | 151.5 | 107.3 | 80.5 | 60.7 | 52.0 | 47.1 | 45.0 | 44.2 |
| 70° | 308.3 | 218.8 | 146.1 | 98.2 | 69.8 | 54.9 | 44.2 | 40.5 | 38.4 | 38.4 | 38.8 |
| 72.5° | 203.1 | 135.0 | 89.2 | 62.7 | 49.5 | 41.3 | 35.9 | 34.3 | 34.3 | 35.1 | 35.5 |
| 75° | 118.9 | 78.4 | 54.9 | 45.8 | 39.2 | 34.7 | 31.8 | 30.5 | 30.5 | 31.0 | 31.0 |
| 77.5° | 70.2 | 48.3 | 39.2 | 34.7 | 31.8 | 29.7 | 28.1 | 26.4 | 26.0 | 26.0 | 27.2 |
| 80° | 43.3 | 34.3 | 30.5 | 27.7 | 25.6 | 23.9 | 22.3 | 22.3 | 22.3 | 21.9 | 22.7 |
| 82.5° | 28.1 | 24.4 | 23.9 | 23.1 | 20.6 | 19.0 | 17.3 | 17.3 | 18.2 | 17.3 | 17.7 |
| 85° | 16.9 | 16.1 | 15.7 | 15.7 | 14.9 | 14.0 | 12.8 | 12.8 | 14.0 | 13.6 | 12.0 |
| 87.5° | 4.5 | 4.1 | 5.4 | 5.0 | 5.8 | 5.8 | 5.8 | 6.6 | 8.7 | 11.1 | 8.3 |
| 90° | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 |
| 92.5° | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 |
| 95° | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| 97.5° | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 |
| 100° | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 |
| 102.5° | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 |
| 105° | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 |
| 107.5° | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 |
| 110° | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 |



REPORT NUMBER: P160052
 CATALOG NUMBER: ENT-F01-LED-E1-SLL-ULG

REPORT N
 CATALOG

CANDELA DISTRIBUTION (continued):

CANDELA

| | 110° | 115° | 120° | 125° | 130° | 135° | 140° | 145° | 150° | 155° | 160° | |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|
| 112.5° | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 0° |
| 115° | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 2.5° |
| 117.5° | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 5° |
| 120° | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 7.5° |
| 122.5° | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 10° |
| 125° | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 12.5° |
| 127.5° | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 15° |
| 130° | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 17.5° |
| 132.5° | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 20° |
| 135° | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 22.5° |
| 137.5° | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 25° |
| 140° | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 27.5° |
| 142.5° | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 30° |
| 145° | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 32.5° |
| 147.5° | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 35° |
| 150° | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 37.5° |
| 152.5° | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 40° |
| 155° | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 42.5° |
| 157.5° | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 45° |
| 160° | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 47.5° |
| 162.5° | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 50° |
| 165° | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 52.5° |
| 167.5° | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 55° |
| 170° | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 57.5° |
| 172.5° | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 60° |
| 175° | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 62.5° |
| 177.5° | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 65° |
| 180° | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 67.5° |
| | | | | | | | | | | | | 70° |
| | | | | | | | | | | | | 72.5° |
| | | | | | | | | | | | | 75° |
| | | | | | | | | | | | | 77.5° |
| | | | | | | | | | | | | 80° |
| | | | | | | | | | | | | 82.5° |
| | | | | | | | | | | | | 85° |
| | | | | | | | | | | | | 87.5° |
| | | | | | | | | | | | | 90° |
| | | | | | | | | | | | | 92.5° |
| | | | | | | | | | | | | 95° |
| | | | | | | | | | | | | 97.5° |
| | | | | | | | | | | | | 100° |
| | | | | | | | | | | | | 102.5° |
| | | | | | | | | | | | | 105° |
| | | | | | | | | | | | | 107.5° |
| | | | | | | | | | | | | 110° |

NUMBER: P160052
 NUMBER: ENT-F01-LED-E1-SLL-ULG

REPORT NUMBER: P
 CATALOG NUMBER:

DISTRIBUTION (continued):

CANDELA DISTRIBUTION

| 165° | 170° | 175° | 180° | 185° | 190° | 195° | 200° | 205° | 210° | 215° | 165° | |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|-------|
| 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 112.5° | 21.2 |
| 265.0 | 265.4 | 264.6 | 264.2 | 264.6 | 265.0 | 263.8 | 263.3 | 262.9 | 262.5 | 262.9 | 115° | 25.0 |
| 267.9 | 267.9 | 266.6 | 265.8 | 265.8 | 265.4 | 264.2 | 263.8 | 262.1 | 261.7 | 262.9 | 117.5° | 29.5 |
| 276.1 | 275.7 | 274.5 | 273.2 | 272.8 | 272.8 | 269.9 | 268.7 | 267.9 | 265.4 | 265.8 | 120° | 34.8 |
| 285.6 | 285.6 | 286.0 | 284.4 | 282.3 | 281.9 | 278.6 | 276.6 | 275.3 | 273.2 | 272.4 | 122.5° | 40.9 |
| 293.1 | 291.8 | 291.4 | 288.9 | 286.9 | 286.0 | 283.2 | 281.5 | 279.9 | 277.8 | 277.4 | 125° | 47.8 |
| 295.5 | 293.1 | 291.4 | 288.5 | 286.0 | 284.4 | 281.9 | 280.3 | 278.2 | 277.0 | 276.1 | 127.5° | 55.3 |
| 293.1 | 290.6 | 288.1 | 284.8 | 281.5 | 279.4 | 276.6 | 274.1 | 273.2 | 271.6 | 269.1 | 130° | 63.0 |
| 287.7 | 284.8 | 281.9 | 277.8 | 274.1 | 271.2 | 267.9 | 265.8 | 263.3 | 260.9 | 255.9 | 132.5° | 70.5 |
| 281.1 | 277.8 | 274.9 | 269.5 | 265.8 | 262.5 | 258.8 | 255.5 | 252.6 | 247.7 | 240.2 | 135° | 77.9 |
| 276.6 | 269.5 | 264.6 | 257.2 | 253.0 | 248.9 | 247.2 | 243.9 | 239.8 | 231.1 | 222.1 | 137.5° | 85.3 |
| 269.9 | 257.2 | 248.1 | 240.6 | 234.9 | 229.9 | 227.0 | 223.3 | 219.2 | 210.9 | 201.4 | 140° | 92.5 |
| 258.8 | 243.9 | 235.3 | 227.4 | 220.8 | 215.5 | 210.1 | 203.1 | 197.7 | 188.2 | 181.6 | 142.5° | 99.2 |
| 241.9 | 229.5 | 221.7 | 214.2 | 205.6 | 198.5 | 191.9 | 183.7 | 175.8 | 166.3 | 160.6 | 145° | 104.9 |
| 222.9 | 211.7 | 201.8 | 194.0 | 184.9 | 177.9 | 170.9 | 161.4 | 154.0 | 145.3 | 139.9 | 147.5° | 110.1 |
| 203.1 | 191.1 | 179.6 | 170.5 | 162.2 | 154.4 | 148.2 | 139.1 | 131.3 | 123.0 | 120.1 | 150° | 115.1 |
| 185.3 | 171.7 | 159.3 | 150.2 | 141.2 | 133.3 | 126.7 | 117.2 | 110.6 | 104.8 | 101.5 | 152.5° | 119.7 |
| 168.0 | 153.5 | 142.0 | 132.5 | 123.4 | 115.2 | 106.5 | 99.1 | 93.3 | 90.8 | 86.3 | 155° | 123.7 |
| 148.6 | 133.7 | 122.6 | 112.3 | 104.8 | 96.2 | 89.6 | 84.6 | 80.9 | 78.8 | 75.9 | 157.5° | 127.0 |
| 128.8 | 116.4 | 104.8 | 95.3 | 86.3 | 78.8 | 74.7 | 72.2 | 71.0 | 69.3 | 68.1 | 160° | 130.3 |
| 112.7 | 102.0 | 90.4 | 81.3 | 73.1 | 67.7 | 65.6 | 64.4 | 63.6 | 62.7 | 62.3 | 162.5° | 133.5 |
| 101.5 | 90.0 | 79.7 | 71.0 | 64.8 | 61.9 | 61.1 | 60.3 | 59.4 | 59.0 | 58.6 | 165° | 136.0 |
| 92.9 | 81.3 | 71.8 | 64.4 | 59.9 | 59.0 | 58.6 | 57.8 | 57.0 | 57.0 | 56.1 | 167.5° | 137.1 |
| 82.6 | 72.6 | 64.4 | 59.0 | 56.5 | 56.1 | 55.7 | 55.3 | 54.9 | 54.9 | 54.5 | 170° | 137.4 |
| 71.8 | 64.4 | 59.0 | 55.3 | 54.5 | 53.7 | 52.8 | 52.0 | 51.6 | 52.4 | 52.8 | 172.5° | 138.6 |
| 61.1 | 56.5 | 53.2 | 52.0 | 51.2 | 49.9 | 49.1 | 48.3 | 48.3 | 49.1 | 50.4 | 175° | 140.5 |
| 50.8 | 49.1 | 48.3 | 47.5 | 47.1 | 46.6 | 45.8 | 45.0 | 45.0 | 45.0 | 45.8 | 177.5° | 141.1 |
| 43.8 | 42.9 | 42.9 | 42.5 | 42.1 | 42.1 | 41.3 | 40.5 | 40.5 | 40.5 | 40.5 | 180° | 140.8 |
| 38.4 | 38.8 | 38.8 | 38.8 | 38.4 | 38.0 | 37.6 | 36.7 | 36.3 | 35.5 | 34.7 | | |
| 35.5 | 35.1 | 34.7 | 34.3 | 33.8 | 33.4 | 33.0 | 32.6 | 31.8 | 31.0 | 30.1 | | |
| 31.8 | 31.0 | 29.7 | 29.3 | 28.9 | 28.1 | 28.1 | 27.7 | 26.8 | 25.6 | 24.8 | | |
| 27.7 | 26.8 | 25.6 | 24.8 | 24.8 | 24.4 | 23.5 | 23.1 | 21.9 | 20.6 | 19.8 | | |
| 22.3 | 21.1 | 19.8 | 19.4 | 19.0 | 18.6 | 18.2 | 17.7 | 17.3 | 16.1 | 15.7 | | |
| 16.5 | 15.3 | 14.0 | 13.6 | 13.2 | 12.4 | 12.0 | 12.0 | 12.0 | 10.7 | 9.9 | | |
| 10.7 | 9.1 | 7.8 | 6.6 | 6.6 | 6.2 | 5.4 | 4.5 | 3.7 | 2.5 | 1.7 | | |
| 5.4 | 2.9 | 1.7 | 0.4 | 0.4 | 0.4 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | | |
| 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | | |
| 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | | |
| 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | | |
| 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | | |
| 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | | |
| 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | | |
| 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | | |
| 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | | |

'160052
 ENT-F01-LED-E1-SLL-ULG

REPORT NUMBER: P160052
 CATALOG NUMBER: ENT-F01-I

TION (continued):

CANDELA DISTRIBUTION (con

| 170° | 175° | 180° | 185° | 190° | 195° | 200° | 205° | 210° | 215° | | 220° | 225° |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|-------|-------|
| 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 0° | 267.9 | 267.9 |
| 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 2.5° | 262.9 | 262.5 |
| 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 5° | 262.9 | 260.5 |
| 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 7.5° | 264.2 | 262.1 |
| 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 10° | 269.5 | 266.2 |
| 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 12.5° | 274.1 | 270.4 |
| 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 15° | 273.7 | 268.3 |
| 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 17.5° | 265.0 | 258.8 |
| 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 20° | 250.5 | 242.3 |
| 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 22.5° | 232.0 | 224.1 |
| 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 25° | 213.8 | 204.7 |
| 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 27.5° | 193.6 | 185.7 |
| 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 30° | 172.9 | 165.9 |
| 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 32.5° | 153.1 | 146.5 |
| 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 35° | 133.3 | 126.7 |
| 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 37.5° | 114.3 | 108.1 |
| 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 40° | 96.6 | 92.0 |
| 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 42.5° | 83.8 | 79.7 |
| 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 45° | 73.5 | 70.2 |
| 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 47.5° | 66.0 | 63.6 |
| 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 50° | 60.7 | 58.6 |
| 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 52.5° | 57.4 | 55.7 |
| 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 55° | 54.9 | 53.7 |
| 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 57.5° | 53.2 | 51.6 |
| 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 60° | 51.2 | 49.9 |
| 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 62.5° | 49.1 | 47.5 |
| 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 65° | 45.4 | 43.3 |
| 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 67.5° | 40.0 | 38.4 |
| | | | | | | | | | | 70° | 33.8 | 33.4 |
| | | | | | | | | | | 72.5° | 28.5 | 28.1 |
| | | | | | | | | | | 75° | 23.9 | 23.9 |
| | | | | | | | | | | 77.5° | 19.8 | 19.4 |
| | | | | | | | | | | 80° | 15.3 | 14.4 |
| | | | | | | | | | | 82.5° | 8.7 | 8.3 |
| | | | | | | | | | | 85° | 1.2 | 0.8 |
| | | | | | | | | | | 87.5° | 0.0 | 0.0 |
| | | | | | | | | | | 90° | 0.1 | 0.1 |
| | | | | | | | | | | 92.5° | 0.1 | 0.1 |
| | | | | | | | | | | 95° | 0.5 | 0.5 |
| | | | | | | | | | | 97.5° | 1.5 | 1.5 |
| | | | | | | | | | | 100° | 5.0 | 5.0 |
| | | | | | | | | | | 102.5° | 8.8 | 8.8 |
| | | | | | | | | | | 105° | 11.8 | 11.8 |
| | | | | | | | | | | 107.5° | 14.7 | 14.7 |
| | | | | | | | | | | 110° | 17.8 | 17.8 |



REPORT NUMBER: P160052

CATALOG NUMBER: ENT-F01-LED-E1-SLL

.ED-E1-SLL-ULG

tinued):

CANDELA DISTRIBUTION (continued):

| 230° | 235° | 240° | 245° | 250° | 255° | 260° | 265° | 270° | | 220° | 225° | 230° |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|-------|-------|-------|
| 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 112.5° | 21.2 | 21.2 | 21.2 |
| 262.9 | 263.3 | 265.0 | 265.8 | 266.2 | 266.2 | 266.6 | 267.5 | 267.9 | 115° | 25.0 | 25.0 | 25.0 |
| 260.5 | 261.3 | 262.1 | 263.3 | 263.8 | 263.8 | 264.2 | 265.4 | 266.6 | 117.5° | 29.5 | 29.5 | 29.5 |
| 260.9 | 260.5 | 260.9 | 261.7 | 261.7 | 261.7 | 262.1 | 263.3 | 264.6 | 120° | 34.8 | 34.8 | 34.8 |
| 264.2 | 261.7 | 260.0 | 259.6 | 259.2 | 259.2 | 260.0 | 261.7 | 262.9 | 122.5° | 40.9 | 40.9 | 40.9 |
| 267.1 | 263.8 | 260.5 | 258.4 | 256.7 | 255.9 | 256.3 | 258.0 | 260.5 | 125° | 47.8 | 47.8 | 47.8 |
| 264.6 | 259.6 | 255.9 | 253.0 | 250.5 | 249.7 | 250.1 | 251.4 | 254.3 | 127.5° | 55.3 | 55.3 | 55.3 |
| 253.8 | 248.5 | 244.4 | 242.3 | 241.1 | 240.6 | 241.5 | 243.9 | 246.4 | 130° | 63.0 | 63.0 | 63.0 |
| 238.6 | 235.7 | 232.0 | 230.7 | 228.3 | 228.3 | 227.8 | 227.8 | 229.1 | 132.5° | 70.5 | 70.5 | 70.5 |
| 221.7 | 220.0 | 216.3 | 213.4 | 210.5 | 210.1 | 207.2 | 207.6 | 207.2 | 135° | 77.9 | 77.9 | 77.9 |
| 202.3 | 200.2 | 195.6 | 191.5 | 188.2 | 186.2 | 182.9 | 182.4 | 181.2 | 137.5° | 85.3 | 85.3 | 85.3 |
| 182.9 | 179.6 | 174.2 | 170.1 | 165.9 | 163.0 | 160.2 | 157.3 | 156.4 | 140° | 92.5 | 92.5 | 92.5 |
| 163.0 | 160.2 | 154.0 | 150.2 | 144.5 | 140.3 | 137.9 | 133.7 | 131.7 | 142.5° | 99.2 | 99.2 | 99.2 |
| 143.6 | 140.3 | 133.3 | 126.3 | 122.2 | 117.2 | 113.5 | 108.1 | 105.7 | 145° | 104.9 | 104.9 | 104.9 |
| 122.2 | 120.1 | 113.1 | 105.7 | 102.0 | 95.3 | 90.8 | 86.3 | 85.4 | 147.5° | 110.1 | 110.1 | 110.1 |
| 104.8 | 100.3 | 94.9 | 89.2 | 83.0 | 79.3 | 77.2 | 76.4 | 75.9 | 150° | 115.1 | 115.1 | 115.1 |
| 88.7 | 85.9 | 80.9 | 76.8 | 73.9 | 73.1 | 73.1 | 73.1 | 73.5 | 152.5° | 119.7 | 119.7 | 119.7 |
| 78.0 | 74.3 | 71.8 | 70.6 | 70.6 | 71.0 | 71.4 | 72.2 | 73.1 | 155° | 123.7 | 123.7 | 123.7 |
| 68.9 | 67.7 | 67.7 | 67.3 | 68.1 | 68.9 | 70.2 | 71.4 | 72.2 | 157.5° | 127.0 | 127.0 | 127.0 |
| 62.7 | 63.2 | 64.0 | 64.4 | 66.0 | 67.3 | 68.5 | 69.3 | 70.2 | 160° | 130.3 | 130.3 | 130.3 |
| 57.8 | 58.2 | 59.0 | 60.3 | 61.5 | 63.2 | 64.4 | 65.2 | 65.6 | 162.5° | 133.5 | 133.5 | 133.5 |
| 54.9 | 54.9 | 56.1 | 57.4 | 59.0 | 60.3 | 61.5 | 61.9 | 62.7 | 165° | 136.0 | 136.0 | 136.0 |
| 52.4 | 52.8 | 54.1 | 54.9 | 55.7 | 56.5 | 57.4 | 57.8 | 59.4 | 167.5° | 137.1 | 137.1 | 137.1 |
| 50.8 | 51.2 | 51.6 | 50.8 | 51.6 | 52.4 | 53.2 | 54.1 | 54.9 | 170° | 137.4 | 137.4 | 137.4 |
| 48.7 | 47.9 | 47.1 | 47.1 | 47.5 | 48.3 | 49.9 | 51.2 | 52.4 | 172.5° | 138.6 | 138.6 | 138.6 |
| 46.2 | 45.0 | 43.8 | 43.3 | 43.8 | 44.6 | 46.2 | 47.9 | 48.7 | 175° | 140.5 | 140.5 | 140.5 |
| 42.1 | 41.7 | 41.3 | 40.9 | 41.3 | 42.1 | 43.8 | 45.0 | 46.2 | 177.5° | 141.1 | 141.1 | 141.1 |
| 38.0 | 37.6 | 37.1 | 37.6 | 38.0 | 38.8 | 40.5 | 41.7 | 42.9 | 180° | 140.8 | 140.8 | 140.8 |
| 33.0 | 33.0 | 33.0 | 33.4 | 33.8 | 35.5 | 36.7 | 38.4 | 38.8 | | | | |
| 27.7 | 28.5 | 28.5 | 28.5 | 29.3 | 31.4 | 33.0 | 34.7 | 35.5 | | | | |
| 23.5 | 23.1 | 23.9 | 23.9 | 24.8 | 26.4 | 27.7 | 28.9 | 29.3 | | | | |
| 19.0 | 19.0 | 19.4 | 19.4 | 19.4 | 20.2 | 21.1 | 21.1 | 21.1 | | | | |
| 14.0 | 13.6 | 13.2 | 12.4 | 12.4 | 12.8 | 12.8 | 12.8 | 13.6 | | | | |
| 6.6 | 5.4 | 5.4 | 5.0 | 4.5 | 4.5 | 4.5 | 5.4 | 5.8 | | | | |
| 0.4 | 0.4 | 0.4 | 0.4 | 0.4 | 0.4 | 0.4 | 0.8 | 0.8 | | | | |
| 0.0 | 0.4 | 0.4 | 0.4 | 0.8 | 0.8 | 0.8 | 1.2 | 1.2 | | | | |
| 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | | | | |
| 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | | | | |
| 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | | | | |
| 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | | | | |
| 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | | | | |
| 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | | | | |
| 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | | | | |
| 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | | | | |
| 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | | | | |



REPORT NUMBER: P160052

CATALOG NUMBER: ENT-F01-LED-E1-SLL-ULG

-ULG

CANDELA DISTRIBUTION (continued):

| 235° | 240° | 245° | 250° | 255° | 260° | 265° | 270° | | 275° | 280° | 285° | 290° |
|-------|-------|-------|-------|-------|-------|-------|-------|--------|-------|-------|-------|-------|
| 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 0° | 267.9 | 267.9 | 267.9 | 267.9 |
| 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 2.5° | 267.5 | 268.3 | 268.3 | 269.1 |
| 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 5° | 266.6 | 267.5 | 267.9 | 269.1 |
| 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 7.5° | 265.4 | 267.1 | 267.9 | 269.5 |
| 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 10° | 264.2 | 266.6 | 268.3 | 271.2 |
| 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 12.5° | 262.9 | 265.4 | 268.3 | 271.2 |
| 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 15° | 256.7 | 259.2 | 263.3 | 267.5 |
| 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 17.5° | 247.7 | 250.1 | 253.4 | 257.2 |
| 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 20° | 230.3 | 231.1 | 234.4 | 238.6 |
| 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 22.5° | 206.0 | 205.6 | 207.2 | 211.7 |
| 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 25° | 178.3 | 180.0 | 178.7 | 184.1 |
| 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 27.5° | 152.7 | 154.0 | 155.6 | 158.1 |
| 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 30° | 128.4 | 128.0 | 129.2 | 131.3 |
| 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 32.5° | 103.2 | 102.8 | 103.2 | 105.3 |
| 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 35° | 84.6 | 83.4 | 84.6 | 87.5 |
| 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 37.5° | 76.4 | 76.4 | 77.6 | 79.7 |
| 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 40° | 73.9 | 74.3 | 75.1 | 76.8 |
| 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 42.5° | 73.5 | 73.5 | 73.5 | 74.3 |
| 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 45° | 72.6 | 72.2 | 72.2 | 72.2 |
| 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 47.5° | 70.6 | 70.2 | 70.2 | 70.2 |
| 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 50° | 66.0 | 66.5 | 66.5 | 66.9 |
| 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 52.5° | 63.2 | 64.0 | 64.4 | 65.2 |
| 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 55° | 60.3 | 61.9 | 63.2 | 64.0 |
| 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 57.5° | 55.7 | 57.4 | 58.6 | 60.7 |
| 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 60° | 53.2 | 54.1 | 54.5 | 55.7 |
| 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 62.5° | 49.9 | 50.8 | 51.6 | 52.0 |
| 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 65° | 47.1 | 47.9 | 49.1 | 49.5 |
| 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 67.5° | 43.8 | 45.0 | 45.8 | 46.2 |
| | | | | | | | | 70° | 40.0 | 41.7 | 42.1 | 42.9 |
| | | | | | | | | 72.5° | 36.3 | 37.1 | 37.6 | 38.4 |
| | | | | | | | | 75° | 30.5 | 31.8 | 32.6 | 33.0 |
| | | | | | | | | 77.5° | 22.7 | 23.9 | 25.2 | 26.4 |
| | | | | | | | | 80° | 14.4 | 15.7 | 16.5 | 17.3 |
| | | | | | | | | 82.5° | 6.6 | 7.8 | 8.3 | 9.1 |
| | | | | | | | | 85° | 1.2 | 1.2 | 1.2 | 1.7 |
| | | | | | | | | 87.5° | 1.2 | 1.7 | 1.7 | 1.7 |
| | | | | | | | | 90° | 0.1 | 0.1 | 0.1 | 0.1 |
| | | | | | | | | 92.5° | 0.1 | 0.1 | 0.1 | 0.1 |
| | | | | | | | | 95° | 0.5 | 0.5 | 0.5 | 0.5 |
| | | | | | | | | 97.5° | 1.5 | 1.5 | 1.5 | 1.5 |
| | | | | | | | | 100° | 5.0 | 5.0 | 5.0 | 5.0 |
| | | | | | | | | 102.5° | 8.8 | 8.8 | 8.8 | 8.8 |
| | | | | | | | | 105° | 11.8 | 11.8 | 11.8 | 11.8 |
| | | | | | | | | 107.5° | 14.7 | 14.7 | 14.7 | 14.7 |
| | | | | | | | | 110° | 17.8 | 17.8 | 17.8 | 17.8 |

REPORT NUMBER: P160052

CATALOG NUMBER: ENT-F01-LED-E1-SLL-ULG

CANDELA DISTRIBUTION (continued):

| 295° | 300° | 305° | 310° | 315° | 320° | 325° | | 275° | 280° | 285° | 290° | 295° |
|-------|-------|-------|-------|-------|-------|-------|--------|-------|-------|-------|-------|-------|
| 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 112.5° | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 |
| 269.1 | 269.5 | 270.4 | 270.4 | 271.2 | 271.2 | 272.0 | 115° | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 |
| 269.9 | 270.8 | 272.0 | 272.4 | 274.1 | 274.9 | 275.7 | 117.5° | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 |
| 271.2 | 272.4 | 274.1 | 275.3 | 277.4 | 278.6 | 279.9 | 120° | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 |
| 273.2 | 275.3 | 278.2 | 279.4 | 281.1 | 284.0 | 286.0 | 122.5° | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 |
| 276.1 | 279.0 | 282.7 | 286.0 | 288.1 | 292.2 | 295.5 | 125° | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 |
| 272.0 | 278.2 | 282.7 | 288.9 | 294.3 | 301.3 | 307.1 | 127.5° | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 |
| 262.1 | 267.9 | 275.7 | 283.6 | 291.8 | 303.8 | 315.4 | 130° | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 |
| 243.9 | 250.5 | 259.6 | 269.5 | 281.5 | 297.2 | 313.7 | 132.5° | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 |
| 217.5 | 223.3 | 233.2 | 244.4 | 258.0 | 277.4 | 301.3 | 135° | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 |
| 189.5 | 197.3 | 206.8 | 218.8 | 234.0 | 257.2 | 282.7 | 137.5° | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 |
| 162.6 | 170.9 | 181.2 | 194.4 | 212.2 | 236.9 | 266.2 | 140° | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 |
| 135.0 | 144.5 | 154.0 | 170.5 | 188.2 | 214.2 | 246.8 | 142.5° | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 |
| 110.2 | 117.2 | 128.8 | 143.6 | 164.3 | 189.9 | 224.5 | 145° | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 |
| 90.4 | 96.2 | 107.3 | 121.8 | 140.3 | 165.5 | 195.6 | 147.5° | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 |
| 82.6 | 87.1 | 94.9 | 105.3 | 121.8 | 146.1 | 171.7 | 150° | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 |
| 79.7 | 83.8 | 89.6 | 98.7 | 111.4 | 130.0 | 151.9 | 152.5° | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 |
| 76.8 | 80.9 | 87.5 | 95.8 | 106.5 | 119.7 | 138.3 | 155° | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 |
| 74.3 | 78.8 | 85.9 | 94.9 | 104.8 | 116.4 | 130.8 | 157.5° | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 |
| 71.8 | 75.9 | 83.0 | 93.3 | 104.0 | 116.4 | 130.8 | 160° | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 |
| 68.1 | 72.2 | 79.7 | 90.4 | 102.4 | 116.0 | 132.5 | 162.5° | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 |
| 66.0 | 69.8 | 77.6 | 89.6 | 102.4 | 117.2 | 135.0 | 165° | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 |
| 64.8 | 68.1 | 77.2 | 90.8 | 105.7 | 123.0 | 142.4 | 167.5° | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 |
| 62.7 | 66.5 | 75.9 | 91.2 | 109.8 | 131.3 | 155.6 | 170° | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 |
| 57.0 | 61.5 | 71.8 | 88.3 | 108.6 | 135.0 | 167.2 | 172.5° | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 |
| 52.4 | 55.3 | 64.0 | 81.3 | 102.4 | 130.8 | 169.2 | 175° | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 |
| 50.4 | 52.0 | 57.8 | 71.8 | 92.5 | 123.0 | 163.0 | 177.5° | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 |
| 47.5 | 48.3 | 52.4 | 63.6 | 79.3 | 109.0 | 147.8 | 180° | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 |
| 43.8 | 44.2 | 47.5 | 54.5 | 66.0 | 86.7 | 123.4 | | | | | | |
| 39.2 | 40.0 | 42.1 | 47.1 | 54.5 | 66.5 | 89.6 | | | | | | |
| 33.8 | 34.3 | 35.1 | 38.4 | 42.9 | 51.2 | 63.6 | | | | | | |
| 27.2 | 27.2 | 28.1 | 29.7 | 32.2 | 38.0 | 45.4 | | | | | | |
| 17.7 | 19.0 | 19.8 | 22.7 | 23.5 | 27.7 | 32.2 | | | | | | |
| 10.3 | 11.1 | 11.6 | 12.4 | 14.4 | 16.5 | 19.8 | | | | | | |
| 1.7 | 2.5 | 2.5 | 3.3 | 4.1 | 4.5 | 5.4 | | | | | | |
| 2.1 | 2.1 | 2.1 | 2.1 | 2.5 | 2.5 | 2.5 | | | | | | |
| 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | | | | | | |
| 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | | | | | | |
| 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | | | | | | |
| 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | | | | | | |
| 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | | | | | | |
| 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | | | | | | |
| 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | | | | | | |
| 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | | | | | | |
| 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | | | | | | |



REPORT NUMBER: P160052

CATALOG NUMBER: ENT-F01-LED-E1-SLL-ULG

CANDELA DISTRIBUTION (continued):

| 300° | 305° | 310° | 315° | 320° | 325° | | 330° | 335° | 340° | 345° | 350° | 355° |
|-------|-------|-------|-------|-------|-------|--------|-------|-------|-------|-------|-------|-------|
| 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 0° | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 | 267.9 |
| 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 2.5° | 272.4 | 272.0 | 272.8 | 273.7 | 273.2 | 275.7 |
| 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 5° | 277.0 | 276.6 | 277.8 | 278.6 | 279.0 | 280.7 |
| 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 7.5° | 281.5 | 281.9 | 284.0 | 284.4 | 285.6 | 287.7 |
| 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 10° | 286.9 | 288.9 | 291.4 | 292.2 | 294.3 | 296.8 |
| 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 12.5° | 297.6 | 300.5 | 303.8 | 306.3 | 310.4 | 315.4 |
| 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 15° | 312.5 | 319.5 | 324.8 | 329.8 | 336.0 | 341.8 |
| 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 17.5° | 325.7 | 339.3 | 350.8 | 361.2 | 371.1 | 380.2 |
| 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 20° | 331.9 | 353.3 | 371.5 | 390.5 | 409.5 | 422.3 |
| 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 22.5° | 326.1 | 356.2 | 384.3 | 414.8 | 443.7 | 469.7 |
| 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 25° | 313.7 | 350.8 | 392.5 | 436.3 | 480.0 | 519.7 |
| 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 27.5° | 302.1 | 347.5 | 395.8 | 445.8 | 497.8 | 545.3 |
| 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 30° | 286.9 | 336.4 | 389.2 | 440.8 | 497.4 | 553.1 |
| 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 32.5° | 264.2 | 314.5 | 370.2 | 426.4 | 489.1 | 551.0 |
| 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 35° | 237.3 | 287.7 | 344.7 | 403.7 | 473.4 | 543.2 |
| 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 37.5° | 208.0 | 257.6 | 317.0 | 380.2 | 452.4 | 530.4 |
| 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 40° | 183.3 | 227.4 | 288.9 | 357.5 | 433.4 | 514.3 |
| 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 42.5° | 163.5 | 203.5 | 261.7 | 331.0 | 412.3 | 495.7 |
| 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 45° | 151.9 | 185.3 | 238.6 | 307.5 | 390.5 | 476.3 |
| 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 47.5° | 149.4 | 176.2 | 222.9 | 289.8 | 369.4 | 455.7 |
| 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 50° | 151.9 | 176.7 | 215.9 | 278.6 | 353.3 | 437.1 |
| 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 52.5° | 156.8 | 180.8 | 216.7 | 274.5 | 346.7 | 426.0 |
| 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 55° | 164.7 | 191.9 | 225.4 | 278.2 | 345.9 | 421.4 |
| 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 57.5° | 180.4 | 211.3 | 245.2 | 293.5 | 355.8 | 426.4 |
| 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 60° | 200.2 | 237.3 | 278.2 | 329.4 | 379.7 | 442.9 |
| 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 62.5° | 212.2 | 262.9 | 319.1 | 378.5 | 430.1 | 481.7 |
| 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 65° | 210.9 | 273.7 | 352.9 | 437.5 | 501.9 | 551.5 |
| 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 67.5° | 197.3 | 265.8 | 344.7 | 440.8 | 537.8 | 607.6 |
| | | | | | | 70° | 164.7 | 228.7 | 320.7 | 436.7 | 556.0 | 645.6 |
| | | | | | | 72.5° | 131.3 | 187.8 | 275.7 | 385.1 | 502.7 | 594.4 |
| | | | | | | 75° | 87.5 | 132.5 | 203.5 | 295.5 | 381.0 | 460.6 |
| | | | | | | 77.5° | 59.4 | 83.8 | 127.1 | 194.0 | 264.6 | 329.8 |
| | | | | | | 80° | 39.6 | 52.4 | 72.6 | 106.9 | 148.2 | 189.9 |
| | | | | | | 82.5° | 23.1 | 28.9 | 37.1 | 52.8 | 78.4 | 110.6 |
| | | | | | | 85° | 6.2 | 7.8 | 10.3 | 13.6 | 24.4 | 42.9 |
| | | | | | | 87.5° | 2.5 | 2.1 | 2.1 | 2.1 | 2.1 | 2.1 |
| | | | | | | 90° | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 |
| | | | | | | 92.5° | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 |
| | | | | | | 95° | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| | | | | | | 97.5° | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 |
| | | | | | | 100° | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 |
| | | | | | | 102.5° | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 |
| | | | | | | 105° | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 | 11.8 |
| | | | | | | 107.5° | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 | 14.7 |
| | | | | | | 110° | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 | 17.8 |



REPORT NUMBER: P160052

CATALOG NUMBER: ENT-F01-LED-E1-SLL-ULG

CANDELA DISTRIBUTION (continued):

| 360° | 330° | 335° | 340° | 345° | 350° | 355° | 360° |
|-------|--------|-------|-------|-------|-------|-------|-------|
| 267.9 | 112.5° | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 | 21.2 |
| 273.7 | 115° | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 | 25.0 |
| 280.3 | 117.5° | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 |
| 288.1 | 120° | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 | 34.8 |
| 300.1 | 122.5° | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 | 40.9 |
| 317.4 | 125° | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 |
| 348.4 | 127.5° | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 | 55.3 |
| 388.4 | 130° | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 |
| 437.5 | 132.5° | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 | 70.5 |
| 492.8 | 135° | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 | 77.9 |
| 556.0 | 137.5° | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 | 85.3 |
| 594.8 | 140° | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 | 92.5 |
| 603.0 | 142.5° | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 | 99.2 |
| 608.8 | 145° | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 | 104.9 |
| 610.5 | 147.5° | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 | 110.1 |
| 608.0 | 150° | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 | 115.1 |
| 598.1 | 152.5° | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 | 119.7 |
| 585.3 | 155° | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 | 123.7 |
| 569.2 | 157.5° | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 | 127.0 |
| 549.4 | 160° | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 | 130.3 |
| 530.8 | 162.5° | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 | 133.5 |
| 516.4 | 165° | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 | 136.0 |
| 507.3 | 167.5° | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 | 137.1 |
| 508.5 | 170° | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 | 137.4 |
| 521.3 | 172.5° | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 | 138.6 |
| 553.5 | 175° | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 | 140.5 |
| 614.6 | 177.5° | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 | 141.1 |
| 674.5 | 180° | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 | 140.8 |
| 732.2 | | | | | | | |
| 694.3 | | | | | | | |
| 530.0 | | | | | | | |
| 381.4 | | | | | | | |
| 221.2 | | | | | | | |
| 138.3 | | | | | | | |
| 59.9 | | | | | | | |
| 2.1 | | | | | | | |
| 0.1 | | | | | | | |
| 0.1 | | | | | | | |
| 0.5 | | | | | | | |
| 1.5 | | | | | | | |
| 5.0 | | | | | | | |
| 8.8 | | | | | | | |
| 11.8 | | | | | | | |
| 14.7 | | | | | | | |
| 17.8 | | | | | | | |

(END OF F

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(REPORT)