

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: LUMARK

Report Number: P295380

Luminaire Tested: **TCRL15W(7030)**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P295380
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1902-140-7)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMARK
Catalog Number: TCRL15W(7030)
Description: TRACER LARGE, STANDARD TRIM NEMA 5x5
Light Source: (16) 3000K CCT, 70 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1601.7 lumens
Efficiency: N/A
Efficacy: 133.5 lumens/watt
Luminous Opening: Circular (Dia: 0.25' x H: 0')
IES Classification: Type V - Short - Full Cutoff
BUG Rating: B2 - U0 - G0


Input Watts (W): 12
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



REPORT NUMBER: P295380
 CATALOG NUMBER: TCRL15W(7030)

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

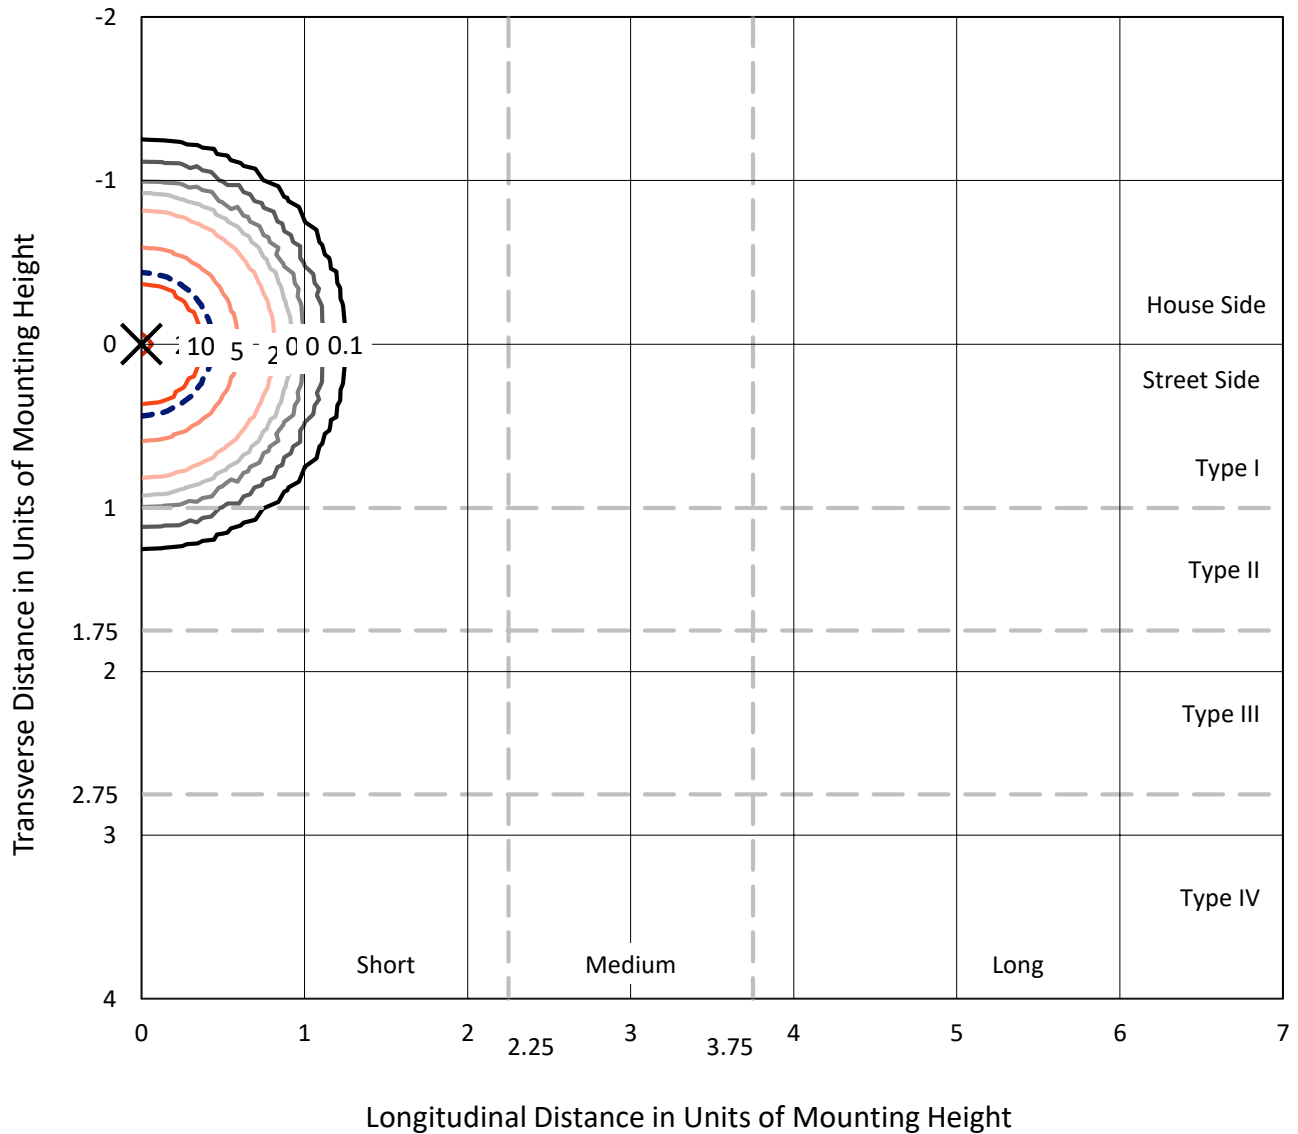

Based on 10 foot mounting height. Maximum calculated value = 21.2 fc
 Type V - Short - Full Cutoff

REPORT NUMBER: P295380
CATALOG NUMBER: TCRL15W(7030)

Luminous Intensity Polar Plot

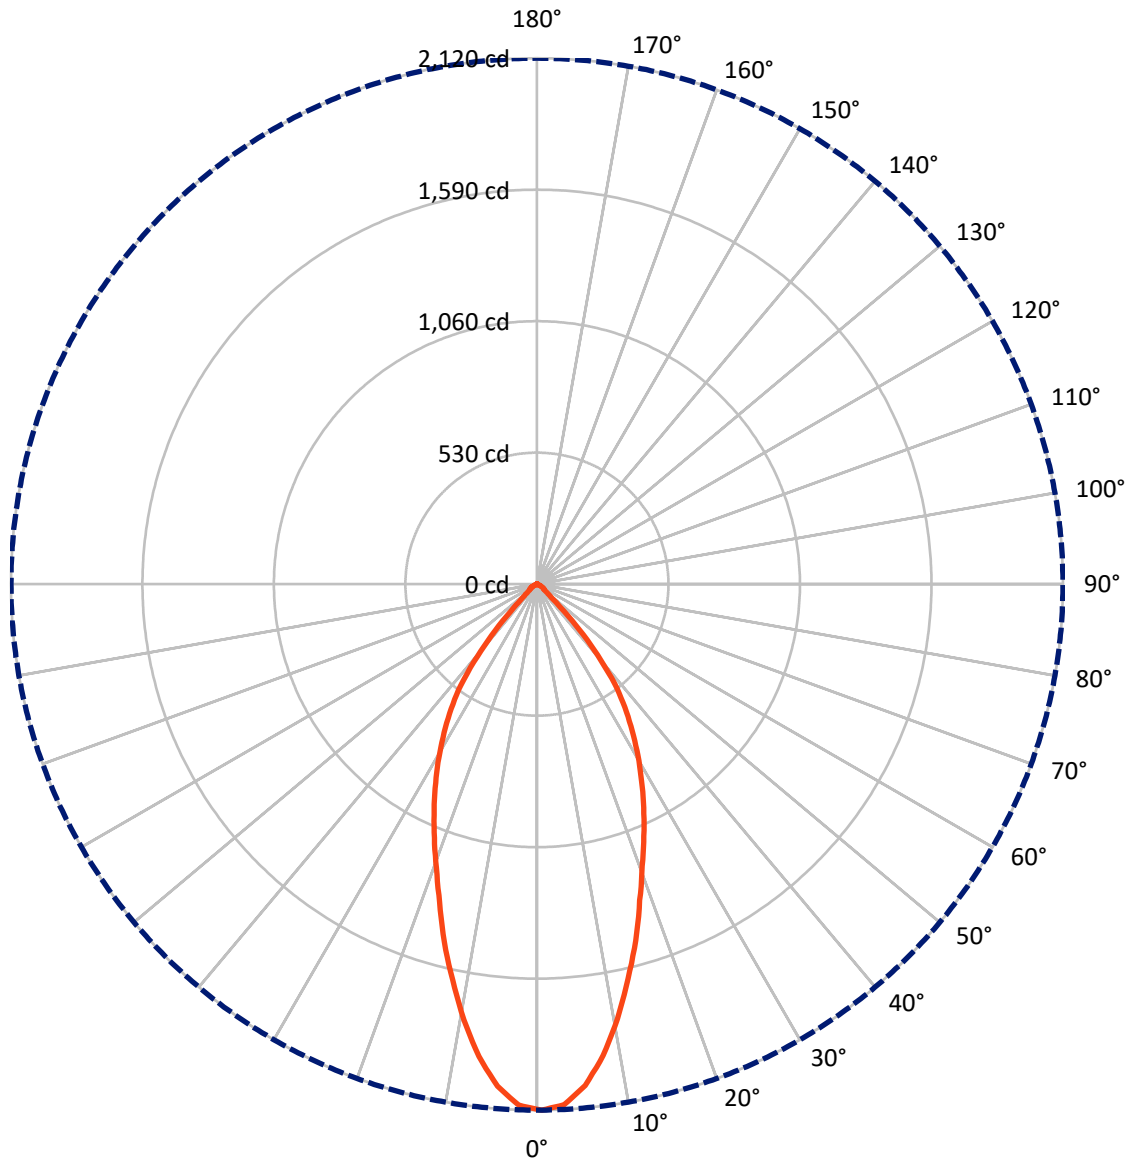

— Vertical Plane Through 0-Deg Lateral - - - Horizontal Cone Through 0-Deg Vertical

REPORT NUMBER: P295380

CATALOG NUMBER: TCRL15W(7030)


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	800.8	0.0	800.8
	% Fixture	50.0	0.0	50.0
Street Side	Lumens	800.8	0.0	800.8
	% Fixture	50.0	0.0	50.0
Total	Lumens	1601.7	0.0	1601.7
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	185.7	11.6
10°-20°	414.0	25.8
20°-30°	458.2	28.6
30°-40°	374.4	23.4
40°-50°	124.6	7.8
50°-60°	30.4	1.9
60°-70°	12.7	0.8
70°-80°	0.8	0.0
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	1601.7	100.0
0°-180°	1601.7	100.0

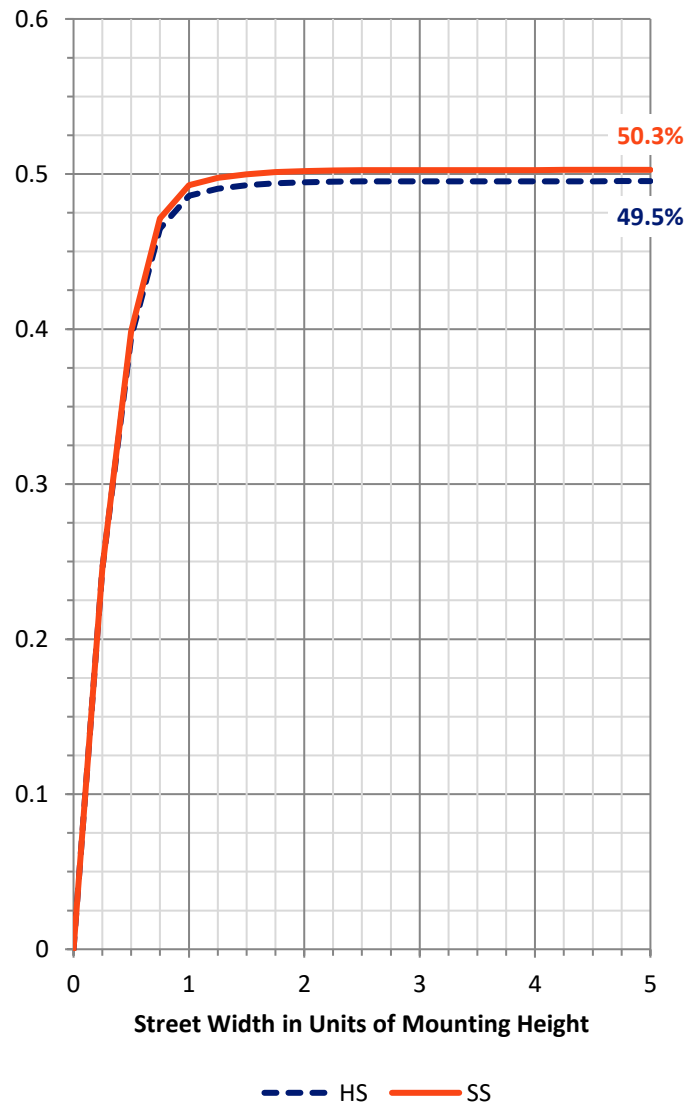

REPORT NUMBER: P295380


CATALOG NUMBER: TCRL15W(7030)

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	528.9	33.0			
FM (30°-60°)	264.7	16.5			
FH (60°-80°)	6.7	0.4			G0/660
FVH (80°-90°)	0.4	0.0			G0/10
BL (0°-30°)	528.9	33.0	B2/1000		
BM (30°-60°)	264.7	16.5	B1/1000		
BH (60°-80°)	6.7	0.4	B0/110		G0/660
BVH (80°-90°)	0.4	0.0			G0/10
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B2-U0-G0

Type V Short

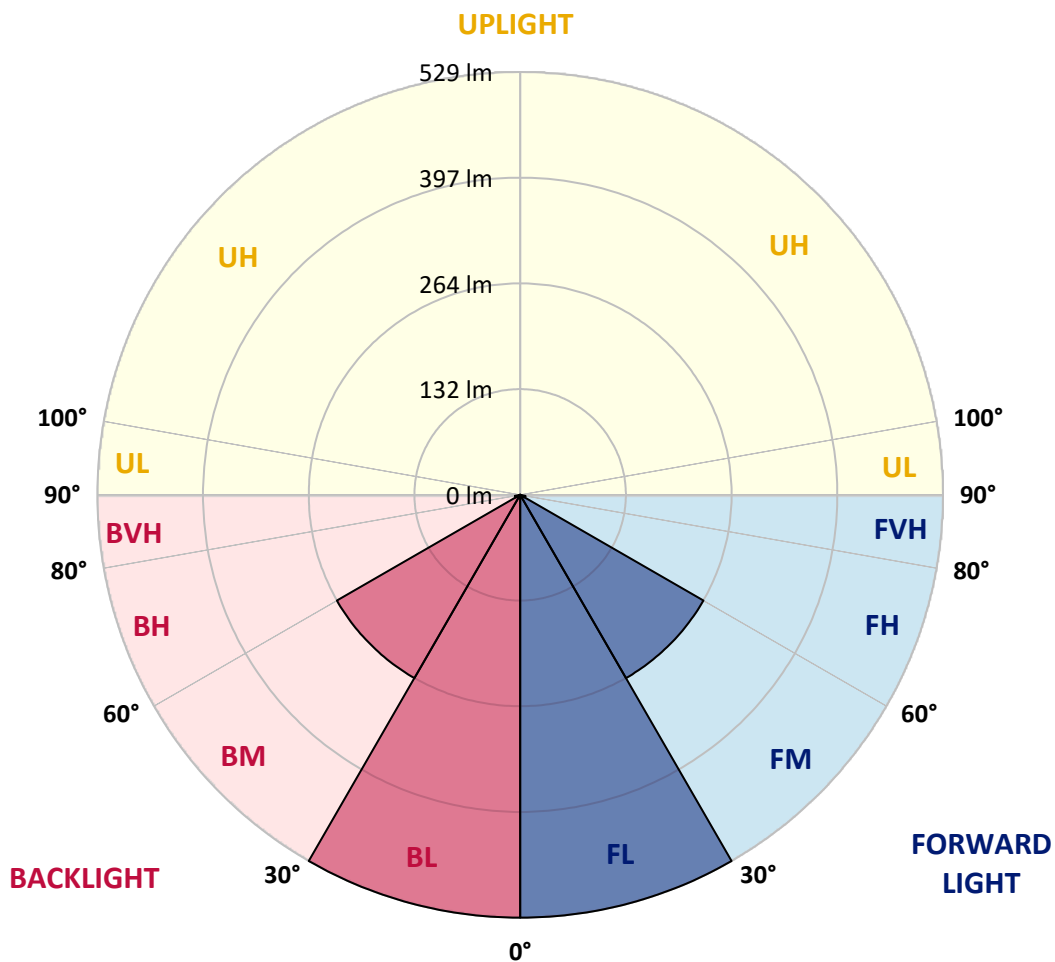

REPORT NUMBER: P295380

CATALOG NUMBER: TCRL15W(7030)

CANDELA DISTRIBUTION (FULL):

	0°
0°	2119.9
2.5°	2100.8
5°	2029.4
7.5°	1917.9
10°	1781.2
12.5°	1631.1
15°	1490.6
17.5°	1340.0
20°	1212.4
22.5°	1103.3
25°	999.0
27.5°	898.4
30°	802.2
32.5°	705.5
35°	609.8
37.5°	511.2
40°	376.3
42.5°	251.5
45°	130.5
47.5°	68.6
50°	47.6
52.5°	35.7
55°	35.3
57.5°	29.5
60°	24.3
62.5°	20.0
65°	12.4
67.5°	6.7
70°	1.4
72.5°	0.0
75°	0.0
77.5°	1.9
80°	0.5
82.5°	1.4
85°	0.0
87.5°	1.4
90°	0.0

(END OF REPORT)