

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: LUMARK

Report Number: P295383

Luminaire Tested: **TCRL20M(7040-7050)**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P295383
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1902-140-6)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMARK
Catalog Number: TCRL20M(7040-7050)
Description: TRACER LARGE, STANDARD TRIM NEMA 4x4
Light Source: (16) 4000K&5000K CCT, 70 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2214.5 lumens
Efficiency: N/A
Efficacy: 125.8 lumens/watt
Luminous Opening: Circular (Dia: 0.25' x H: 0')
IES Classification: Type V - Short - Full Cutoff
BUG Rating: B2 - U0 - G0

Input Watts (W): 17.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT




REPORT NUMBER: P295383

CATALOG NUMBER: TCRL20M(7040-7050)

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

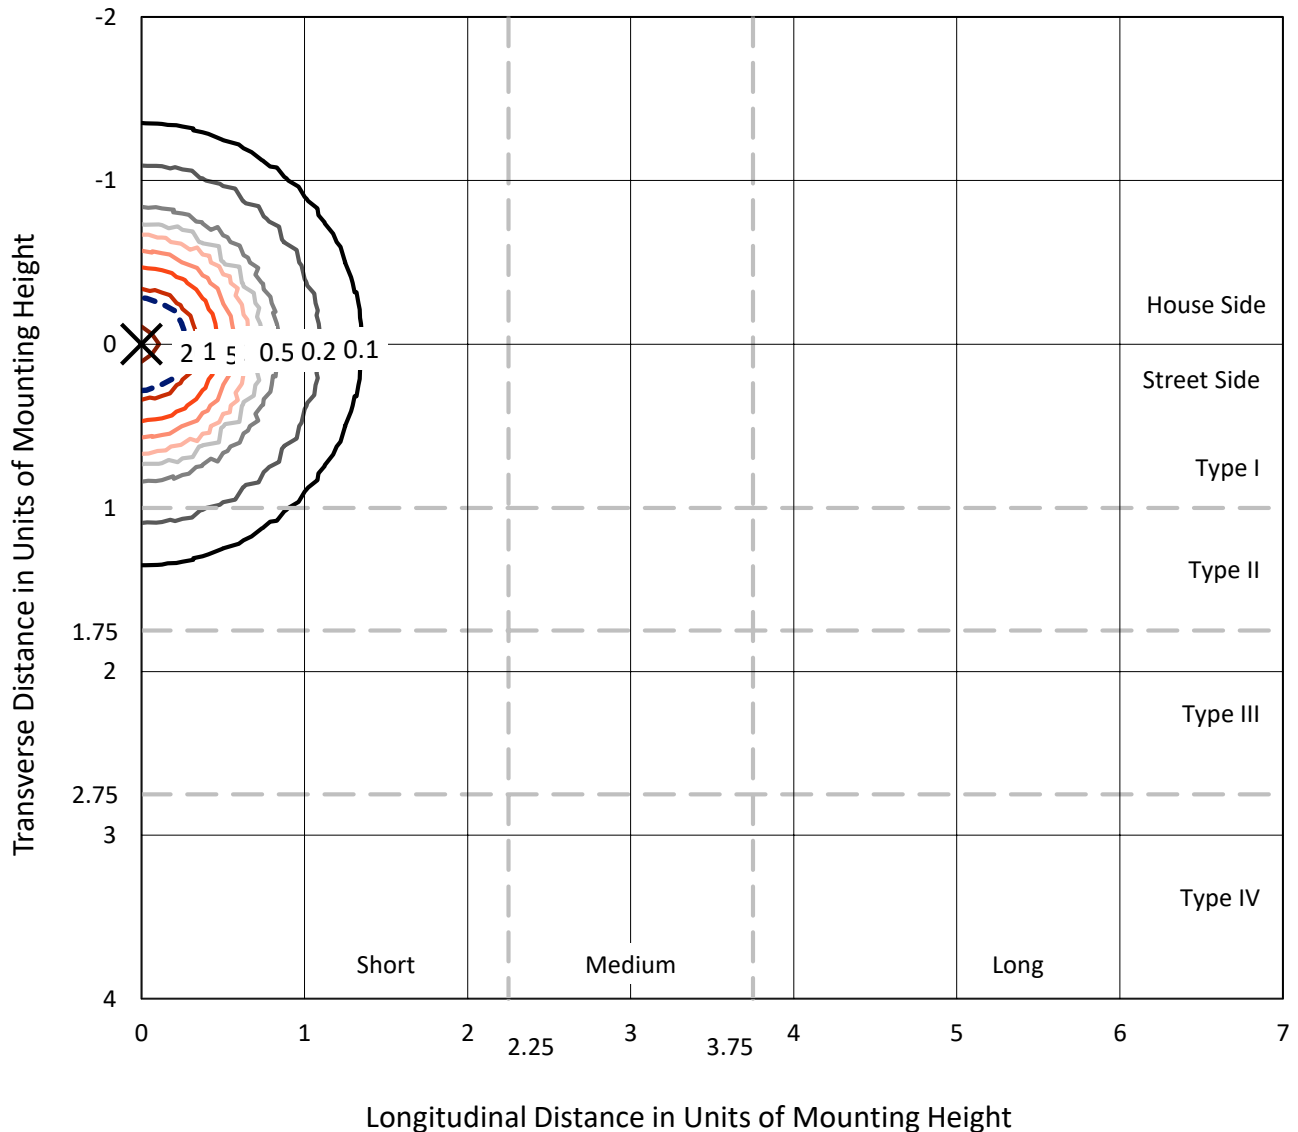

Based on 10 foot mounting height. Maximum calculated value = 58.7 fc
 Type V - Short - Full Cutoff

REPORT NUMBER: P295383
CATALOG NUMBER: TCRL20M(7040-7050)

Luminous Intensity Polar Plot

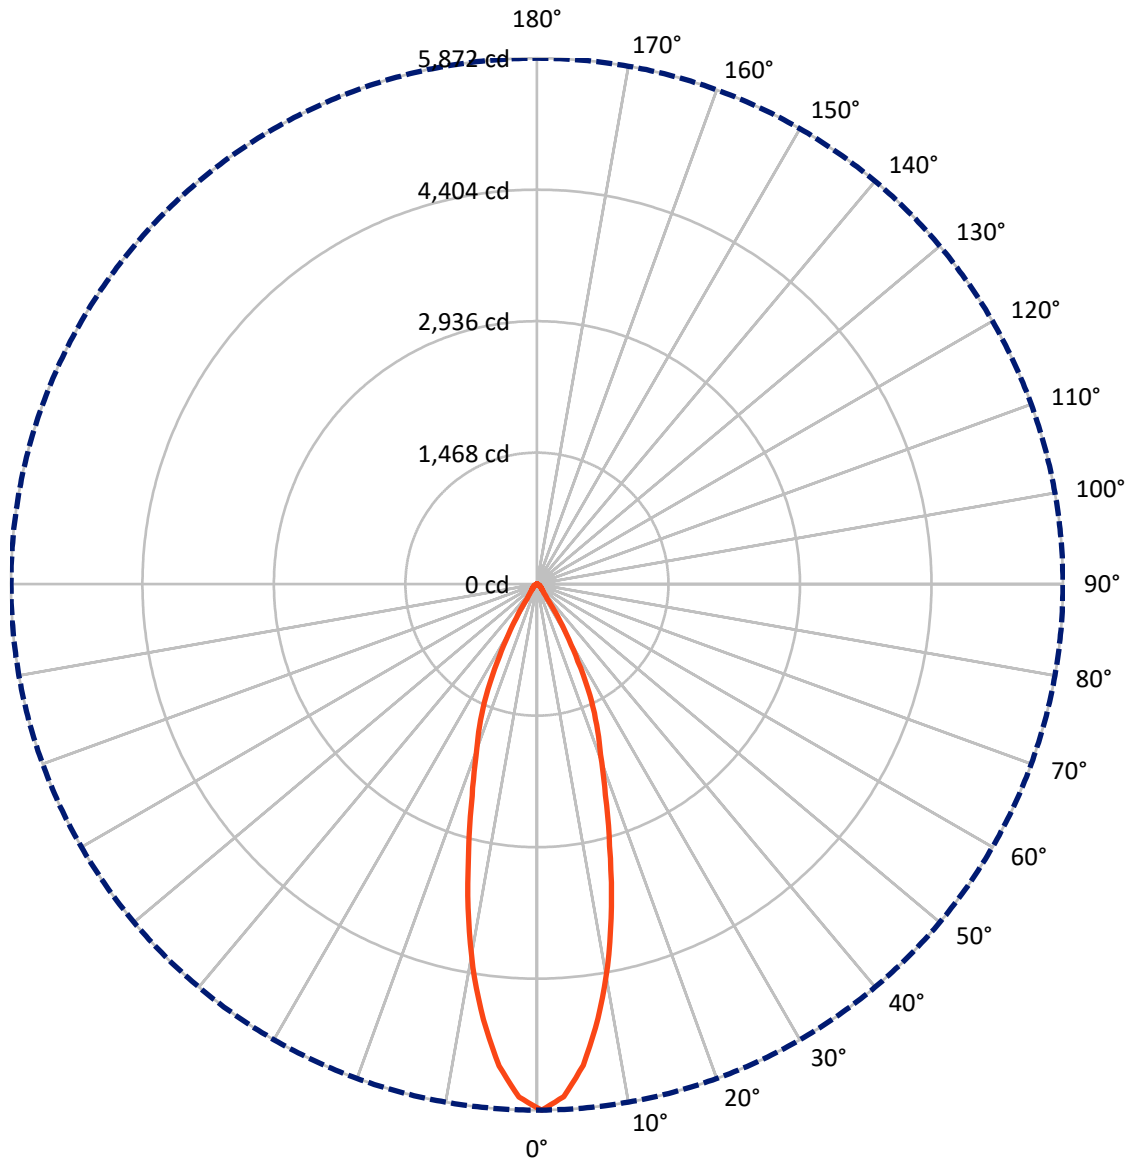

— Vertical Plane Through 0-Deg Lateral - - - Horizontal Cone Through 0-Deg Vertical

REPORT NUMBER: P295383

CATALOG NUMBER: TCRL20M(7040-7050)


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	1107.3	0.0	1107.3
	% Fixture	50.0	0.0	50.0
Street Side	Lumens	1107.3	0.0	1107.3
	% Fixture	50.0	0.0	50.0
Total	Lumens	2214.5	0.0	2214.5
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	480.5	21.7
10°-20°	843.8	38.1
20°-30°	605.4	27.3
30°-40°	164.7	7.4
40°-50°	57.8	2.6
50°-60°	38.1	1.7
60°-70°	19.3	0.9
70°-80°	3.9	0.2
80°-90°	0.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	2214.5	100.0
0°-180°	2214.5	100.0

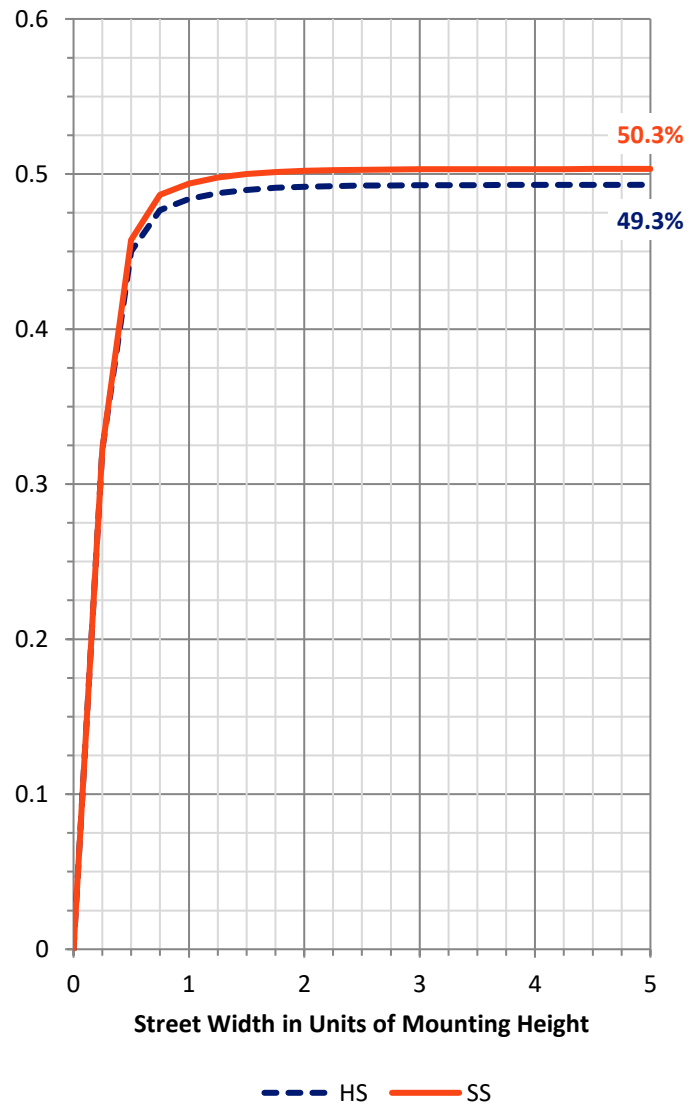

REPORT NUMBER: P295383


CATALOG NUMBER: TCRL20M(7040-7050)

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	964.9	43.6			
FM (30°-60°)	130.3	5.9			
FH (60°-80°)	11.6	0.5			G0/660
FVH (80°-90°)	0.4	0.0			G0/10
BL (0°-30°)	964.9	43.6	B2/1000		
BM (30°-60°)	130.3	5.9	B0/220		
BH (60°-80°)	11.6	0.5	B0/110		G0/660
BVH (80°-90°)	0.4	0.0			G0/10
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B2-U0-G0

Type V Short

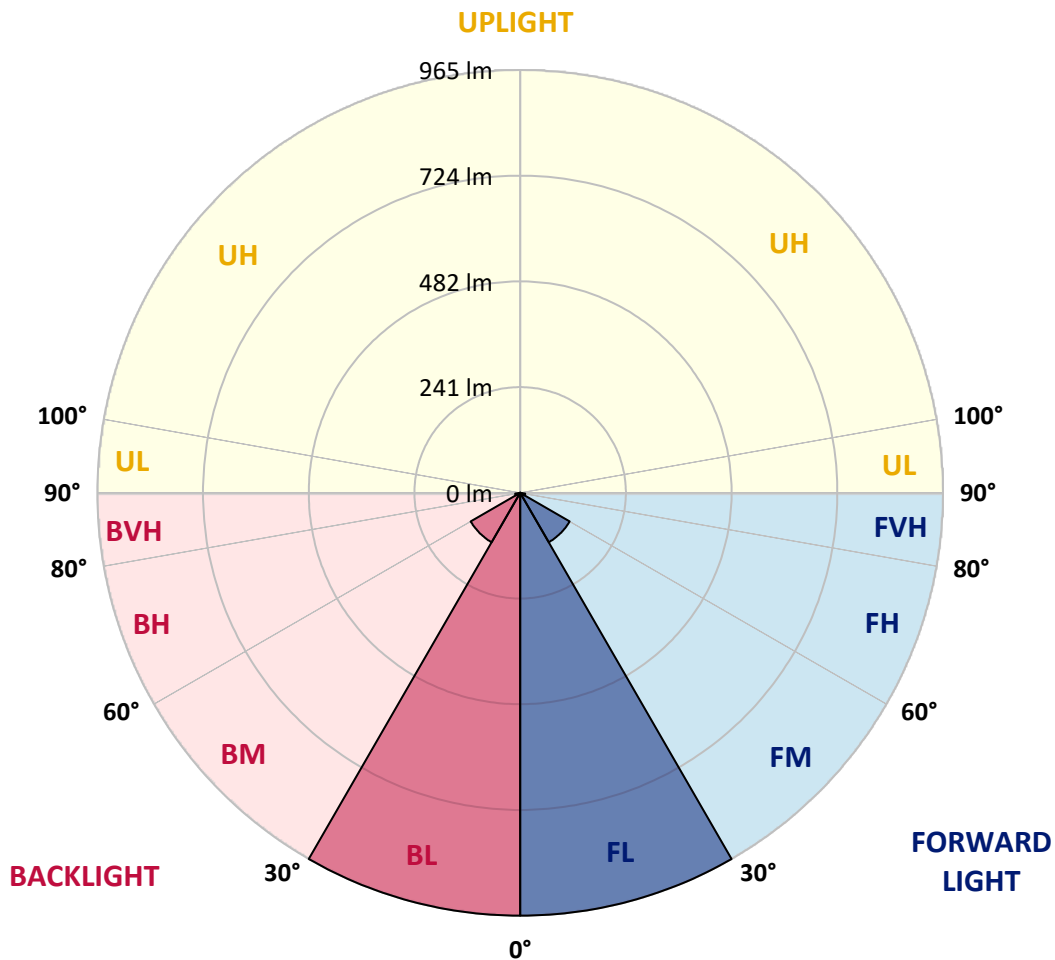

REPORT NUMBER: P295383

CATALOG NUMBER: TCRL20M(7040-7050)

CANDELA DISTRIBUTION (FULL):

	0°
0°	5872.0
2.5°	5729.4
5°	5395.2
7.5°	4896.3
10°	4337.2
12.5°	3695.0
15°	3036.1
17.5°	2472.9
20°	2030.3
22.5°	1708.2
25°	1375.4
27.5°	976.3
30°	645.5
32.5°	391.1
35°	192.2
37.5°	133.9
40°	101.1
42.5°	85.7
45°	73.0
47.5°	60.9
50°	61.6
52.5°	49.6
55°	42.2
57.5°	31.5
60°	34.2
62.5°	28.8
65°	17.4
67.5°	8.7
70°	13.4
72.5°	3.3
75°	2.7
77.5°	0.0
80°	4.7
82.5°	0.0
85°	0.7
87.5°	0.0
90°	0.0

(END OF REPORT)