

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: LUMARK

Report Number: P295393

Luminaire Tested: **TCRL26W(7040-7050)**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P295393
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1902-140-7)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMARK
Catalog Number: TCRL26W(7040-7050)
Description: TRACER LARGE, STANDARD TRIM NEMA 5x5
Light Source: (16) 4000K&5000K CCT, 70 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3001.8 lumens
Efficiency: N/A
Efficacy: 119.6 lumens/watt
Luminous Opening: Circular (Dia: 0.25' x H: 0')
IES Classification: Type V - Short - Full Cutoff
BUG Rating: B2 - U0 - G0


Input Watts (W): 25.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



REPORT NUMBER: P295393
 CATALOG NUMBER: TCRL26W(7040-7050)

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

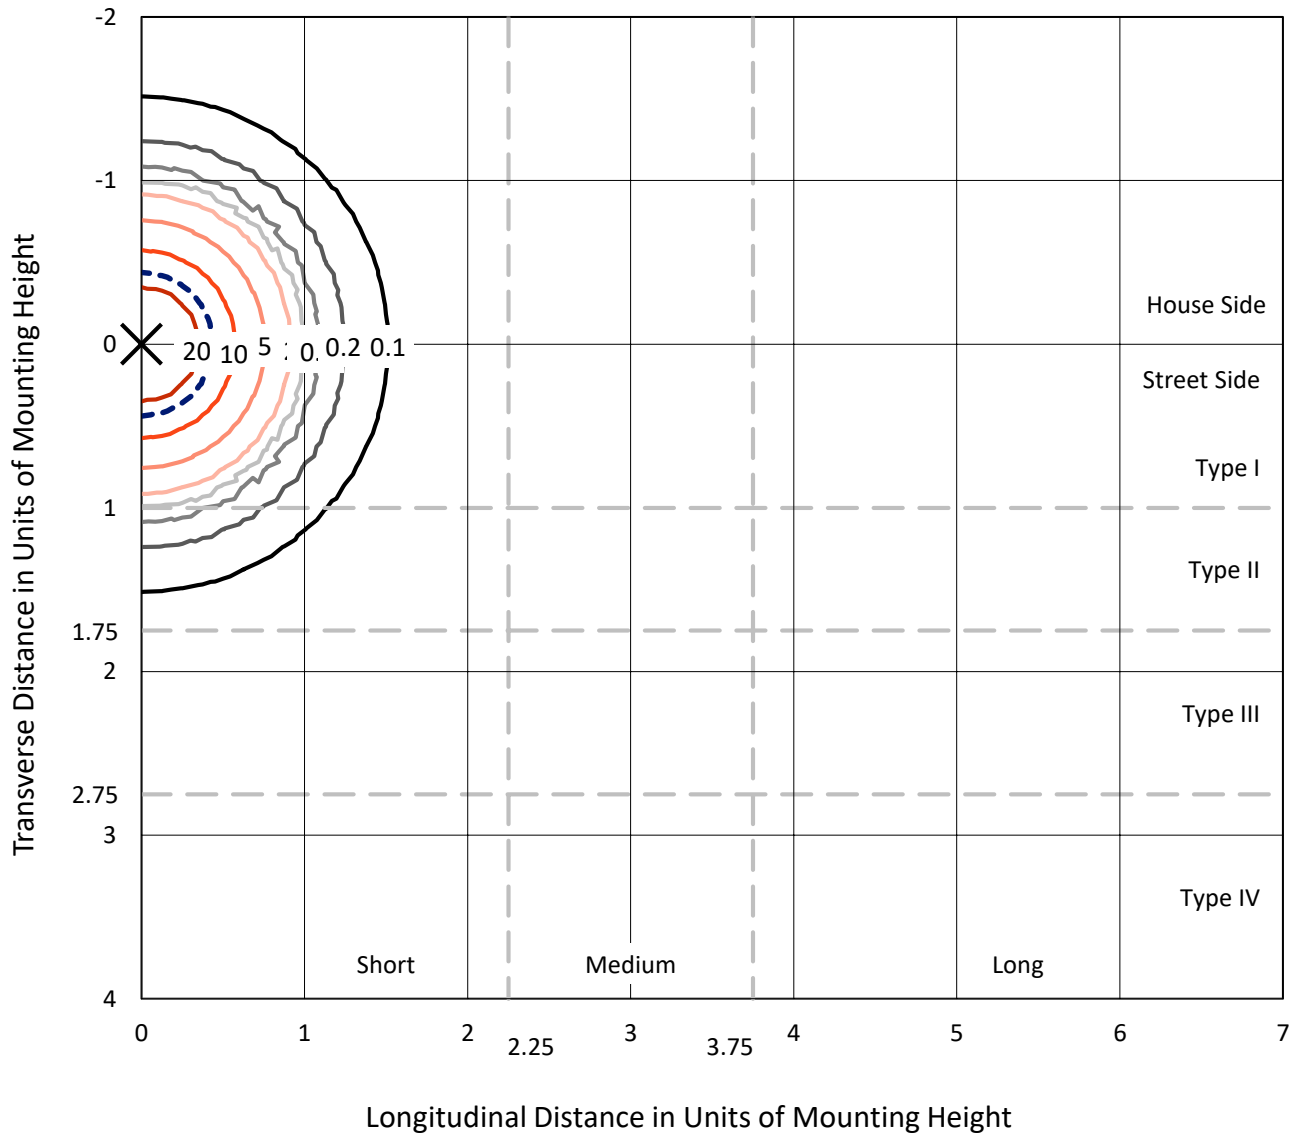

Based on 10 foot mounting height. Maximum calculated value = 39.7 fc
 Type V - Short - Full Cutoff

REPORT NUMBER: P295393
CATALOG NUMBER: TCRL26W(7040-7050)

Luminous Intensity Polar Plot

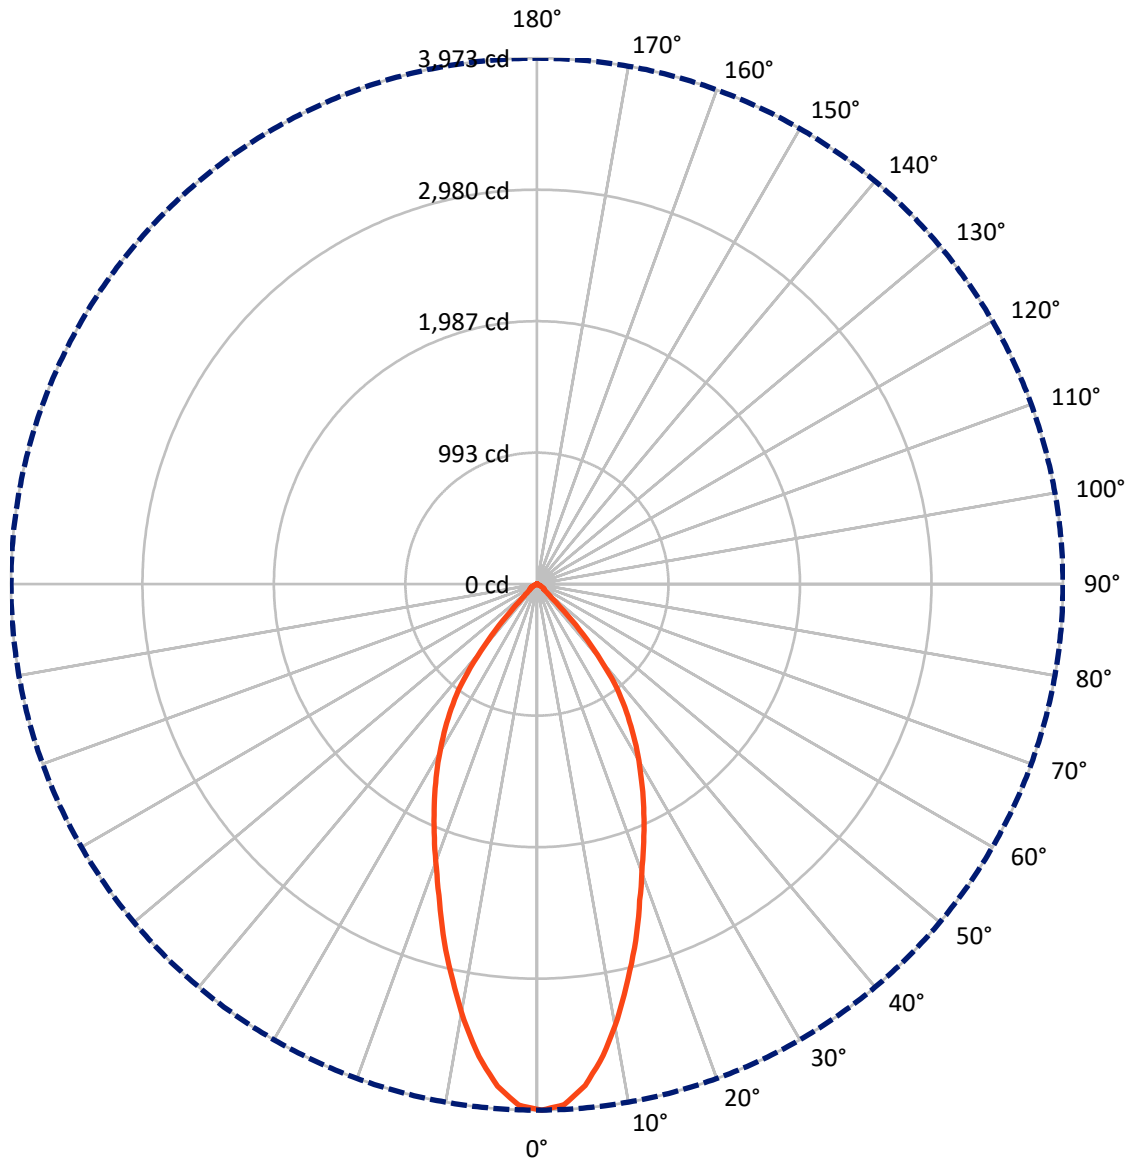

— Vertical Plane Through 0-Deg Lateral - - - Horizontal Cone Through 0-Deg Vertical

REPORT NUMBER: P295393

CATALOG NUMBER: TCRL26W(7040-7050)


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	1500.9	0.0	1500.9
	% Fixture	50.0	0.0	50.0
Street Side	Lumens	1500.9	0.0	1500.9
	% Fixture	50.0	0.0	50.0
Total	Lumens	3001.8	0.0	3001.8
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	348.0	11.6
10°-20°	775.9	25.8
20°-30°	858.8	28.6
30°-40°	701.6	23.4
40°-50°	233.6	7.8
50°-60°	57.1	1.9
60°-70°	23.9	0.8
70°-80°	1.4	0.0
80°-90°	1.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	3001.8	100.0
0°-180°	3001.8	100.0

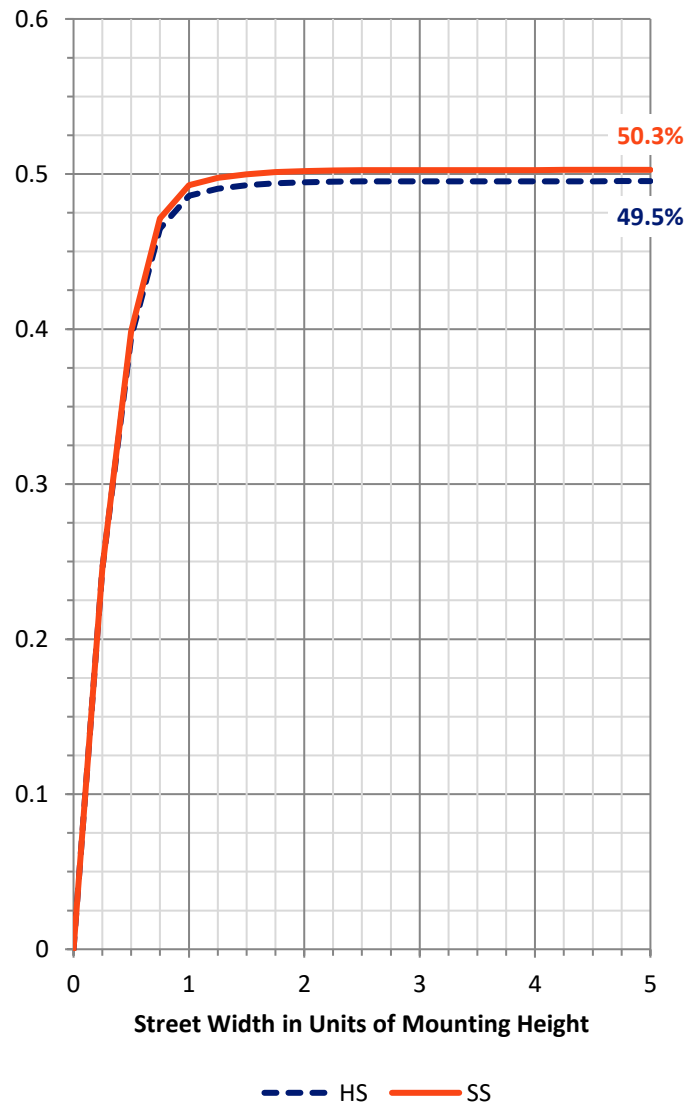

REPORT NUMBER: P295393


CATALOG NUMBER: TCRL26W(7040-7050)

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	991.3	33.0			
FM	(30°-60°)	496.2	16.5			
FH	(60°-80°)	12.6	0.4			G0/660
FVH	(80°-90°)	0.8	0.0			G0/10
BL	(0°-30°)	991.3	33.0	B2/1000		
BM	(30°-60°)	496.2	16.5	B1/1000		
BH	(60°-80°)	12.6	0.4	B0/110		G0/660
BVH	(80°-90°)	0.8	0.0			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B2-U0-G0

Type V Short

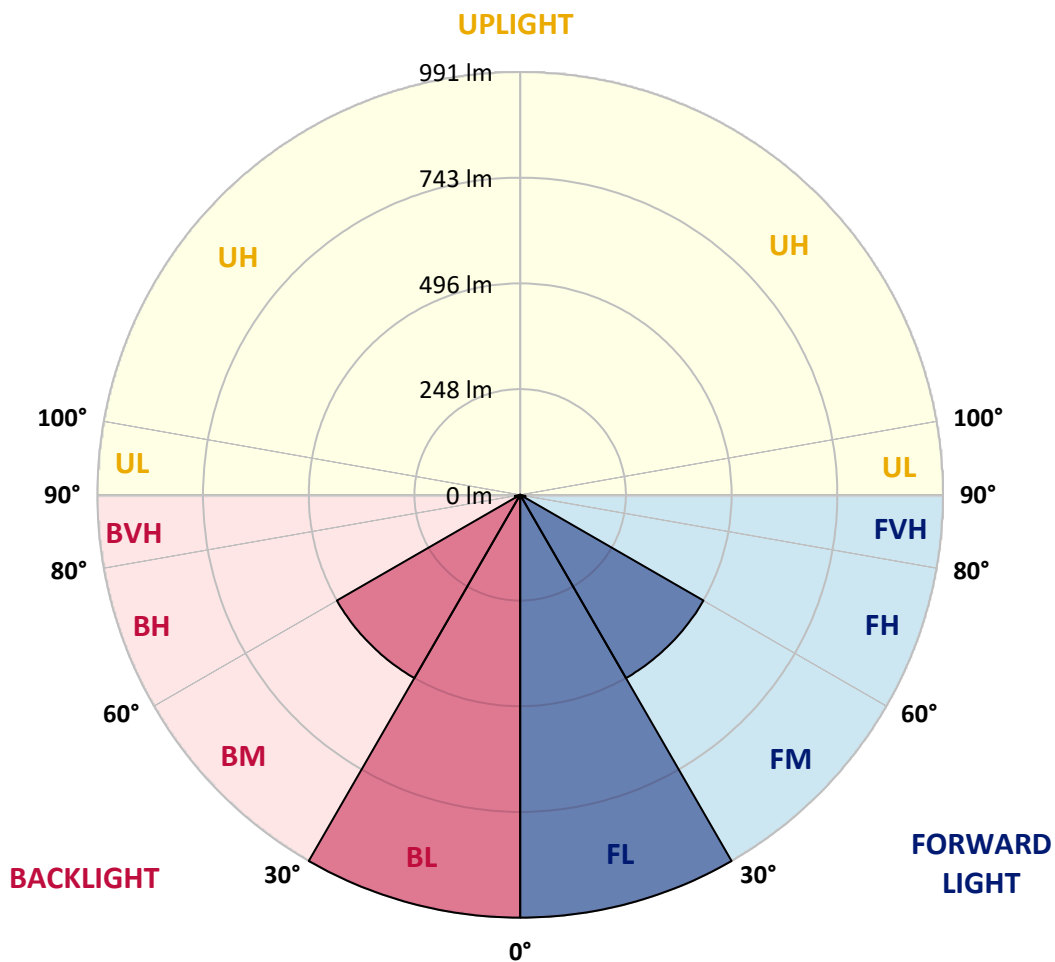

REPORT NUMBER: P295393

CATALOG NUMBER: TCRL26W(7040-7050)

CANDELA DISTRIBUTION (FULL):

	0°
0°	3973.0
2.5°	3937.3
5°	3803.3
7.5°	3594.4
10°	3338.2
12.5°	3057.0
15°	2793.6
17.5°	2511.4
20°	2272.2
22.5°	2067.7
25°	1872.2
27.5°	1683.8
30°	1503.5
32.5°	1322.2
35°	1142.8
37.5°	958.0
40°	705.3
42.5°	471.4
45°	244.6
47.5°	128.6
50°	89.3
52.5°	67.0
55°	66.1
57.5°	55.4
60°	45.5
62.5°	37.5
65°	23.2
67.5°	12.5
70°	2.7
72.5°	0.0
75°	0.0
77.5°	3.6
80°	0.9
82.5°	2.7
85°	0.0
87.5°	2.7
90°	0.0

(END OF REPORT)