

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: LUMIERE

Report Number: P246973 (CONVERTED FROM TYPE C PHOTOMETRY)

Luminaire Tested: **203-8LED3025-12-BK**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P246973 (CONVERTED FROM TYPE C PHOTOMETRY)
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1802-569-5)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 203-8LED3025-12-BK
Description: CAMBRIA 203 LED LUMINAIRE, 8 WATT, 3000K CCT, 25 DEGREE NARROW OPTIC, REGRESSED HOOD BLACK
Light Source: (1) SORAA 3000K 95 CRI 25°NFL LED
SM16-07-25D-930-03
Ballast/Driver: CHROMA POWER SUPPLY IN0004

Summary


Lumens per Lamp:	N/A	NEMA Type:	3H x 3V
Luminaire Lumens:	330.1 lumens	Max Intensity:	2268.5 candela
Efficiency:	N/A	Max Intensity Angle:	0°H x 0°V
Efficacy:	41.8 lumens/watt		
Luminous Opening:	Circular (Dia: 0.17' x H: 0')		
Beam Angle (50%):	18.2°H x 18.2°V	Field Angle (10%):	39.8°H x 39.8°V
Beam Lumens:	129.9 lumens	Field Lumens:	280.7 lumens
Beam Efficiency:	39.4%	Field Efficiency:	85.1%

Input Watts (W): 7.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



REPORT NUMBER: P246973 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-8LED3025-12-BK

Iso-Candela Plot

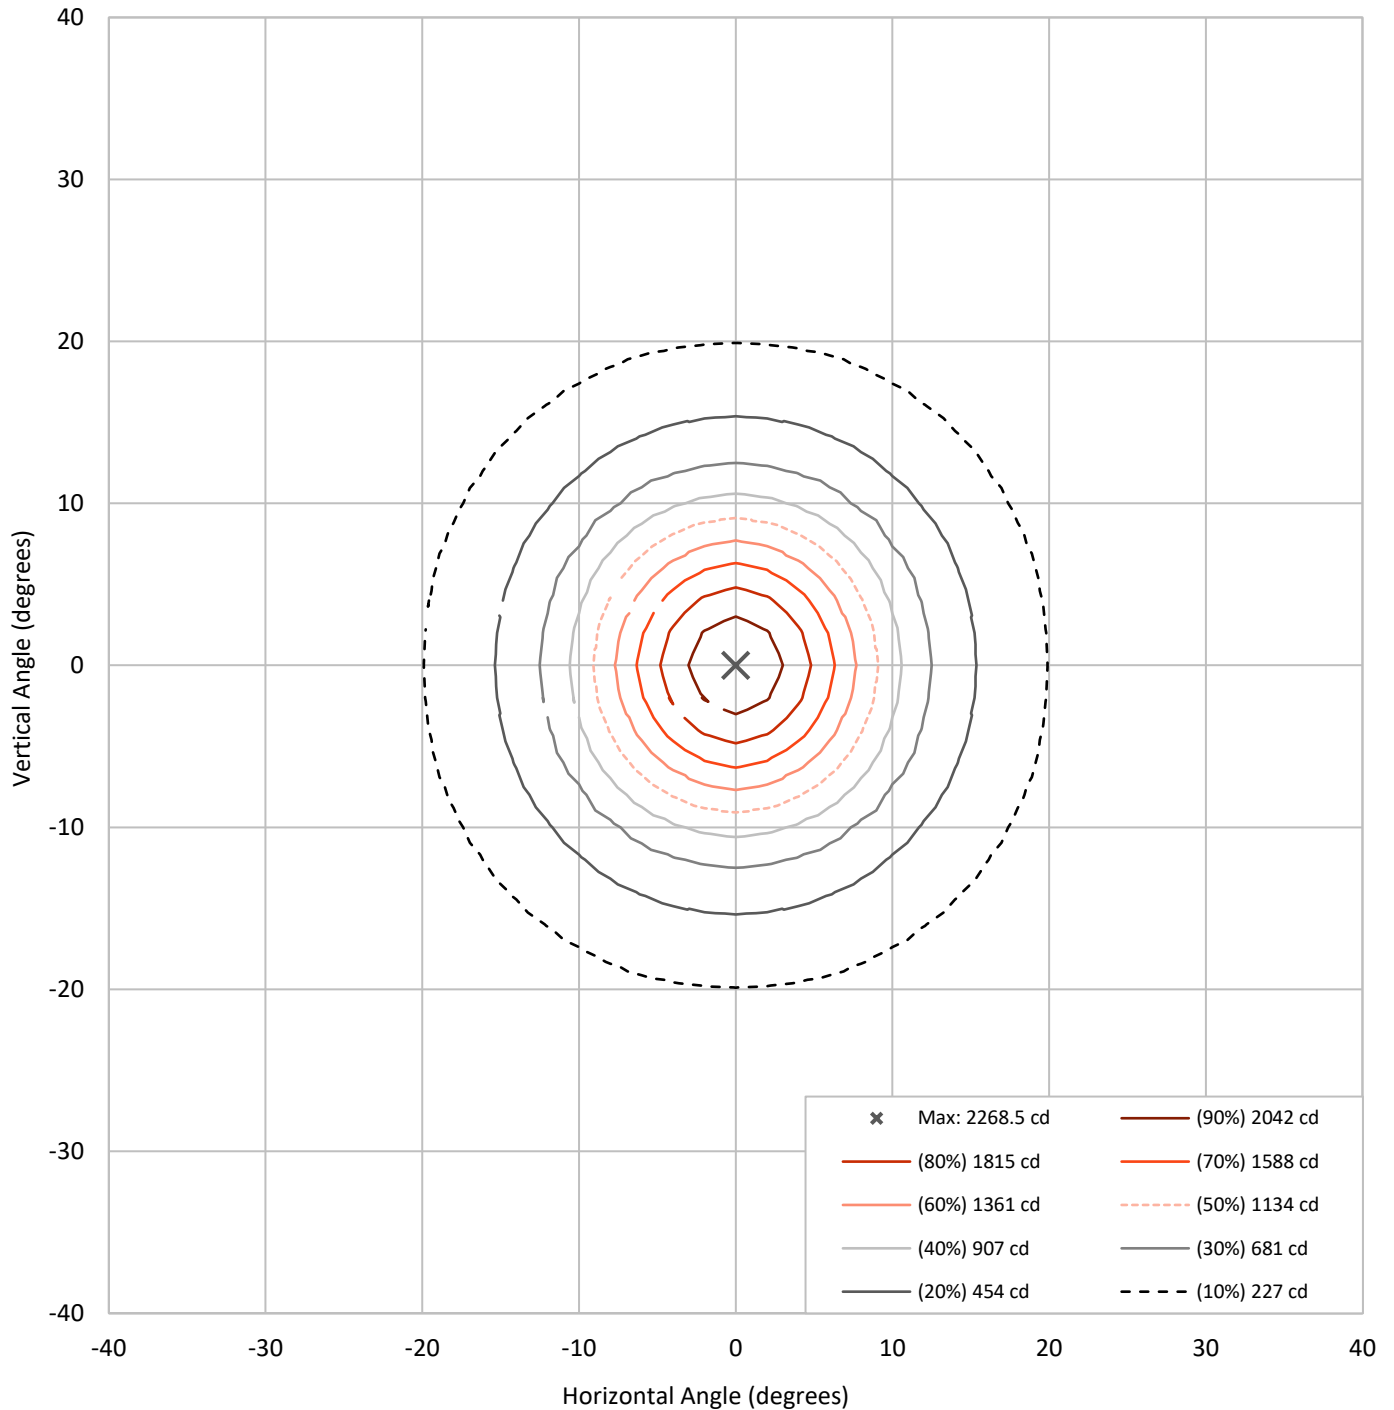

REPORT NUMBER: P246973 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-8LED3025-12-BK


Lumen Table

90	0.0														
80	0.0														
70	0.0														
60	0.0														
50	0.0														
40	0.0														
30	0.0														
20	0.0														
10	0.0														
0	0.0														
-10	0.0														
-20	0.0														
-30	0.0														
-40	0.0														
-50	0.0														
-60	0.0														
-70	0.0														
-80	0.0														
-90	0.0														

	-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90
--	-----	-----	-----	-----	-----	-----	-----	-----	-----	---	----	----	----	----	----	----	----	----	----


REPORT NUMBER: P246973 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-8LED3025-12-BK

Luminous Intensity Polar Plot

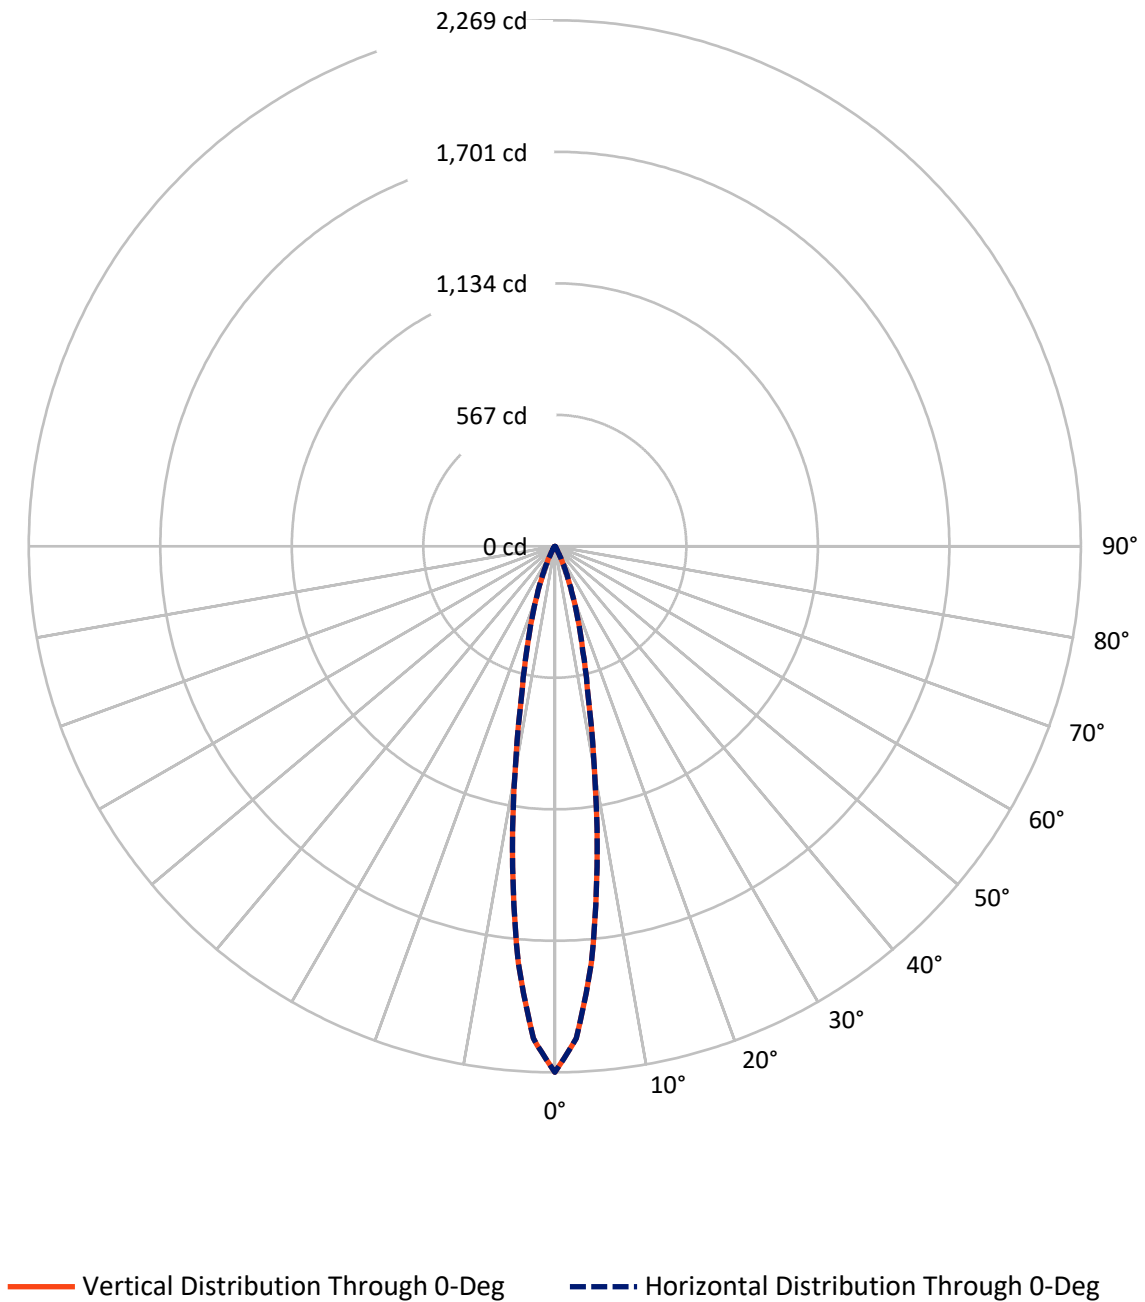

REPORT NUMBER: P246973 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-8LED3025-12-BK

Luminous Intensity Plot

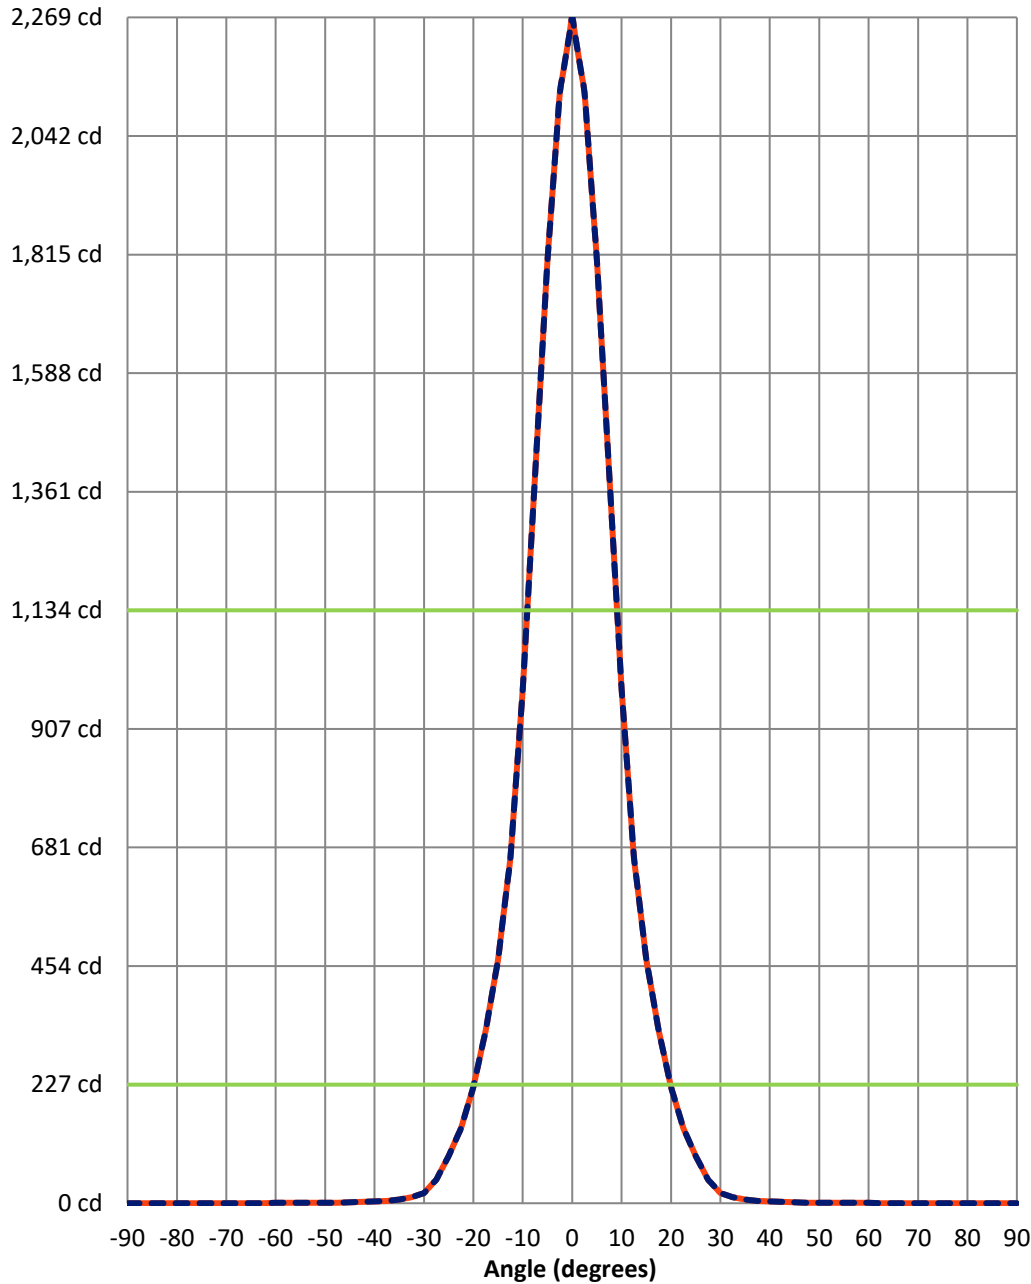

Beam:
H Angle: 18.2°
V Angle: 18.2°
Lumens: 129.9
Efficiency: 39.4%

Field:
H Angle: 39.8°
V Angle: 39.8°
Lumens: 280.7
Efficiency: 85.1%

Spill:
Lumens: 49.3
Efficiency: 14.9%

— Vertical Distribution through 0-Deg
- - Horizontal Distribution through 0-Deg



REPORT NUMBER: P246973 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-8LED3025-12-BK

FIELD
 BEAM

CANDELA DISTRIBUTION:

	-90°	-87.5°	-85°	-82.5°	-80°	-77.5°	-75°	-72.5°	-70°	-67.5°	-65°
90°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246973 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-8LED3025-12-BK

CANDELA DISTRIBUTION (continued):

	-90°	-87.5°	-85°	-82.5°	-80°	-77.5°	-75°	-72.5°	-70°	-67.5°	-65°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246973 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-8LED3025-12-BK

CANDELA DISTRIBUTION (continued):

	-62.5°	-60°	-57.5°	-55°	-52.5°	-50°	-47.5°	-45°	-42.5°	-40°	-37.5°
90°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	1	1
47.5°	0	0	0	0	0	0	0	0	1	1	1
45°	0	0	0	0	0	0	0	1	1	1	1
42.5°	0	0	0	0	0	0	1	1	1	1	1
40°	0	0	0	0	0	1	1	1	1	1	1
37.5°	0	0	0	0	0	1	1	1	1	1	1
35°	0	0	0	0	1	1	1	1	1	1	1
32.5°	0	0	0	1	1	1	1	1	1	1	1
30°	0	0	0	1	1	1	1	1	1	1	1
27.5°	0	0	0	1	1	1	1	1	1	1	2
25°	0	0	1	1	1	1	1	1	1	1	2
22.5°	0	0	1	1	1	1	1	1	1	2	3
20°	0	0	1	1	1	1	1	1	1	2	3
17.5°	0	0	1	1	1	1	1	1	2	2	3
15°	0	0	1	1	1	1	1	1	2	3	4
12.5°	0	1	1	1	1	1	1	1	2	3	4
10°	0	1	1	1	1	1	1	1	2	3	4
7.5°	0	1	1	1	1	1	1	2	3	3	4
5°	0	1	1	1	1	1	1	2	3	3	4
2.5°	0	1	1	1	1	1	1	2	3	3	4
0°	0	1	1	1	1	1	1	2	3	4	4
-2.5°	0	1	1	1	1	1	1	2	3	3	4
-5°	0	1	1	1	1	1	1	2	3	3	4
-7.5°	0	1	1	1	1	1	1	2	3	3	4
-10°	0	1	1	1	1	1	1	1	2	3	4
-12.5°	0	1	1	1	1	1	1	1	2	3	4
-15°	0	0	1	1	1	1	1	1	2	3	4
-17.5°	0	0	1	1	1	1	1	1	2	2	3
-20°	0	0	1	1	1	1	1	1	1	2	3



REPORT NUMBER: P246973 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-8LED3025-12-BK

CANDELA DISTRIBUTION (continued):

	-62.5°	-60°	-57.5°	-55°	-52.5°	-50°	-47.5°	-45°	-42.5°	-40°	-37.5°
-22.5°	0	0	1	1	1	1	1	1	1	2	3
-25°	0	0	1	1	1	1	1	1	1	1	2
-27.5°	0	0	0	1	1	1	1	1	1	1	2
-30°	0	0	0	1	1	1	1	1	1	1	1
-32.5°	0	0	0	1	1	1	1	1	1	1	1
-35°	0	0	0	0	1	1	1	1	1	1	1
-37.5°	0	0	0	0	0	1	1	1	1	1	1
-40°	0	0	0	0	0	1	1	1	1	1	1
-42.5°	0	0	0	0	0	0	1	1	1	1	1
-45°	0	0	0	0	0	0	0	1	1	1	1
-47.5°	0	0	0	0	0	0	0	0	1	1	1
-50°	0	0	0	0	0	0	0	0	0	1	1
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246973 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-8LED3025-12-BK

CANDELA DISTRIBUTION (continued):

	-35°	-32.5°	-30°	-27.5°	-25°	-22.5°	-20°	-17.5°	-15°	-12.5°	-10°
90°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	1	1
57.5°	0	0	0	0	1	1	1	1	1	1	1
55°	0	1	1	1	1	1	1	1	1	1	1
52.5°	1	1	1	1	1	1	1	1	1	1	1
50°	1	1	1	1	1	1	1	1	1	1	1
47.5°	1	1	1	1	1	1	1	1	1	1	1
45°	1	1	1	1	1	1	1	1	1	1	1
42.5°	1	1	1	1	1	1	1	2	2	2	2
40°	1	1	1	1	1	2	2	2	3	3	3
37.5°	1	1	1	2	2	3	3	3	4	4	4
35°	1	1	2	2	3	3	4	4	4	5	6
32.5°	1	2	2	3	3	4	4	6	7	8	9
30°	2	2	3	4	4	5	7	8	10	12	15
27.5°	2	3	4	4	5	7	10	12	16	19	28
25°	3	3	4	5	7	10	14	19	31	42	58
22.5°	3	4	5	7	10	15	22	38	57	80	101
20°	4	4	7	10	14	22	40	66	94	123	151
17.5°	4	6	8	12	19	38	66	100	135	179	220
15°	4	7	10	16	31	57	94	135	188	247	311
12.5°	5	8	12	19	42	80	123	179	247	326	414
10°	6	9	15	28	58	101	151	220	311	414	536
7.5°	6	10	17	36	72	119	181	266	372	502	664
5°	7	11	18	41	82	133	204	301	423	587	833
2.5°	7	11	19	44	88	141	218	323	455	642	945
0°	7	12	20	45	90	144	223	331	466	661	984
-2.5°	7	11	19	44	88	141	218	323	455	642	945
-5°	7	11	18	41	82	133	204	301	423	587	833
-7.5°	6	10	17	36	72	119	181	266	372	502	664
-10°	6	9	15	28	58	101	151	220	311	414	536
-12.5°	5	8	12	19	42	80	123	179	247	326	414
-15°	4	7	10	16	31	57	94	135	188	247	311
-17.5°	4	6	8	12	19	38	66	100	135	179	220
-20°	4	4	7	10	14	22	40	66	94	123	151



REPORT NUMBER: P246973 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-8LED3025-12-BK

CANDELA DISTRIBUTION (continued):

	-35°	-32.5°	-30°	-27.5°	-25°	-22.5°	-20°	-17.5°	-15°	-12.5°	-10°
-22.5°	3	4	5	7	10	15	22	38	57	80	101
-25°	3	3	4	5	7	10	14	19	31	42	58
-27.5°	2	3	4	4	5	7	10	12	16	19	28
-30°	2	2	3	4	4	5	7	8	10	12	15
-32.5°	1	2	2	3	3	4	4	6	7	8	9
-35°	1	1	2	2	3	3	4	4	4	5	6
-37.5°	1	1	1	2	2	3	3	3	4	4	4
-40°	1	1	1	1	1	2	2	2	3	3	3
-42.5°	1	1	1	1	1	1	1	2	2	2	2
-45°	1	1	1	1	1	1	1	1	1	1	1
-47.5°	1	1	1	1	1	1	1	1	1	1	1
-50°	1	1	1	1	1	1	1	1	1	1	1
-52.5°	1	1	1	1	1	1	1	1	1	1	1
-55°	0	1	1	1	1	1	1	1	1	1	1
-57.5°	0	0	0	0	1	1	1	1	1	1	1
-60°	0	0	0	0	0	0	0	0	0	1	1
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246973 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-8LED3025-12-BK

CANDELA DISTRIBUTION (continued):

	-7.5°	-5°	-2.5°	0°	2.5°	5°	7.5°	10°	12.5°	15°	17.5°
90°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
60°	1	1	1	1	1	1	1	1	1	0	0
57.5°	1	1	1	1	1	1	1	1	1	1	1
55°	1	1	1	1	1	1	1	1	1	1	1
52.5°	1	1	1	1	1	1	1	1	1	1	1
50°	1	1	1	1	1	1	1	1	1	1	1
47.5°	1	1	1	1	1	1	1	1	1	1	1
45°	2	2	2	2	2	2	2	1	1	1	1
42.5°	3	3	3	3	3	3	3	2	2	2	2
40°	3	3	3	4	3	3	3	3	3	3	2
37.5°	4	4	4	4	4	4	4	4	4	4	3
35°	6	7	7	7	7	7	6	6	5	4	4
32.5°	10	11	11	12	11	11	10	9	8	7	6
30°	17	18	19	20	19	18	17	15	12	10	8
27.5°	36	41	44	45	44	41	36	28	19	16	12
25°	72	82	88	90	88	82	72	58	42	31	19
22.5°	119	133	141	144	141	133	119	101	80	57	38
20°	181	204	218	223	218	204	181	151	123	94	66
17.5°	266	301	323	331	323	301	266	220	179	135	100
15°	372	423	455	466	455	423	372	311	247	188	135
12.5°	502	587	642	661	642	587	502	414	326	247	179
10°	664	833	945	984	945	833	664	536	414	311	220
7.5°	908	1143	1327	1395	1327	1143	908	664	502	372	266
5°	1143	1468	1710	1804	1710	1468	1143	833	587	423	301
2.5°	1327	1710	2010	2125	2010	1710	1327	945	642	455	323
0°	1395	1804	2125	2269	2125	1804	1395	984	661	466	331
-2.5°	1327	1710	2010	2125	2010	1710	1327	945	642	455	323
-5°	1143	1468	1710	1804	1710	1468	1143	833	587	423	301
-7.5°	908	1143	1327	1395	1327	1143	908	664	502	372	266
-10°	664	833	945	984	945	833	664	536	414	311	220
-12.5°	502	587	642	661	642	587	502	414	326	247	179
-15°	372	423	455	466	455	423	372	311	247	188	135
-17.5°	266	301	323	331	323	301	266	220	179	135	100
-20°	181	204	218	223	218	204	181	151	123	94	66



REPORT NUMBER: P246973 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-8LED3025-12-BK

CANDELA DISTRIBUTION (continued):

	-7.5°	-5°	-2.5°	0°	2.5°	5°	7.5°	10°	12.5°	15°	17.5°
-22.5°	119	133	141	144	141	133	119	101	80	57	38
-25°	72	82	88	90	88	82	72	58	42	31	19
-27.5°	36	41	44	45	44	41	36	28	19	16	12
-30°	17	18	19	20	19	18	17	15	12	10	8
-32.5°	10	11	11	12	11	11	10	9	8	7	6
-35°	6	7	7	7	7	7	6	6	5	4	4
-37.5°	4	4	4	4	4	4	4	4	4	4	3
-40°	3	3	3	4	3	3	3	3	3	3	2
-42.5°	3	3	3	3	3	3	3	2	2	2	2
-45°	2	2	2	2	2	2	2	1	1	1	1
-47.5°	1	1	1	1	1	1	1	1	1	1	1
-50°	1	1	1	1	1	1	1	1	1	1	1
-52.5°	1	1	1	1	1	1	1	1	1	1	1
-55°	1	1	1	1	1	1	1	1	1	1	1
-57.5°	1	1	1	1	1	1	1	1	1	1	1
-60°	1	1	1	1	1	1	1	1	1	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246973 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-8LED3025-12-BK

CANDELA DISTRIBUTION (continued):

	20°	22.5°	25°	27.5°	30°	32.5°	35°	37.5°	40°	42.5°	45°
90°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
57.5°	1	1	1	0	0	0	0	0	0	0	0
55°	1	1	1	1	1	1	0	0	0	0	0
52.5°	1	1	1	1	1	1	1	0	0	0	0
50°	1	1	1	1	1	1	1	1	1	0	0
47.5°	1	1	1	1	1	1	1	1	1	1	0
45°	1	1	1	1	1	1	1	1	1	1	1
42.5°	1	1	1	1	1	1	1	1	1	1	1
40°	2	2	1	1	1	1	1	1	1	1	1
37.5°	3	3	2	2	1	1	1	1	1	1	1
35°	4	3	3	2	2	1	1	1	1	1	1
32.5°	4	4	3	3	2	2	1	1	1	1	1
30°	7	5	4	4	3	2	2	1	1	1	1
27.5°	10	7	5	4	4	3	2	2	1	1	1
25°	14	10	7	5	4	3	3	2	1	1	1
22.5°	22	15	10	7	5	4	3	3	2	1	1
20°	40	22	14	10	7	4	4	3	2	1	1
17.5°	66	38	19	12	8	6	4	3	2	2	1
15°	94	57	31	16	10	7	4	4	3	2	1
12.5°	123	80	42	19	12	8	5	4	3	2	1
10°	151	101	58	28	15	9	6	4	3	2	1
7.5°	181	119	72	36	17	10	6	4	3	3	2
5°	204	133	82	41	18	11	7	4	3	3	2
2.5°	218	141	88	44	19	11	7	4	3	3	2
0°	223	144	90	45	20	12	7	4	4	3	2
-2.5°	218	141	88	44	19	11	7	4	3	3	2
-5°	204	133	82	41	18	11	7	4	3	3	2
-7.5°	181	119	72	36	17	10	6	4	3	3	2
-10°	151	101	58	28	15	9	6	4	3	2	1
-12.5°	123	80	42	19	12	8	5	4	3	2	1
-15°	94	57	31	16	10	7	4	4	3	2	1
-17.5°	66	38	19	12	8	6	4	3	2	2	1
-20°	40	22	14	10	7	4	4	3	2	1	1



REPORT NUMBER: P246973 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-8LED3025-12-BK

CANDELA DISTRIBUTION (continued):

	20°	22.5°	25°	27.5°	30°	32.5°	35°	37.5°	40°	42.5°	45°
-22.5°	22	15	10	7	5	4	3	3	2	1	1
-25°	14	10	7	5	4	3	3	2	1	1	1
-27.5°	10	7	5	4	4	3	2	2	1	1	1
-30°	7	5	4	4	3	2	2	1	1	1	1
-32.5°	4	4	3	3	2	2	1	1	1	1	1
-35°	4	3	3	2	2	1	1	1	1	1	1
-37.5°	3	3	2	2	1	1	1	1	1	1	1
-40°	2	2	1	1	1	1	1	1	1	1	1
-42.5°	1	1	1	1	1	1	1	1	1	1	1
-45°	1	1	1	1	1	1	1	1	1	1	1
-47.5°	1	1	1	1	1	1	1	1	1	1	0
-50°	1	1	1	1	1	1	1	1	1	0	0
-52.5°	1	1	1	1	1	1	1	0	0	0	0
-55°	1	1	1	1	1	1	0	0	0	0	0
-57.5°	1	1	1	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246973 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-8LED3025-12-BK

CANDELA DISTRIBUTION (continued):

	47.5°	50°	52.5°	55°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°
90°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
42.5°	1	0	0	0	0	0	0	0	0	0	0
40°	1	1	0	0	0	0	0	0	0	0	0
37.5°	1	1	0	0	0	0	0	0	0	0	0
35°	1	1	1	0	0	0	0	0	0	0	0
32.5°	1	1	1	1	0	0	0	0	0	0	0
30°	1	1	1	1	0	0	0	0	0	0	0
27.5°	1	1	1	1	0	0	0	0	0	0	0
25°	1	1	1	1	1	0	0	0	0	0	0
22.5°	1	1	1	1	1	0	0	0	0	0	0
20°	1	1	1	1	1	0	0	0	0	0	0
17.5°	1	1	1	1	1	0	0	0	0	0	0
15°	1	1	1	1	1	0	0	0	0	0	0
12.5°	1	1	1	1	1	1	0	0	0	0	0
10°	1	1	1	1	1	1	0	0	0	0	0
7.5°	1	1	1	1	1	1	0	0	0	0	0
5°	1	1	1	1	1	1	0	0	0	0	0
2.5°	1	1	1	1	1	1	0	0	0	0	0
0°	1	1	1	1	1	1	0	0	0	0	0
-2.5°	1	1	1	1	1	1	0	0	0	0	0
-5°	1	1	1	1	1	1	0	0	0	0	0
-7.5°	1	1	1	1	1	1	0	0	0	0	0
-10°	1	1	1	1	1	1	0	0	0	0	0
-12.5°	1	1	1	1	1	1	0	0	0	0	0
-15°	1	1	1	1	1	0	0	0	0	0	0
-17.5°	1	1	1	1	1	0	0	0	0	0	0
-20°	1	1	1	1	1	0	0	0	0	0	0



REPORT NUMBER: P246973 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-8LED3025-12-BK

CANDELA DISTRIBUTION (continued):

	47.5°	50°	52.5°	55°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°
-22.5°	1	1	1	1	1	0	0	0	0	0	0
-25°	1	1	1	1	1	0	0	0	0	0	0
-27.5°	1	1	1	1	0	0	0	0	0	0	0
-30°	1	1	1	1	0	0	0	0	0	0	0
-32.5°	1	1	1	1	0	0	0	0	0	0	0
-35°	1	1	1	0	0	0	0	0	0	0	0
-37.5°	1	1	0	0	0	0	0	0	0	0	0
-40°	1	1	0	0	0	0	0	0	0	0	0
-42.5°	1	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246973 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-8LED3025-12-BK

CANDELA DISTRIBUTION (continued):

	75°	77.5°	80°	82.5°	85°	87.5°	90°
90°	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0



REPORT NUMBER: P246973 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-8LED3025-12-BK

CANDELA DISTRIBUTION (continued):

	75°	77.5°	80°	82.5°	85°	87.5°	90°
-22.5°	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0

(END OF REPORT)