

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: LUMIERE

Report Number: P246967 (CONVERTED FROM TYPE C PHOTOMETRY)

Luminaire Tested: **206-8LED3010-12-XX-LVR**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P246967 (CONVERTED FROM TYPE C PHOTOMETRY)
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1802-569-26)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 206-8LED3010-12-XX-LVR
Description: CAMBRIA 203 LED LUMINAIRE, 8 WATT, 3000K CCT, 10 DEGREE SPOT OPTIC,
REGRESSED HOOD BLACK, HEX CELL LOUVER
Light Source: (1) SORAA 3000K 95 CRI 10°NSP LED
SM16-07-10D-930-03
Ballast/Driver: CHROMA POWER SUPPLY IN0004

Summary


Lumens per Lamp:	N/A	NEMA Type:	2H x 2V
Luminaire Lumens:	207 lumens	Max Intensity:	4288.9 candela
Efficiency:	N/A	Max Intensity Angle:	0°H x 0°V
Efficacy:	25.9 lumens/watt		
Luminous Opening:	Circular (Dia: 0.17' x H: 0')		
Beam Angle (50%):	12°H x 12°V	Field Angle (10%):	19.2°H x 19.2°V
Beam Lumens:	96.5 lumens	Field Lumens:	166.4 lumens
Beam Efficiency:	46.6%	Field Efficiency:	80.4%
Input Watts (W):	8		
Input Voltage (V):	NR		
Input Current (A _{in}):	NR		
Voltage Rise (V):	NR		
Power Factor:	NR		
Total Harmonic Distortion (THDi):	NR		
Frequency (hertz):	60		
Stabilization Time:	NR		
Operation Time:	NR		
Ambient Temperature (°C):	NR		
Test Distance:	25 FT		



REPORT NUMBER: P246967 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 206-8LED3010-12-XX-LVR

Iso-Candela Plot

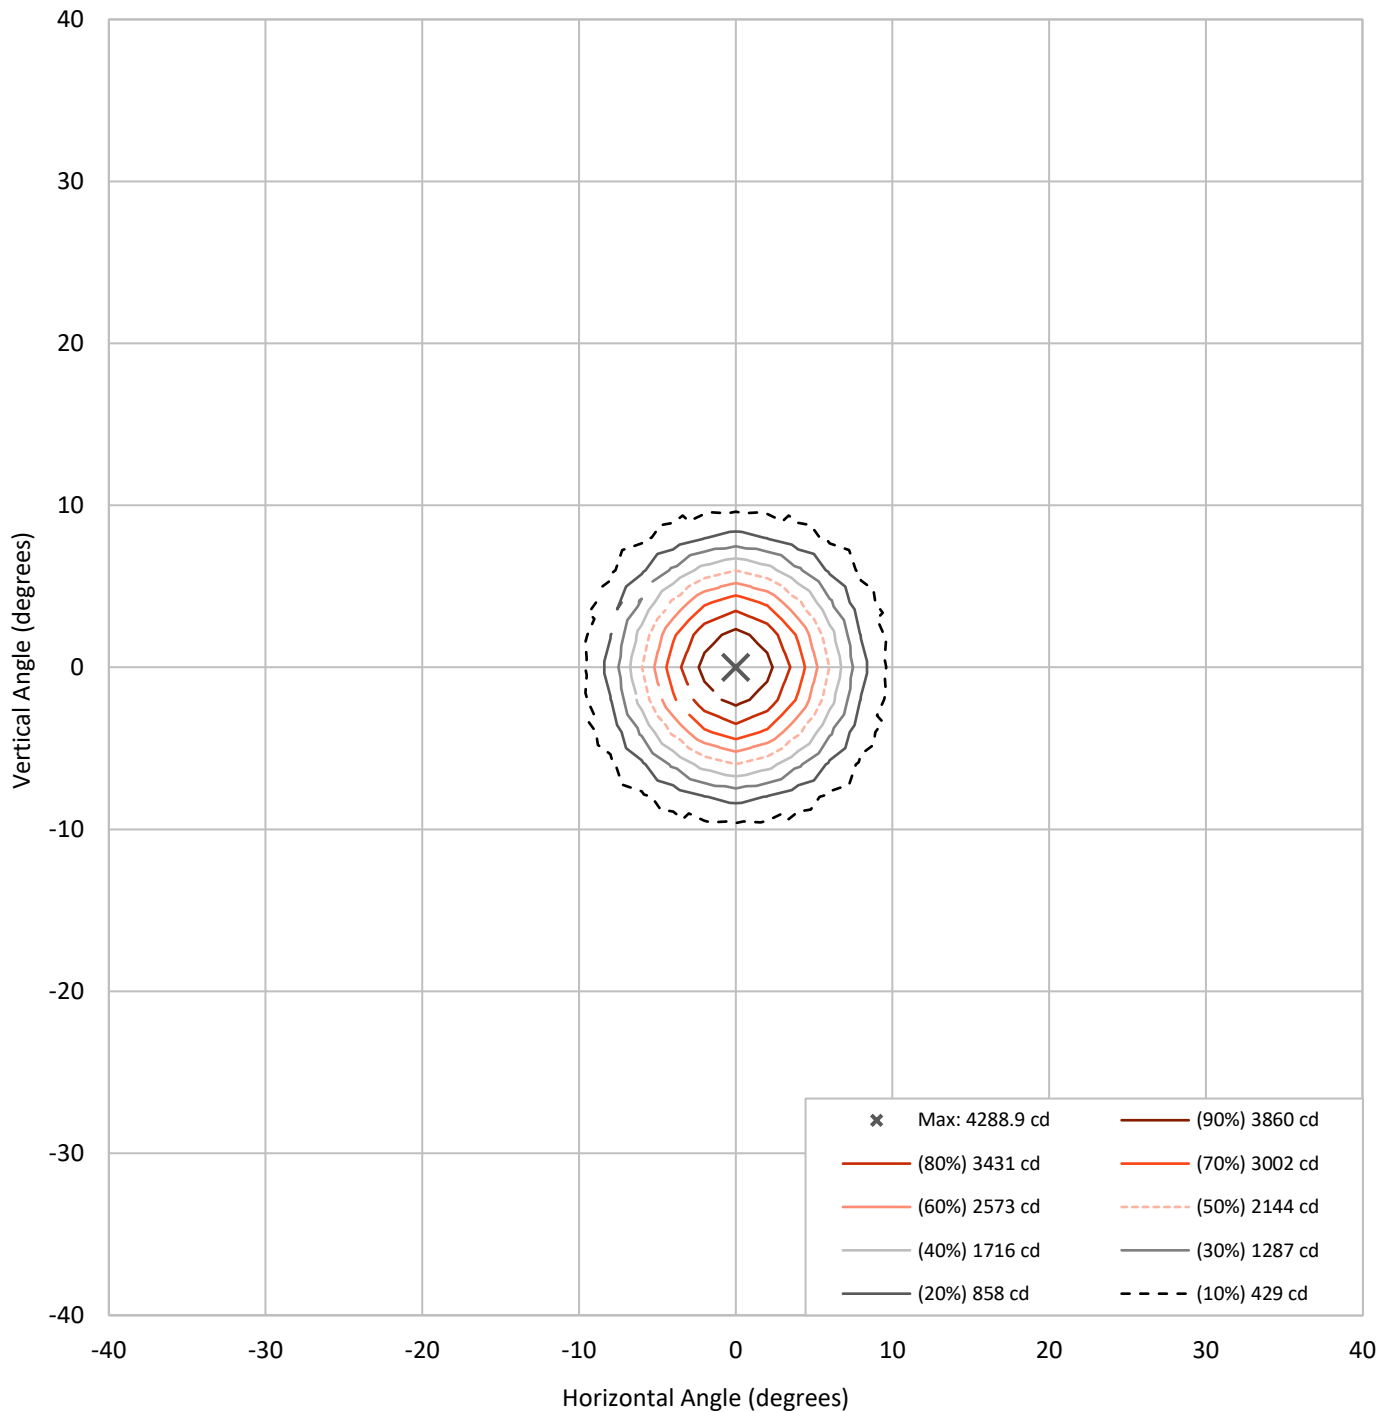



REPORT NUMBER: P246967 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 206-8LED3010-12-XX-LVR


Lumen Table

90	0.0															
80	0.0															
70	0.0															
60	0.0															
50	0.0															
40	0.0															
30	0.0															
20	0.0															
10	0.0															
0	0.0															
-10	0.0															
-20	0.0															
-30	0.0															
-40	0.0															
-50	0.0															
-60	0.0															
-70	0.0															
-80	0.0															
-90	0.0															

90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.2	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0
20	0.0	0.0	0.0	0.1	0.2	0.3	0.5	0.5	0.3	0.2	0.1	0.0	0.0	0.0	0.0	0.0
10	0.0	0.0	0.0	0.1	0.3	0.9	2.6	2.6	0.9	0.3	0.1	0.0	0.0	0.0	0.0	0.0
0	0.0	0.0	0.0	0.1	0.4	2.6	42.9	42.9	2.6	0.4	0.1	0.0	0.0	0.0	0.0	0.0
-10	0.0	0.0	0.0	0.1	0.4	2.6	42.9	42.9	2.6	0.4	0.1	0.0	0.0	0.0	0.0	0.0
-20	0.0	0.0	0.0	0.1	0.3	0.9	2.6	2.6	0.9	0.3	0.1	0.0	0.0	0.0	0.0	0.0
-30	0.0	0.0	0.0	0.1	0.2	0.3	0.5	0.5	0.3	0.2	0.1	0.0	0.0	0.0	0.0	0.0
-40	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.2	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0
-50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P246967 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 206-8LED3010-12-XX-LVR


Luminous Intensity Polar Plot

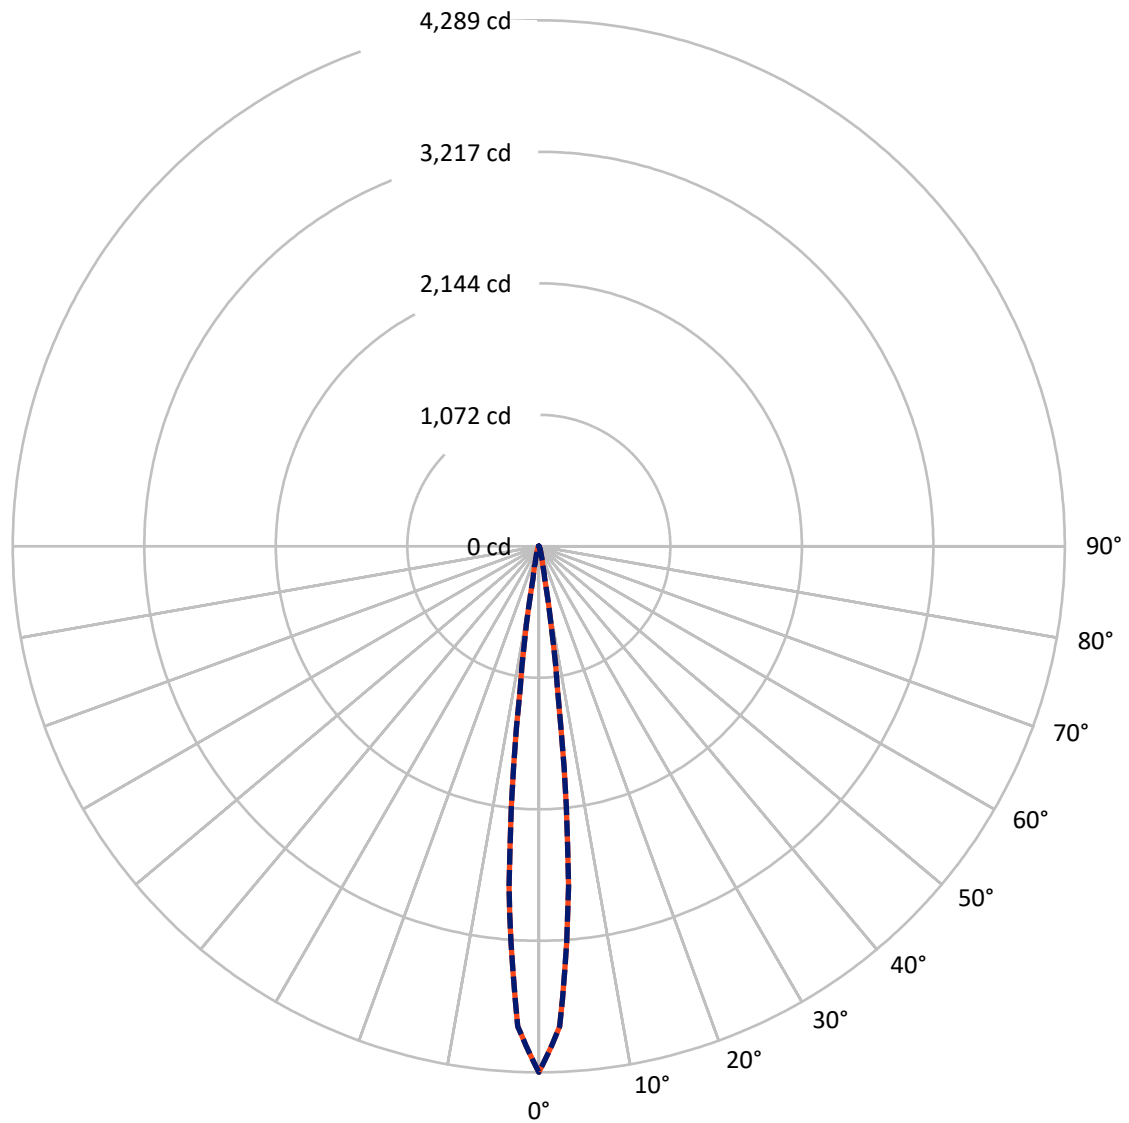

— Vertical Distribution Through 0-Deg - - - Horizontal Distribution Through 0-Deg

REPORT NUMBER: P246967 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 206-8LED3010-12-XX-LVR

Luminous Intensity Plot

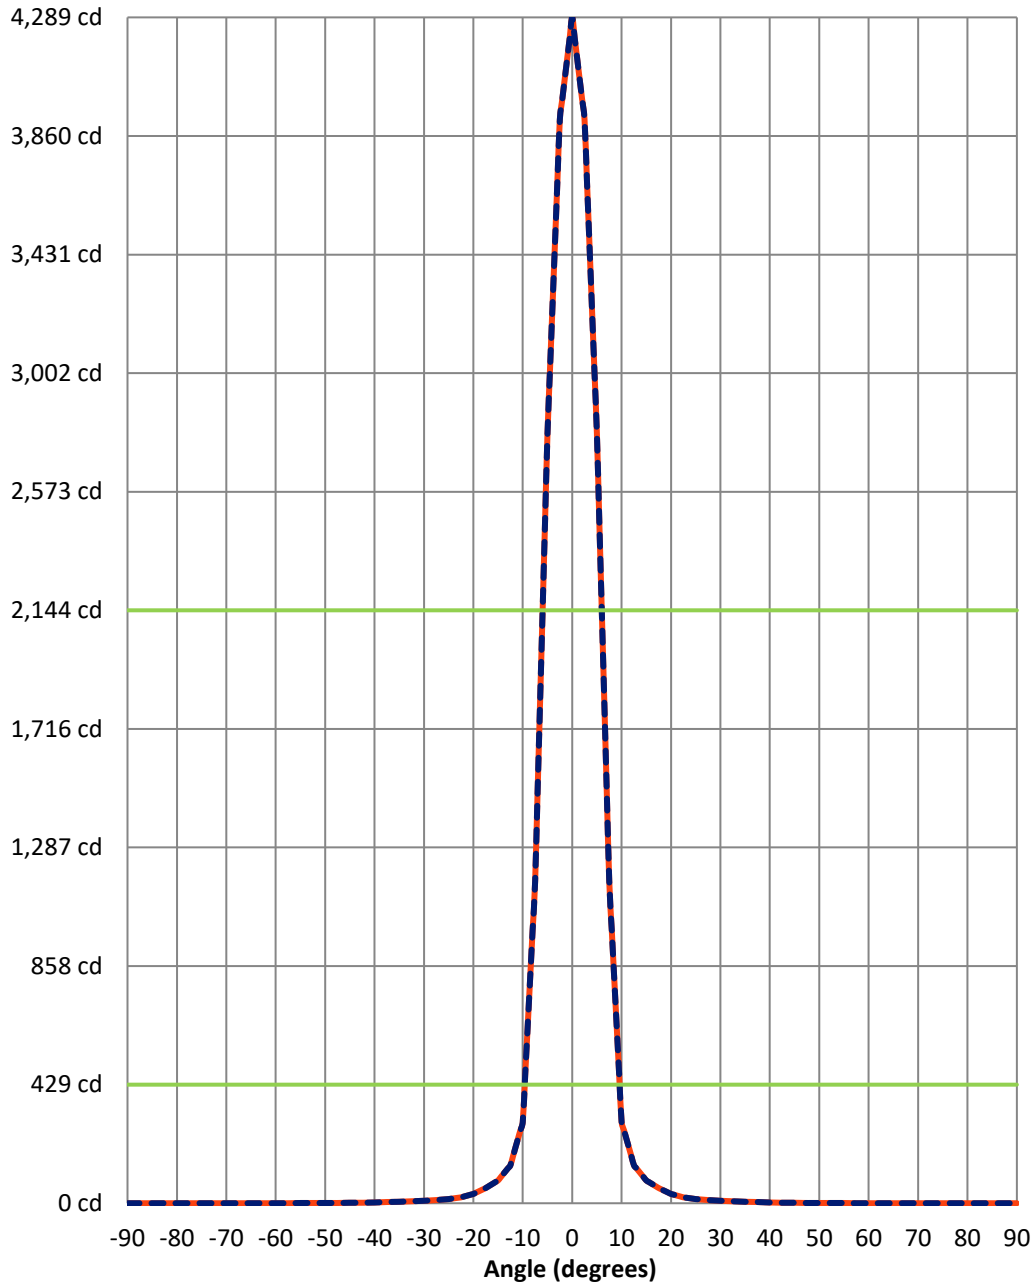

Beam:
H Angle: 12°
V Angle: 12°
Lumens: 96.5
Efficiency: 46.6%

Field:
H Angle: 19.2°
V Angle: 19.2°
Lumens: 166.4
Efficiency: 80.4%

Spill:
Lumens: 40.6
Efficiency: 19.6%

— Vertical Distribution through 0-Deg
- - Horizontal Distribution through 0-Deg



REPORT NUMBER: P246967 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 206-8LED3010-12-XX-LVR

FIELD
 BEAM

CANDELA DISTRIBUTION:

	-90°	-87.5°	-85°	-82.5°	-80°	-77.5°	-75°	-72.5°	-70°	-67.5°	-65°
90°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246967 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 206-8LED3010-12-XX-LVR

CANDELA DISTRIBUTION (continued):

	-90°	-87.5°	-85°	-82.5°	-80°	-77.5°	-75°	-72.5°	-70°	-67.5°	-65°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246967 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 206-8LED3010-12-XX-LVR

CANDELA DISTRIBUTION (continued):

	-62.5°	-60°	-57.5°	-55°	-52.5°	-50°	-47.5°	-45°	-42.5°	-40°	-37.5°
90°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	1
42.5°	0	0	0	0	0	0	0	0	0	1	1
40°	0	0	0	0	0	0	0	0	1	1	1
37.5°	0	0	0	0	0	0	0	1	1	1	1
35°	0	0	0	0	0	0	0	1	1	1	1
32.5°	0	0	0	0	0	0	1	1	1	1	1
30°	0	0	0	0	0	0	1	1	1	1	1
27.5°	0	0	0	0	0	1	1	1	1	1	2
25°	0	0	0	0	0	1	1	1	1	1	2
22.5°	0	0	0	0	1	1	1	1	1	2	2
20°	0	0	0	0	1	1	1	1	1	2	2
17.5°	0	0	0	0	1	1	1	1	2	2	2
15°	0	0	0	0	1	1	1	1	2	2	3
12.5°	0	0	0	1	1	1	1	1	2	2	3
10°	0	0	0	1	1	1	1	1	2	2	4
7.5°	0	0	0	1	1	1	1	2	2	2	4
5°	0	0	0	1	1	1	1	2	2	3	4
2.5°	0	0	0	1	1	1	1	2	2	3	4
0°	0	0	0	1	1	1	1	2	2	3	4
-2.5°	0	0	0	1	1	1	1	2	2	3	4
-5°	0	0	0	1	1	1	1	2	2	3	4
-7.5°	0	0	0	1	1	1	1	2	2	2	4
-10°	0	0	0	1	1	1	1	1	2	2	4
-12.5°	0	0	0	1	1	1	1	1	2	2	3
-15°	0	0	0	0	1	1	1	1	2	2	3
-17.5°	0	0	0	0	1	1	1	1	2	2	2
-20°	0	0	0	0	1	1	1	1	1	2	2



REPORT NUMBER: P246967 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 206-8LED3010-12-XX-LVR

CANDELA DISTRIBUTION (continued):

	-62.5°	-60°	-57.5°	-55°	-52.5°	-50°	-47.5°	-45°	-42.5°	-40°	-37.5°
-22.5°	0	0	0	0	1	1	1	1	1	2	2
-25°	0	0	0	0	0	1	1	1	1	1	2
-27.5°	0	0	0	0	0	1	1	1	1	1	2
-30°	0	0	0	0	0	0	1	1	1	1	1
-32.5°	0	0	0	0	0	0	1	1	1	1	1
-35°	0	0	0	0	0	0	0	1	1	1	1
-37.5°	0	0	0	0	0	0	0	1	1	1	1
-40°	0	0	0	0	0	0	0	0	1	1	1
-42.5°	0	0	0	0	0	0	0	0	0	1	1
-45°	0	0	0	0	0	0	0	0	0	0	1
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246967 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 206-8LED3010-12-XX-LVR

CANDELA DISTRIBUTION (continued):

	-35°	-32.5°	-30°	-27.5°	-25°	-22.5°	-20°	-17.5°	-15°	-12.5°	-10°
90°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	1	1
52.5°	0	0	0	0	0	1	1	1	1	1	1
50°	0	0	0	1	1	1	1	1	1	1	1
47.5°	0	1	1	1	1	1	1	1	1	1	1
45°	1	1	1	1	1	1	1	1	1	1	1
42.5°	1	1	1	1	1	1	1	2	2	2	2
40°	1	1	1	1	1	2	2	2	2	2	2
37.5°	1	1	1	2	2	2	2	2	3	3	4
35°	1	1	2	2	2	2	3	4	4	5	5
32.5°	1	2	2	2	3	4	4	5	5	6	6
30°	2	2	2	3	4	5	5	6	7	7	8
27.5°	2	2	3	4	5	5	6	7	8	9	10
25°	2	3	4	5	5	7	8	9	10	11	12
22.5°	2	4	5	5	7	8	9	11	12	14	16
20°	3	4	5	6	8	9	11	13	16	19	22
17.5°	4	5	6	7	9	11	13	16	20	27	33
15°	4	5	7	8	10	12	16	20	28	39	51
12.5°	5	6	7	9	11	14	19	27	39	54	72
10°	5	6	8	10	12	16	22	33	51	72	102
7.5°	5	7	8	11	14	18	27	42	63	92	139
5°	5	7	9	11	14	20	31	49	74	117	221
2.5°	5	7	9	11	15	21	33	54	80	132	275
0°	5	7	9	12	15	21	34	55	82	137	294
-2.5°	5	7	9	11	15	21	33	54	80	132	275
-5°	5	7	9	11	14	20	31	49	74	117	221
-7.5°	5	7	8	11	14	18	27	42	63	92	139
-10°	5	6	8	10	12	16	22	33	51	72	102
-12.5°	5	6	7	9	11	14	19	27	39	54	72
-15°	4	5	7	8	10	12	16	20	28	39	51
-17.5°	4	5	6	7	9	11	13	16	20	27	33
-20°	3	4	5	6	8	9	11	13	16	19	22



REPORT NUMBER: P246967 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 206-8LED3010-12-XX-LVR

CANDELA DISTRIBUTION (continued):

	-35°	-32.5°	-30°	-27.5°	-25°	-22.5°	-20°	-17.5°	-15°	-12.5°	-10°
-22.5°	2	4	5	5	7	8	9	11	12	14	16
-25°	2	3	4	5	5	7	8	9	10	11	12
-27.5°	2	2	3	4	5	5	6	7	8	9	10
-30°	2	2	2	3	4	5	5	6	7	7	8
-32.5°	1	2	2	2	3	4	4	5	5	6	6
-35°	1	1	2	2	2	2	3	4	4	5	5
-37.5°	1	1	1	2	2	2	2	2	3	3	4
-40°	1	1	1	1	1	2	2	2	2	2	2
-42.5°	1	1	1	1	1	1	1	2	2	2	2
-45°	1	1	1	1	1	1	1	1	1	1	1
-47.5°	0	1	1	1	1	1	1	1	1	1	1
-50°	0	0	0	1	1	1	1	1	1	1	1
-52.5°	0	0	0	0	0	1	1	1	1	1	1
-55°	0	0	0	0	0	0	0	0	0	1	1
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246967 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 206-8LED3010-12-XX-LVR

CANDELA DISTRIBUTION (continued):

	-7.5°	-5°	-2.5°	0°	2.5°	5°	7.5°	10°	12.5°	15°	17.5°
90°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
55°	1	1	1	1	1	1	1	1	1	0	0
52.5°	1	1	1	1	1	1	1	1	1	1	1
50°	1	1	1	1	1	1	1	1	1	1	1
47.5°	1	1	1	1	1	1	1	1	1	1	1
45°	2	2	2	2	2	2	2	1	1	1	1
42.5°	2	2	2	2	2	2	2	2	2	2	2
40°	2	3	3	3	3	3	2	2	2	2	2
37.5°	4	4	4	4	4	4	4	4	3	3	2
35°	5	5	5	5	5	5	5	5	5	4	4
32.5°	7	7	7	7	7	7	7	6	6	5	5
30°	8	9	9	9	9	9	8	8	7	7	6
27.5°	11	11	11	12	11	11	11	10	9	8	7
25°	14	14	15	15	15	14	14	12	11	10	9
22.5°	18	20	21	21	21	20	18	16	14	12	11
20°	27	31	33	34	33	31	27	22	19	16	13
17.5°	42	49	54	55	54	49	42	33	27	20	16
15°	63	74	80	82	80	74	63	51	39	28	20
12.5°	92	117	132	137	132	117	92	72	54	39	27
10°	139	221	275	294	275	221	139	102	72	51	33
7.5°	257	493	934	1165	934	493	257	139	92	63	42
5°	493	1413	2401	2784	2401	1413	493	221	117	74	49
2.5°	934	2401	3543	3920	3543	2401	934	275	132	80	54
0°	1165	2784	3920	4289	3920	2784	1165	294	137	82	55
-2.5°	934	2401	3543	3920	3543	2401	934	275	132	80	54
-5°	493	1413	2401	2784	2401	1413	493	221	117	74	49
-7.5°	257	493	934	1165	934	493	257	139	92	63	42
-10°	139	221	275	294	275	221	139	102	72	51	33
-12.5°	92	117	132	137	132	117	92	72	54	39	27
-15°	63	74	80	82	80	74	63	51	39	28	20
-17.5°	42	49	54	55	54	49	42	33	27	20	16
-20°	27	31	33	34	33	31	27	22	19	16	13



REPORT NUMBER: P246967 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 206-8LED3010-12-XX-LVR

CANDELA DISTRIBUTION (continued):

	-7.5°	-5°	-2.5°	0°	2.5°	5°	7.5°	10°	12.5°	15°	17.5°
-22.5°	18	20	21	21	21	20	18	16	14	12	11
-25°	14	14	15	15	15	14	14	12	11	10	9
-27.5°	11	11	11	12	11	11	11	10	9	8	7
-30°	8	9	9	9	9	9	8	8	7	7	6
-32.5°	7	7	7	7	7	7	7	6	6	5	5
-35°	5	5	5	5	5	5	5	5	5	4	4
-37.5°	4	4	4	4	4	4	4	4	3	3	2
-40°	2	3	3	3	3	3	2	2	2	2	2
-42.5°	2	2	2	2	2	2	2	2	2	2	2
-45°	2	2	2	2	2	2	2	1	1	1	1
-47.5°	1	1	1	1	1	1	1	1	1	1	1
-50°	1	1	1	1	1	1	1	1	1	1	1
-52.5°	1	1	1	1	1	1	1	1	1	1	1
-55°	1	1	1	1	1	1	1	1	1	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246967 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 206-8LED3010-12-XX-LVR

CANDELA DISTRIBUTION (continued):

	20°	22.5°	25°	27.5°	30°	32.5°	35°	37.5°	40°	42.5°	45°
90°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
52.5°	1	1	0	0	0	0	0	0	0	0	0
50°	1	1	1	1	0	0	0	0	0	0	0
47.5°	1	1	1	1	1	1	0	0	0	0	0
45°	1	1	1	1	1	1	1	1	0	0	0
42.5°	1	1	1	1	1	1	1	1	1	0	0
40°	2	2	1	1	1	1	1	1	1	1	0
37.5°	2	2	2	2	1	1	1	1	1	1	1
35°	3	2	2	2	2	1	1	1	1	1	1
32.5°	4	4	3	2	2	2	1	1	1	1	1
30°	5	5	4	3	2	2	2	1	1	1	1
27.5°	6	5	5	4	3	2	2	2	1	1	1
25°	8	7	5	5	4	3	2	2	1	1	1
22.5°	9	8	7	5	5	4	2	2	2	1	1
20°	11	9	8	6	5	4	3	2	2	1	1
17.5°	13	11	9	7	6	5	4	2	2	2	1
15°	16	12	10	8	7	5	4	3	2	2	1
12.5°	19	14	11	9	7	6	5	3	2	2	1
10°	22	16	12	10	8	6	5	4	2	2	1
7.5°	27	18	14	11	8	7	5	4	2	2	2
5°	31	20	14	11	9	7	5	4	3	2	2
2.5°	33	21	15	11	9	7	5	4	3	2	2
0°	34	21	15	12	9	7	5	4	3	2	2
-2.5°	33	21	15	11	9	7	5	4	3	2	2
-5°	31	20	14	11	9	7	5	4	3	2	2
-7.5°	27	18	14	11	8	7	5	4	2	2	2
-10°	22	16	12	10	8	6	5	4	2	2	1
-12.5°	19	14	11	9	7	6	5	3	2	2	1
-15°	16	12	10	8	7	5	4	3	2	2	1
-17.5°	13	11	9	7	6	5	4	2	2	2	1
-20°	11	9	8	6	5	4	3	2	2	1	1



REPORT NUMBER: P246967 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 206-8LED3010-12-XX-LVR

CANDELA DISTRIBUTION (continued):

	20°	22.5°	25°	27.5°	30°	32.5°	35°	37.5°	40°	42.5°	45°
-22.5°	9	8	7	5	5	4	2	2	2	1	1
-25°	8	7	5	5	4	3	2	2	1	1	1
-27.5°	6	5	5	4	3	2	2	2	1	1	1
-30°	5	5	4	3	2	2	2	1	1	1	1
-32.5°	4	4	3	2	2	2	1	1	1	1	1
-35°	3	2	2	2	2	1	1	1	1	1	1
-37.5°	2	2	2	2	1	1	1	1	1	1	1
-40°	2	2	1	1	1	1	1	1	1	1	0
-42.5°	1	1	1	1	1	1	1	1	1	0	0
-45°	1	1	1	1	1	1	1	1	0	0	0
-47.5°	1	1	1	1	1	1	0	0	0	0	0
-50°	1	1	1	1	0	0	0	0	0	0	0
-52.5°	1	1	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246967 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 206-8LED3010-12-XX-LVR

CANDELA DISTRIBUTION (continued):

	47.5°	50°	52.5°	55°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°
90°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0
32.5°	1	0	0	0	0	0	0	0	0	0	0
30°	1	0	0	0	0	0	0	0	0	0	0
27.5°	1	1	0	0	0	0	0	0	0	0	0
25°	1	1	0	0	0	0	0	0	0	0	0
22.5°	1	1	1	0	0	0	0	0	0	0	0
20°	1	1	1	0	0	0	0	0	0	0	0
17.5°	1	1	1	0	0	0	0	0	0	0	0
15°	1	1	1	0	0	0	0	0	0	0	0
12.5°	1	1	1	1	0	0	0	0	0	0	0
10°	1	1	1	1	0	0	0	0	0	0	0
7.5°	1	1	1	1	0	0	0	0	0	0	0
5°	1	1	1	1	0	0	0	0	0	0	0
2.5°	1	1	1	1	0	0	0	0	0	0	0
0°	1	1	1	1	0	0	0	0	0	0	0
-2.5°	1	1	1	1	0	0	0	0	0	0	0
-5°	1	1	1	1	0	0	0	0	0	0	0
-7.5°	1	1	1	1	0	0	0	0	0	0	0
-10°	1	1	1	1	0	0	0	0	0	0	0
-12.5°	1	1	1	1	0	0	0	0	0	0	0
-15°	1	1	1	0	0	0	0	0	0	0	0
-17.5°	1	1	1	0	0	0	0	0	0	0	0
-20°	1	1	1	0	0	0	0	0	0	0	0



REPORT NUMBER: P246967 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 206-8LED3010-12-XX-LVR

CANDELA DISTRIBUTION (continued):

	47.5°	50°	52.5°	55°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°
-22.5°	1	1	1	0	0	0	0	0	0	0	0
-25°	1	1	0	0	0	0	0	0	0	0	0
-27.5°	1	1	0	0	0	0	0	0	0	0	0
-30°	1	0	0	0	0	0	0	0	0	0	0
-32.5°	1	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246967 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 206-8LED3010-12-XX-LVR

CANDELA DISTRIBUTION (continued):

	75°	77.5°	80°	82.5°	85°	87.5°	90°
90°	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0



REPORT NUMBER: P246967 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 206-8LED3010-12-XX-LVR

CANDELA DISTRIBUTION (continued):

	75°	77.5°	80°	82.5°	85°	87.5°	90°
-22.5°	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0

(END OF REPORT)