

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: LUMIERE

Report Number: P253127

Luminaire Tested: **3002A-18LED3000-WFL-UNV-NBR**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P253127
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (P23738)
Test Lab: INNOVATION CENTER P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 3002A-18LED3000-WFL-UNV-NBR
Description: LUMIERE MONACO 30002 LED FIXTURE, GROUND RECESSED.
Light Source: (7) 3000K CCT, 80 CRI LEDS
LBA-80578XPG2-3K
Ballast/Driver: (1) MAGTECH ELECTRONIC DRIVER
LP1020-24-C0700

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 946.6 lumens
Efficiency: N/A
Efficacy: 57.0 lumens/watt
N/A
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Indirect


Input Watts (W): 16.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P253127

CATALOG NUMBER: 3002A-18LED3000-WFL-UNV-NBR

Luminous Intensity Polar Plot

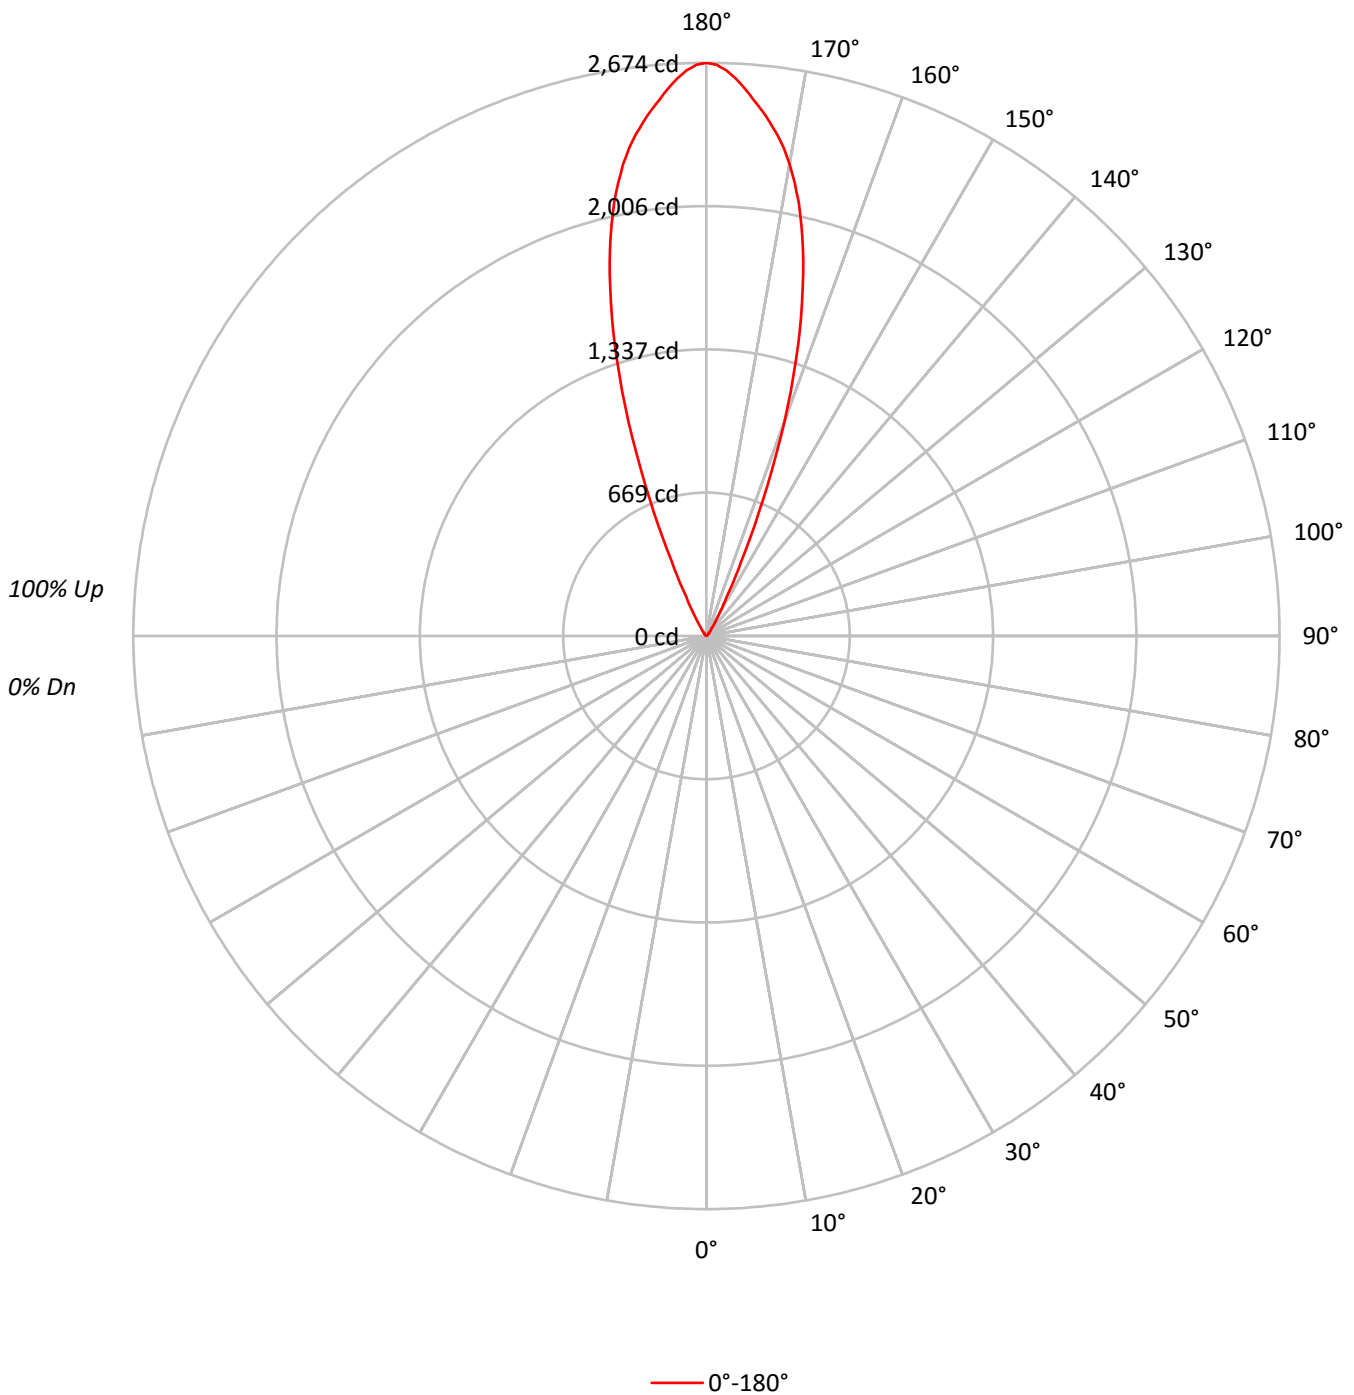



TEST NUMBER: P253127

CATALOG NUMBER: 3002A-18LED3000-WFL-UNV-NBR

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10	0
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8	0
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7	0
3	72	63	57	51	61	54	49	44	37	34	31	21	20	18	7	6	6	0
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5	0
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4	0
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4	0
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3	0
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3	0
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3	0
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2	0

AVERAGE LUMINANCE (cd/sqm):

	0°
95°	0
100°	0
105°	0
110°	0
115°	220
120°	186
125°	487
130°	724
135°	1185
140°	1832
145°	3645
150°	9706
155°	30298
160°	80898
165°	129271
170°	162542
175°	180558



TEST NUMBER: P253127

CATALOG NUMBER: 3002A-18LED3000-WFL-UNV-NBR

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	0.0	0.0
10°-20°	0.0	0.0
20°-30°	0.0	0.0
30°-40°	0.0	0.0
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	1.1	0.1
120°-130°	3.5	0.4
130°-140°	9.2	1.0
140°-150°	31.1	3.3
150°-160°	202.8	21.4
160°-170°	467.5	49.4
170°-180°	231.4	24.4
0°-30°	0.0	0.0
0°-40°	0.0	0.0
0°-60°	0.0	0.0
0°-90°	0.0	0.0
90°-120°	1.1	0.1
90°-150°	44.9	4.7
90°-180°	947.0	100.0
0°-180°	946.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
90°	0	
95°	0	0
105°	0	0
115°	1	1
125°	4	3
135°	12	9
145°	42	31
155°	384	203
165°	1744	467
175°	2512	231
180°	2674	



TEST NUMBER: P253127

CATALOG NUMBER: 3002A-18LED3000-WFL-UNV-NBR

CANDELA DISTRIBUTION (FULL):

	0°
90°	0.0
92.5°	0.0
95°	0.0
97.5°	0.0
100°	0.0
102.5°	0.0
105°	0.0
107.5°	0.0
110°	0.0
112.5°	1.3
115°	1.3
117.5°	1.3
120°	1.3
122.5°	2.6
125°	3.9
127.5°	5.2
130°	6.5
132.5°	9.1
135°	11.7
137.5°	14.3
140°	19.6
142.5°	27.4
145°	41.7
147.5°	67.8
150°	117.4
152.5°	203.5
155°	383.5
157.5°	687.4
160°	1061.7
162.5°	1424.3
165°	1743.9
166°	1860.0
167°	1968.2
168°	2068.7
169°	2154.7
170°	2235.6
171°	2304.7
172°	2363.4
173°	2415.6
174°	2466.5
175°	2512.1
176°	2560.4
177°	2604.7
178°	2641.3
179°	2664.7



TEST NUMBER: P253127

CATALOG NUMBER: 3002A-18LED3000-WFL-UNV-NBR

CANDELA DISTRIBUTION (continued):

180° | $\frac{0^\circ}{2673.9}$

(END OF REPORT)