

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: LUMIERE

Report Number: P253134

Luminaire Tested: **3002A-18LED4000-SP-UNV-NBR**

Test Date: 11/19/12

Test Information

Test Method: LM-79-08
Report Number: P253134
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (P22979)
Test Lab: INNOVATION CENTER P2
Test Date: 11/19/12
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 3002A-18LED4000-SP-UNV-NBR
Description: LUMIERE MONACO INGRADE TEST FIXTURE WITH SPOT OPTICS
Light Source: (7) 4000K CCT, 80 CRI LEDS
LBA-8057XPG2-4K
Ballast/Driver: (1) MAGTECH ELECTRONIC DRIVER
LP1020-24-C0700

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1112.6 lumens
Efficiency: N/A
Efficacy: 66.6 lumens/watt
N/A
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Indirect

Input Watts (W): 16.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P253134
CATALOG NUMBER: 3002A-18LED4000-SP-UNV-NBR

Luminous Intensity Polar Plot

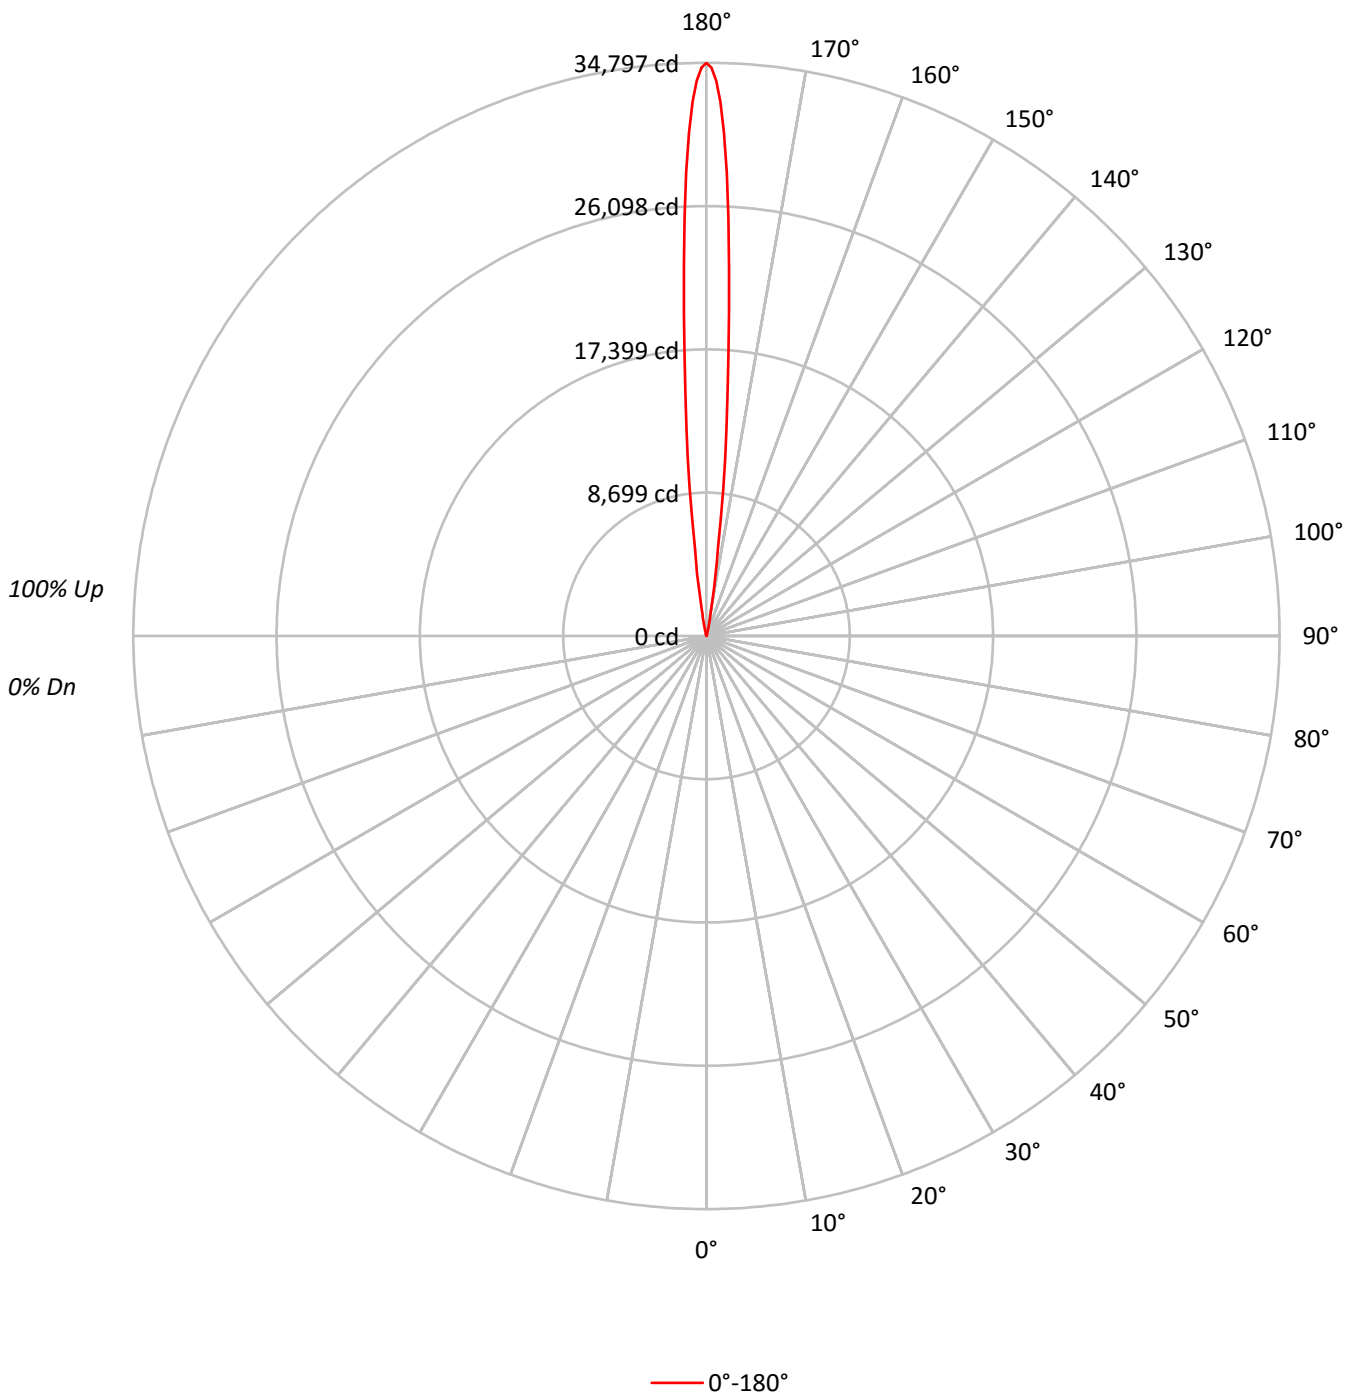



TEST NUMBER: P253134

CATALOG NUMBER: 3002A-18LED4000-SP-UNV-NBR

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10	0
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8	0
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7	0
3	72	63	57	51	61	54	49	44	37	34	31	21	20	18	7	6	6	0
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5	0
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4	0
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4	0
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3	0
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3	0
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3	0
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2	0

AVERAGE LUMINANCE (cd/sqm):

	0°
95°	0
100°	0
105°	0
110°	0
115°	0
120°	158
125°	262
130°	356
135°	435
140°	505
145°	935
150°	2307
155°	2465
160°	3436
165°	12187
170°	115836
175°	1043659



TEST NUMBER: P253134

CATALOG NUMBER: 3002A-18LED4000-SP-UNV-NBR

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	0.0	0.0
10°-20°	0.0	0.0
20°-30°	0.0	0.0
30°-40°	0.0	0.0
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.7	0.1
120°-130°	2.1	0.2
130°-140°	3.1	0.3
140°-150°	8.4	0.8
150°-160°	15.0	1.3
160°-170°	90.0	8.1
170°-180°	993.6	89.3
0°-30°	0.0	0.0
0°-40°	0.0	0.0
0°-60°	0.0	0.0
0°-90°	0.0	0.0
90°-120°	0.7	0.1
90°-150°	14.3	1.3
90°-180°	1113.0	100.0
0°-180°	1112.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
90°	0	
95°	0	0
105°	0	0
115°	0	1
125°	2	2
135°	4	3
145°	11	8
155°	31	15
165°	164	90
175°	14520	994
180°	34797	



TEST NUMBER: P253134

CATALOG NUMBER: 3002A-18LED4000-SP-UNV-NBR

CANDELA DISTRIBUTION (FULL):

	0°
90°	0.0
92.5°	0.0
95°	0.0
97.5°	0.0
100°	0.0
102.5°	0.0
105°	0.0
107.5°	0.0
110°	0.0
112.5°	0.0
115°	0.0
117.5°	1.1
120°	1.1
122.5°	2.1
125°	2.1
127.5°	3.2
130°	3.2
132.5°	3.2
135°	4.3
137.5°	4.3
140°	5.4
142.5°	7.5
145°	10.7
147.5°	20.4
150°	27.9
152.5°	30.1
155°	31.2
157.5°	33.3
160°	45.1
162.5°	82.7
165°	164.4
167.5°	453.4
170°	1593.2
172.5°	5285.6
175°	14520.4
175.5°	17022.5
176°	19627.7
176.5°	22425.2
177°	25412.8
177.5°	28168.4
178°	30594.2
178.5°	32436.7
179°	33708.7
179.5°	34514.4
180°	34796.9

(END OF REPORT)