

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: LUMIERE

Report Number: P253145

Luminaire Tested: **3002A-25LED3500-NFL-UNV-NBR**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P253145  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (P22980)  
Test Lab: INNOVATION CENTER P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: LUMIERE  
Catalog Number: 3002A-25LED3500-NFL-UNV-NBR  
Description: LUMIERE MONACO INGRADE TEST FIXTURE WITH NARROW FLOOD OPTICS  
Light Source: (7) 3500K CCT, 80 CRI LEDS  
LBA-8057XPG2-35K  
Ballast/Driver: -  
ESS030W-1000-24-CPL

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1528.5 lumens  
Efficiency: N/A  
Efficacy: 60.9 lumens/watt  
N/A  
Luminous Opening: Circular (Dia: 0.44' x H: 0')  
CIE Type: Indirect

Input Watts (W): 25.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P253145  
CATALOG NUMBER: 3002A-25LED3500-NFL-UNV-NBR

### Luminous Intensity Polar Plot

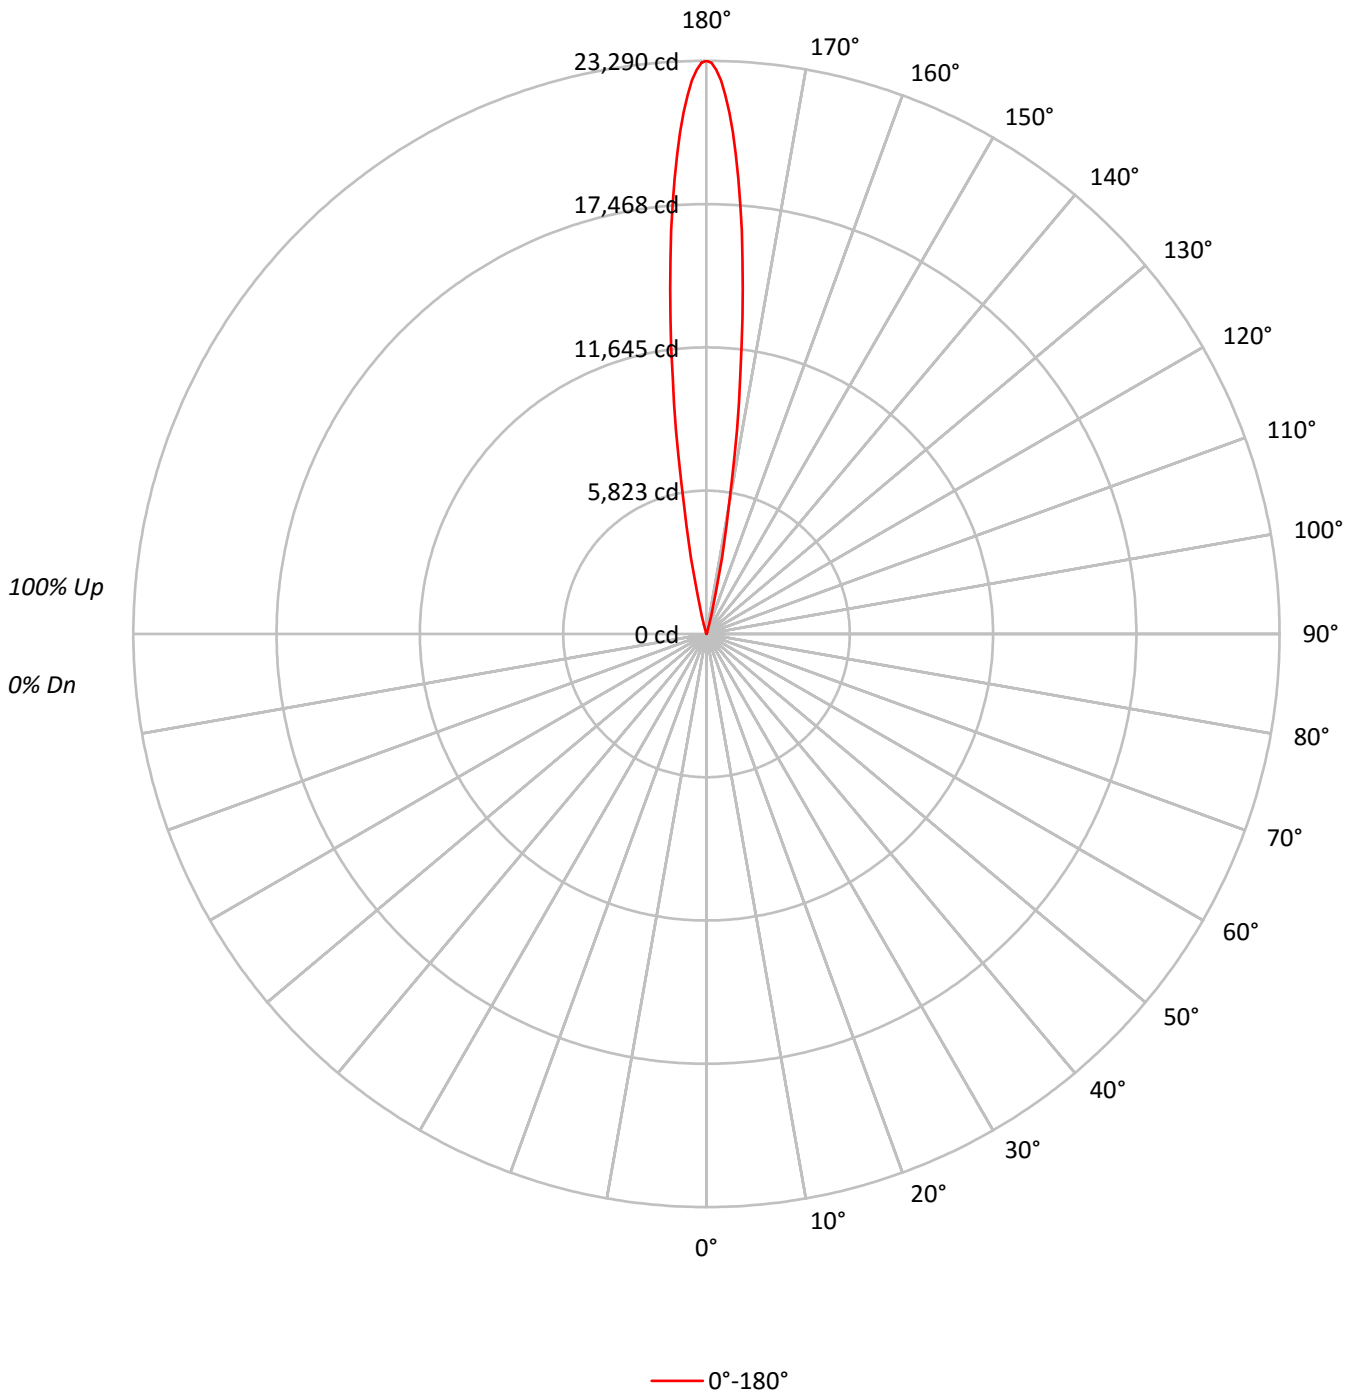



TEST NUMBER: P253145

CATALOG NUMBER: 3002A-25LED3500-NFL-UNV-NBR

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10	0
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8	0
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7	0
3	72	63	57	51	61	54	49	44	37	34	31	21	20	18	7	6	6	0
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5	0
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4	0
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4	0
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3	0
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3	0
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3	0
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2	0

**AVERAGE LUMINANCE (cd/sqm):**

	0°
95°	0
100°	0
105°	0
110°	0
115°	0
120°	215
125°	362
130°	323
135°	446
140°	804
145°	1521
150°	2530
155°	3674
160°	4976
165°	34469
170°	373137
175°	1183464



TEST NUMBER: P253145

CATALOG NUMBER: 3002A-25LED3500-NFL-UNV-NBR

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	0.0	0.0
10°-20°	0.0	0.0
20°-30°	0.0	0.0
30°-40°	0.0	0.0
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.9	0.1
120°-130°	2.1	0.1
130°-140°	3.9	0.3
140°-150°	11.0	0.7
150°-160°	21.1	1.4
160°-170°	291.1	19.0
170°-180°	1198.7	78.4
0°-30°	0.0	0.0
0°-40°	0.0	0.0
0°-60°	0.0	0.0
0°-90°	0.0	0.0
90°-120°	0.9	0.1
90°-150°	17.9	1.2
90°-180°	1529.0	100.0
0°-180°	1528.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
90°	0	
95°	0	0
105°	0	0
115°	0	1
125°	3	2
135°	4	4
145°	17	11
155°	46	21
165°	465	291
175°	16466	###
180°	23290	



TEST NUMBER: P253145

CATALOG NUMBER: 3002A-25LED3500-NFL-UNV-NBR

**CANDELA DISTRIBUTION (FULL):**

	0°
90°	0.0
92.5°	0.0
95°	0.0
97.5°	0.0
100°	0.0
102.5°	0.0
105°	0.0
107.5°	0.0
110°	0.0
112.5°	0.0
115°	0.0
117.5°	1.5
120°	1.5
122.5°	1.5
125°	2.9
127.5°	2.9
130°	2.9
132.5°	4.4
135°	4.4
137.5°	5.8
140°	8.6
142.5°	11.6
145°	17.4
147.5°	23.3
150°	30.6
152.5°	39.2
155°	46.5
157.5°	52.4
160°	65.3
162.5°	122.0
165°	465.0
167.5°	1819.1
170°	5132.1
172.5°	10551.7
175°	16465.5
175.5°	17542.2
176°	18546.2
176.5°	19534.2
177°	20420.6
177.5°	21212.5
178°	21918.6
178.5°	22502.8
179°	22925.7
179.5°	23214.7
180°	23290.3

(END OF REPORT)