

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: LUMIERE

Report Number: P253151

Luminaire Tested: **3002A-25LED4000-WFL-UNV-NBR**

Test Date: 11/19/12

Test Information

Test Method: LM-79-08
Report Number: P253151
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (P22982)
Test Lab: INNOVATION CENTER P2
Test Date: 11/19/12
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 3002A-25LED4000-WFL-UNV-NBR
Description: LUMIERE MONACO INGRADE TEST FIXTURE WITH WIDE FLOOD OPTICS
Light Source: (7) 4000K CCT, 80 CRI LEDS
LBA-8057XPG2-4K
Ballast/Driver: -
ESS030W-1000-24-CPL

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1361.7 lumens
Efficiency: N/A
Efficacy: 54.3 lumens/watt
N/A
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Indirect


Input Watts (W): 25.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P253151

CATALOG NUMBER: 3002A-25LED4000-WFL-UNV-NBR

Luminous Intensity Polar Plot

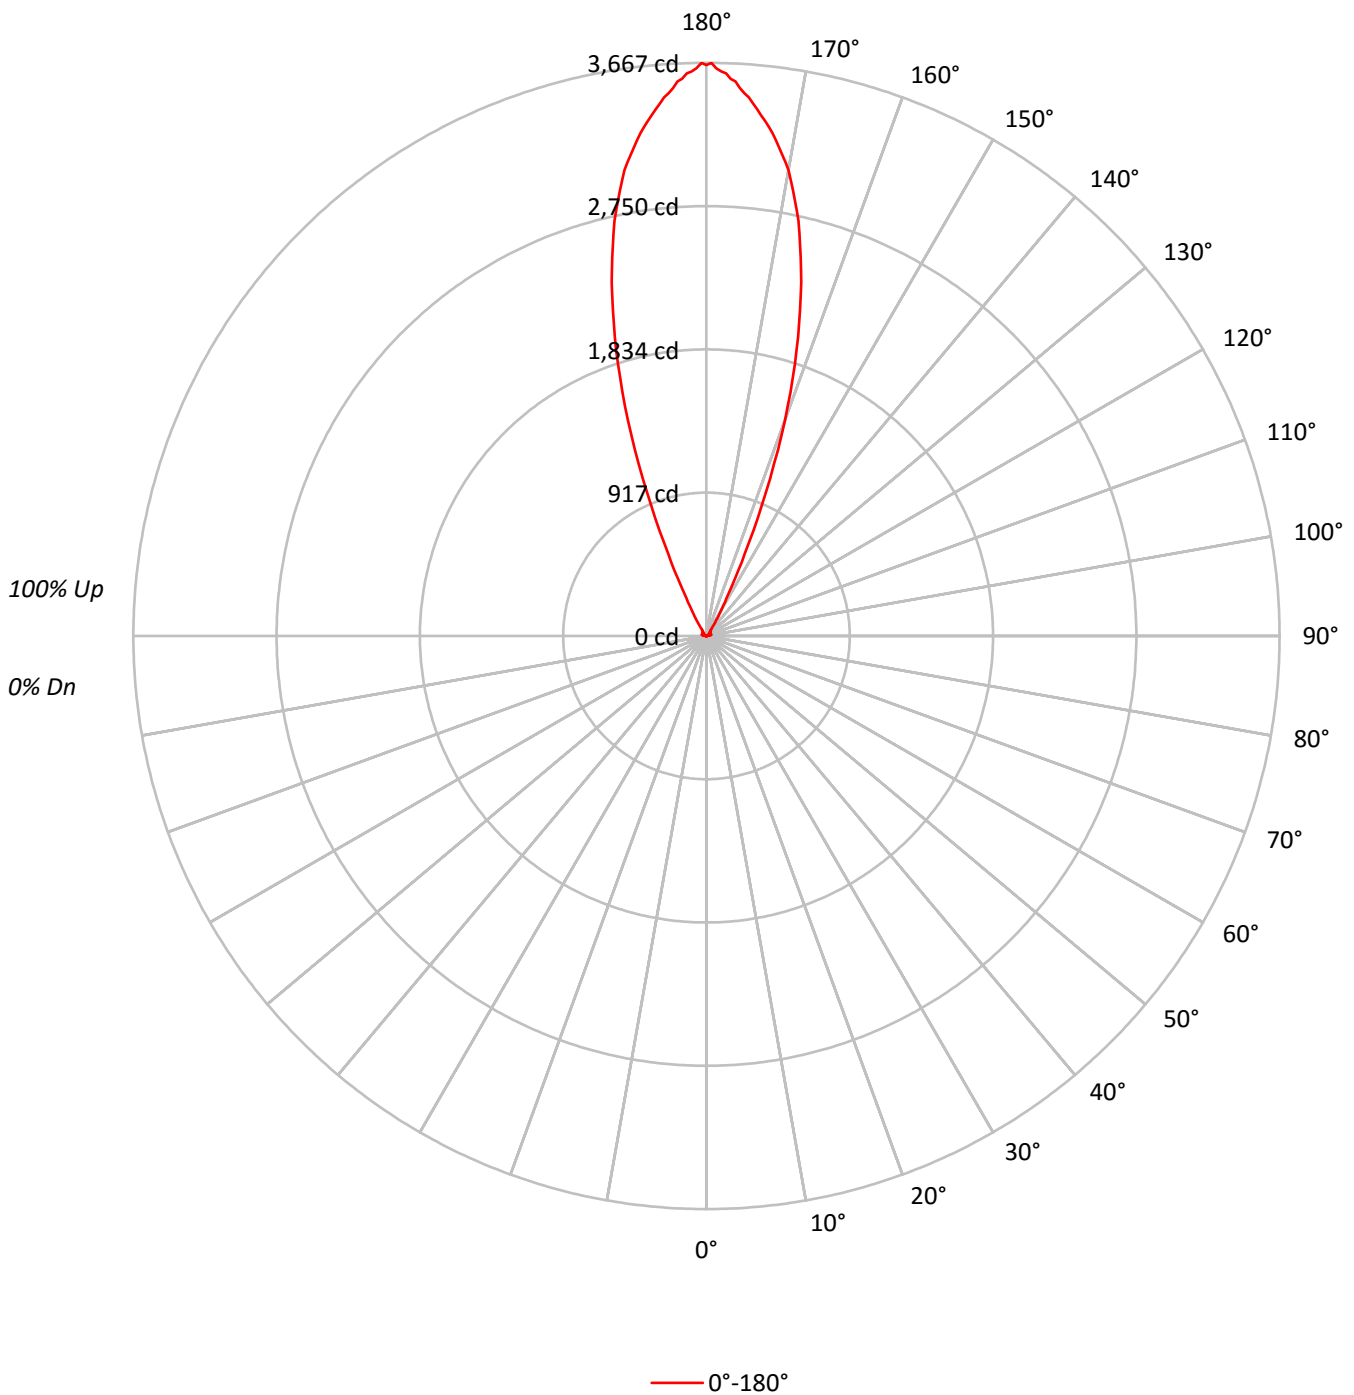



TEST NUMBER: P253151

CATALOG NUMBER: 3002A-25LED4000-WFL-UNV-NBR

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | |
|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | |
| 0 | 95 | 95 | 95 | 95 | 81 | 81 | 81 | 81 | 56 | 56 | 56 | 32 | 32 | 32 | 10 | 10 | 10 | 0 |
| 1 | 87 | 83 | 79 | 76 | 74 | 71 | 68 | 65 | 48 | 47 | 45 | 28 | 27 | 26 | 9 | 9 | 8 | 0 |
| 2 | 79 | 72 | 66 | 62 | 67 | 62 | 57 | 53 | 42 | 40 | 37 | 24 | 23 | 22 | 8 | 7 | 7 | 0 |
| 3 | 72 | 63 | 57 | 51 | 61 | 54 | 49 | 44 | 37 | 34 | 31 | 21 | 20 | 18 | 7 | 6 | 6 | 0 |
| 4 | 65 | 56 | 48 | 43 | 56 | 48 | 42 | 37 | 33 | 29 | 26 | 19 | 17 | 16 | 6 | 6 | 5 | 0 |
| 5 | 60 | 49 | 42 | 36 | 51 | 42 | 36 | 32 | 29 | 25 | 22 | 17 | 15 | 13 | 5 | 5 | 4 | 0 |
| 6 | 55 | 44 | 36 | 31 | 47 | 38 | 32 | 27 | 26 | 22 | 19 | 15 | 13 | 11 | 5 | 4 | 4 | 0 |
| 7 | 50 | 39 | 32 | 27 | 43 | 34 | 28 | 23 | 23 | 19 | 17 | 14 | 11 | 10 | 4 | 4 | 3 | 0 |
| 8 | 47 | 35 | 28 | 23 | 40 | 30 | 24 | 20 | 21 | 17 | 14 | 12 | 10 | 9 | 4 | 3 | 3 | 0 |
| 9 | 43 | 32 | 25 | 20 | 37 | 27 | 22 | 18 | 19 | 15 | 13 | 11 | 9 | 8 | 4 | 3 | 3 | 0 |
| 10 | 40 | 29 | 22 | 18 | 34 | 25 | 19 | 16 | 17 | 14 | 11 | 10 | 8 | 7 | 3 | 3 | 2 | 0 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|------|--------|
| | 0° |
| 95° | 1150 |
| 100° | 1691 |
| 105° | 4537 |
| 110° | 3999 |
| 115° | 237 |
| 120° | 3924 |
| 125° | 2384 |
| 130° | 3498 |
| 135° | 2076 |
| 140° | 3197 |
| 145° | 4537 |
| 150° | 14709 |
| 155° | 45814 |
| 160° | 111819 |
| 165° | 173674 |
| 170° | 219966 |
| 175° | 245864 |



TEST NUMBER: P253151

CATALOG NUMBER: 3002A-25LED4000-WFL-UNV-NBR

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 0.0 | 0.0 |
| 10°-20° | 0.0 | 0.0 |
| 20°-30° | 0.0 | 0.0 |
| 30°-40° | 0.0 | 0.0 |
| 40°-50° | 0.0 | 0.0 |
| 50°-60° | 0.0 | 0.0 |
| 60°-70° | 0.0 | 0.0 |
| 70°-80° | 0.0 | 0.0 |
| 80°-90° | 0.0 | 0.0 |
| 90°-100° | 3.5 | 0.3 |
| 100°-110° | 17.6 | 1.3 |
| 110°-120° | 10.5 | 0.8 |
| 120°-130° | 22.1 | 1.6 |
| 130°-140° | 22.5 | 1.7 |
| 140°-150° | 46.8 | 3.4 |
| 150°-160° | 293.0 | 21.5 |
| 160°-170° | 631.3 | 46.4 |
| 170°-180° | 314.4 | 23.1 |
| 0°-30° | 0.0 | 0.0 |
| 0°-40° | 0.0 | 0.0 |
| 0°-60° | 0.0 | 0.0 |
| 0°-90° | 0.0 | 0.0 |
| 90°-120° | 31.7 | 2.3 |
| 90°-150° | 123.1 | 9.0 |
| 90°-180° | 1362.0 | 100.0 |
| 0°-180° | 1361.7 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|------|------|------|
| 90° | 0 | |
| 95° | 1 | 4 |
| 105° | 16 | 18 |
| 115° | 1 | 11 |
| 125° | 19 | 22 |
| 135° | 20 | 23 |
| 145° | 52 | 47 |
| 155° | 580 | 293 |
| 165° | 2343 | 631 |
| 175° | 3421 | 314 |
| 180° | 3653 | |



TEST NUMBER: P253151

CATALOG NUMBER: 3002A-25LED4000-WFL-UNV-NBR

CANDELA DISTRIBUTION (FULL):

| | 0° |
|--------|--------|
| 90° | 0.0 |
| 92.5° | 8.1 |
| 95° | 1.4 |
| 97.5° | 1.4 |
| 100° | 4.1 |
| 102.5° | 32.8 |
| 105° | 16.4 |
| 107.5° | 5.5 |
| 110° | 19.1 |
| 112.5° | 12.3 |
| 115° | 1.4 |
| 117.5° | 5.5 |
| 120° | 27.4 |
| 122.5° | 19.1 |
| 125° | 19.1 |
| 127.5° | 31.4 |
| 130° | 31.4 |
| 132.5° | 35.5 |
| 135° | 20.5 |
| 137.5° | 27.4 |
| 140° | 34.2 |
| 142.5° | 45.2 |
| 145° | 51.9 |
| 147.5° | 105.3 |
| 150° | 177.9 |
| 152.5° | 298.2 |
| 155° | 579.9 |
| 157.5° | 986.1 |
| 160° | 1467.5 |
| 162.5° | 1920.2 |
| 165° | 2342.9 |
| 167.5° | 2719.0 |
| 170° | 3025.4 |
| 172.5° | 3244.2 |
| 175° | 3420.7 |
| 175.5° | 3456.2 |
| 176° | 3480.8 |
| 176.5° | 3511.0 |
| 177° | 3553.3 |
| 177.5° | 3568.4 |
| 178° | 3601.2 |
| 178.5° | 3613.4 |
| 179° | 3632.7 |
| 179.5° | 3666.8 |
| 180° | 3653.2 |

(END OF REPORT)