

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: LUMIERE

Report Number: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)

Luminaire Tested: **203-SS-8LED2710-12-BK**

Issue Date: 3/3/2020

Test Information


Test Method: LM-79-08
Report Number: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (Pxxxxxx)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 203-SS-8LED2710-12-BK
Description: CAMBRIA 203 LED LUMINAIRE, 8 WATT, 2700K CCT, 10 DEGREE SPOT OPTIC,
REGRESSED HOOD BLACK
Light Source: (1) SORAA 2700K 95 CRI 10°NSP LED
SM16-07-10D-927-03
Ballast/Driver: CHROMA POWER SUPPLY IN0004

Summary

Lumens per Lamp:	N/A	NEMA Type:	2H x 2V
Luminaire Lumens:	271.1 lumens	Max Intensity:	5058.3 candela
Efficiency:	N/A	Max Intensity Angle:	0°H x 0°V
Efficacy:	33.9 lumens/watt		
Luminous Opening:	Circular (Dia: 0.17' x H: 0')		
Beam Angle (50%):	12.3°H x 12.3°V	Field Angle (10%):	19.2°H x 19.2°V
Beam Lumens:	136.3 lumens	Field Lumens:	202 lumens
Beam Efficiency:	50.3%	Field Efficiency:	74.5%
Input Watts (W):	8		
Input Voltage (V):	NR		
Input Current (A _{in}):	NR		
Voltage Rise (V):	NR		
Power Factor:	NR		
Total Harmonic Distortion (THDi):	NR		
Frequency (hertz):	60		
Stabilization Time:	NR		
Operation Time:	NR		
Ambient Temperature (°C):	NR		
Test Distance:	25 FT		

REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED2710-12-BK

Iso-Candela Plot

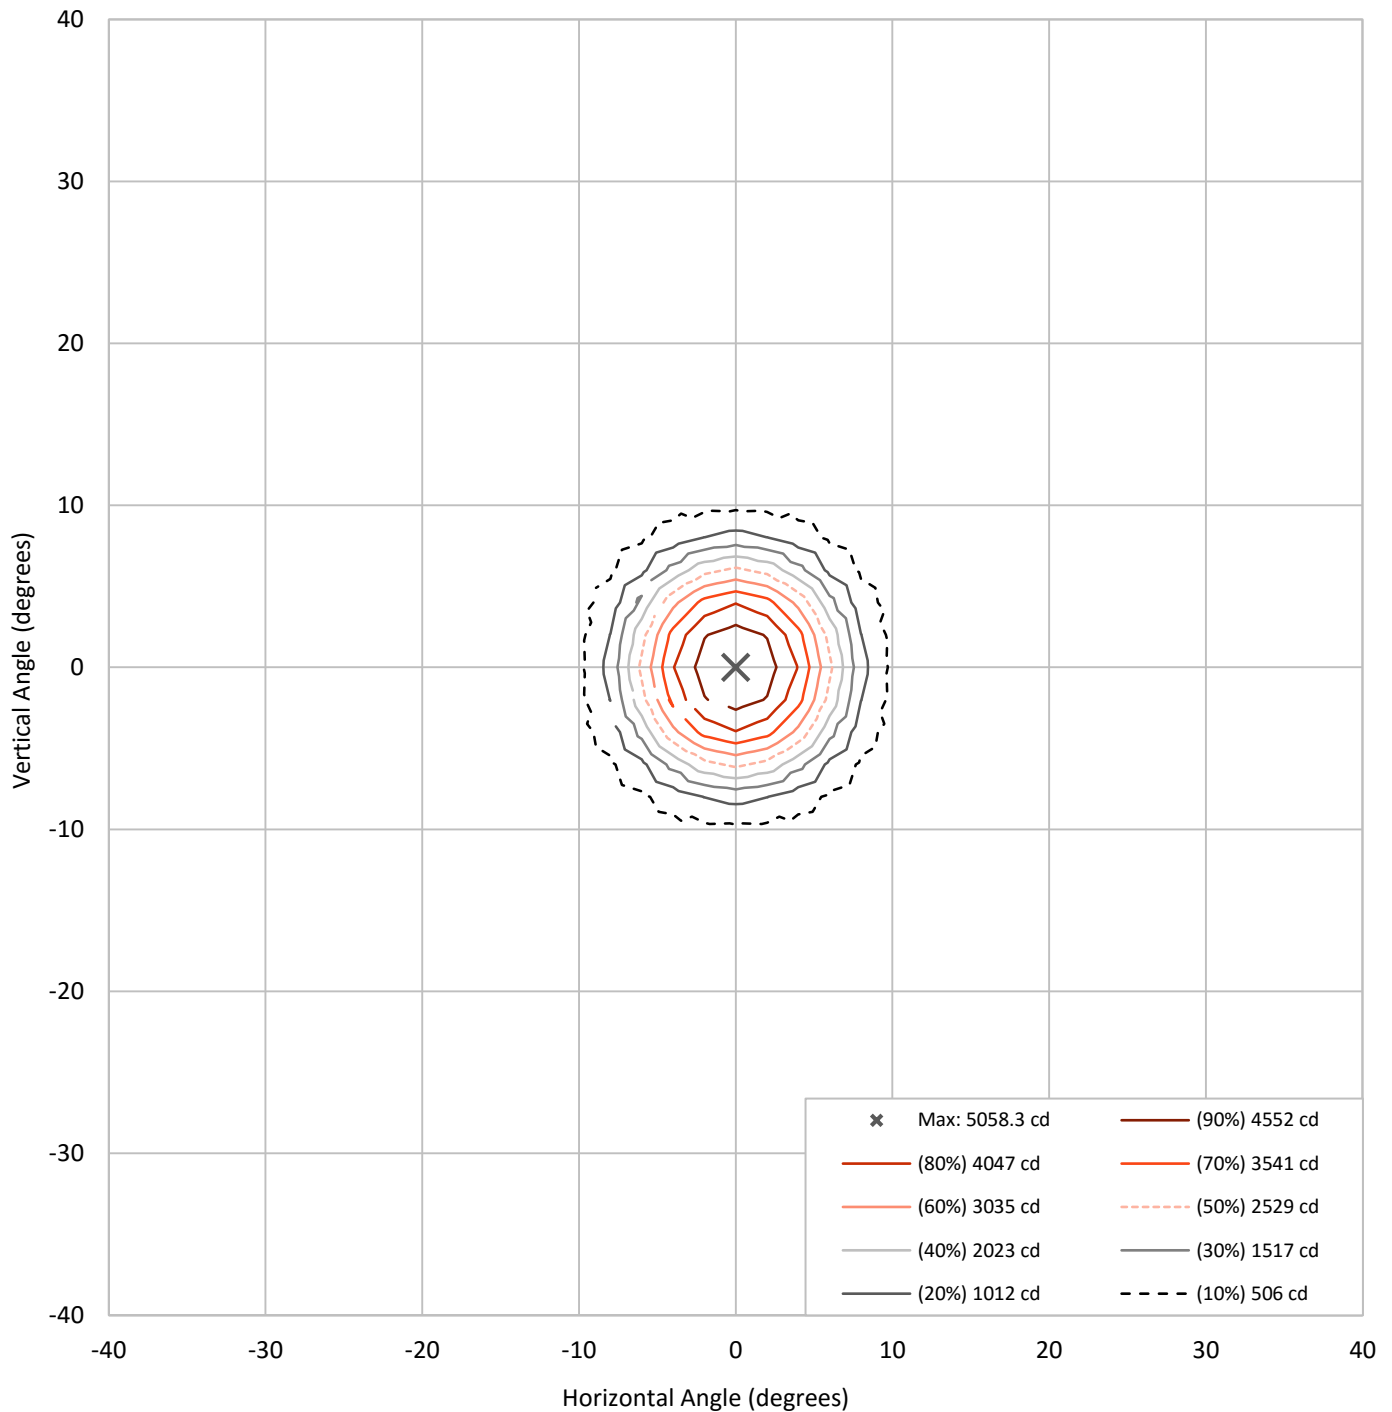


REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

Lumen Table

90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60		0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	
50	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.2	0.2	0.2	0.1	0.1	0.0	0.0	0.0	0.0
40		0.0	0.0	0.1	0.1	0.2	0.3	0.4	0.4	0.3	0.2	0.1	0.1	0.0	0.0	
30	0.0	0.0	0.0	0.1	0.2	0.4	0.5	0.8	0.8	0.5	0.4	0.2	0.1	0.0	0.0	0.0
20		0.0	0.0	0.1	0.3	0.5	1.4	3.6	3.6	1.4	0.5	0.3	0.1	0.0	0.0	
10	0.0	0.0	0.0	0.1	0.3	0.7	3.5	53.2	53.2	3.5	0.7	0.3	0.1	0.0	0.0	0.0
0		0.0	0.0	0.1	0.3	0.7	3.5	53.2	53.2	3.5	0.7	0.3	0.1	0.0	0.0	
-10	0.0	0.0	0.0	0.1	0.3	0.5	1.4	3.6	3.6	1.4	0.5	0.3	0.1	0.0	0.0	0.0
-20		0.0	0.0	0.1	0.2	0.4	0.5	0.8	0.8	0.5	0.4	0.2	0.1	0.0	0.0	
-30	0.0	0.0	0.0	0.1	0.1	0.2	0.3	0.4	0.4	0.3	0.2	0.1	0.1	0.0	0.0	0.0
-40		0.0	0.0	0.0	0.1	0.1	0.2	0.2	0.2	0.2	0.1	0.1	0.0	0.0	0.0	
-50	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0
-60		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
-70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED2710-12-BK

Luminous Intensity Polar Plot

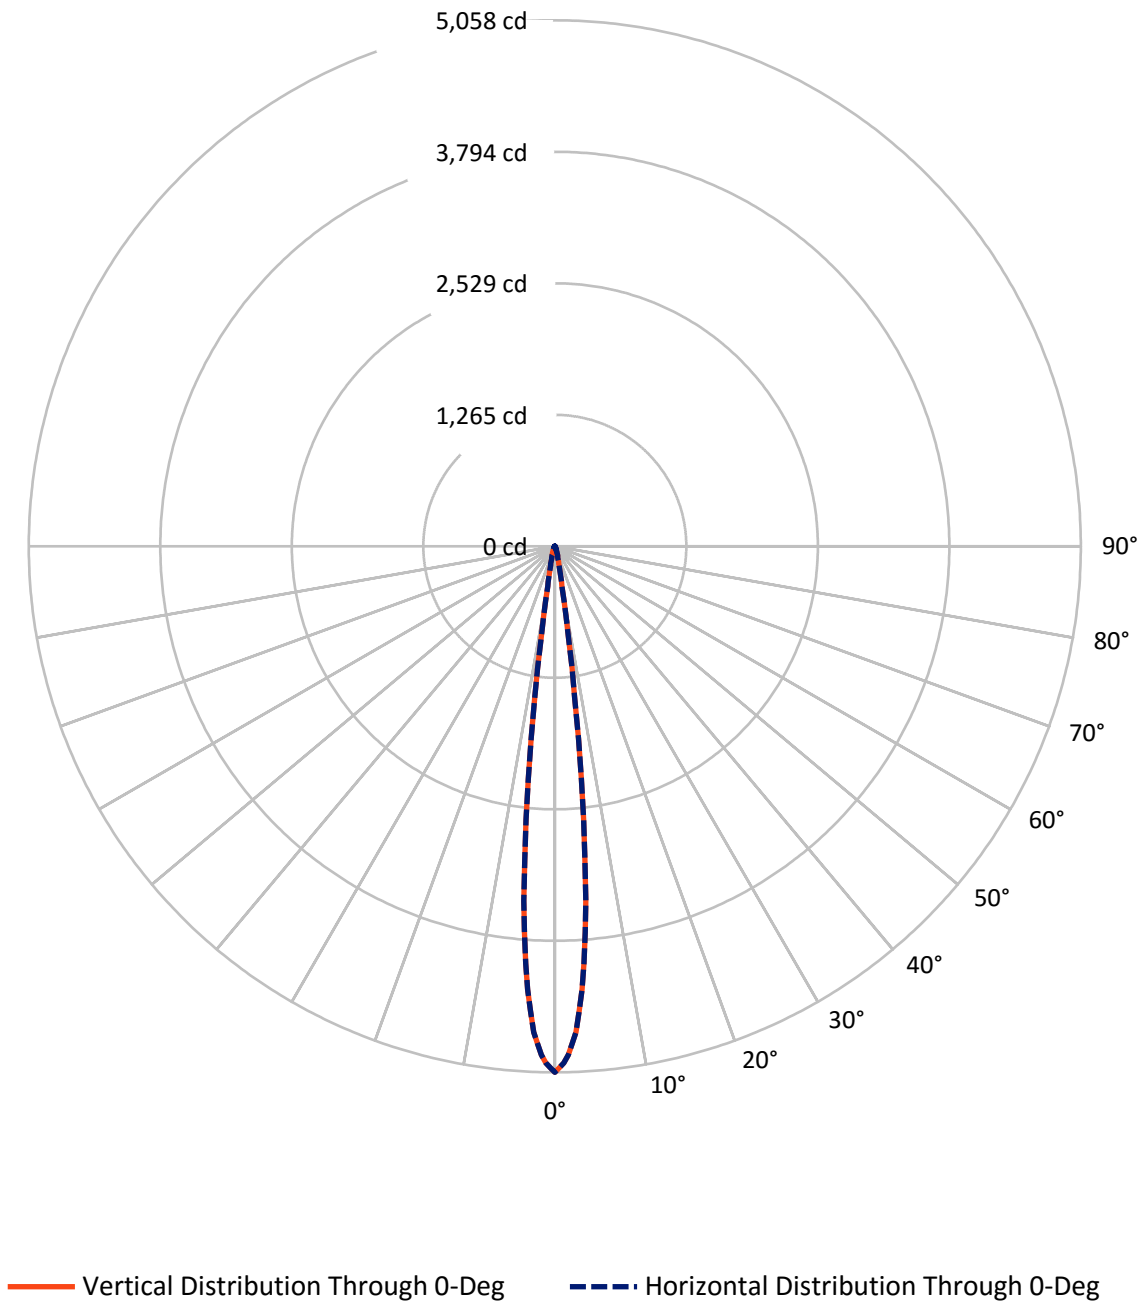

REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

Luminous Intensity Plot

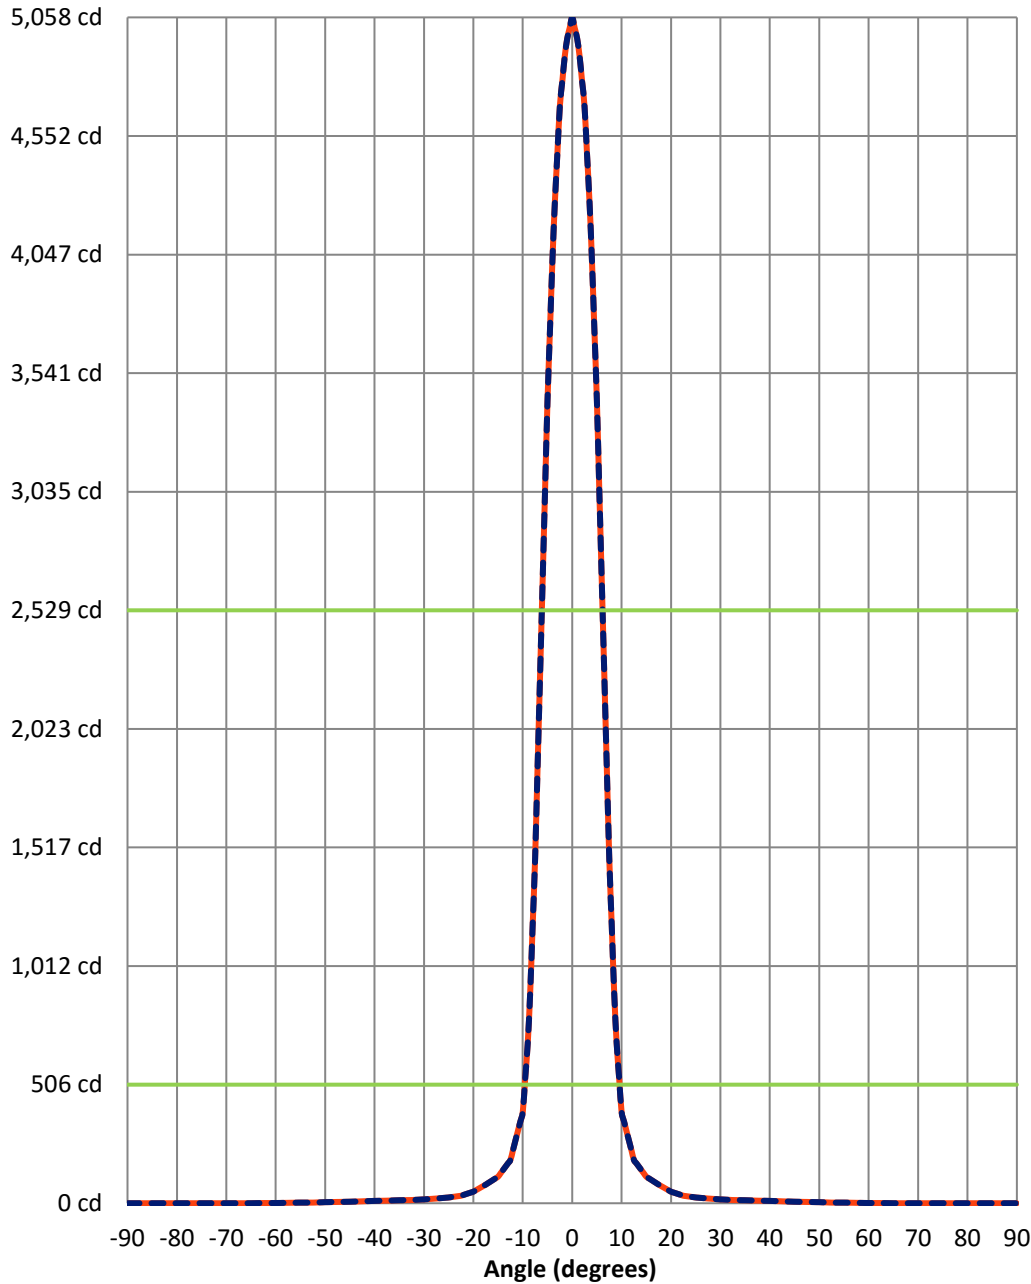

Beam:
 H Angle: 12.3°
 V Angle: 12.3°
 Lumens: 136.3
 Efficiency: 50.3%

Field:
 H Angle: 19.2°
 V Angle: 19.2°
 Lumens: 202
 Efficiency: 74.5%

Spill:
 Lumens: 69.1
 Efficiency: 25.5%

— Vertical Distribution through 0-Deg
 - - Horizontal Distribution through 0-Deg



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

FIELD
 BEAM

CANDELA DISTRIBUTION:

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
26.25°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
23.75°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
21.25°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
18.75°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
16.25°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
13.75°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
11.25°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
8.75°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
6.25°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
3.75°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
1.25°	0	0	0	0	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0	0	0	0	0
-1.25°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-3.75°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-6.25°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-8.75°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-11.25°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-13.75°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-16.25°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-18.75°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0
-21.25°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-23.75°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-26.25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
26.25°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
23.75°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
21.25°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
18.75°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
16.25°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
13.75°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
11.25°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
8.75°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
6.25°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
3.75°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
1.25°	0	0	0	0	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0	0	0	0	0
-1.25°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-3.75°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-6.25°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-8.75°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-11.25°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-13.75°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-16.25°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-18.75°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0
-21.25°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-23.75°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-26.25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	1
45°	0	0	0	0	0	0	0	0	0	0	1
43.75°	0	0	0	0	0	0	0	0	0	1	1
42.5°	0	0	0	0	0	0	0	0	1	1	1
41.25°	0	0	0	0	0	0	0	1	1	1	1
40°	0	0	0	0	0	0	0	1	1	1	1
38.75°	0	0	0	0	0	0	1	1	1	1	1
37.5°	0	0	0	0	0	0	1	1	1	1	1
36.25°	0	0	0	0	0	1	1	1	1	1	1
35°	0	0	0	0	0	1	1	1	1	1	2



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
33.75°	0	0	0	0	1	1	1	1	1	1	2
32.5°	0	0	0	0	1	1	1	1	1	2	2
31.25°	0	0	0	0	1	1	1	1	1	2	2
30°	0	0	0	1	1	1	1	1	2	2	2
28.75°	0	0	0	1	1	1	1	1	2	2	2
27.5°	0	0	0	1	1	1	1	1	2	2	3
26.25°	0	0	1	1	1	1	1	2	2	2	3
25°	0	0	1	1	1	1	1	2	2	3	3
23.75°	0	0	1	1	1	1	2	2	2	3	3
22.5°	0	0	1	1	1	1	2	2	2	3	3
21.25°	0	1	1	1	1	1	2	2	3	3	3
20°	0	1	1	1	1	1	2	2	3	3	3
18.75°	0	1	1	1	1	2	2	2	3	3	3
17.5°	0	1	1	1	1	2	2	2	3	3	3
16.25°	0	1	1	1	1	2	2	3	3	3	3
15°	1	1	1	1	1	2	2	3	3	3	3
13.75°	1	1	1	1	1	2	2	3	3	3	4
12.5°	1	1	1	1	1	2	2	3	3	3	4
11.25°	1	1	1	1	2	2	2	3	3	3	4
10°	1	1	1	1	2	2	2	3	3	3	4
8.75°	1	1	1	1	2	2	3	3	3	3	4
7.5°	1	1	1	1	2	2	3	3	3	3	4
6.25°	1	1	1	1	2	2	3	3	3	3	4
5°	1	1	1	1	2	2	3	3	3	4	4
3.75°	1	1	1	1	2	2	3	3	3	4	5
2.5°	1	1	1	1	2	2	3	3	3	4	5
1.25°	1	1	1	1	2	2	3	3	3	4	5
0°	1	1	1	1	2	2	3	3	3	4	5
-1.25°	1	1	1	1	2	2	3	3	3	4	5
-2.5°	1	1	1	1	2	2	3	3	3	4	5
-3.75°	1	1	1	1	2	2	3	3	3	4	5
-5°	1	1	1	1	2	2	3	3	3	4	4
-6.25°	1	1	1	1	2	2	3	3	3	3	4
-7.5°	1	1	1	1	2	2	3	3	3	3	4
-8.75°	1	1	1	1	2	2	3	3	3	3	4
-10°	1	1	1	1	2	2	2	3	3	3	4
-11.25°	1	1	1	1	2	2	2	3	3	3	4
-12.5°	1	1	1	1	1	2	2	3	3	3	4
-13.75°	1	1	1	1	1	2	2	3	3	3	4
-15°	1	1	1	1	1	2	2	3	3	3	3
-16.25°	0	1	1	1	1	2	2	3	3	3	3
-17.5°	0	1	1	1	1	2	2	2	3	3	3
-18.75°	0	1	1	1	1	2	2	2	3	3	3
-20°	0	1	1	1	1	1	2	2	3	3	3
-21.25°	0	1	1	1	1	1	2	2	3	3	3



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
-22.5°	0	0	1	1	1	1	2	2	2	3	3
-23.75°	0	0	1	1	1	1	2	2	2	3	3
-25°	0	0	1	1	1	1	1	2	2	3	3
-26.25°	0	0	1	1	1	1	1	2	2	2	3
-27.5°	0	0	0	1	1	1	1	1	2	2	3
-28.75°	0	0	0	1	1	1	1	1	2	2	2
-30°	0	0	0	1	1	1	1	1	2	2	2
-31.25°	0	0	0	0	1	1	1	1	1	2	2
-32.5°	0	0	0	0	1	1	1	1	1	2	2
-33.75°	0	0	0	0	1	1	1	1	1	1	2
-35°	0	0	0	0	0	1	1	1	1	1	2
-36.25°	0	0	0	0	0	1	1	1	1	1	1
-37.5°	0	0	0	0	0	0	1	1	1	1	1
-38.75°	0	0	0	0	0	0	1	1	1	1	1
-40°	0	0	0	0	0	0	0	1	1	1	1
-41.25°	0	0	0	0	0	0	0	1	1	1	1
-42.5°	0	0	0	0	0	0	0	0	1	1	1
-43.75°	0	0	0	0	0	0	0	0	0	1	1
-45°	0	0	0	0	0	0	0	0	0	0	1
-46.25°	0	0	0	0	0	0	0	0	0	0	1
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	1
55°	0	0	0	0	0	0	0	0	1	1	1
53.75°	0	0	0	0	0	0	1	1	1	1	1
52.5°	0	0	0	0	0	1	1	1	1	1	1
51.25°	0	0	0	0	1	1	1	1	1	1	1
50°	0	0	1	1	1	1	1	1	1	1	1
48.75°	0	1	1	1	1	1	1	1	1	1	2
47.5°	1	1	1	1	1	1	1	1	2	2	2
46.25°	1	1	1	1	1	1	1	2	2	2	2
45°	1	1	1	1	1	1	2	2	2	2	3
43.75°	1	1	1	1	1	2	2	2	2	3	3
42.5°	1	1	1	1	2	2	2	2	3	3	3
41.25°	1	1	1	2	2	2	2	3	3	3	3
40°	1	1	2	2	2	2	3	3	3	3	3
38.75°	1	2	2	2	2	3	3	3	3	3	4
37.5°	1	2	2	2	3	3	3	3	3	4	4
36.25°	2	2	2	3	3	3	3	3	4	4	5
35°	2	2	3	3	3	3	3	4	4	5	5



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
33.75°	2	2	3	3	3	3	4	4	5	5	5
32.5°	2	3	3	3	3	3	4	5	5	5	6
31.25°	2	3	3	3	3	4	5	5	5	6	6
30°	3	3	3	3	4	4	5	5	5	6	6
28.75°	3	3	3	3	4	5	5	5	6	6	6
27.5°	3	3	3	4	4	5	5	6	6	6	7
26.25°	3	3	3	4	5	5	5	6	6	7	7
25°	3	3	4	4	5	5	6	6	6	7	8
23.75°	3	3	4	5	5	5	6	6	7	8	8
22.5°	3	4	4	5	5	6	6	6	7	8	9
21.25°	3	4	5	5	5	6	6	7	8	8	9
20°	3	4	5	5	6	6	6	7	8	9	9
18.75°	4	4	5	5	6	6	7	7	8	9	10
17.5°	4	5	5	5	6	6	7	8	9	9	10
16.25°	4	5	5	6	6	6	7	8	9	10	10
15°	4	5	5	6	6	7	8	8	9	10	10
13.75°	4	5	5	6	6	7	8	9	9	10	11
12.5°	5	5	5	6	6	7	8	9	10	10	11
11.25°	5	5	6	6	6	7	8	9	10	10	11
10°	5	5	6	6	7	8	8	9	10	11	11
8.75°	5	5	6	6	7	8	9	9	10	11	11
7.5°	5	5	6	6	7	8	9	10	10	11	11
6.25°	5	5	6	6	7	8	9	10	10	11	12
5°	5	5	6	6	7	8	9	10	10	11	12
3.75°	5	5	6	6	7	8	9	10	10	11	12
2.5°	5	5	6	6	7	8	9	10	10	11	12
1.25°	5	5	6	6	7	8	9	10	10	11	12
0°	5	6	6	6	7	8	9	10	11	11	12
-1.25°	5	5	6	6	7	8	9	10	10	11	12
-2.5°	5	5	6	6	7	8	9	10	10	11	12
-3.75°	5	5	6	6	7	8	9	10	10	11	12
-5°	5	5	6	6	7	8	9	10	10	11	12
-6.25°	5	5	6	6	7	8	9	10	10	11	12
-7.5°	5	5	6	6	7	8	9	10	10	11	11
-8.75°	5	5	6	6	7	8	9	9	10	11	11
-10°	5	5	6	6	7	8	8	9	10	11	11
-11.25°	5	5	6	6	6	7	8	9	10	10	11
-12.5°	5	5	5	6	6	7	8	9	10	10	11
-13.75°	4	5	5	6	6	7	8	9	9	10	11
-15°	4	5	5	6	6	7	8	8	9	10	10
-16.25°	4	5	5	6	6	6	7	8	9	10	10
-17.5°	4	5	5	5	6	6	7	8	9	9	10
-18.75°	4	4	5	5	6	6	7	7	8	9	10
-20°	3	4	5	5	6	6	6	7	8	9	9
-21.25°	3	4	5	5	5	6	6	7	8	8	9



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
-22.5°	3	4	4	5	5	6	6	6	7	8	9
-23.75°	3	3	4	5	5	5	6	6	7	8	8
-25°	3	3	4	4	5	5	6	6	6	7	8
-26.25°	3	3	3	4	5	5	5	6	6	7	7
-27.5°	3	3	3	4	4	5	5	6	6	6	7
-28.75°	3	3	3	3	4	5	5	5	6	6	6
-30°	3	3	3	3	4	4	5	5	5	6	6
-31.25°	2	3	3	3	3	4	5	5	5	6	6
-32.5°	2	3	3	3	3	3	4	5	5	5	6
-33.75°	2	2	3	3	3	3	4	4	5	5	5
-35°	2	2	3	3	3	3	3	4	4	5	5
-36.25°	2	2	2	3	3	3	3	3	4	4	5
-37.5°	1	2	2	2	3	3	3	3	3	4	4
-38.75°	1	2	2	2	2	3	3	3	3	3	4
-40°	1	1	2	2	2	2	3	3	3	3	3
-41.25°	1	1	1	2	2	2	2	3	3	3	3
-42.5°	1	1	1	1	2	2	2	2	3	3	3
-43.75°	1	1	1	1	1	2	2	2	2	3	3
-45°	1	1	1	1	1	1	2	2	2	2	3
-46.25°	1	1	1	1	1	1	1	2	2	2	2
-47.5°	1	1	1	1	1	1	1	1	2	2	2
-48.75°	0	1	1	1	1	1	1	1	1	1	2
-50°	0	0	1	1	1	1	1	1	1	1	1
-51.25°	0	0	0	0	1	1	1	1	1	1	1
-52.5°	0	0	0	0	0	1	1	1	1	1	1
-53.75°	0	0	0	0	0	0	1	1	1	1	1
-55°	0	0	0	0	0	0	0	0	1	1	1
-56.25°	0	0	0	0	0	0	0	0	0	0	1
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	1	1	1	1
58.75°	0	0	0	0	1	1	1	1	1	1	1
57.5°	0	1	1	1	1	1	1	1	1	1	1
56.25°	1	1	1	1	1	1	1	1	1	1	1
55°	1	1	1	1	1	1	1	1	1	2	2
53.75°	1	1	1	1	1	1	1	2	2	2	2
52.5°	1	1	1	1	2	2	2	2	2	2	2
51.25°	1	1	2	2	2	2	2	2	3	3	3
50°	2	2	2	2	2	2	3	3	3	3	3
48.75°	2	2	2	2	3	3	3	3	3	3	3
47.5°	2	2	3	3	3	3	3	3	3	3	4
46.25°	3	3	3	3	3	3	3	3	4	4	4
45°	3	3	3	3	3	3	4	4	4	5	5
43.75°	3	3	3	3	4	4	4	5	5	5	5
42.5°	3	3	3	4	4	5	5	5	5	5	6
41.25°	3	4	4	5	5	5	5	5	6	6	6
40°	4	4	5	5	5	5	6	6	6	6	6
38.75°	4	5	5	5	5	6	6	6	6	7	7
37.5°	5	5	5	6	6	6	6	7	7	8	8
36.25°	5	5	6	6	6	6	7	7	8	8	9
35°	5	6	6	6	7	7	8	8	9	9	9



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
33.75°	6	6	6	7	7	8	8	9	9	10	10
32.5°	6	6	7	7	8	8	9	9	10	10	10
31.25°	6	7	7	8	8	9	10	10	10	11	11
30°	7	7	8	8	9	10	10	10	11	11	11
28.75°	7	8	8	9	10	10	10	11	11	12	12
27.5°	8	8	9	10	10	10	11	11	12	12	13
26.25°	8	9	9	10	10	11	11	12	12	13	13
25°	9	9	10	10	11	11	12	12	13	13	13
23.75°	9	10	10	11	11	12	12	13	13	13	14
22.5°	9	10	10	11	11	12	13	13	13	14	15
21.25°	10	10	11	11	12	13	13	13	14	15	16
20°	10	11	11	12	12	13	13	14	15	16	17
18.75°	10	11	11	12	13	13	14	14	15	17	18
17.5°	11	11	12	13	13	13	14	15	16	18	19
16.25°	11	11	12	13	13	14	15	16	17	19	20
15°	11	12	12	13	13	14	15	16	18	20	21
13.75°	11	12	13	13	14	15	16	17	19	21	22
12.5°	11	12	13	13	14	15	16	18	20	22	24
11.25°	12	13	13	14	14	16	17	19	21	23	25
10°	12	13	13	14	15	16	18	19	21	23	26
8.75°	12	13	13	14	15	16	18	20	22	24	27
7.5°	12	13	13	14	15	17	19	21	23	25	29
6.25°	12	13	14	14	16	17	19	21	23	26	30
5°	13	13	14	15	16	18	19	22	24	27	30
3.75°	13	13	14	15	16	18	20	22	24	27	31
2.5°	13	13	14	15	16	18	20	22	24	28	32
1.25°	13	13	14	15	16	18	20	22	25	28	32
0°	13	13	14	15	16	18	20	22	25	28	32
-1.25°	13	13	14	15	16	18	20	22	25	28	32
-2.5°	13	13	14	15	16	18	20	22	24	28	32
-3.75°	13	13	14	15	16	18	20	22	24	27	31
-5°	13	13	14	15	16	18	19	22	24	27	30
-6.25°	12	13	14	14	16	17	19	21	23	26	30
-7.5°	12	13	13	14	15	17	19	21	23	25	29
-8.75°	12	13	13	14	15	16	18	20	22	24	27
-10°	12	13	13	14	15	16	18	19	21	23	26
-11.25°	12	13	13	14	14	16	17	19	21	23	25
-12.5°	11	12	13	13	14	15	16	18	20	22	24
-13.75°	11	12	13	13	14	15	16	17	19	21	22
-15°	11	12	12	13	13	14	15	16	18	20	21
-16.25°	11	11	12	13	13	14	15	16	17	19	20
-17.5°	11	11	12	13	13	13	14	15	16	18	19
-18.75°	10	11	11	12	13	13	14	14	15	17	18
-20°	10	11	11	12	12	13	13	14	15	16	17
-21.25°	10	10	11	11	12	13	13	13	14	15	16



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
-22.5°	9	10	10	11	11	12	13	13	13	14	15
-23.75°	9	10	10	11	11	12	12	13	13	13	14
-25°	9	9	10	10	11	11	12	12	13	13	13
-26.25°	8	9	9	10	10	11	11	12	12	13	13
-27.5°	8	8	9	10	10	10	11	11	12	12	13
-28.75°	7	8	8	9	10	10	10	11	11	12	12
-30°	7	7	8	8	9	10	10	10	11	11	11
-31.25°	6	7	7	8	8	9	10	10	10	11	11
-32.5°	6	6	7	7	8	8	9	9	10	10	10
-33.75°	6	6	6	7	7	8	8	9	9	10	10
-35°	5	6	6	6	7	7	8	8	9	9	9
-36.25°	5	5	6	6	6	6	7	7	8	8	9
-37.5°	5	5	5	6	6	6	6	7	7	8	8
-38.75°	4	5	5	5	5	6	6	6	6	7	7
-40°	4	4	5	5	5	5	6	6	6	6	6
-41.25°	3	4	4	5	5	5	5	5	6	6	6
-42.5°	3	3	3	4	4	5	5	5	5	5	6
-43.75°	3	3	3	3	4	4	4	5	5	5	5
-45°	3	3	3	3	3	3	4	4	4	5	5
-46.25°	3	3	3	3	3	3	3	3	4	4	4
-47.5°	2	2	3	3	3	3	3	3	3	3	4
-48.75°	2	2	2	2	3	3	3	3	3	3	3
-50°	2	2	2	2	2	2	3	3	3	3	3
-51.25°	1	1	2	2	2	2	2	2	3	3	3
-52.5°	1	1	1	1	2	2	2	2	2	2	2
-53.75°	1	1	1	1	1	1	1	2	2	2	2
-55°	1	1	1	1	1	1	1	1	1	2	2
-56.25°	1	1	1	1	1	1	1	1	1	1	1
-57.5°	0	1	1	1	1	1	1	1	1	1	1
-58.75°	0	0	0	0	1	1	1	1	1	1	1
-60°	0	0	0	0	0	0	0	1	1	1	1
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	1	1	1	1	1	1
61.25°	1	1	1	1	1	1	1	1	1	1	1
60°	1	1	1	1	1	1	1	1	1	1	1
58.75°	1	1	1	1	1	1	1	1	1	1	1
57.5°	1	1	1	1	1	1	1	1	2	2	2
56.25°	1	1	2	2	2	2	2	2	2	2	2
55°	2	2	2	2	2	2	2	2	2	2	3
53.75°	2	2	2	2	3	3	3	3	3	3	3
52.5°	3	3	3	3	3	3	3	3	3	3	3
51.25°	3	3	3	3	3	3	3	3	3	3	3
50°	3	3	3	3	3	3	4	4	4	4	4
48.75°	3	3	4	4	4	4	4	5	5	5	5
47.5°	4	4	4	5	5	5	5	5	5	5	5
46.25°	5	5	5	5	5	5	5	5	6	6	6
45°	5	5	5	5	6	6	6	6	6	6	6
43.75°	5	6	6	6	6	6	6	6	6	7	7
42.5°	6	6	6	6	6	7	7	7	7	8	8
41.25°	6	6	7	7	7	8	8	8	8	8	9
40°	7	7	7	8	8	8	9	9	9	9	9
38.75°	8	8	8	9	9	9	9	10	10	10	10
37.5°	8	9	9	9	10	10	10	10	10	11	11
36.25°	9	9	10	10	10	10	11	11	11	11	11
35°	10	10	10	11	11	11	11	11	12	12	12



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
33.75°	10	11	11	11	11	12	12	12	13	13	13
32.5°	11	11	11	12	12	12	13	13	13	13	13
31.25°	11	12	12	13	13	13	13	13	14	14	14
30°	12	12	13	13	13	13	14	14	14	15	15
28.75°	13	13	13	13	14	14	15	15	16	16	16
27.5°	13	13	14	14	15	15	16	16	17	18	18
26.25°	13	14	14	15	16	16	17	18	19	19	20
25°	14	15	15	16	17	18	19	20	21	21	22
23.75°	15	16	17	18	19	20	21	22	23	23	24
22.5°	16	17	18	19	20	21	22	24	25	26	27
21.25°	17	18	19	21	22	23	24	26	28	29	31
20°	18	19	21	22	24	25	27	29	31	34	37
18.75°	19	21	22	24	26	28	30	33	37	41	45
17.5°	21	22	24	26	28	31	35	40	44	49	55
16.25°	22	24	26	28	31	36	41	47	53	61	69
15°	23	25	28	31	36	42	48	56	65	74	82
13.75°	24	27	30	35	41	48	57	67	77	87	96
12.5°	26	29	33	40	47	56	67	78	89	100	110
11.25°	28	31	37	44	53	65	77	89	102	113	135
10°	29	34	41	49	61	74	87	100	113	139	163
8.75°	31	37	45	55	69	82	96	110	135	163	197
7.5°	32	40	48	61	75	90	105	126	156	186	266
6.25°	35	43	53	67	81	97	112	143	174	244	328
5°	37	45	57	71	86	102	124	157	201	293	383
3.75°	38	47	60	75	91	107	135	169	237	334	509
2.5°	40	48	62	77	94	110	143	177	264	364	612
1.25°	40	49	64	79	96	113	147	183	281	383	713
0°	41	49	64	79	96	113	149	184	287	389	755
-1.25°	40	49	64	79	96	113	147	183	281	383	713
-2.5°	40	48	62	77	94	110	143	177	264	364	612
-3.75°	38	47	60	75	91	107	135	169	237	334	509
-5°	37	45	57	71	86	102	124	157	201	293	383
-6.25°	35	43	53	67	81	97	112	143	174	244	328
-7.5°	32	40	48	61	75	90	105	126	156	186	266
-8.75°	31	37	45	55	69	82	96	110	135	163	197
-10°	29	34	41	49	61	74	87	100	113	139	163
-11.25°	28	31	37	44	53	65	77	89	102	113	135
-12.5°	26	29	33	40	47	56	67	78	89	100	110
-13.75°	24	27	30	35	41	48	57	67	77	87	96
-15°	23	25	28	31	36	42	48	56	65	74	82
-16.25°	22	24	26	28	31	36	41	47	53	61	69
-17.5°	21	22	24	26	28	31	35	40	44	49	55
-18.75°	19	21	22	24	26	28	30	33	37	41	45
-20°	18	19	21	22	24	25	27	29	31	34	37
-21.25°	17	18	19	21	22	23	24	26	28	29	31



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
-22.5°	16	17	18	19	20	21	22	24	25	26	27
-23.75°	15	16	17	18	19	20	21	22	23	23	24
-25°	14	15	15	16	17	18	19	20	21	21	22
-26.25°	13	14	14	15	16	16	17	18	19	19	20
-27.5°	13	13	14	14	15	15	16	16	17	18	18
-28.75°	13	13	13	13	14	14	15	15	16	16	16
-30°	12	12	13	13	13	13	14	14	14	15	15
-31.25°	11	12	12	13	13	13	13	13	14	14	14
-32.5°	11	11	11	12	12	12	13	13	13	13	13
-33.75°	10	11	11	11	11	12	12	12	13	13	13
-35°	10	10	10	11	11	11	11	11	12	12	12
-36.25°	9	9	10	10	10	10	11	11	11	11	11
-37.5°	8	9	9	9	10	10	10	10	10	11	11
-38.75°	8	8	8	9	9	9	9	10	10	10	10
-40°	7	7	7	8	8	8	9	9	9	9	9
-41.25°	6	6	7	7	7	8	8	8	8	8	9
-42.5°	6	6	6	6	6	7	7	7	7	8	8
-43.75°	5	6	6	6	6	6	6	6	6	7	7
-45°	5	5	5	5	6	6	6	6	6	6	6
-46.25°	5	5	5	5	5	5	5	5	6	6	6
-47.5°	4	4	4	5	5	5	5	5	5	5	5
-48.75°	3	3	4	4	4	4	4	5	5	5	5
-50°	3	3	3	3	3	3	4	4	4	4	4
-51.25°	3	3	3	3	3	3	3	3	3	3	3
-52.5°	3	3	3	3	3	3	3	3	3	3	3
-53.75°	2	2	2	2	3	3	3	3	3	3	3
-55°	2	2	2	2	2	2	2	2	2	2	3
-56.25°	1	1	2	2	2	2	2	2	2	2	2
-57.5°	1	1	1	1	1	1	1	1	2	2	2
-58.75°	1	1	1	1	1	1	1	1	1	1	1
-60°	1	1	1	1	1	1	1	1	1	1	1
-61.25°	1	1	1	1	1	1	1	1	1	1	1
-62.5°	0	0	0	0	0	1	1	1	1	1	1
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	1	1	1	1	1	1	1	1	1	1	1
61.25°	1	1	1	1	1	1	1	1	1	1	1
60°	1	1	1	1	1	1	1	1	1	1	1
58.75°	1	1	1	1	1	1	1	1	1	1	1
57.5°	2	2	2	2	2	2	2	2	2	2	2
56.25°	2	2	2	2	2	2	2	2	2	2	2
55°	3	3	3	3	3	3	3	3	3	3	3
53.75°	3	3	3	3	3	3	3	3	3	3	3
52.5°	3	3	3	3	3	3	3	3	3	3	3
51.25°	3	3	4	4	4	4	4	4	4	4	4
50°	4	4	4	5	5	5	5	5	5	5	4
48.75°	5	5	5	5	5	5	5	5	5	5	5
47.5°	5	5	5	5	5	5	6	5	5	5	5
46.25°	6	6	6	6	6	6	6	6	6	6	6
45°	6	6	6	6	6	6	6	6	6	6	6
43.75°	7	7	7	7	7	7	7	7	7	7	7
42.5°	8	8	8	8	8	8	8	8	8	8	8
41.25°	9	9	9	9	9	9	9	9	9	9	9
40°	10	10	10	10	10	10	10	10	10	10	10
38.75°	10	10	10	10	10	10	11	10	10	10	10
37.5°	11	11	11	11	11	11	11	11	11	11	11
36.25°	11	12	12	12	12	12	12	12	12	12	12
35°	12	12	13	13	13	13	13	13	13	13	13



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
33.75°	13	13	13	13	13	13	13	13	13	13	13
32.5°	13	14	14	14	14	14	14	14	14	14	14
31.25°	14	14	15	15	15	15	15	15	15	15	15
30°	15	16	16	16	16	16	16	16	16	16	16
28.75°	17	17	18	18	18	18	18	18	18	18	18
27.5°	19	19	19	20	20	20	20	20	20	20	19
26.25°	21	21	22	22	22	22	22	22	22	22	22
25°	23	23	24	24	24	25	25	25	24	24	24
23.75°	25	26	27	27	28	28	28	28	28	27	27
22.5°	29	30	30	31	32	32	32	32	32	31	30
21.25°	32	35	37	38	40	40	41	40	40	38	37
20°	40	43	45	47	48	49	49	49	48	47	45
18.75°	48	53	57	60	62	64	64	64	62	60	57
17.5°	61	67	71	75	77	79	79	79	77	75	71
16.25°	75	81	86	91	94	96	96	96	94	91	86
15°	90	97	102	107	110	113	113	113	110	107	102
13.75°	105	112	124	135	143	147	149	147	143	135	124
12.5°	126	143	157	169	177	183	184	183	177	169	157
11.25°	156	174	201	237	264	281	287	281	264	237	201
10°	186	244	293	334	364	383	389	383	364	334	293
8.75°	266	328	383	509	612	713	755	713	612	509	383
7.5°	341	450	635	931	1182	1399	1474	1399	1182	931	635
6.25°	450	717	1114	1630	2056	2347	2448	2347	2056	1630	1114
5°	635	1114	1788	2450	2968	3303	3422	3303	2968	2450	1788
3.75°	931	1630	2450	3190	3733	4074	4171	4074	3733	3190	2450
2.5°	1182	2056	2968	3733	4275	4592	4679	4592	4275	3733	2968
1.25°	1399	2347	3303	4074	4592	4863	4946	4863	4592	4074	3303
0°	1474	2448	3422	4171	4679	4946	5058	4946	4679	4171	3422
-1.25°	1399	2347	3303	4074	4592	4863	4946	4863	4592	4074	3303
-2.5°	1182	2056	2968	3733	4275	4592	4679	4592	4275	3733	2968
-3.75°	931	1630	2450	3190	3733	4074	4171	4074	3733	3190	2450
-5°	635	1114	1788	2450	2968	3303	3422	3303	2968	2450	1788
-6.25°	450	717	1114	1630	2056	2347	2448	2347	2056	1630	1114
-7.5°	341	450	635	931	1182	1399	1474	1399	1182	931	635
-8.75°	266	328	383	509	612	713	755	713	612	509	383
-10°	186	244	293	334	364	383	389	383	364	334	293
-11.25°	156	174	201	237	264	281	287	281	264	237	201
-12.5°	126	143	157	169	177	183	184	183	177	169	157
-13.75°	105	112	124	135	143	147	149	147	143	135	124
-15°	90	97	102	107	110	113	113	113	110	107	102
-16.25°	75	81	86	91	94	96	96	96	94	91	86
-17.5°	61	67	71	75	77	79	79	79	77	75	71
-18.75°	48	53	57	60	62	64	64	64	62	60	57
-20°	40	43	45	47	48	49	49	49	48	47	45
-21.25°	32	35	37	38	40	40	41	40	40	38	37



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
-22.5°	29	30	30	31	32	32	32	32	32	31	30
-23.75°	25	26	27	27	28	28	28	28	28	27	27
-25°	23	23	24	24	24	25	25	25	24	24	24
-26.25°	21	21	22	22	22	22	22	22	22	22	22
-27.5°	19	19	19	20	20	20	20	20	20	20	19
-28.75°	17	17	18	18	18	18	18	18	18	18	18
-30°	15	16	16	16	16	16	16	16	16	16	16
-31.25°	14	14	15	15	15	15	15	15	15	15	15
-32.5°	13	14	14	14	14	14	14	14	14	14	14
-33.75°	13	13	13	13	13	13	13	13	13	13	13
-35°	12	12	13	13	13	13	13	13	13	13	13
-36.25°	11	12	12	12	12	12	12	12	12	12	12
-37.5°	11	11	11	11	11	11	11	11	11	11	11
-38.75°	10	10	10	10	10	10	11	10	10	10	10
-40°	10	10	10	10	10	10	10	10	10	10	10
-41.25°	9	9	9	9	9	9	9	9	9	9	9
-42.5°	8	8	8	8	8	8	8	8	8	8	8
-43.75°	7	7	7	7	7	7	7	7	7	7	7
-45°	6	6	6	6	6	6	6	6	6	6	6
-46.25°	6	6	6	6	6	6	6	6	6	6	6
-47.5°	5	5	5	5	5	5	6	5	5	5	5
-48.75°	5	5	5	5	5	5	5	5	5	5	5
-50°	4	4	4	5	5	5	5	5	5	5	4
-51.25°	3	3	4	4	4	4	4	4	4	4	4
-52.5°	3	3	3	3	3	3	3	3	3	3	3
-53.75°	3	3	3	3	3	3	3	3	3	3	3
-55°	3	3	3	3	3	3	3	3	3	3	3
-56.25°	2	2	2	2	2	2	2	2	2	2	2
-57.5°	2	2	2	2	2	2	2	2	2	2	2
-58.75°	1	1	1	1	1	1	1	1	1	1	1
-60°	1	1	1	1	1	1	1	1	1	1	1
-61.25°	1	1	1	1	1	1	1	1	1	1	1
-62.5°	1	1	1	1	1	1	1	1	1	1	1
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	1	1	1	1	1	1	1	1	0	0	0
61.25°	1	1	1	1	1	1	1	1	1	1	1
60°	1	1	1	1	1	1	1	1	1	1	1
58.75°	1	1	1	1	1	1	1	1	1	1	1
57.5°	2	2	2	2	2	1	1	1	1	1	1
56.25°	2	2	2	2	2	2	2	2	2	2	2
55°	3	3	3	2	2	2	2	2	2	2	2
53.75°	3	3	3	3	3	3	3	3	3	2	2
52.5°	3	3	3	3	3	3	3	3	3	3	3
51.25°	3	3	3	3	3	3	3	3	3	3	3
50°	4	4	4	4	4	4	4	3	3	3	3
48.75°	5	5	5	5	5	5	4	4	4	4	4
47.5°	5	5	5	5	5	5	5	5	5	5	4
46.25°	6	6	6	6	6	5	5	5	5	5	5
45°	6	6	6	6	6	6	6	6	6	5	5
43.75°	7	7	7	7	6	6	6	6	6	6	6
42.5°	8	8	8	8	7	7	7	7	6	6	6
41.25°	9	9	9	8	8	8	8	8	7	7	7
40°	10	10	9	9	9	9	9	8	8	8	7
38.75°	10	10	10	10	10	10	9	9	9	9	8
37.5°	11	11	11	11	10	10	10	10	10	9	9
36.25°	12	11	11	11	11	11	11	10	10	10	10
35°	12	12	12	12	12	11	11	11	11	11	10



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
33.75°	13	13	13	13	13	12	12	12	11	11	11
32.5°	14	13	13	13	13	13	13	12	12	12	11
31.25°	14	14	14	14	14	13	13	13	13	13	12
30°	16	15	15	15	14	14	14	13	13	13	13
28.75°	17	17	16	16	16	15	15	14	14	13	13
27.5°	19	19	18	18	17	16	16	15	15	14	14
26.25°	21	21	20	19	19	18	17	16	16	15	14
25°	23	23	22	21	21	20	19	18	17	16	15
23.75°	26	25	24	23	23	22	21	20	19	18	17
22.5°	30	29	27	26	25	24	22	21	20	19	18
21.25°	35	32	31	29	28	26	24	23	22	21	19
20°	43	40	37	34	31	29	27	25	24	22	21
18.75°	53	48	45	41	37	33	30	28	26	24	22
17.5°	67	61	55	49	44	40	35	31	28	26	24
16.25°	81	75	69	61	53	47	41	36	31	28	26
15°	97	90	82	74	65	56	48	42	36	31	28
13.75°	112	105	96	87	77	67	57	48	41	35	30
12.5°	143	126	110	100	89	78	67	56	47	40	33
11.25°	174	156	135	113	102	89	77	65	53	44	37
10°	244	186	163	139	113	100	87	74	61	49	41
8.75°	328	266	197	163	135	110	96	82	69	55	45
7.5°	450	341	266	186	156	126	105	90	75	61	48
6.25°	717	450	328	244	174	143	112	97	81	67	53
5°	1114	635	383	293	201	157	124	102	86	71	57
3.75°	1630	931	509	334	237	169	135	107	91	75	60
2.5°	2056	1182	612	364	264	177	143	110	94	77	62
1.25°	2347	1399	713	383	281	183	147	113	96	79	64
0°	2448	1474	755	389	287	184	149	113	96	79	64
-1.25°	2347	1399	713	383	281	183	147	113	96	79	64
-2.5°	2056	1182	612	364	264	177	143	110	94	77	62
-3.75°	1630	931	509	334	237	169	135	107	91	75	60
-5°	1114	635	383	293	201	157	124	102	86	71	57
-6.25°	717	450	328	244	174	143	112	97	81	67	53
-7.5°	450	341	266	186	156	126	105	90	75	61	48
-8.75°	328	266	197	163	135	110	96	82	69	55	45
-10°	244	186	163	139	113	100	87	74	61	49	41
-11.25°	174	156	135	113	102	89	77	65	53	44	37
-12.5°	143	126	110	100	89	78	67	56	47	40	33
-13.75°	112	105	96	87	77	67	57	48	41	35	30
-15°	97	90	82	74	65	56	48	42	36	31	28
-16.25°	81	75	69	61	53	47	41	36	31	28	26
-17.5°	67	61	55	49	44	40	35	31	28	26	24
-18.75°	53	48	45	41	37	33	30	28	26	24	22
-20°	43	40	37	34	31	29	27	25	24	22	21
-21.25°	35	32	31	29	28	26	24	23	22	21	19



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
-22.5°	30	29	27	26	25	24	22	21	20	19	18
-23.75°	26	25	24	23	23	22	21	20	19	18	17
-25°	23	23	22	21	21	20	19	18	17	16	15
-26.25°	21	21	20	19	19	18	17	16	16	15	14
-27.5°	19	19	18	18	17	16	16	15	15	14	14
-28.75°	17	17	16	16	16	15	15	14	14	13	13
-30°	16	15	15	15	14	14	14	13	13	13	13
-31.25°	14	14	14	14	14	13	13	13	13	13	12
-32.5°	14	13	13	13	13	13	13	12	12	12	11
-33.75°	13	13	13	13	13	12	12	12	11	11	11
-35°	12	12	12	12	12	11	11	11	11	11	10
-36.25°	12	11	11	11	11	11	11	10	10	10	10
-37.5°	11	11	11	11	10	10	10	10	10	9	9
-38.75°	10	10	10	10	10	10	9	9	9	9	8
-40°	10	10	9	9	9	9	9	8	8	8	7
-41.25°	9	9	9	8	8	8	8	8	7	7	7
-42.5°	8	8	8	8	7	7	7	7	6	6	6
-43.75°	7	7	7	7	6	6	6	6	6	6	6
-45°	6	6	6	6	6	6	6	6	6	5	5
-46.25°	6	6	6	6	6	5	5	5	5	5	5
-47.5°	5	5	5	5	5	5	5	5	5	5	4
-48.75°	5	5	5	5	5	5	4	4	4	4	4
-50°	4	4	4	4	4	4	4	3	3	3	3
-51.25°	3	3	3	3	3	3	3	3	3	3	3
-52.5°	3	3	3	3	3	3	3	3	3	3	3
-53.75°	3	3	3	3	3	3	3	3	3	2	2
-55°	3	3	3	2	2	2	2	2	2	2	2
-56.25°	2	2	2	2	2	2	2	2	2	2	2
-57.5°	2	2	2	2	2	1	1	1	1	1	1
-58.75°	1	1	1	1	1	1	1	1	1	1	1
-60°	1	1	1	1	1	1	1	1	1	1	1
-61.25°	1	1	1	1	1	1	1	1	1	1	1
-62.5°	1	1	1	1	1	1	1	1	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	1	1	0	0	0	0	0	0	0	0	0
60°	1	1	1	1	1	1	0	0	0	0	0
58.75°	1	1	1	1	1	1	1	1	1	0	0
57.5°	1	1	1	1	1	1	1	1	1	1	1
56.25°	1	1	1	1	1	1	1	1	1	1	1
55°	2	2	2	2	1	1	1	1	1	1	1
53.75°	2	2	2	2	2	2	1	1	1	1	1
52.5°	3	3	2	2	2	2	2	2	2	1	1
51.25°	3	3	3	3	3	2	2	2	2	2	2
50°	3	3	3	3	3	3	3	2	2	2	2
48.75°	3	3	3	3	3	3	3	3	3	2	2
47.5°	4	4	4	3	3	3	3	3	3	3	3
46.25°	5	5	4	4	4	3	3	3	3	3	3
45°	5	5	5	5	4	4	4	3	3	3	3
43.75°	6	5	5	5	5	5	4	4	4	3	3
42.5°	6	6	6	5	5	5	5	5	4	4	3
41.25°	6	6	6	6	6	5	5	5	5	5	4
40°	7	7	6	6	6	6	6	5	5	5	5
38.75°	8	8	7	7	6	6	6	6	5	5	5
37.5°	9	8	8	8	7	7	6	6	6	6	5
36.25°	9	9	9	8	8	7	7	6	6	6	6
35°	10	10	9	9	9	8	8	7	7	6	6



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
33.75°	11	10	10	10	9	9	8	8	7	7	6
32.5°	11	11	10	10	10	9	9	8	8	7	7
31.25°	12	11	11	11	10	10	10	9	8	8	7
30°	12	12	11	11	11	10	10	10	9	8	8
28.75°	13	13	12	12	11	11	10	10	10	9	8
27.5°	13	13	13	12	12	11	11	10	10	10	9
26.25°	14	13	13	13	12	12	11	11	10	10	9
25°	15	14	13	13	13	12	12	11	11	10	10
23.75°	16	15	14	13	13	13	12	12	11	11	10
22.5°	17	16	15	14	13	13	13	12	11	11	10
21.25°	18	17	16	15	14	13	13	13	12	11	11
20°	19	18	17	16	15	14	13	13	12	12	11
18.75°	21	19	18	17	15	14	14	13	13	12	11
17.5°	22	21	19	18	16	15	14	13	13	13	12
16.25°	24	22	20	19	17	16	15	14	13	13	12
15°	25	23	21	20	18	16	15	14	13	13	12
13.75°	27	24	22	21	19	17	16	15	14	13	13
12.5°	29	26	24	22	20	18	16	15	14	13	13
11.25°	31	28	25	23	21	19	17	16	14	14	13
10°	34	29	26	23	21	19	18	16	15	14	13
8.75°	37	31	27	24	22	20	18	16	15	14	13
7.5°	40	32	29	25	23	21	19	17	15	14	13
6.25°	43	35	30	26	23	21	19	17	16	14	14
5°	45	37	30	27	24	22	19	18	16	15	14
3.75°	47	38	31	27	24	22	20	18	16	15	14
2.5°	48	40	32	28	24	22	20	18	16	15	14
1.25°	49	40	32	28	25	22	20	18	16	15	14
0°	49	41	32	28	25	22	20	18	16	15	14
-1.25°	49	40	32	28	25	22	20	18	16	15	14
-2.5°	48	40	32	28	24	22	20	18	16	15	14
-3.75°	47	38	31	27	24	22	20	18	16	15	14
-5°	45	37	30	27	24	22	19	18	16	15	14
-6.25°	43	35	30	26	23	21	19	17	16	14	14
-7.5°	40	32	29	25	23	21	19	17	15	14	13
-8.75°	37	31	27	24	22	20	18	16	15	14	13
-10°	34	29	26	23	21	19	18	16	15	14	13
-11.25°	31	28	25	23	21	19	17	16	14	14	13
-12.5°	29	26	24	22	20	18	16	15	14	13	13
-13.75°	27	24	22	21	19	17	16	15	14	13	13
-15°	25	23	21	20	18	16	15	14	13	13	12
-16.25°	24	22	20	19	17	16	15	14	13	13	12
-17.5°	22	21	19	18	16	15	14	13	13	13	12
-18.75°	21	19	18	17	15	14	14	13	13	12	11
-20°	19	18	17	16	15	14	13	13	12	12	11
-21.25°	18	17	16	15	14	13	13	13	12	11	11



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
-22.5°	17	16	15	14	13	13	13	12	11	11	10
-23.75°	16	15	14	13	13	13	12	12	11	11	10
-25°	15	14	13	13	13	12	12	11	11	10	10
-26.25°	14	13	13	13	12	12	11	11	10	10	9
-27.5°	13	13	13	12	12	11	11	10	10	10	9
-28.75°	13	13	12	12	11	11	10	10	10	9	8
-30°	12	12	11	11	11	10	10	10	9	8	8
-31.25°	12	11	11	11	10	10	10	9	8	8	7
-32.5°	11	11	10	10	10	9	9	8	8	7	7
-33.75°	11	10	10	10	9	9	8	8	7	7	6
-35°	10	10	9	9	9	8	8	7	7	6	6
-36.25°	9	9	9	8	8	7	7	6	6	6	6
-37.5°	9	8	8	8	7	7	6	6	6	6	5
-38.75°	8	8	7	7	6	6	6	6	5	5	5
-40°	7	7	6	6	6	6	6	5	5	5	5
-41.25°	6	6	6	6	6	5	5	5	5	5	4
-42.5°	6	6	6	5	5	5	5	5	4	4	3
-43.75°	6	5	5	5	5	5	4	4	4	3	3
-45°	5	5	5	5	4	4	4	3	3	3	3
-46.25°	5	5	4	4	4	3	3	3	3	3	3
-47.5°	4	4	4	3	3	3	3	3	3	3	3
-48.75°	3	3	3	3	3	3	3	3	3	2	2
-50°	3	3	3	3	3	3	3	2	2	2	2
-51.25°	3	3	3	3	3	2	2	2	2	2	2
-52.5°	3	3	2	2	2	2	2	2	2	1	1
-53.75°	2	2	2	2	2	2	1	1	1	1	1
-55°	2	2	2	2	1	1	1	1	1	1	1
-56.25°	1	1	1	1	1	1	1	1	1	1	1
-57.5°	1	1	1	1	1	1	1	1	1	1	1
-58.75°	1	1	1	1	1	1	1	1	1	0	0
-60°	1	1	1	1	1	1	0	0	0	0	0
-61.25°	1	1	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	1	0	0	0	0	0	0	0	0	0	0
56.25°	1	1	1	0	0	0	0	0	0	0	0
55°	1	1	1	1	1	0	0	0	0	0	0
53.75°	1	1	1	1	1	1	1	0	0	0	0
52.5°	1	1	1	1	1	1	1	1	0	0	0
51.25°	1	1	1	1	1	1	1	1	1	0	0
50°	2	2	1	1	1	1	1	1	1	1	1
48.75°	2	2	2	1	1	1	1	1	1	1	1
47.5°	2	2	2	2	2	1	1	1	1	1	1
46.25°	3	3	2	2	2	2	1	1	1	1	1
45°	3	3	3	2	2	2	2	1	1	1	1
43.75°	3	3	3	3	2	2	2	2	1	1	1
42.5°	3	3	3	3	3	2	2	2	2	1	1
41.25°	4	3	3	3	3	3	2	2	2	2	1
40°	4	4	3	3	3	3	3	2	2	2	2
38.75°	5	4	4	3	3	3	3	3	2	2	2
37.5°	5	5	4	4	3	3	3	3	3	2	2
36.25°	5	5	5	4	4	3	3	3	3	3	2
35°	6	5	5	5	4	4	3	3	3	3	3



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
33.75°	6	6	5	5	5	4	4	3	3	3	3
32.5°	6	6	6	5	5	5	4	3	3	3	3
31.25°	7	6	6	6	5	5	5	4	3	3	3
30°	7	7	6	6	5	5	5	4	4	3	3
28.75°	8	7	6	6	6	5	5	5	4	3	3
27.5°	8	8	7	6	6	6	5	5	4	4	3
26.25°	9	8	7	7	6	6	5	5	5	4	3
25°	9	9	8	7	6	6	6	5	5	4	4
23.75°	10	9	8	8	7	6	6	5	5	5	4
22.5°	10	9	9	8	7	6	6	6	5	5	4
21.25°	10	10	9	8	8	7	6	6	5	5	5
20°	11	10	9	9	8	7	6	6	6	5	5
18.75°	11	10	10	9	8	7	7	6	6	5	5
17.5°	11	11	10	9	9	8	7	6	6	5	5
16.25°	11	11	10	10	9	8	7	6	6	6	5
15°	12	11	10	10	9	8	8	7	6	6	5
13.75°	12	11	11	10	9	9	8	7	6	6	5
12.5°	12	11	11	10	10	9	8	7	6	6	5
11.25°	13	12	11	10	10	9	8	7	6	6	6
10°	13	12	11	11	10	9	8	8	7	6	6
8.75°	13	12	11	11	10	9	9	8	7	6	6
7.5°	13	12	11	11	10	10	9	8	7	6	6
6.25°	13	12	12	11	10	10	9	8	7	6	6
5°	13	13	12	11	10	10	9	8	7	6	6
3.75°	13	13	12	11	10	10	9	8	7	6	6
2.5°	13	13	12	11	10	10	9	8	7	6	6
1.25°	13	13	12	11	10	10	9	8	7	6	6
0°	13	13	12	11	10	10	9	8	7	6	6
-1.25°	13	13	12	11	10	10	9	8	7	6	6
-2.5°	13	13	12	11	10	10	9	8	7	6	6
-3.75°	13	13	12	11	10	10	9	8	7	6	6
-5°	13	13	12	11	10	10	9	8	7	6	6
-6.25°	13	12	12	11	10	10	9	8	7	6	6
-7.5°	13	12	11	11	10	10	9	8	7	6	6
-8.75°	13	12	11	11	10	9	9	8	7	6	6
-10°	13	12	11	11	10	9	8	8	7	6	6
-11.25°	13	12	11	10	10	9	8	7	6	6	6
-12.5°	12	11	11	10	10	9	8	7	6	6	5
-13.75°	12	11	11	10	9	9	8	7	6	6	5
-15°	12	11	10	10	9	8	8	7	6	6	5
-16.25°	11	11	10	10	9	8	7	6	6	6	5
-17.5°	11	11	10	9	9	8	7	6	6	5	5
-18.75°	11	10	10	9	8	7	7	6	6	5	5
-20°	11	10	9	9	8	7	6	6	6	5	5
-21.25°	10	10	9	8	8	7	6	6	5	5	5



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
-22.5°	10	9	9	8	7	6	6	6	5	5	4
-23.75°	10	9	8	8	7	6	6	5	5	5	4
-25°	9	9	8	7	6	6	6	5	5	4	4
-26.25°	9	8	7	7	6	6	5	5	5	4	3
-27.5°	8	8	7	6	6	6	5	5	4	4	3
-28.75°	8	7	6	6	6	5	5	5	4	3	3
-30°	7	7	6	6	5	5	5	4	4	3	3
-31.25°	7	6	6	6	5	5	5	4	3	3	3
-32.5°	6	6	6	5	5	5	4	3	3	3	3
-33.75°	6	6	5	5	5	4	4	3	3	3	3
-35°	6	5	5	5	4	4	3	3	3	3	3
-36.25°	5	5	5	4	4	3	3	3	3	3	2
-37.5°	5	5	4	4	3	3	3	3	3	2	2
-38.75°	5	4	4	3	3	3	3	3	2	2	2
-40°	4	4	3	3	3	3	3	2	2	2	2
-41.25°	4	3	3	3	3	3	2	2	2	2	1
-42.5°	3	3	3	3	3	2	2	2	2	1	1
-43.75°	3	3	3	3	2	2	2	2	1	1	1
-45°	3	3	3	2	2	2	2	1	1	1	1
-46.25°	3	3	2	2	2	2	1	1	1	1	1
-47.5°	2	2	2	2	2	1	1	1	1	1	1
-48.75°	2	2	2	1	1	1	1	1	1	1	1
-50°	2	2	1	1	1	1	1	1	1	1	1
-51.25°	1	1	1	1	1	1	1	1	1	0	0
-52.5°	1	1	1	1	1	1	1	1	0	0	0
-53.75°	1	1	1	1	1	1	1	0	0	0	0
-55°	1	1	1	1	1	0	0	0	0	0	0
-56.25°	1	1	1	0	0	0	0	0	0	0	0
-57.5°	1	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	1	0	0	0	0	0	0	0	0	0	0
47.5°	1	1	0	0	0	0	0	0	0	0	0
46.25°	1	1	1	0	0	0	0	0	0	0	0
45°	1	1	1	0	0	0	0	0	0	0	0
43.75°	1	1	1	1	0	0	0	0	0	0	0
42.5°	1	1	1	1	1	0	0	0	0	0	0
41.25°	1	1	1	1	1	1	0	0	0	0	0
40°	1	1	1	1	1	1	0	0	0	0	0
38.75°	2	1	1	1	1	1	1	0	0	0	0
37.5°	2	1	1	1	1	1	1	0	0	0	0
36.25°	2	2	1	1	1	1	1	1	0	0	0
35°	2	2	2	1	1	1	1	1	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
33.75°	2	2	2	1	1	1	1	1	1	0	0
32.5°	3	2	2	2	1	1	1	1	1	0	0
31.25°	3	2	2	2	1	1	1	1	1	0	0
30°	3	3	2	2	2	1	1	1	1	1	0
28.75°	3	3	2	2	2	1	1	1	1	1	0
27.5°	3	3	3	2	2	1	1	1	1	1	0
26.25°	3	3	3	2	2	2	1	1	1	1	1
25°	3	3	3	3	2	2	1	1	1	1	1
23.75°	3	3	3	3	2	2	2	1	1	1	1
22.5°	4	3	3	3	2	2	2	1	1	1	1
21.25°	4	3	3	3	3	2	2	1	1	1	1
20°	4	3	3	3	3	2	2	1	1	1	1
18.75°	4	4	3	3	3	2	2	2	1	1	1
17.5°	5	4	3	3	3	2	2	2	1	1	1
16.25°	5	4	3	3	3	3	2	2	1	1	1
15°	5	4	3	3	3	3	2	2	1	1	1
13.75°	5	4	4	3	3	3	2	2	1	1	1
12.5°	5	5	4	3	3	3	2	2	1	1	1
11.25°	5	5	4	3	3	3	2	2	2	1	1
10°	5	5	4	3	3	3	2	2	2	1	1
8.75°	5	5	4	3	3	3	3	2	2	1	1
7.5°	5	5	4	3	3	3	3	2	2	1	1
6.25°	5	5	4	3	3	3	3	2	2	1	1
5°	5	5	4	4	3	3	3	2	2	1	1
3.75°	5	5	5	4	3	3	3	2	2	1	1
2.5°	5	5	5	4	3	3	3	2	2	1	1
1.25°	5	5	5	4	3	3	3	2	2	1	1
0°	6	5	5	4	3	3	3	2	2	1	1
-1.25°	5	5	5	4	3	3	3	2	2	1	1
-2.5°	5	5	5	4	3	3	3	2	2	1	1
-3.75°	5	5	5	4	3	3	3	2	2	1	1
-5°	5	5	4	4	3	3	3	2	2	1	1
-6.25°	5	5	4	3	3	3	3	2	2	1	1
-7.5°	5	5	4	3	3	3	3	2	2	1	1
-8.75°	5	5	4	3	3	3	3	2	2	1	1
-10°	5	5	4	3	3	3	2	2	2	1	1
-11.25°	5	5	4	3	3	3	2	2	2	1	1
-12.5°	5	5	4	3	3	3	2	2	1	1	1
-13.75°	5	4	4	3	3	3	2	2	1	1	1
-15°	5	4	3	3	3	3	2	2	1	1	1
-16.25°	5	4	3	3	3	3	2	2	1	1	1
-17.5°	5	4	3	3	3	2	2	2	1	1	1
-18.75°	4	4	3	3	3	2	2	2	1	1	1
-20°	4	3	3	3	3	2	2	1	1	1	1
-21.25°	4	3	3	3	3	2	2	1	1	1	1



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
-22.5°	4	3	3	3	2	2	2	1	1	1	1
-23.75°	3	3	3	3	2	2	2	1	1	1	1
-25°	3	3	3	3	2	2	1	1	1	1	1
-26.25°	3	3	3	2	2	2	1	1	1	1	1
-27.5°	3	3	3	2	2	1	1	1	1	1	0
-28.75°	3	3	2	2	2	1	1	1	1	1	0
-30°	3	3	2	2	2	1	1	1	1	1	0
-31.25°	3	2	2	2	1	1	1	1	1	0	0
-32.5°	3	2	2	2	1	1	1	1	1	0	0
-33.75°	2	2	2	1	1	1	1	1	1	0	0
-35°	2	2	2	1	1	1	1	1	0	0	0
-36.25°	2	2	1	1	1	1	1	1	0	0	0
-37.5°	2	1	1	1	1	1	1	0	0	0	0
-38.75°	2	1	1	1	1	1	1	0	0	0	0
-40°	1	1	1	1	1	1	0	0	0	0	0
-41.25°	1	1	1	1	1	1	0	0	0	0	0
-42.5°	1	1	1	1	1	0	0	0	0	0	0
-43.75°	1	1	1	1	0	0	0	0	0	0	0
-45°	1	1	1	0	0	0	0	0	0	0	0
-46.25°	1	1	1	0	0	0	0	0	0	0	0
-47.5°	1	1	0	0	0	0	0	0	0	0	0
-48.75°	1	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
26.25°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
23.75°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
21.25°	1	0	0	0	0	0	0	0	0	0	0
20°	1	0	0	0	0	0	0	0	0	0	0
18.75°	1	0	0	0	0	0	0	0	0	0	0
17.5°	1	0	0	0	0	0	0	0	0	0	0
16.25°	1	0	0	0	0	0	0	0	0	0	0
15°	1	1	0	0	0	0	0	0	0	0	0
13.75°	1	1	0	0	0	0	0	0	0	0	0
12.5°	1	1	0	0	0	0	0	0	0	0	0
11.25°	1	1	0	0	0	0	0	0	0	0	0
10°	1	1	0	0	0	0	0	0	0	0	0
8.75°	1	1	0	0	0	0	0	0	0	0	0
7.5°	1	1	0	0	0	0	0	0	0	0	0
6.25°	1	1	0	0	0	0	0	0	0	0	0
5°	1	1	0	0	0	0	0	0	0	0	0
3.75°	1	1	0	0	0	0	0	0	0	0	0
2.5°	1	1	0	0	0	0	0	0	0	0	0
1.25°	1	1	0	0	0	0	0	0	0	0	0
0°	1	1	0	0	0	0	0	0	0	0	0
-1.25°	1	1	0	0	0	0	0	0	0	0	0
-2.5°	1	1	0	0	0	0	0	0	0	0	0
-3.75°	1	1	0	0	0	0	0	0	0	0	0
-5°	1	1	0	0	0	0	0	0	0	0	0
-6.25°	1	1	0	0	0	0	0	0	0	0	0
-7.5°	1	1	0	0	0	0	0	0	0	0	0
-8.75°	1	1	0	0	0	0	0	0	0	0	0
-10°	1	1	0	0	0	0	0	0	0	0	0
-11.25°	1	1	0	0	0	0	0	0	0	0	0
-12.5°	1	1	0	0	0	0	0	0	0	0	0
-13.75°	1	1	0	0	0	0	0	0	0	0	0
-15°	1	1	0	0	0	0	0	0	0	0	0
-16.25°	1	0	0	0	0	0	0	0	0	0	0
-17.5°	1	0	0	0	0	0	0	0	0	0	0
-18.75°	1	0	0	0	0	0	0	0	0	0	0
-20°	1	0	0	0	0	0	0	0	0	0	0
-21.25°	1	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-23.75°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-26.25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
26.25°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
23.75°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
21.25°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
18.75°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
16.25°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
13.75°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
11.25°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
8.75°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
6.25°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
3.75°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
1.25°	0	0	0	0	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0	0	0	0	0
-1.25°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-3.75°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-6.25°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-8.75°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-11.25°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-13.75°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-16.25°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-18.75°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0
-21.25°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-23.75°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-26.25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	88.75°	90°
90°	0	0
88.75°	0	0
87.5°	0	0
86.25°	0	0
85°	0	0
83.75°	0	0
82.5°	0	0
81.25°	0	0
80°	0	0
78.75°	0	0
77.5°	0	0
76.25°	0	0
75°	0	0
73.75°	0	0
72.5°	0	0
71.25°	0	0
70°	0	0
68.75°	0	0
67.5°	0	0
66.25°	0	0
65°	0	0
63.75°	0	0
62.5°	0	0
61.25°	0	0
60°	0	0
58.75°	0	0
57.5°	0	0
56.25°	0	0
55°	0	0
53.75°	0	0
52.5°	0	0
51.25°	0	0
50°	0	0
48.75°	0	0
47.5°	0	0
46.25°	0	0
45°	0	0
43.75°	0	0
42.5°	0	0
41.25°	0	0
40°	0	0
38.75°	0	0
37.5°	0	0
36.25°	0	0
35°	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	88.75°	90°
33.75°	0	0
32.5°	0	0
31.25°	0	0
30°	0	0
28.75°	0	0
27.5°	0	0
26.25°	0	0
25°	0	0
23.75°	0	0
22.5°	0	0
21.25°	0	0
20°	0	0
18.75°	0	0
17.5°	0	0
16.25°	0	0
15°	0	0
13.75°	0	0
12.5°	0	0
11.25°	0	0
10°	0	0
8.75°	0	0
7.5°	0	0
6.25°	0	0
5°	0	0
3.75°	0	0
2.5°	0	0
1.25°	0	0
0°	0	0
-1.25°	0	0
-2.5°	0	0
-3.75°	0	0
-5°	0	0
-6.25°	0	0
-7.5°	0	0
-8.75°	0	0
-10°	0	0
-11.25°	0	0
-12.5°	0	0
-13.75°	0	0
-15°	0	0
-16.25°	0	0
-17.5°	0	0
-18.75°	0	0
-20°	0	0
-21.25°	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	88.75°	90°
-22.5°	0	0
-23.75°	0	0
-25°	0	0
-26.25°	0	0
-27.5°	0	0
-28.75°	0	0
-30°	0	0
-31.25°	0	0
-32.5°	0	0
-33.75°	0	0
-35°	0	0
-36.25°	0	0
-37.5°	0	0
-38.75°	0	0
-40°	0	0
-41.25°	0	0
-42.5°	0	0
-43.75°	0	0
-45°	0	0
-46.25°	0	0
-47.5°	0	0
-48.75°	0	0
-50°	0	0
-51.25°	0	0
-52.5°	0	0
-53.75°	0	0
-55°	0	0
-56.25°	0	0
-57.5°	0	0
-58.75°	0	0
-60°	0	0
-61.25°	0	0
-62.5°	0	0
-63.75°	0	0
-65°	0	0
-66.25°	0	0
-67.5°	0	0
-68.75°	0	0
-70°	0	0
-71.25°	0	0
-72.5°	0	0
-73.75°	0	0
-75°	0	0
-76.25°	0	0
-77.5°	0	0



REPORT NUMBER: Pxxxxxx (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED2710-12-BK

CANDELA DISTRIBUTION (continued):

	88.75°	90°
-78.75°	0	0
-80°	0	0
-81.25°	0	0
-82.5°	0	0
-83.75°	0	0
-85°	0	0
-86.25°	0	0
-87.5°	0	0
-88.75°	0	0
-90°	0	0

(END OF REPORT)