

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: LUMIERE

Report Number: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)

Luminaire Tested: **203-SS-8LED3025-12-BK-DIFF**

Issue Date: 3/3/2020

Test Information


Test Method: LM-79-08
Report Number: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1802-569-28)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 203-SS-8LED3025-12-BK-DIFF
Description: CAMBRIA 203 LED LUMINAIRE, 8 WATT, 3000K CCT, 25 DEGREE NARROW OPTIC, REGRESSED HOOD BLACK, DIFFUSED LENS
Light Source: (1) SORAA 3000K 95 CRI 25°NFL LED
SM16-07-25D-930-03
Ballast/Driver: CHROMA POWER SUPPLY IN0004

Summary

Lumens per Lamp:	N/A	NEMA Type:	4H x 4V
Luminaire Lumens:	236.9 lumens	Max Intensity:	646.3 candela
Efficiency:	N/A	Max Intensity Angle:	0°H x 0°V
Efficacy:	30.0 lumens/watt		
Luminous Opening:	Circular (Dia: 0.17' x H: 0')		
Beam Angle (50%):	31°H x 31°V	Field Angle (10%):	62°H x 62°V
Beam Lumens:	104.6 lumens	Field Lumens:	210.1 lumens
Beam Efficiency:	44.1%	Field Efficiency:	88.7%
Input Watts (W):	7.9		
Input Voltage (V):	NR		
Input Current (A _{in}):	NR		
Voltage Rise (V):	NR		
Power Factor:	NR		
Total Harmonic Distortion (THDi):	NR		
Frequency (hertz):	60		
Stabilization Time:	NR		
Operation Time:	NR		
Ambient Temperature (°C):	NR		
Test Distance:	25 FT		

REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

Iso-Candela Plot

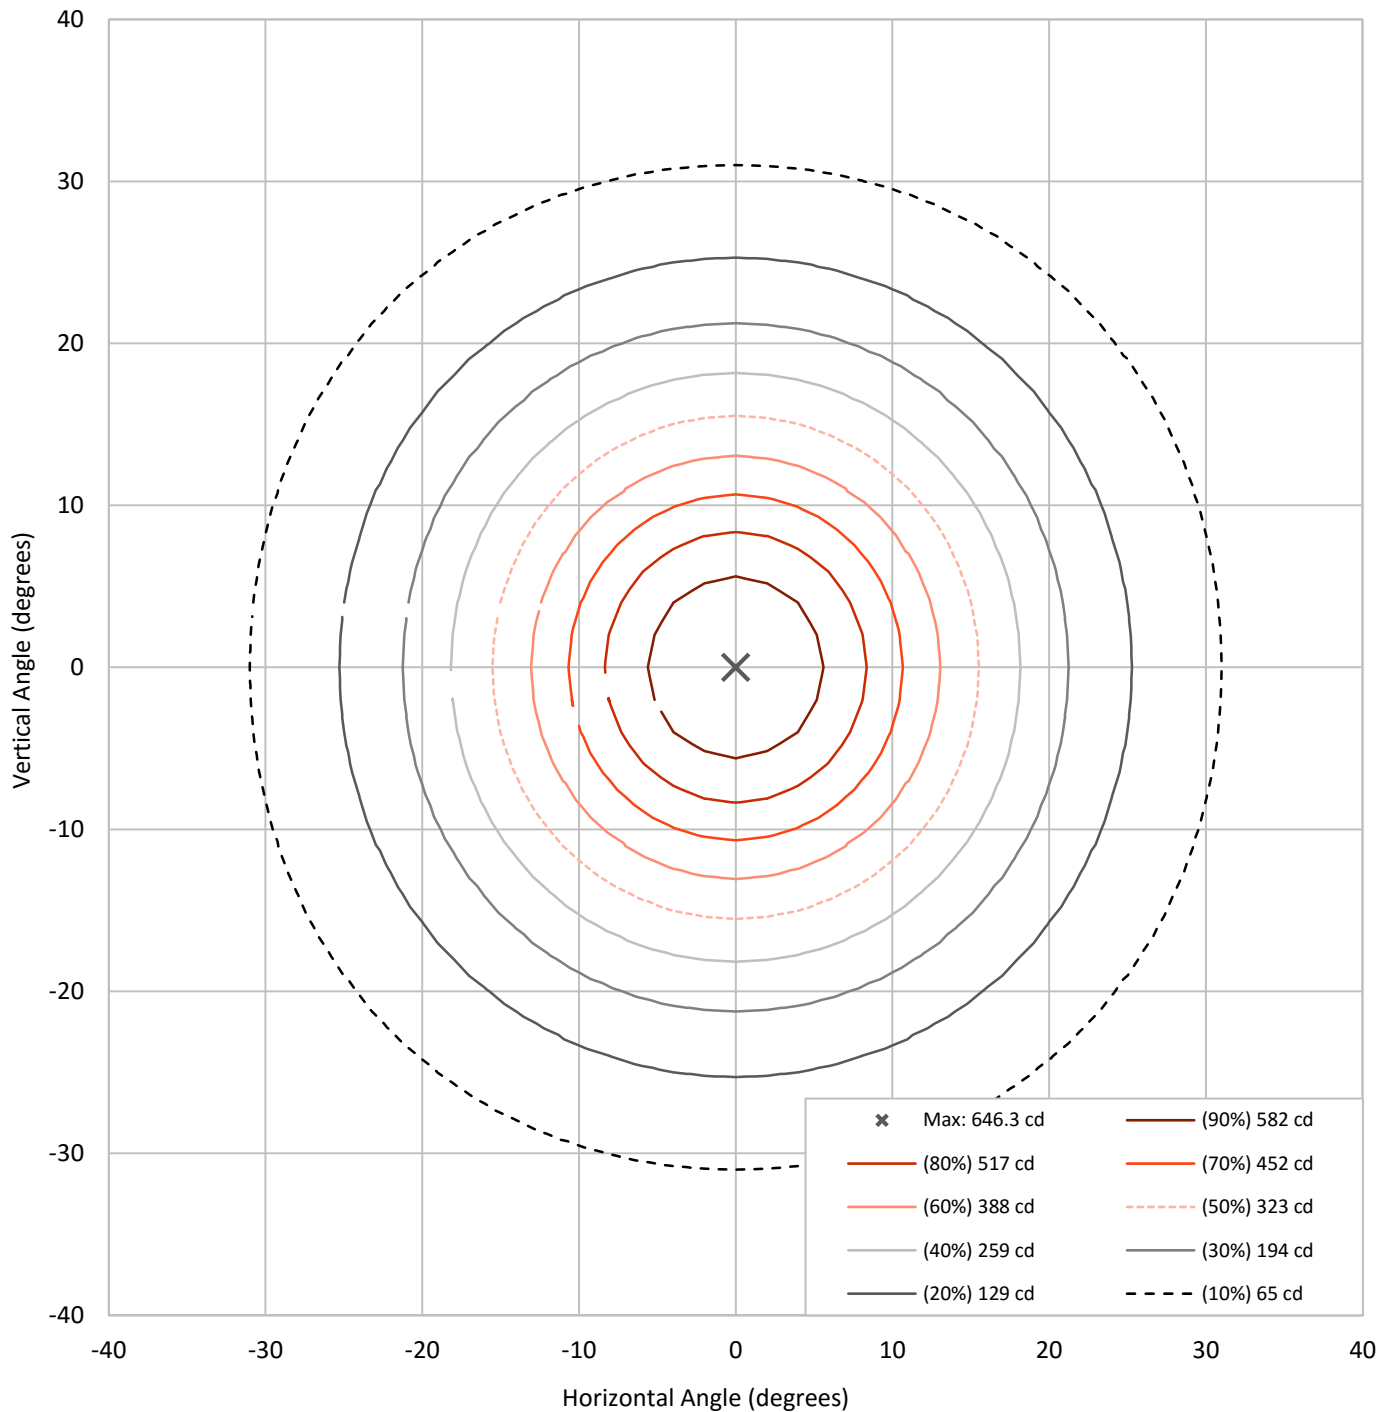




REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

Lumen Table

90	0.0														
80	0.0														
70	0.0														
60	0.0														
50	0.0														
40	0.0														
30	0.0														
20	0.0														
10	0.0														
0	0.0														
-10	0.0														
-20	0.0														
-30	0.0														
-40	0.0														
-50	0.0														
-60	0.0														
-70	0.0														
-80	0.0														
-90	0.0														


REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

Luminous Intensity Polar Plot

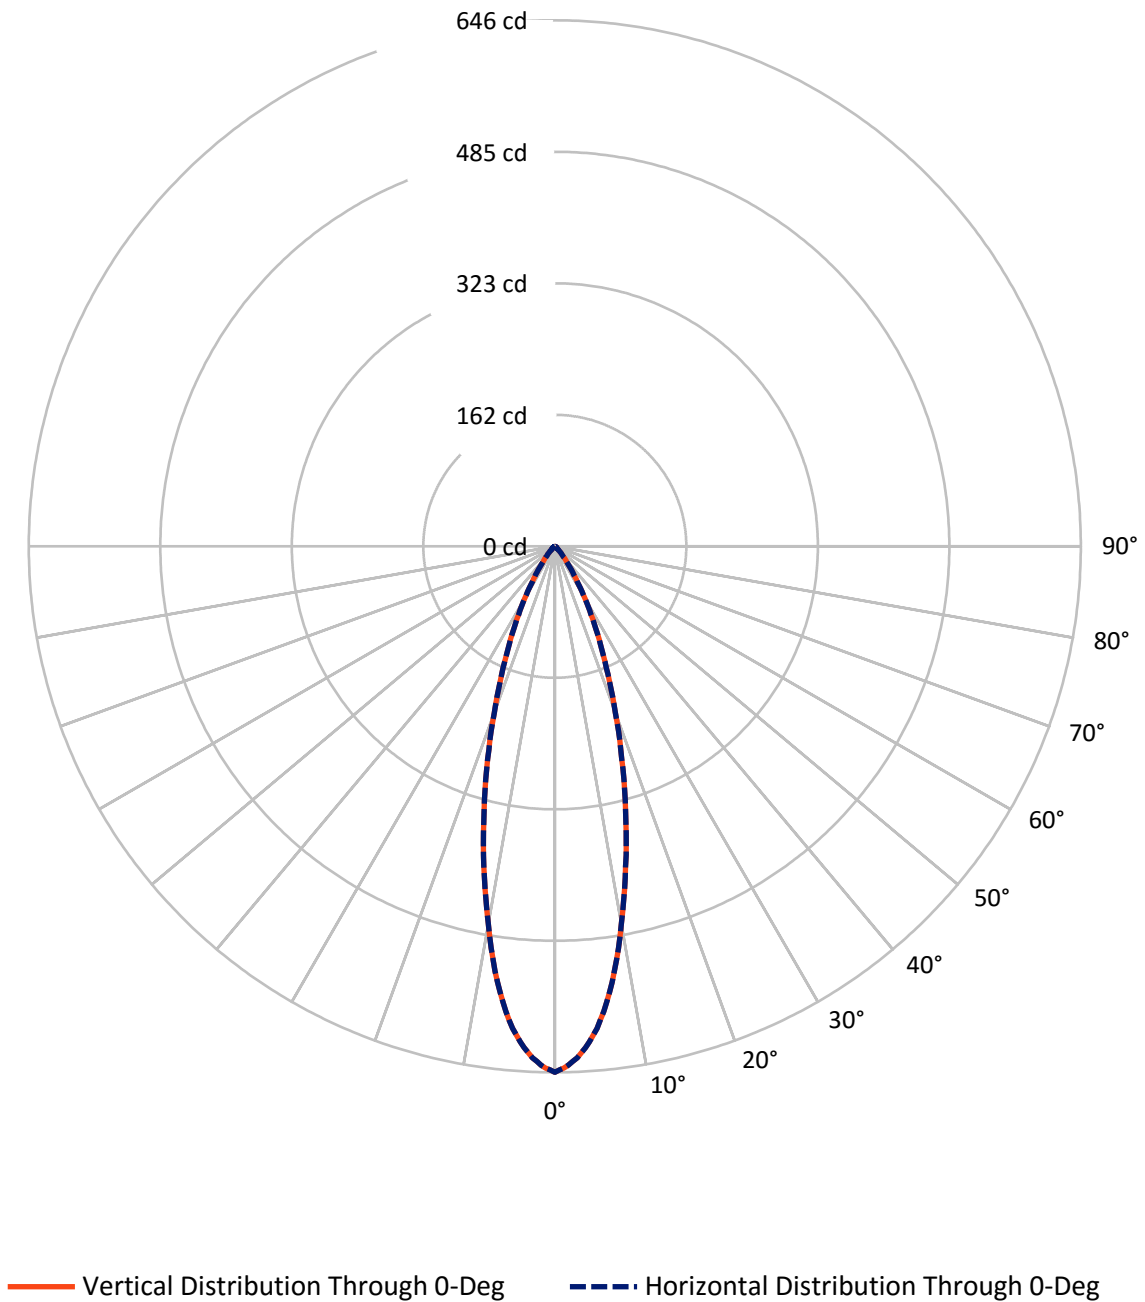

REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

Luminous Intensity Plot

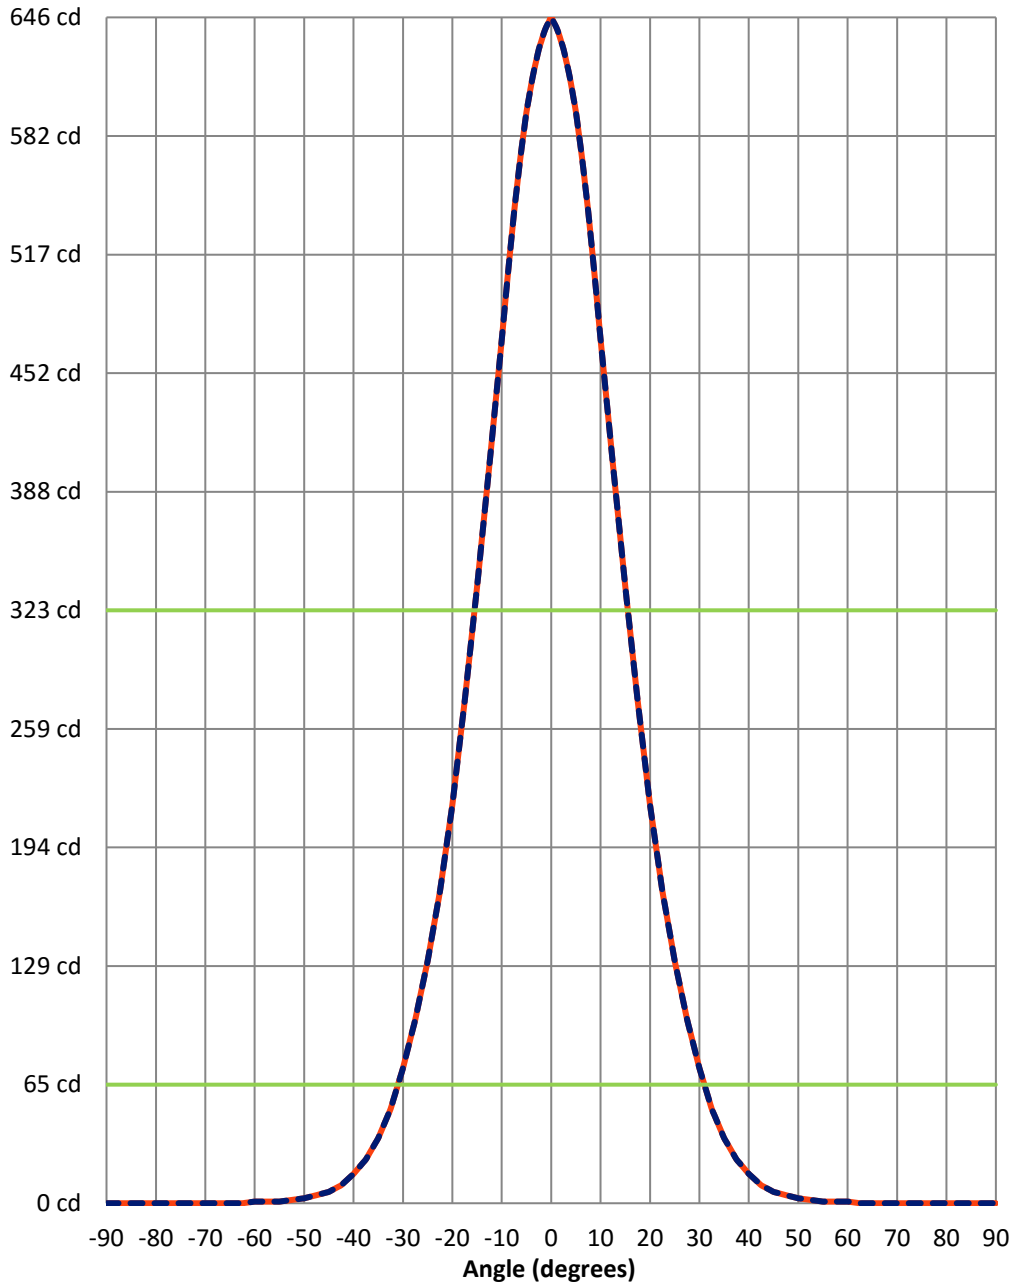

Beam:
 H Angle: 31°
 V Angle: 31°
 Lumens: 104.6
 Efficiency: 44.1%

Field:
 H Angle: 62°
 V Angle: 62°
 Lumens: 210.1
 Efficiency: 88.7%

Spill:
 Lumens: 26.8
 Efficiency: 11.3%

- Vertical Distribution through 0-Deg
- - - Horizontal Distribution through 0-Deg



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

FIELD
 BEAM

CANDELA DISTRIBUTION:

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
26.25°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
23.75°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
21.25°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
18.75°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
16.25°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
13.75°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
11.25°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
8.75°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
6.25°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
3.75°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
1.25°	0	0	0	0	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0	0	0	0	0
-1.25°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-3.75°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-6.25°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-8.75°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-11.25°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-13.75°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-16.25°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-18.75°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0
-21.25°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-23.75°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-26.25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
26.25°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
23.75°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
21.25°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
18.75°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
16.25°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
13.75°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
11.25°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
8.75°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
6.25°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
3.75°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
1.25°	0	0	0	0	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0	0	0	0	0
-1.25°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-3.75°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-6.25°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-8.75°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-11.25°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-13.75°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-16.25°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-18.75°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0
-21.25°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-23.75°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-26.25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	1
40°	0	0	0	0	0	0	0	0	0	0	1
38.75°	0	0	0	0	0	0	0	0	0	1	1
37.5°	0	0	0	0	0	0	0	0	0	1	1
36.25°	0	0	0	0	0	0	0	0	1	1	1
35°	0	0	0	0	0	0	0	1	1	1	1



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
33.75°	0	0	0	0	0	0	0	1	1	1	1
32.5°	0	0	0	0	0	0	1	1	1	1	1
31.25°	0	0	0	0	0	0	1	1	1	1	1
30°	0	0	0	0	0	0	1	1	1	1	1
28.75°	0	0	0	0	0	1	1	1	1	1	1
27.5°	0	0	0	0	0	1	1	1	1	1	1
26.25°	0	0	0	0	0	1	1	1	1	1	1
25°	0	0	0	0	1	1	1	1	1	1	1
23.75°	0	0	0	0	1	1	1	1	1	1	1
22.5°	0	0	0	0	1	1	1	1	1	1	1
21.25°	0	0	0	1	1	1	1	1	1	1	2
20°	0	0	0	1	1	1	1	1	1	1	2
18.75°	0	0	0	1	1	1	1	1	1	1	2
17.5°	0	0	0	1	1	1	1	1	1	1	2
16.25°	0	0	0	1	1	1	1	1	1	2	2
15°	0	0	0	1	1	1	1	1	1	2	2
13.75°	0	0	1	1	1	1	1	1	1	2	2
12.5°	0	0	1	1	1	1	1	1	1	2	2
11.25°	0	0	1	1	1	1	1	1	1	2	2
10°	0	0	1	1	1	1	1	1	2	2	2
8.75°	0	0	1	1	1	1	1	1	2	2	2
7.5°	0	0	1	1	1	1	1	1	2	2	3
6.25°	0	0	1	1	1	1	1	1	2	2	3
5°	0	0	1	1	1	1	1	1	2	2	3
3.75°	0	0	1	1	1	1	1	1	2	2	3
2.5°	0	0	1	1	1	1	1	1	2	2	3
1.25°	0	0	1	1	1	1	1	1	2	2	3
0°	0	0	1	1	1	1	1	1	2	2	3
-1.25°	0	0	1	1	1	1	1	1	2	2	3
-2.5°	0	0	1	1	1	1	1	1	2	2	3
-3.75°	0	0	1	1	1	1	1	1	2	2	3
-5°	0	0	1	1	1	1	1	1	2	2	3
-6.25°	0	0	1	1	1	1	1	1	2	2	3
-7.5°	0	0	1	1	1	1	1	1	2	2	3
-8.75°	0	0	1	1	1	1	1	1	2	2	2
-10°	0	0	1	1	1	1	1	1	2	2	2
-11.25°	0	0	1	1	1	1	1	1	1	2	2
-12.5°	0	0	1	1	1	1	1	1	1	2	2
-13.75°	0	0	1	1	1	1	1	1	1	2	2
-15°	0	0	0	1	1	1	1	1	1	2	2
-16.25°	0	0	0	1	1	1	1	1	1	2	2
-17.5°	0	0	0	1	1	1	1	1	1	1	2
-18.75°	0	0	0	1	1	1	1	1	1	1	2
-20°	0	0	0	1	1	1	1	1	1	1	2
-21.25°	0	0	0	1	1	1	1	1	1	1	2



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
-22.5°	0	0	0	0	1	1	1	1	1	1	1
-23.75°	0	0	0	0	1	1	1	1	1	1	1
-25°	0	0	0	0	1	1	1	1	1	1	1
-26.25°	0	0	0	0	0	1	1	1	1	1	1
-27.5°	0	0	0	0	0	1	1	1	1	1	1
-28.75°	0	0	0	0	0	1	1	1	1	1	1
-30°	0	0	0	0	0	0	1	1	1	1	1
-31.25°	0	0	0	0	0	0	1	1	1	1	1
-32.5°	0	0	0	0	0	0	1	1	1	1	1
-33.75°	0	0	0	0	0	0	0	1	1	1	1
-35°	0	0	0	0	0	0	0	1	1	1	1
-36.25°	0	0	0	0	0	0	0	0	1	1	1
-37.5°	0	0	0	0	0	0	0	0	0	1	1
-38.75°	0	0	0	0	0	0	0	0	0	0	1
-40°	0	0	0	0	0	0	0	0	0	0	1
-41.25°	0	0	0	0	0	0	0	0	0	0	1
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	1
51.25°	0	0	0	0	0	0	0	0	1	1	1
50°	0	0	0	0	0	0	1	1	1	1	1
48.75°	0	0	0	0	0	1	1	1	1	1	1
47.5°	0	0	0	0	1	1	1	1	1	1	1
46.25°	0	0	0	1	1	1	1	1	1	1	1
45°	0	0	1	1	1	1	1	1	1	1	1
43.75°	0	1	1	1	1	1	1	1	1	1	1
42.5°	1	1	1	1	1	1	1	1	1	1	1
41.25°	1	1	1	1	1	1	1	1	1	1	2
40°	1	1	1	1	1	1	1	1	2	2	2
38.75°	1	1	1	1	1	1	1	2	2	2	2
37.5°	1	1	1	1	1	1	1	2	2	2	3
36.25°	1	1	1	1	1	1	2	2	2	3	3
35°	1	1	1	1	1	2	2	2	3	3	4



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
33.75°	1	1	1	1	2	2	2	3	3	4	4
32.5°	1	1	1	1	2	2	2	3	3	4	5
31.25°	1	1	1	2	2	2	3	3	4	5	5
30°	1	1	2	2	2	3	3	4	4	5	6
28.75°	1	1	2	2	2	3	4	4	5	6	6
27.5°	1	2	2	2	3	3	4	5	5	6	7
26.25°	1	2	2	2	3	4	4	5	6	7	8
25°	2	2	2	3	3	4	5	5	6	8	9
23.75°	2	2	2	3	4	4	5	6	7	8	10
22.5°	2	2	3	3	4	5	5	6	8	9	11
21.25°	2	2	3	4	4	5	6	7	9	10	13
20°	2	2	3	4	5	5	6	8	9	12	14
18.75°	2	3	3	4	5	6	7	8	10	13	15
17.5°	2	3	4	4	5	6	7	9	11	14	17
16.25°	2	3	4	5	5	6	8	10	12	15	18
15°	3	3	4	5	6	7	8	10	13	16	20
13.75°	3	3	4	5	6	7	9	11	14	17	21
12.5°	3	4	4	5	6	8	9	12	15	18	22
11.25°	3	4	5	5	6	8	10	13	16	19	23
10°	3	4	5	6	7	8	10	13	17	20	24
8.75°	3	4	5	6	7	9	11	14	17	21	26
7.5°	3	4	5	6	7	9	12	15	18	22	27
6.25°	3	4	5	6	7	9	12	15	19	23	28
5°	3	4	5	6	8	9	12	15	19	23	28
3.75°	3	4	5	6	8	10	13	16	19	23	29
2.5°	4	4	5	6	8	10	13	16	20	24	29
1.25°	4	4	5	6	8	10	13	16	20	24	30
0°	4	4	5	6	8	10	13	16	20	24	30
-1.25°	4	4	5	6	8	10	13	16	20	24	30
-2.5°	4	4	5	6	8	10	13	16	20	24	29
-3.75°	3	4	5	6	8	10	13	16	19	23	29
-5°	3	4	5	6	8	9	12	15	19	23	28
-6.25°	3	4	5	6	7	9	12	15	19	23	28
-7.5°	3	4	5	6	7	9	12	15	18	22	27
-8.75°	3	4	5	6	7	9	11	14	17	21	26
-10°	3	4	5	6	7	8	10	13	17	20	24
-11.25°	3	4	5	5	6	8	10	13	16	19	23
-12.5°	3	4	4	5	6	8	9	12	15	18	22
-13.75°	3	3	4	5	6	7	9	11	14	17	21
-15°	3	3	4	5	6	7	8	10	13	16	20
-16.25°	2	3	4	5	5	6	8	10	12	15	18
-17.5°	2	3	4	4	5	6	7	9	11	14	17
-18.75°	2	3	3	4	5	6	7	8	10	13	15
-20°	2	2	3	4	5	5	6	8	9	12	14
-21.25°	2	2	3	4	4	5	6	7	9	10	13



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
-22.5°	2	2	3	3	4	5	5	6	8	9	11
-23.75°	2	2	2	3	4	4	5	6	7	8	10
-25°	2	2	2	3	3	4	5	5	6	8	9
-26.25°	1	2	2	2	3	4	4	5	6	7	8
-27.5°	1	2	2	2	3	3	4	5	5	6	7
-28.75°	1	1	2	2	2	3	4	4	5	6	6
-30°	1	1	2	2	2	3	3	4	4	5	6
-31.25°	1	1	1	2	2	2	3	3	4	5	5
-32.5°	1	1	1	1	2	2	2	3	3	4	5
-33.75°	1	1	1	1	2	2	2	3	3	4	4
-35°	1	1	1	1	1	2	2	2	3	3	4
-36.25°	1	1	1	1	1	1	2	2	2	3	3
-37.5°	1	1	1	1	1	1	1	2	2	2	3
-38.75°	1	1	1	1	1	1	1	2	2	2	2
-40°	1	1	1	1	1	1	1	1	2	2	2
-41.25°	1	1	1	1	1	1	1	1	1	1	2
-42.5°	1	1	1	1	1	1	1	1	1	1	1
-43.75°	0	1	1	1	1	1	1	1	1	1	1
-45°	0	0	1	1	1	1	1	1	1	1	1
-46.25°	0	0	0	1	1	1	1	1	1	1	1
-47.5°	0	0	0	0	1	1	1	1	1	1	1
-48.75°	0	0	0	0	0	1	1	1	1	1	1
-50°	0	0	0	0	0	0	1	1	1	1	1
-51.25°	0	0	0	0	0	0	0	0	1	1	1
-52.5°	0	0	0	0	0	0	0	0	0	0	1
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	1	1	1
56.25°	0	0	0	0	0	1	1	1	1	1	1
55°	0	0	1	1	1	1	1	1	1	1	1
53.75°	1	1	1	1	1	1	1	1	1	1	1
52.5°	1	1	1	1	1	1	1	1	1	1	1
51.25°	1	1	1	1	1	1	1	1	1	1	1
50°	1	1	1	1	1	1	1	1	1	1	1
48.75°	1	1	1	1	1	1	1	1	2	2	2
47.5°	1	1	1	1	1	1	2	2	2	2	2
46.25°	1	1	1	1	2	2	2	2	2	2	3
45°	1	1	1	2	2	2	2	2	3	3	3
43.75°	1	2	2	2	2	2	3	3	3	4	4
42.5°	2	2	2	2	3	3	3	4	4	4	5
41.25°	2	2	2	3	3	4	4	4	5	5	5
40°	2	3	3	3	4	4	5	5	5	6	6
38.75°	3	3	3	4	4	5	5	6	6	7	8
37.5°	3	4	4	5	5	6	6	7	8	8	9
36.25°	4	4	5	5	6	6	7	8	9	10	11
35°	4	5	5	6	6	8	9	9	11	12	14



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
33.75°	5	5	6	7	8	9	10	12	13	15	17
32.5°	5	6	7	8	9	10	12	14	16	18	20
31.25°	6	7	8	9	10	12	14	16	18	21	23
30°	6	8	9	10	13	15	17	19	21	24	27
28.75°	8	9	10	12	15	17	19	22	24	28	31
27.5°	9	10	12	14	17	19	22	25	29	32	36
26.25°	9	12	14	16	19	22	25	29	33	37	42
25°	11	13	16	18	21	24	29	33	37	42	47
23.75°	12	15	18	21	24	28	32	37	42	48	54
22.5°	14	17	20	23	27	31	36	42	47	54	61
21.25°	15	19	22	25	30	35	40	46	53	61	69
20°	17	20	24	28	33	39	45	51	59	68	76
18.75°	19	22	26	31	36	43	49	57	66	74	85
17.5°	20	24	29	34	40	47	54	63	72	82	93
16.25°	22	26	31	37	43	50	59	69	79	89	100
15°	23	28	33	40	47	55	64	74	85	96	109
13.75°	25	30	36	43	50	59	69	80	92	103	117
12.5°	27	32	38	46	53	64	74	85	97	111	125
11.25°	28	34	41	48	57	67	78	91	103	118	132
10°	30	35	43	50	61	71	83	95	109	124	139
8.75°	31	37	45	53	64	74	87	99	114	129	146
7.5°	32	39	47	55	66	78	90	104	119	135	153
6.25°	33	40	48	58	68	80	93	107	123	140	158
5°	34	41	49	59	70	83	96	111	126	144	162
3.75°	35	42	50	61	72	85	98	113	129	147	166
2.5°	35	43	51	62	73	86	99	115	131	149	168
1.25°	35	43	51	62	73	87	100	116	132	151	170
0°	36	43	51	63	74	87	100	116	132	151	170
-1.25°	35	43	51	62	73	87	100	116	132	151	170
-2.5°	35	43	51	62	73	86	99	115	131	149	168
-3.75°	35	42	50	61	72	85	98	113	129	147	166
-5°	34	41	49	59	70	83	96	111	126	144	162
-6.25°	33	40	48	58	68	80	93	107	123	140	158
-7.5°	32	39	47	55	66	78	90	104	119	135	153
-8.75°	31	37	45	53	64	74	87	99	114	129	146
-10°	30	35	43	50	61	71	83	95	109	124	139
-11.25°	28	34	41	48	57	67	78	91	103	118	132
-12.5°	27	32	38	46	53	64	74	85	97	111	125
-13.75°	25	30	36	43	50	59	69	80	92	103	117
-15°	23	28	33	40	47	55	64	74	85	96	109
-16.25°	22	26	31	37	43	50	59	69	79	89	100
-17.5°	20	24	29	34	40	47	54	63	72	82	93
-18.75°	19	22	26	31	36	43	49	57	66	74	85
-20°	17	20	24	28	33	39	45	51	59	68	76
-21.25°	15	19	22	25	30	35	40	46	53	61	69



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
-22.5°	14	17	20	23	27	31	36	42	47	54	61
-23.75°	12	15	18	21	24	28	32	37	42	48	54
-25°	11	13	16	18	21	24	29	33	37	42	47
-26.25°	9	12	14	16	19	22	25	29	33	37	42
-27.5°	9	10	12	14	17	19	22	25	29	32	36
-28.75°	8	9	10	12	15	17	19	22	24	28	31
-30°	6	8	9	10	13	15	17	19	21	24	27
-31.25°	6	7	8	9	10	12	14	16	18	21	23
-32.5°	5	6	7	8	9	10	12	14	16	18	20
-33.75°	5	5	6	7	8	9	10	12	13	15	17
-35°	4	5	5	6	6	8	9	9	11	12	14
-36.25°	4	4	5	5	6	6	7	8	9	10	11
-37.5°	3	4	4	5	5	6	6	7	8	8	9
-38.75°	3	3	3	4	4	5	5	6	6	7	8
-40°	2	3	3	3	4	4	5	5	5	6	6
-41.25°	2	2	2	3	3	4	4	4	5	5	5
-42.5°	2	2	2	2	3	3	3	4	4	4	5
-43.75°	1	2	2	2	2	2	3	3	3	4	4
-45°	1	1	1	2	2	2	2	2	3	3	3
-46.25°	1	1	1	1	2	2	2	2	2	2	3
-47.5°	1	1	1	1	1	1	2	2	2	2	2
-48.75°	1	1	1	1	1	1	1	1	2	2	2
-50°	1	1	1	1	1	1	1	1	1	1	1
-51.25°	1	1	1	1	1	1	1	1	1	1	1
-52.5°	1	1	1	1	1	1	1	1	1	1	1
-53.75°	1	1	1	1	1	1	1	1	1	1	1
-55°	0	0	1	1	1	1	1	1	1	1	1
-56.25°	0	0	0	0	0	1	1	1	1	1	1
-57.5°	0	0	0	0	0	0	0	0	1	1	1
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	1	1	1	1	1
58.75°	1	1	1	1	1	1	1	1	1	1	1
57.5°	1	1	1	1	1	1	1	1	1	1	1
56.25°	1	1	1	1	1	1	1	1	1	1	1
55°	1	1	1	1	1	1	1	1	1	1	1
53.75°	1	1	1	1	1	1	1	1	1	1	1
52.5°	1	1	1	1	1	1	1	1	1	2	2
51.25°	1	1	1	1	2	2	2	2	2	2	2
50°	2	2	2	2	2	2	2	2	2	2	2
48.75°	2	2	2	2	2	3	3	3	3	3	3
47.5°	2	2	3	3	3	3	3	4	4	4	4
46.25°	3	3	3	4	4	4	4	4	5	5	5
45°	4	4	4	4	5	5	5	5	5	6	6
43.75°	4	5	5	5	5	6	6	6	6	7	7
42.5°	5	5	6	6	6	7	7	8	8	8	9
41.25°	6	6	7	7	8	8	9	9	10	10	11
40°	7	8	8	9	10	10	11	12	13	13	14
38.75°	9	9	10	11	12	13	14	15	16	17	17
37.5°	10	12	13	14	15	16	17	18	19	20	21
36.25°	13	14	15	17	18	20	21	22	23	24	26
35°	15	17	19	20	22	23	25	27	28	30	31



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
33.75°	19	20	22	24	26	28	30	32	34	35	37
32.5°	22	24	26	29	31	33	36	38	41	43	45
31.25°	25	28	31	34	37	40	43	46	48	50	53
30°	30	33	36	40	43	47	50	53	57	61	64
28.75°	35	39	43	47	50	55	59	64	67	71	74
27.5°	40	45	49	54	59	64	69	74	78	83	87
26.25°	46	51	57	63	69	74	80	85	91	95	99
25°	53	59	66	72	79	85	92	97	103	109	114
23.75°	61	68	74	82	89	96	103	111	118	124	129
22.5°	69	76	85	93	100	109	117	125	132	139	146
21.25°	77	86	94	103	113	122	130	140	149	157	164
20°	86	95	105	115	125	135	146	156	165	175	184
18.75°	94	105	116	127	138	150	161	172	184	195	205
17.5°	103	115	127	139	152	164	177	191	204	216	228
16.25°	113	125	138	152	165	180	195	210	225	240	253
15°	122	135	150	164	180	197	213	230	247	263	279
13.75°	130	146	161	177	195	213	232	251	269	288	305
12.5°	140	156	172	191	210	230	251	271	292	312	331
11.25°	149	165	184	204	225	247	269	292	315	336	357
10°	157	175	195	216	240	263	288	312	336	360	382
8.75°	164	184	205	228	253	279	305	331	357	382	407
7.5°	171	193	214	240	266	293	320	348	376	403	430
6.25°	178	200	223	250	277	306	334	364	393	422	451
5°	183	206	231	259	287	316	346	377	408	439	469
3.75°	188	211	237	265	295	325	356	388	420	452	485
2.5°	191	214	242	270	300	331	363	396	429	462	497
1.25°	193	216	245	273	304	335	368	401	435	469	504
0°	194	217	246	274	305	336	369	403	437	471	507
-1.25°	193	216	245	273	304	335	368	401	435	469	504
-2.5°	191	214	242	270	300	331	363	396	429	462	497
-3.75°	188	211	237	265	295	325	356	388	420	452	485
-5°	183	206	231	259	287	316	346	377	408	439	469
-6.25°	178	200	223	250	277	306	334	364	393	422	451
-7.5°	171	193	214	240	266	293	320	348	376	403	430
-8.75°	164	184	205	228	253	279	305	331	357	382	407
-10°	157	175	195	216	240	263	288	312	336	360	382
-11.25°	149	165	184	204	225	247	269	292	315	336	357
-12.5°	140	156	172	191	210	230	251	271	292	312	331
-13.75°	130	146	161	177	195	213	232	251	269	288	305
-15°	122	135	150	164	180	197	213	230	247	263	279
-16.25°	113	125	138	152	165	180	195	210	225	240	253
-17.5°	103	115	127	139	152	164	177	191	204	216	228
-18.75°	94	105	116	127	138	150	161	172	184	195	205
-20°	86	95	105	115	125	135	146	156	165	175	184
-21.25°	77	86	94	103	113	122	130	140	149	157	164



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
-22.5°	69	76	85	93	100	109	117	125	132	139	146
-23.75°	61	68	74	82	89	96	103	111	118	124	129
-25°	53	59	66	72	79	85	92	97	103	109	114
-26.25°	46	51	57	63	69	74	80	85	91	95	99
-27.5°	40	45	49	54	59	64	69	74	78	83	87
-28.75°	35	39	43	47	50	55	59	64	67	71	74
-30°	30	33	36	40	43	47	50	53	57	61	64
-31.25°	25	28	31	34	37	40	43	46	48	50	53
-32.5°	22	24	26	29	31	33	36	38	41	43	45
-33.75°	19	20	22	24	26	28	30	32	34	35	37
-35°	15	17	19	20	22	23	25	27	28	30	31
-36.25°	13	14	15	17	18	20	21	22	23	24	26
-37.5°	10	12	13	14	15	16	17	18	19	20	21
-38.75°	9	9	10	11	12	13	14	15	16	17	17
-40°	7	8	8	9	10	10	11	12	13	13	14
-41.25°	6	6	7	7	8	8	9	9	10	10	11
-42.5°	5	5	6	6	6	7	7	8	8	8	9
-43.75°	4	5	5	5	5	6	6	6	6	7	7
-45°	4	4	4	4	5	5	5	5	5	6	6
-46.25°	3	3	3	4	4	4	4	4	5	5	5
-47.5°	2	2	3	3	3	3	3	4	4	4	4
-48.75°	2	2	2	2	2	3	3	3	3	3	3
-50°	2	2	2	2	2	2	2	2	2	2	2
-51.25°	1	1	1	1	2	2	2	2	2	2	2
-52.5°	1	1	1	1	1	1	1	1	1	2	2
-53.75°	1	1	1	1	1	1	1	1	1	1	1
-55°	1	1	1	1	1	1	1	1	1	1	1
-56.25°	1	1	1	1	1	1	1	1	1	1	1
-57.5°	1	1	1	1	1	1	1	1	1	1	1
-58.75°	1	1	1	1	1	1	1	1	1	1	1
-60°	0	0	0	0	0	0	1	1	1	1	1
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	1	1	1	1	1	1	1	1	1	1	1
58.75°	1	1	1	1	1	1	1	1	1	1	1
57.5°	1	1	1	1	1	1	1	1	1	1	1
56.25°	1	1	1	1	1	1	1	1	1	1	1
55°	1	1	1	1	1	1	1	1	1	1	1
53.75°	1	1	1	1	1	1	1	1	1	1	1
52.5°	2	2	2	2	2	2	2	2	2	2	2
51.25°	2	2	2	2	2	2	2	2	2	2	2
50°	3	3	3	3	3	3	3	3	3	3	3
48.75°	3	3	3	3	4	4	4	4	4	3	3
47.5°	4	4	4	4	4	4	4	4	4	4	4
46.25°	5	5	5	5	5	5	5	5	5	5	5
45°	6	6	6	6	6	6	6	6	6	6	6
43.75°	7	7	8	8	8	8	8	8	8	8	8
42.5°	9	9	9	10	10	10	10	10	10	10	9
41.25°	12	12	12	13	13	13	13	13	13	13	12
40°	15	15	15	16	16	16	16	16	16	16	15
38.75°	18	19	19	19	20	20	20	20	20	19	19
37.5°	22	23	23	23	24	24	24	24	24	23	23
36.25°	27	28	28	29	29	30	30	30	29	29	28
35°	32	33	34	35	35	35	36	35	35	35	34



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
33.75°	39	40	41	42	43	43	43	43	43	42	41
32.5°	47	48	49	50	51	51	51	51	51	50	49
31.25°	55	58	59	61	62	62	63	62	62	61	59
30°	66	68	70	72	73	73	74	73	73	72	70
28.75°	78	80	83	85	86	87	87	87	86	85	83
27.5°	90	93	96	98	99	100	100	100	99	98	96
26.25°	104	107	111	113	115	116	116	116	115	113	111
25°	119	123	126	129	131	132	132	132	131	129	126
23.75°	135	140	144	147	149	151	151	151	149	147	144
22.5°	153	158	162	166	168	170	170	170	168	166	162
21.25°	171	178	183	188	191	193	194	193	191	188	183
20°	193	200	206	211	214	216	217	216	214	211	206
18.75°	214	223	231	237	242	245	246	245	242	237	231
17.5°	240	250	259	265	270	273	274	273	270	265	259
16.25°	266	277	287	295	300	304	305	304	300	295	287
15°	293	306	316	325	331	335	336	335	331	325	316
13.75°	320	334	346	356	363	368	369	368	363	356	346
12.5°	348	364	377	388	396	401	403	401	396	388	377
11.25°	376	393	408	420	429	435	437	435	429	420	408
10°	403	422	439	452	462	469	471	469	462	452	439
8.75°	430	451	469	485	497	504	507	504	497	485	469
7.5°	455	478	500	517	530	538	540	538	530	517	500
6.25°	478	505	528	546	559	567	570	567	559	546	528
5°	500	528	551	570	583	592	595	592	583	570	551
3.75°	517	546	570	589	603	611	614	611	603	589	570
2.5°	530	559	583	603	617	626	629	626	617	603	583
1.25°	538	567	592	611	626	636	640	636	626	611	592
0°	540	570	595	614	629	640	646	640	629	614	595
-1.25°	538	567	592	611	626	636	640	636	626	611	592
-2.5°	530	559	583	603	617	626	629	626	617	603	583
-3.75°	517	546	570	589	603	611	614	611	603	589	570
-5°	500	528	551	570	583	592	595	592	583	570	551
-6.25°	478	505	528	546	559	567	570	567	559	546	528
-7.5°	455	478	500	517	530	538	540	538	530	517	500
-8.75°	430	451	469	485	497	504	507	504	497	485	469
-10°	403	422	439	452	462	469	471	469	462	452	439
-11.25°	376	393	408	420	429	435	437	435	429	420	408
-12.5°	348	364	377	388	396	401	403	401	396	388	377
-13.75°	320	334	346	356	363	368	369	368	363	356	346
-15°	293	306	316	325	331	335	336	335	331	325	316
-16.25°	266	277	287	295	300	304	305	304	300	295	287
-17.5°	240	250	259	265	270	273	274	273	270	265	259
-18.75°	214	223	231	237	242	245	246	245	242	237	231
-20°	193	200	206	211	214	216	217	216	214	211	206
-21.25°	171	178	183	188	191	193	194	193	191	188	183



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
-22.5°	153	158	162	166	168	170	170	170	168	166	162
-23.75°	135	140	144	147	149	151	151	151	149	147	144
-25°	119	123	126	129	131	132	132	132	131	129	126
-26.25°	104	107	111	113	115	116	116	116	115	113	111
-27.5°	90	93	96	98	99	100	100	100	99	98	96
-28.75°	78	80	83	85	86	87	87	87	86	85	83
-30°	66	68	70	72	73	73	74	73	73	72	70
-31.25°	55	58	59	61	62	62	63	62	62	61	59
-32.5°	47	48	49	50	51	51	51	51	51	50	49
-33.75°	39	40	41	42	43	43	43	43	43	42	41
-35°	32	33	34	35	35	35	36	35	35	35	34
-36.25°	27	28	28	29	29	30	30	30	29	29	28
-37.5°	22	23	23	23	24	24	24	24	24	23	23
-38.75°	18	19	19	19	20	20	20	20	20	19	19
-40°	15	15	15	16	16	16	16	16	16	16	15
-41.25°	12	12	12	13	13	13	13	13	13	13	12
-42.5°	9	9	9	10	10	10	10	10	10	10	9
-43.75°	7	7	8	8	8	8	8	8	8	8	8
-45°	6	6	6	6	6	6	6	6	6	6	6
-46.25°	5	5	5	5	5	5	5	5	5	5	5
-47.5°	4	4	4	4	4	4	4	4	4	4	4
-48.75°	3	3	3	3	4	4	4	4	4	3	3
-50°	3	3	3	3	3	3	3	3	3	3	3
-51.25°	2	2	2	2	2	2	2	2	2	2	2
-52.5°	2	2	2	2	2	2	2	2	2	2	2
-53.75°	1	1	1	1	1	1	1	1	1	1	1
-55°	1	1	1	1	1	1	1	1	1	1	1
-56.25°	1	1	1	1	1	1	1	1	1	1	1
-57.5°	1	1	1	1	1	1	1	1	1	1	1
-58.75°	1	1	1	1	1	1	1	1	1	1	1
-60°	1	1	1	1	1	1	1	1	1	1	1
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	1	1	1	1	1	1	1	0	0	0	0
58.75°	1	1	1	1	1	1	1	1	1	1	1
57.5°	1	1	1	1	1	1	1	1	1	1	1
56.25°	1	1	1	1	1	1	1	1	1	1	1
55°	1	1	1	1	1	1	1	1	1	1	1
53.75°	1	1	1	1	1	1	1	1	1	1	1
52.5°	2	2	2	2	1	1	1	1	1	1	1
51.25°	2	2	2	2	2	2	2	2	2	1	1
50°	3	3	2	2	2	2	2	2	2	2	2
48.75°	3	3	3	3	3	3	3	3	2	2	2
47.5°	4	4	4	4	4	4	3	3	3	3	3
46.25°	5	5	5	5	5	4	4	4	4	4	3
45°	6	6	6	6	5	5	5	5	5	4	4
43.75°	7	7	7	7	6	6	6	6	5	5	5
42.5°	9	9	9	8	8	8	7	7	6	6	6
41.25°	12	12	11	10	10	9	9	8	8	7	7
40°	15	15	14	13	13	12	11	10	10	9	8
38.75°	19	18	17	17	16	15	14	13	12	11	10
37.5°	23	22	21	20	19	18	17	16	15	14	13
36.25°	28	27	26	24	23	22	21	20	18	17	15
35°	33	32	31	30	28	27	25	23	22	20	19



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
33.75°	40	39	37	35	34	32	30	28	26	24	22
32.5°	48	47	45	43	41	38	36	33	31	29	26
31.25°	58	55	53	50	48	46	43	40	37	34	31
30°	68	66	64	61	57	53	50	47	43	40	36
28.75°	80	78	74	71	67	64	59	55	50	47	43
27.5°	93	90	87	83	78	74	69	64	59	54	49
26.25°	107	104	99	95	91	85	80	74	69	63	57
25°	123	119	114	109	103	97	92	85	79	72	66
23.75°	140	135	129	124	118	111	103	96	89	82	74
22.5°	158	153	146	139	132	125	117	109	100	93	85
21.25°	178	171	164	157	149	140	130	122	113	103	94
20°	200	193	184	175	165	156	146	135	125	115	105
18.75°	223	214	205	195	184	172	161	150	138	127	116
17.5°	250	240	228	216	204	191	177	164	152	139	127
16.25°	277	266	253	240	225	210	195	180	165	152	138
15°	306	293	279	263	247	230	213	197	180	164	150
13.75°	334	320	305	288	269	251	232	213	195	177	161
12.5°	364	348	331	312	292	271	251	230	210	191	172
11.25°	393	376	357	336	315	292	269	247	225	204	184
10°	422	403	382	360	336	312	288	263	240	216	195
8.75°	451	430	407	382	357	331	305	279	253	228	205
7.5°	478	455	430	403	376	348	320	293	266	240	214
6.25°	505	478	451	422	393	364	334	306	277	250	223
5°	528	500	469	439	408	377	346	316	287	259	231
3.75°	546	517	485	452	420	388	356	325	295	265	237
2.5°	559	530	497	462	429	396	363	331	300	270	242
1.25°	567	538	504	469	435	401	368	335	304	273	245
0°	570	540	507	471	437	403	369	336	305	274	246
-1.25°	567	538	504	469	435	401	368	335	304	273	245
-2.5°	559	530	497	462	429	396	363	331	300	270	242
-3.75°	546	517	485	452	420	388	356	325	295	265	237
-5°	528	500	469	439	408	377	346	316	287	259	231
-6.25°	505	478	451	422	393	364	334	306	277	250	223
-7.5°	478	455	430	403	376	348	320	293	266	240	214
-8.75°	451	430	407	382	357	331	305	279	253	228	205
-10°	422	403	382	360	336	312	288	263	240	216	195
-11.25°	393	376	357	336	315	292	269	247	225	204	184
-12.5°	364	348	331	312	292	271	251	230	210	191	172
-13.75°	334	320	305	288	269	251	232	213	195	177	161
-15°	306	293	279	263	247	230	213	197	180	164	150
-16.25°	277	266	253	240	225	210	195	180	165	152	138
-17.5°	250	240	228	216	204	191	177	164	152	139	127
-18.75°	223	214	205	195	184	172	161	150	138	127	116
-20°	200	193	184	175	165	156	146	135	125	115	105
-21.25°	178	171	164	157	149	140	130	122	113	103	94



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
-22.5°	158	153	146	139	132	125	117	109	100	93	85
-23.75°	140	135	129	124	118	111	103	96	89	82	74
-25°	123	119	114	109	103	97	92	85	79	72	66
-26.25°	107	104	99	95	91	85	80	74	69	63	57
-27.5°	93	90	87	83	78	74	69	64	59	54	49
-28.75°	80	78	74	71	67	64	59	55	50	47	43
-30°	68	66	64	61	57	53	50	47	43	40	36
-31.25°	58	55	53	50	48	46	43	40	37	34	31
-32.5°	48	47	45	43	41	38	36	33	31	29	26
-33.75°	40	39	37	35	34	32	30	28	26	24	22
-35°	33	32	31	30	28	27	25	23	22	20	19
-36.25°	28	27	26	24	23	22	21	20	18	17	15
-37.5°	23	22	21	20	19	18	17	16	15	14	13
-38.75°	19	18	17	17	16	15	14	13	12	11	10
-40°	15	15	14	13	13	12	11	10	10	9	8
-41.25°	12	12	11	10	10	9	9	8	8	7	7
-42.5°	9	9	9	8	8	8	7	7	6	6	6
-43.75°	7	7	7	7	6	6	6	6	5	5	5
-45°	6	6	6	6	5	5	5	5	5	4	4
-46.25°	5	5	5	5	5	4	4	4	4	4	3
-47.5°	4	4	4	4	4	4	3	3	3	3	3
-48.75°	3	3	3	3	3	3	3	3	2	2	2
-50°	3	3	2	2	2	2	2	2	2	2	2
-51.25°	2	2	2	2	2	2	2	2	2	1	1
-52.5°	2	2	2	2	1	1	1	1	1	1	1
-53.75°	1	1	1	1	1	1	1	1	1	1	1
-55°	1	1	1	1	1	1	1	1	1	1	1
-56.25°	1	1	1	1	1	1	1	1	1	1	1
-57.5°	1	1	1	1	1	1	1	1	1	1	1
-58.75°	1	1	1	1	1	1	1	1	1	1	1
-60°	1	1	1	1	1	1	1	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	1	1	0	0	0	0	0	0	0	0	0
57.5°	1	1	1	1	1	0	0	0	0	0	0
56.25°	1	1	1	1	1	1	1	1	0	0	0
55°	1	1	1	1	1	1	1	1	1	1	1
53.75°	1	1	1	1	1	1	1	1	1	1	1
52.5°	1	1	1	1	1	1	1	1	1	1	1
51.25°	1	1	1	1	1	1	1	1	1	1	1
50°	2	2	1	1	1	1	1	1	1	1	1
48.75°	2	2	2	2	2	1	1	1	1	1	1
47.5°	2	2	2	2	2	2	2	1	1	1	1
46.25°	3	3	3	2	2	2	2	2	2	1	1
45°	4	4	3	3	3	2	2	2	2	2	1
43.75°	5	4	4	4	3	3	3	2	2	2	2
42.5°	5	5	5	4	4	4	3	3	3	2	2
41.25°	6	6	5	5	5	4	4	4	3	3	2
40°	8	7	6	6	5	5	5	4	4	3	3
38.75°	9	9	8	7	6	6	5	5	4	4	3
37.5°	12	10	9	8	8	7	6	6	5	5	4
36.25°	14	13	11	10	9	8	7	6	6	5	5
35°	17	15	14	12	11	9	9	8	6	6	5



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
33.75°	20	19	17	15	13	12	10	9	8	7	6
32.5°	24	22	20	18	16	14	12	10	9	8	7
31.25°	28	25	23	21	18	16	14	12	10	9	8
30°	33	30	27	24	21	19	17	15	13	10	9
28.75°	39	35	31	28	24	22	19	17	15	12	10
27.5°	45	40	36	32	29	25	22	19	17	14	12
26.25°	51	46	42	37	33	29	25	22	19	16	14
25°	59	53	47	42	37	33	29	24	21	18	16
23.75°	68	61	54	48	42	37	32	28	24	21	18
22.5°	76	69	61	54	47	42	36	31	27	23	20
21.25°	86	77	69	61	53	46	40	35	30	25	22
20°	95	86	76	68	59	51	45	39	33	28	24
18.75°	105	94	85	74	66	57	49	43	36	31	26
17.5°	115	103	93	82	72	63	54	47	40	34	29
16.25°	125	113	100	89	79	69	59	50	43	37	31
15°	135	122	109	96	85	74	64	55	47	40	33
13.75°	146	130	117	103	92	80	69	59	50	43	36
12.5°	156	140	125	111	97	85	74	64	53	46	38
11.25°	165	149	132	118	103	91	78	67	57	48	41
10°	175	157	139	124	109	95	83	71	61	50	43
8.75°	184	164	146	129	114	99	87	74	64	53	45
7.5°	193	171	153	135	119	104	90	78	66	55	47
6.25°	200	178	158	140	123	107	93	80	68	58	48
5°	206	183	162	144	126	111	96	83	70	59	49
3.75°	211	188	166	147	129	113	98	85	72	61	50
2.5°	214	191	168	149	131	115	99	86	73	62	51
1.25°	216	193	170	151	132	116	100	87	73	62	51
0°	217	194	170	151	132	116	100	87	74	63	51
-1.25°	216	193	170	151	132	116	100	87	73	62	51
-2.5°	214	191	168	149	131	115	99	86	73	62	51
-3.75°	211	188	166	147	129	113	98	85	72	61	50
-5°	206	183	162	144	126	111	96	83	70	59	49
-6.25°	200	178	158	140	123	107	93	80	68	58	48
-7.5°	193	171	153	135	119	104	90	78	66	55	47
-8.75°	184	164	146	129	114	99	87	74	64	53	45
-10°	175	157	139	124	109	95	83	71	61	50	43
-11.25°	165	149	132	118	103	91	78	67	57	48	41
-12.5°	156	140	125	111	97	85	74	64	53	46	38
-13.75°	146	130	117	103	92	80	69	59	50	43	36
-15°	135	122	109	96	85	74	64	55	47	40	33
-16.25°	125	113	100	89	79	69	59	50	43	37	31
-17.5°	115	103	93	82	72	63	54	47	40	34	29
-18.75°	105	94	85	74	66	57	49	43	36	31	26
-20°	95	86	76	68	59	51	45	39	33	28	24
-21.25°	86	77	69	61	53	46	40	35	30	25	22



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
-22.5°	76	69	61	54	47	42	36	31	27	23	20
-23.75°	68	61	54	48	42	37	32	28	24	21	18
-25°	59	53	47	42	37	33	29	24	21	18	16
-26.25°	51	46	42	37	33	29	25	22	19	16	14
-27.5°	45	40	36	32	29	25	22	19	17	14	12
-28.75°	39	35	31	28	24	22	19	17	15	12	10
-30°	33	30	27	24	21	19	17	15	13	10	9
-31.25°	28	25	23	21	18	16	14	12	10	9	8
-32.5°	24	22	20	18	16	14	12	10	9	8	7
-33.75°	20	19	17	15	13	12	10	9	8	7	6
-35°	17	15	14	12	11	9	9	8	6	6	5
-36.25°	14	13	11	10	9	8	7	6	6	5	5
-37.5°	12	10	9	8	8	7	6	6	5	5	4
-38.75°	9	9	8	7	6	6	5	5	4	4	3
-40°	8	7	6	6	5	5	5	4	4	3	3
-41.25°	6	6	5	5	5	4	4	4	3	3	2
-42.5°	5	5	5	4	4	4	3	3	3	2	2
-43.75°	5	4	4	4	3	3	3	2	2	2	2
-45°	4	4	3	3	3	2	2	2	2	2	1
-46.25°	3	3	3	2	2	2	2	2	2	1	1
-47.5°	2	2	2	2	2	2	2	1	1	1	1
-48.75°	2	2	2	2	2	1	1	1	1	1	1
-50°	2	2	1	1	1	1	1	1	1	1	1
-51.25°	1	1	1	1	1	1	1	1	1	1	1
-52.5°	1	1	1	1	1	1	1	1	1	1	1
-53.75°	1	1	1	1	1	1	1	1	1	1	1
-55°	1	1	1	1	1	1	1	1	1	1	1
-56.25°	1	1	1	1	1	1	1	1	0	0	0
-57.5°	1	1	1	1	1	0	0	0	0	0	0
-58.75°	1	1	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	1	1	0	0	0	0	0	0	0	0	0
52.5°	1	1	1	0	0	0	0	0	0	0	0
51.25°	1	1	1	1	1	0	0	0	0	0	0
50°	1	1	1	1	1	1	1	0	0	0	0
48.75°	1	1	1	1	1	1	1	1	0	0	0
47.5°	1	1	1	1	1	1	1	1	1	0	0
46.25°	1	1	1	1	1	1	1	1	1	1	0
45°	1	1	1	1	1	1	1	1	1	1	1
43.75°	2	1	1	1	1	1	1	1	1	1	1
42.5°	2	2	1	1	1	1	1	1	1	1	1
41.25°	2	2	2	1	1	1	1	1	1	1	1
40°	3	2	2	2	2	1	1	1	1	1	1
38.75°	3	3	2	2	2	2	1	1	1	1	1
37.5°	4	3	3	2	2	2	1	1	1	1	1
36.25°	4	4	3	3	2	2	2	1	1	1	1
35°	5	4	4	3	3	2	2	2	1	1	1



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
33.75°	5	5	4	4	3	3	2	2	2	1	1
32.5°	6	5	5	4	3	3	2	2	2	1	1
31.25°	7	6	5	5	4	3	3	2	2	2	1
30°	8	6	6	5	4	4	3	3	2	2	2
28.75°	9	8	6	6	5	4	4	3	2	2	2
27.5°	10	9	7	6	5	5	4	3	3	2	2
26.25°	12	9	8	7	6	5	4	4	3	2	2
25°	13	11	9	8	6	5	5	4	3	3	2
23.75°	15	12	10	8	7	6	5	4	4	3	2
22.5°	17	14	11	9	8	6	5	5	4	3	3
21.25°	19	15	13	10	9	7	6	5	4	4	3
20°	20	17	14	12	9	8	6	5	5	4	3
18.75°	22	19	15	13	10	8	7	6	5	4	3
17.5°	24	20	17	14	11	9	7	6	5	4	4
16.25°	26	22	18	15	12	10	8	6	5	5	4
15°	28	23	20	16	13	10	8	7	6	5	4
13.75°	30	25	21	17	14	11	9	7	6	5	4
12.5°	32	27	22	18	15	12	9	8	6	5	4
11.25°	34	28	23	19	16	13	10	8	6	5	5
10°	35	30	24	20	17	13	10	8	7	6	5
8.75°	37	31	26	21	17	14	11	9	7	6	5
7.5°	39	32	27	22	18	15	12	9	7	6	5
6.25°	40	33	28	23	19	15	12	9	7	6	5
5°	41	34	28	23	19	15	12	9	8	6	5
3.75°	42	35	29	23	19	16	13	10	8	6	5
2.5°	43	35	29	24	20	16	13	10	8	6	5
1.25°	43	35	30	24	20	16	13	10	8	6	5
0°	43	36	30	24	20	16	13	10	8	6	5
-1.25°	43	35	30	24	20	16	13	10	8	6	5
-2.5°	43	35	29	24	20	16	13	10	8	6	5
-3.75°	42	35	29	23	19	16	13	10	8	6	5
-5°	41	34	28	23	19	15	12	9	8	6	5
-6.25°	40	33	28	23	19	15	12	9	7	6	5
-7.5°	39	32	27	22	18	15	12	9	7	6	5
-8.75°	37	31	26	21	17	14	11	9	7	6	5
-10°	35	30	24	20	17	13	10	8	7	6	5
-11.25°	34	28	23	19	16	13	10	8	6	5	5
-12.5°	32	27	22	18	15	12	9	8	6	5	4
-13.75°	30	25	21	17	14	11	9	7	6	5	4
-15°	28	23	20	16	13	10	8	7	6	5	4
-16.25°	26	22	18	15	12	10	8	6	5	5	4
-17.5°	24	20	17	14	11	9	7	6	5	4	4
-18.75°	22	19	15	13	10	8	7	6	5	4	3
-20°	20	17	14	12	9	8	6	5	5	4	3
-21.25°	19	15	13	10	9	7	6	5	4	4	3



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
-22.5°	17	14	11	9	8	6	5	5	4	3	3
-23.75°	15	12	10	8	7	6	5	4	4	3	2
-25°	13	11	9	8	6	5	5	4	3	3	2
-26.25°	12	9	8	7	6	5	4	4	3	2	2
-27.5°	10	9	7	6	5	5	4	3	3	2	2
-28.75°	9	8	6	6	5	4	4	3	2	2	2
-30°	8	6	6	5	4	4	3	3	2	2	2
-31.25°	7	6	5	5	4	3	3	2	2	2	1
-32.5°	6	5	5	4	3	3	2	2	2	1	1
-33.75°	5	5	4	4	3	3	2	2	2	1	1
-35°	5	4	4	3	3	2	2	2	1	1	1
-36.25°	4	4	3	3	2	2	2	1	1	1	1
-37.5°	4	3	3	2	2	2	1	1	1	1	1
-38.75°	3	3	2	2	2	2	1	1	1	1	1
-40°	3	2	2	2	2	1	1	1	1	1	1
-41.25°	2	2	2	1	1	1	1	1	1	1	1
-42.5°	2	2	1	1	1	1	1	1	1	1	1
-43.75°	2	1	1	1	1	1	1	1	1	1	1
-45°	1	1	1	1	1	1	1	1	1	1	1
-46.25°	1	1	1	1	1	1	1	1	1	1	0
-47.5°	1	1	1	1	1	1	1	1	1	0	0
-48.75°	1	1	1	1	1	1	1	1	0	0	0
-50°	1	1	1	1	1	1	1	0	0	0	0
-51.25°	1	1	1	1	1	0	0	0	0	0	0
-52.5°	1	1	1	0	0	0	0	0	0	0	0
-53.75°	1	1	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	1	0	0	0	0	0	0	0	0	0	0
42.5°	1	1	0	0	0	0	0	0	0	0	0
41.25°	1	1	1	0	0	0	0	0	0	0	0
40°	1	1	1	0	0	0	0	0	0	0	0
38.75°	1	1	1	1	0	0	0	0	0	0	0
37.5°	1	1	1	1	0	0	0	0	0	0	0
36.25°	1	1	1	1	1	0	0	0	0	0	0
35°	1	1	1	1	1	1	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
33.75°	1	1	1	1	1	1	0	0	0	0	0
32.5°	1	1	1	1	1	1	1	0	0	0	0
31.25°	1	1	1	1	1	1	1	0	0	0	0
30°	1	1	1	1	1	1	1	0	0	0	0
28.75°	1	1	1	1	1	1	1	1	0	0	0
27.5°	2	1	1	1	1	1	1	1	0	0	0
26.25°	2	1	1	1	1	1	1	1	0	0	0
25°	2	2	1	1	1	1	1	1	1	0	0
23.75°	2	2	1	1	1	1	1	1	1	0	0
22.5°	2	2	1	1	1	1	1	1	1	0	0
21.25°	2	2	2	1	1	1	1	1	1	1	0
20°	2	2	2	1	1	1	1	1	1	1	0
18.75°	3	2	2	1	1	1	1	1	1	1	0
17.5°	3	2	2	1	1	1	1	1	1	1	0
16.25°	3	2	2	2	1	1	1	1	1	1	0
15°	3	3	2	2	1	1	1	1	1	1	0
13.75°	3	3	2	2	1	1	1	1	1	1	1
12.5°	4	3	2	2	1	1	1	1	1	1	1
11.25°	4	3	2	2	1	1	1	1	1	1	1
10°	4	3	2	2	2	1	1	1	1	1	1
8.75°	4	3	2	2	2	1	1	1	1	1	1
7.5°	4	3	3	2	2	1	1	1	1	1	1
6.25°	4	3	3	2	2	1	1	1	1	1	1
5°	4	3	3	2	2	1	1	1	1	1	1
3.75°	4	3	3	2	2	1	1	1	1	1	1
2.5°	4	4	3	2	2	1	1	1	1	1	1
1.25°	4	4	3	2	2	1	1	1	1	1	1
0°	4	4	3	2	2	1	1	1	1	1	1
-1.25°	4	4	3	2	2	1	1	1	1	1	1
-2.5°	4	4	3	2	2	1	1	1	1	1	1
-3.75°	4	3	3	2	2	1	1	1	1	1	1
-5°	4	3	3	2	2	1	1	1	1	1	1
-6.25°	4	3	3	2	2	1	1	1	1	1	1
-7.5°	4	3	3	2	2	1	1	1	1	1	1
-8.75°	4	3	2	2	2	1	1	1	1	1	1
-10°	4	3	2	2	2	1	1	1	1	1	1
-11.25°	4	3	2	2	1	1	1	1	1	1	1
-12.5°	4	3	2	2	1	1	1	1	1	1	1
-13.75°	3	3	2	2	1	1	1	1	1	1	1
-15°	3	3	2	2	1	1	1	1	1	1	0
-16.25°	3	2	2	2	1	1	1	1	1	1	0
-17.5°	3	2	2	1	1	1	1	1	1	1	0
-18.75°	3	2	2	1	1	1	1	1	1	1	0
-20°	2	2	2	1	1	1	1	1	1	1	0
-21.25°	2	2	2	1	1	1	1	1	1	1	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
-22.5°	2	2	1	1	1	1	1	1	1	0	0
-23.75°	2	2	1	1	1	1	1	1	1	0	0
-25°	2	2	1	1	1	1	1	1	1	0	0
-26.25°	2	1	1	1	1	1	1	1	0	0	0
-27.5°	2	1	1	1	1	1	1	1	0	0	0
-28.75°	1	1	1	1	1	1	1	1	0	0	0
-30°	1	1	1	1	1	1	1	0	0	0	0
-31.25°	1	1	1	1	1	1	1	0	0	0	0
-32.5°	1	1	1	1	1	1	1	0	0	0	0
-33.75°	1	1	1	1	1	1	0	0	0	0	0
-35°	1	1	1	1	1	1	0	0	0	0	0
-36.25°	1	1	1	1	1	0	0	0	0	0	0
-37.5°	1	1	1	1	0	0	0	0	0	0	0
-38.75°	1	1	1	1	0	0	0	0	0	0	0
-40°	1	1	1	0	0	0	0	0	0	0	0
-41.25°	1	1	1	0	0	0	0	0	0	0	0
-42.5°	1	1	0	0	0	0	0	0	0	0	0
-43.75°	1	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
26.25°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
23.75°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
21.25°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
18.75°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
16.25°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
13.75°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
11.25°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
8.75°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
6.25°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
3.75°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
1.25°	0	0	0	0	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0	0	0	0	0
-1.25°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-3.75°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-6.25°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-8.75°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-11.25°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-13.75°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-16.25°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-18.75°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0
-21.25°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-23.75°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-26.25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
26.25°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
23.75°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
21.25°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
18.75°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
16.25°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
13.75°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
11.25°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
8.75°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
6.25°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
3.75°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
1.25°	0	0	0	0	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0	0	0	0	0
-1.25°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-3.75°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-6.25°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-8.75°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-11.25°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-13.75°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-16.25°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-18.75°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0
-21.25°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-23.75°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-26.25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	88.75°	90°
90°	0	0
88.75°	0	0
87.5°	0	0
86.25°	0	0
85°	0	0
83.75°	0	0
82.5°	0	0
81.25°	0	0
80°	0	0
78.75°	0	0
77.5°	0	0
76.25°	0	0
75°	0	0
73.75°	0	0
72.5°	0	0
71.25°	0	0
70°	0	0
68.75°	0	0
67.5°	0	0
66.25°	0	0
65°	0	0
63.75°	0	0
62.5°	0	0
61.25°	0	0
60°	0	0
58.75°	0	0
57.5°	0	0
56.25°	0	0
55°	0	0
53.75°	0	0
52.5°	0	0
51.25°	0	0
50°	0	0
48.75°	0	0
47.5°	0	0
46.25°	0	0
45°	0	0
43.75°	0	0
42.5°	0	0
41.25°	0	0
40°	0	0
38.75°	0	0
37.5°	0	0
36.25°	0	0
35°	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	88.75°	90°
33.75°	0	0
32.5°	0	0
31.25°	0	0
30°	0	0
28.75°	0	0
27.5°	0	0
26.25°	0	0
25°	0	0
23.75°	0	0
22.5°	0	0
21.25°	0	0
20°	0	0
18.75°	0	0
17.5°	0	0
16.25°	0	0
15°	0	0
13.75°	0	0
12.5°	0	0
11.25°	0	0
10°	0	0
8.75°	0	0
7.5°	0	0
6.25°	0	0
5°	0	0
3.75°	0	0
2.5°	0	0
1.25°	0	0
0°	0	0
-1.25°	0	0
-2.5°	0	0
-3.75°	0	0
-5°	0	0
-6.25°	0	0
-7.5°	0	0
-8.75°	0	0
-10°	0	0
-11.25°	0	0
-12.5°	0	0
-13.75°	0	0
-15°	0	0
-16.25°	0	0
-17.5°	0	0
-18.75°	0	0
-20°	0	0
-21.25°	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	88.75°	90°
-22.5°	0	0
-23.75°	0	0
-25°	0	0
-26.25°	0	0
-27.5°	0	0
-28.75°	0	0
-30°	0	0
-31.25°	0	0
-32.5°	0	0
-33.75°	0	0
-35°	0	0
-36.25°	0	0
-37.5°	0	0
-38.75°	0	0
-40°	0	0
-41.25°	0	0
-42.5°	0	0
-43.75°	0	0
-45°	0	0
-46.25°	0	0
-47.5°	0	0
-48.75°	0	0
-50°	0	0
-51.25°	0	0
-52.5°	0	0
-53.75°	0	0
-55°	0	0
-56.25°	0	0
-57.5°	0	0
-58.75°	0	0
-60°	0	0
-61.25°	0	0
-62.5°	0	0
-63.75°	0	0
-65°	0	0
-66.25°	0	0
-67.5°	0	0
-68.75°	0	0
-70°	0	0
-71.25°	0	0
-72.5°	0	0
-73.75°	0	0
-75°	0	0
-76.25°	0	0
-77.5°	0	0



REPORT NUMBER: P246974 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	88.75°	90°
-78.75°	0	0
-80°	0	0
-81.25°	0	0
-82.5°	0	0
-83.75°	0	0
-85°	0	0
-86.25°	0	0
-87.5°	0	0
-88.75°	0	0
-90°	0	0

(END OF REPORT)