

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: LUMIERE

Report Number: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)

Luminaire Tested: **203-SS-8LED3025-12-CS**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1802-569-8)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 203-SS-8LED3025-12-CS
Description: CAMBRIA 203 LED LUMINAIRE, 8 WATT, 3000K CCT, 25 DEGREE NARROW
OPTIC, REGRESSED HOOD SILVER
Light Source: (1) SORAA 3000K 90 CRI LED
SM16-07-25D-930-03
Ballast/Driver: (1) CHROMA POWER SUPPLY IN0004


Summary

Lumens per Lamp:	N/A	NEMA Type:	3H x 3V
Luminaire Lumens:	319.6 lumens	Max Intensity:	2089.5 candela
Efficiency:	N/A	Max Intensity Angle:	0°H x 0°V
Efficacy:	43.8 lumens/watt		
Luminous Opening:	Circular (Dia: 0.17' x H: 0')		
Beam Angle (50%):	18.4°H x 18.4°V	Field Angle (10%):	40.5°H x 40.5°V
Beam Lumens:	116.1 lumens	Field Lumens:	264.9 lumens
Beam Efficiency:	36.3%	Field Efficiency:	82.9%
Input Watts (W):	7.3		
Input Voltage (V):	NR		
Input Current (A _{in}):	NR		
Voltage Rise (V):	NR		
Power Factor:	NR		
Total Harmonic Distortion (THDi):	NR		
Frequency (hertz):	60		
Stabilization Time:	NR		
Operation Time:	NR		
Ambient Temperature (°C):	NR		
Test Distance:	25 FT		

REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-CS

Iso-Candela Plot

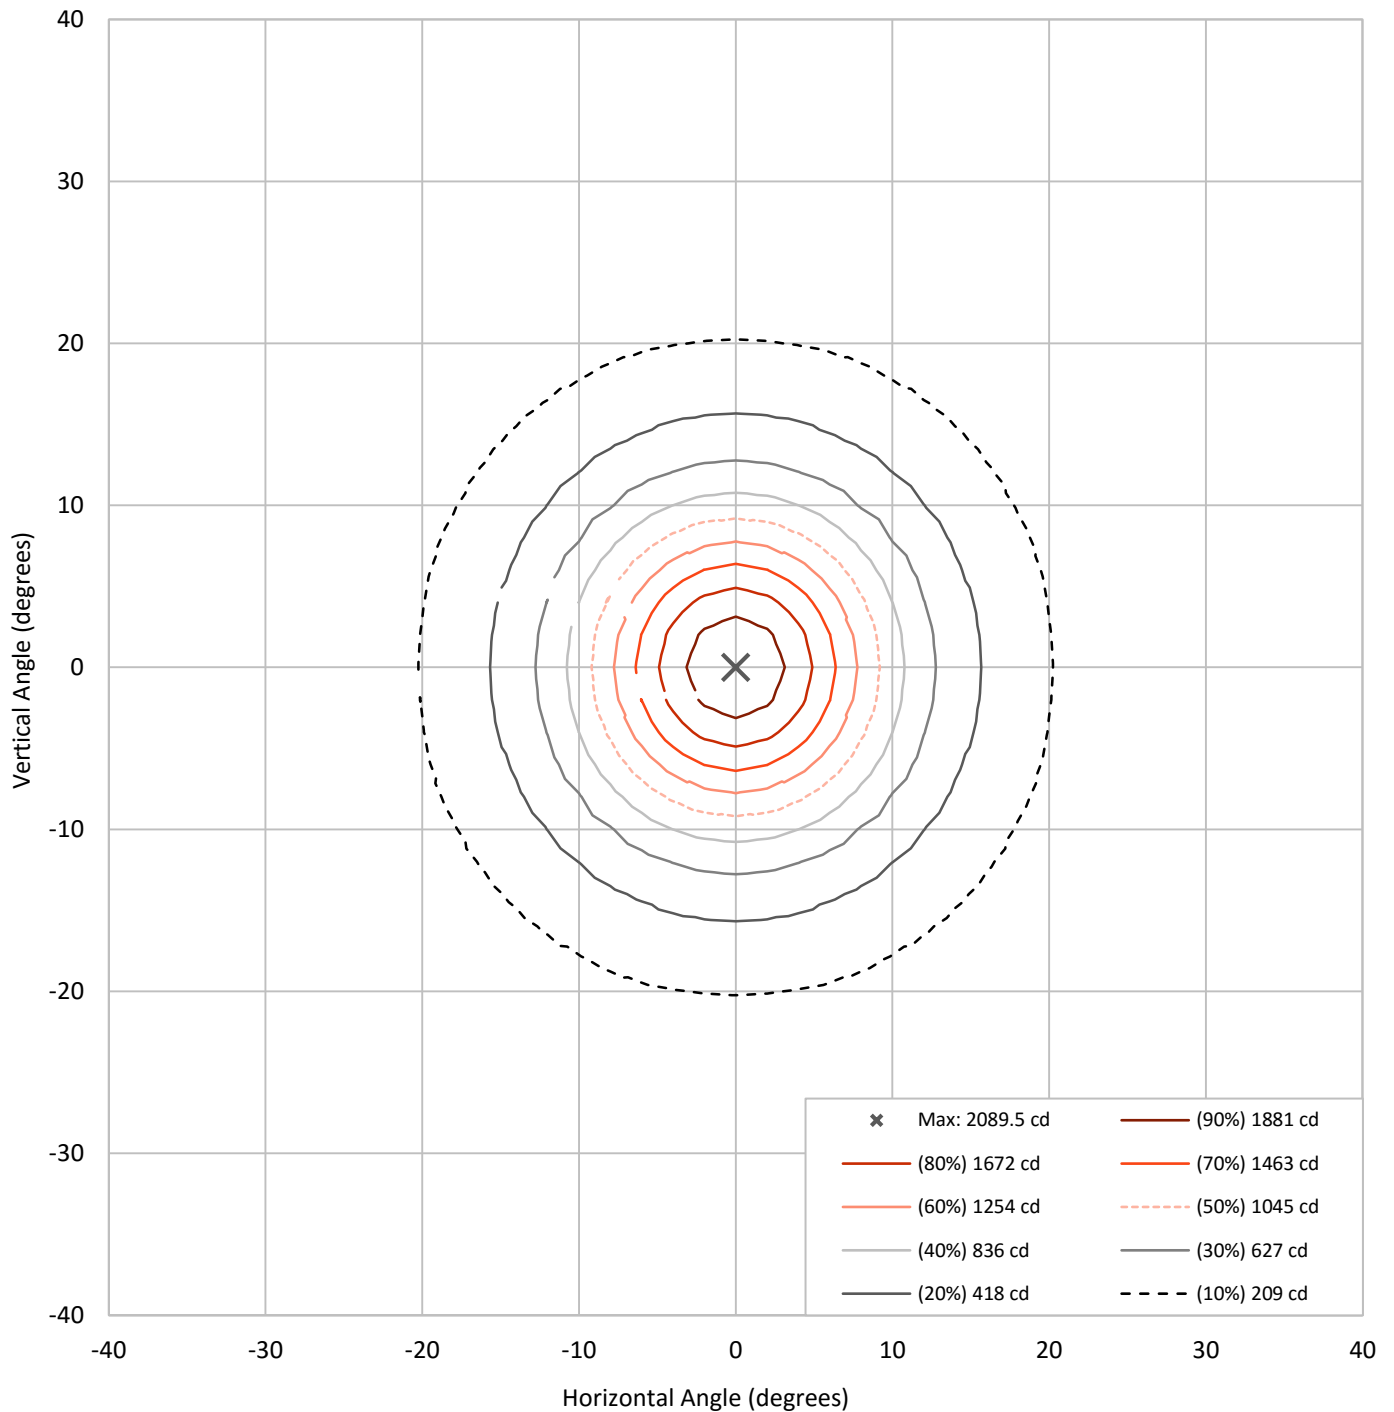




REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

Lumen Table

90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60		0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.0		
50	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.0	
40		0.0	0.0	0.1	0.1	0.1	0.2	0.3	0.3	0.2	0.1	0.1	0.1	0.0	0.0		
30	0.0	0.0	0.0	0.1	0.1	0.3	1.2	2.6	2.6	1.2	0.3	0.1	0.1	0.0	0.0	0.0	
20		0.0	0.0	0.1	0.2	1.1	5.7	12.9	12.9	5.7	1.1	0.2	0.1	0.0	0.0		
10	0.0	0.0	0.0	0.1	0.3	2.4	12.5	38.5	38.5	12.5	2.4	0.3	0.1	0.0	0.0	0.0	
0		0.0	0.0	0.1	0.3	2.4	12.5	38.5	38.5	12.5	2.4	0.3	0.1	0.0	0.0		
-10	0.0	0.0	0.0	0.1	0.3	2.4	12.5	38.5	38.5	12.5	2.4	0.3	0.1	0.0	0.0	0.0	
-20		0.0	0.0	0.1	0.2	1.1	5.7	12.9	12.9	5.7	1.1	0.2	0.1	0.0	0.0		
-30	0.0	0.0	0.0	0.1	0.1	0.3	1.2	2.6	2.6	1.2	0.3	0.1	0.1	0.0	0.0	0.0	
-40		0.0	0.0	0.1	0.1	0.1	0.2	0.3	0.3	0.2	0.1	0.1	0.1	0.0	0.0		
-50	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.0	
-60		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
-70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
-80		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	


REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED3025-12-CS

Luminous Intensity Polar Plot

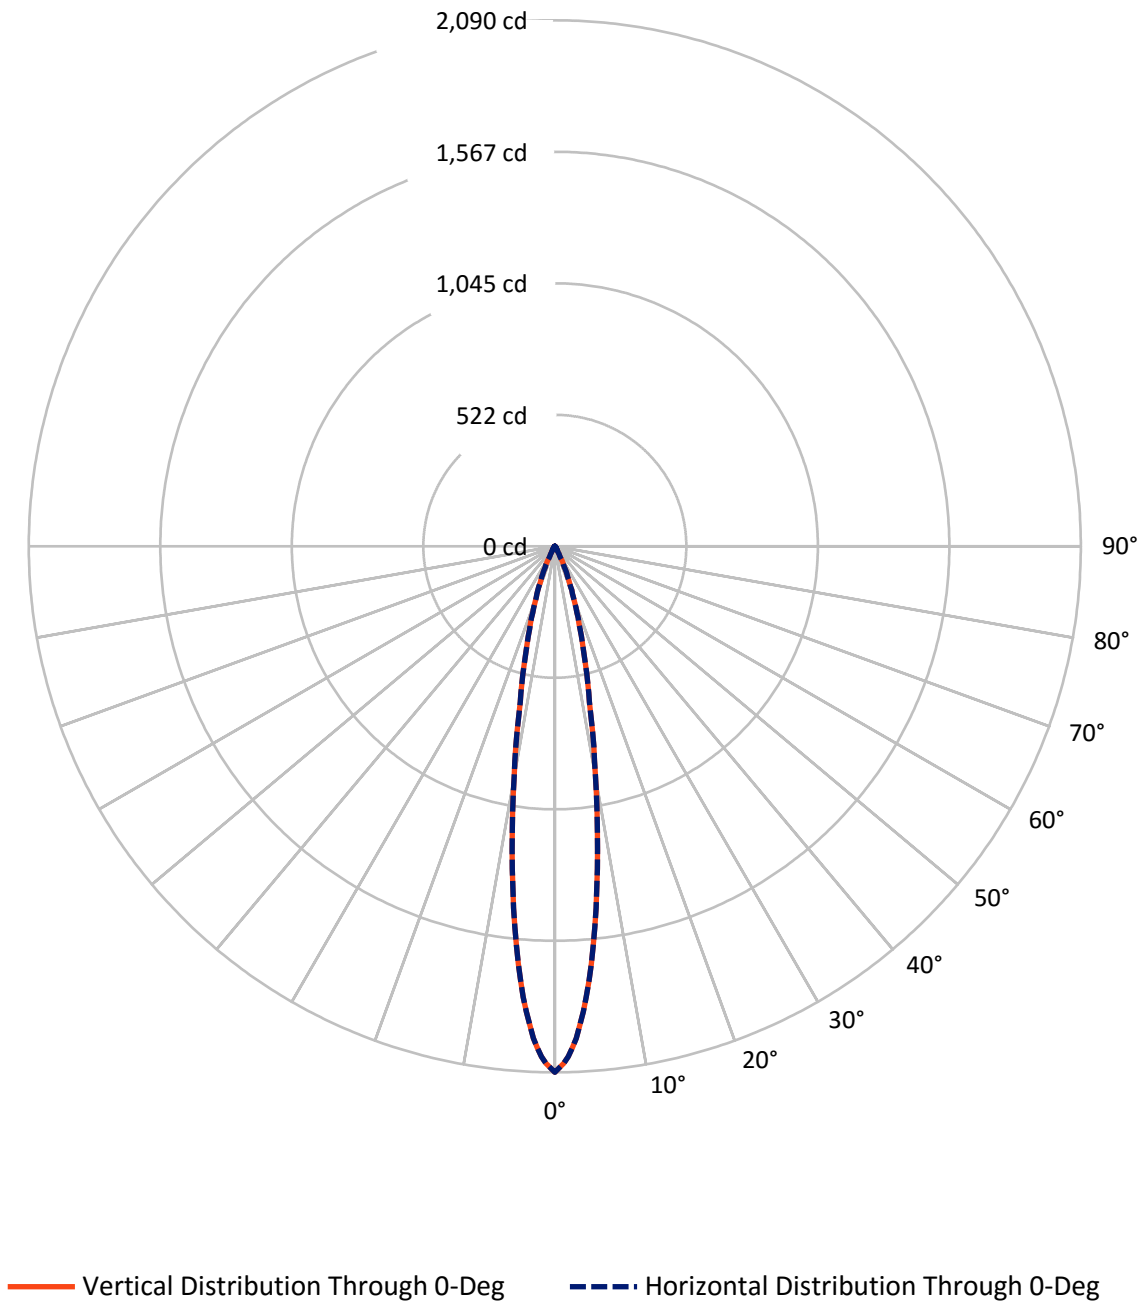

REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

Luminous Intensity Plot

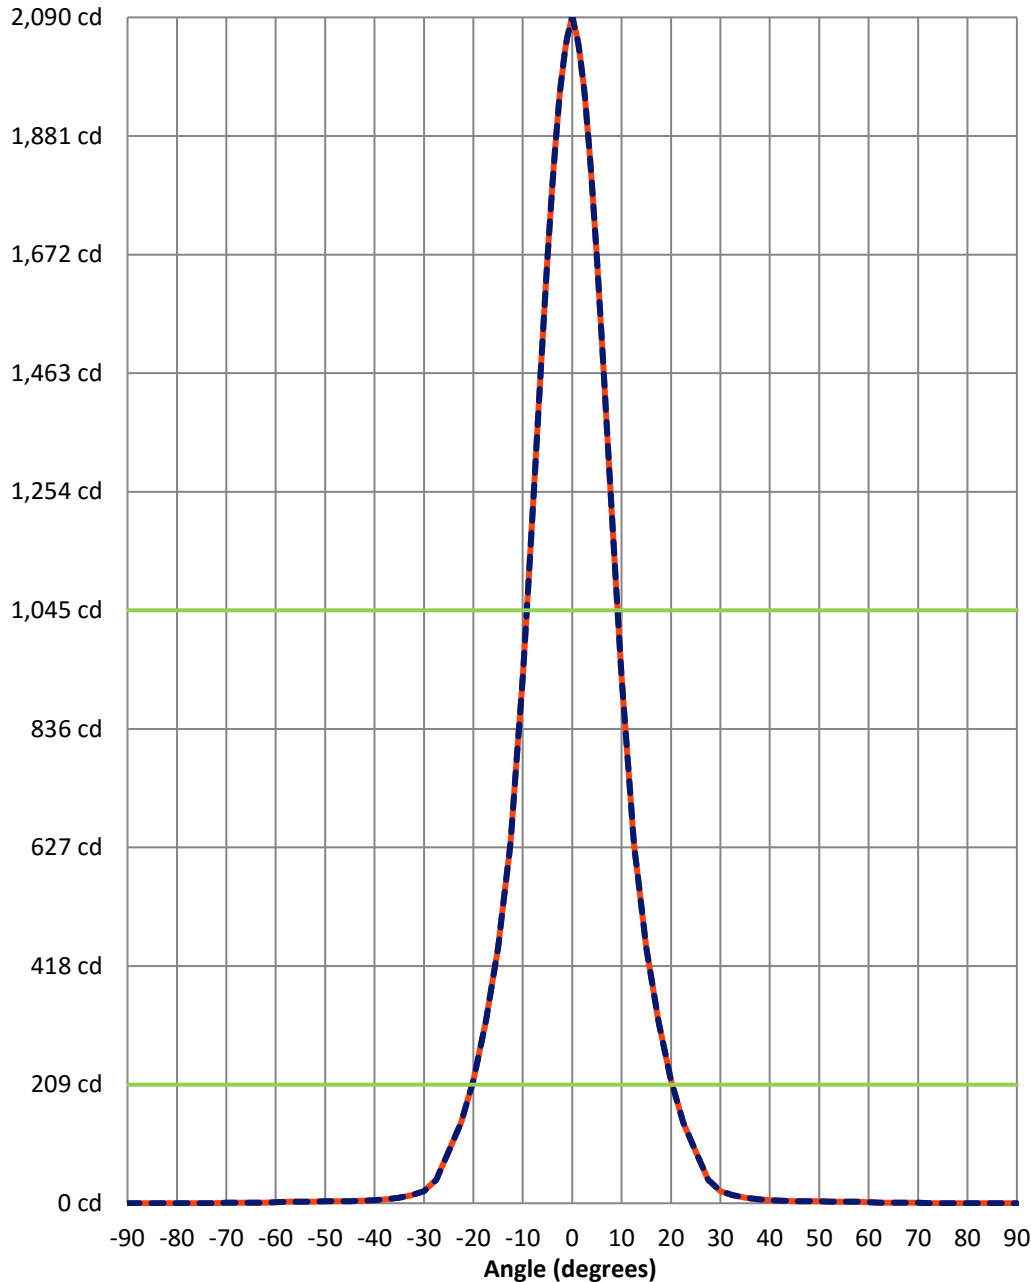

Beam:
 H Angle: 18.4°
 V Angle: 18.4°
 Lumens: 116.1
 Efficiency: 36.3%

Field:
 H Angle: 40.5°
 V Angle: 40.5°
 Lumens: 264.9
 Efficiency: 82.9%

Spill:
 Lumens: 54.7
 Efficiency: 17.1%

— Vertical Distribution through 0-Deg
 - - Horizontal Distribution through 0-Deg



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

FIELD
 BEAM

CANDELA DISTRIBUTION:

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
26.25°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
23.75°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
21.25°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
18.75°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
16.25°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
13.75°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
11.25°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
8.75°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
6.25°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
3.75°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
1.25°	0	0	0	0	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0	0	0	0	0
-1.25°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-3.75°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-6.25°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-8.75°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-11.25°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-13.75°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-16.25°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-18.75°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0
-21.25°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-23.75°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-26.25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	1
41.25°	0	0	0	0	0	0	0	0	0	0	1
40°	0	0	0	0	0	0	0	0	0	1	1
38.75°	0	0	0	0	0	0	0	0	0	1	1
37.5°	0	0	0	0	0	0	0	0	0	1	1
36.25°	0	0	0	0	0	0	0	0	1	1	1
35°	0	0	0	0	0	0	0	0	1	1	1



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
33.75°	0	0	0	0	0	0	0	0	1	1	1
32.5°	0	0	0	0	0	0	0	0	1	1	1
31.25°	0	0	0	0	0	0	0	1	1	1	1
30°	0	0	0	0	0	0	0	1	1	1	1
28.75°	0	0	0	0	0	0	0	1	1	1	1
27.5°	0	0	0	0	0	0	0	1	1	1	1
26.25°	0	0	0	0	0	0	1	1	1	1	1
25°	0	0	0	0	0	0	1	1	1	1	1
23.75°	0	0	0	0	0	0	1	1	1	1	1
22.5°	0	0	0	0	0	0	1	1	1	1	1
21.25°	0	0	0	0	0	0	1	1	1	1	1
20°	0	0	0	0	0	0	1	1	1	1	1
18.75°	0	0	0	0	0	1	1	1	1	1	1
17.5°	0	0	0	0	0	1	1	1	1	1	1
16.25°	0	0	0	0	0	1	1	1	1	1	1
15°	0	0	0	0	0	1	1	1	1	1	1
13.75°	0	0	0	0	0	1	1	1	1	1	1
12.5°	0	0	0	0	0	1	1	1	1	1	1
11.25°	0	0	0	0	0	1	1	1	1	1	1
10°	0	0	0	0	0	1	1	1	1	1	1
8.75°	0	0	0	0	0	1	1	1	1	1	1
7.5°	0	0	0	0	0	1	1	1	1	1	1
6.25°	0	0	0	0	0	1	1	1	1	1	1
5°	0	0	0	0	0	1	1	1	1	1	1
3.75°	0	0	0	0	0	1	1	1	1	1	1
2.5°	0	0	0	0	0	1	1	1	1	1	1
1.25°	0	0	0	0	0	1	1	1	1	1	1
0°	0	0	0	0	0	1	1	1	1	1	1
-1.25°	0	0	0	0	0	1	1	1	1	1	1
-2.5°	0	0	0	0	0	1	1	1	1	1	1
-3.75°	0	0	0	0	0	1	1	1	1	1	1
-5°	0	0	0	0	0	1	1	1	1	1	1
-6.25°	0	0	0	0	0	1	1	1	1	1	1
-7.5°	0	0	0	0	0	1	1	1	1	1	1
-8.75°	0	0	0	0	0	1	1	1	1	1	1
-10°	0	0	0	0	0	1	1	1	1	1	1
-11.25°	0	0	0	0	0	1	1	1	1	1	1
-12.5°	0	0	0	0	0	1	1	1	1	1	1
-13.75°	0	0	0	0	0	1	1	1	1	1	1
-15°	0	0	0	0	0	1	1	1	1	1	1
-16.25°	0	0	0	0	0	1	1	1	1	1	1
-17.5°	0	0	0	0	0	1	1	1	1	1	1
-18.75°	0	0	0	0	0	1	1	1	1	1	1
-20°	0	0	0	0	0	0	1	1	1	1	1
-21.25°	0	0	0	0	0	0	1	1	1	1	1



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
-22.5°	0	0	0	0	0	0	1	1	1	1	1
-23.75°	0	0	0	0	0	0	1	1	1	1	1
-25°	0	0	0	0	0	0	1	1	1	1	1
-26.25°	0	0	0	0	0	0	1	1	1	1	1
-27.5°	0	0	0	0	0	0	0	1	1	1	1
-28.75°	0	0	0	0	0	0	0	1	1	1	1
-30°	0	0	0	0	0	0	0	1	1	1	1
-31.25°	0	0	0	0	0	0	0	1	1	1	1
-32.5°	0	0	0	0	0	0	0	0	1	1	1
-33.75°	0	0	0	0	0	0	0	0	1	1	1
-35°	0	0	0	0	0	0	0	0	1	1	1
-36.25°	0	0	0	0	0	0	0	0	1	1	1
-37.5°	0	0	0	0	0	0	0	0	0	1	1
-38.75°	0	0	0	0	0	0	0	0	0	1	1
-40°	0	0	0	0	0	0	0	0	0	1	1
-41.25°	0	0	0	0	0	0	0	0	0	0	1
-42.5°	0	0	0	0	0	0	0	0	0	0	1
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	1	1
57.5°	0	0	0	0	0	0	0	0	1	1	1
56.25°	0	0	0	0	0	0	0	1	1	1	1
55°	0	0	0	0	0	0	1	1	1	1	1
53.75°	0	0	0	0	0	1	1	1	1	1	1
52.5°	0	0	0	0	1	1	1	1	1	1	1
51.25°	0	0	0	1	1	1	1	1	1	1	1
50°	0	0	0	1	1	1	1	1	1	1	1
48.75°	0	0	1	1	1	1	1	1	1	1	1
47.5°	0	1	1	1	1	1	1	1	1	1	1
46.25°	0	1	1	1	1	1	1	1	1	1	1
45°	1	1	1	1	1	1	1	1	1	1	1
43.75°	1	1	1	1	1	1	1	1	1	1	1
42.5°	1	1	1	1	1	1	1	1	1	1	1
41.25°	1	1	1	1	1	1	1	1	1	1	1
40°	1	1	1	1	1	1	1	1	1	1	2
38.75°	1	1	1	1	1	1	1	1	1	2	2
37.5°	1	1	1	1	1	1	1	1	1	2	2
36.25°	1	1	1	1	1	1	1	1	2	2	2
35°	1	1	1	1	1	1	1	1	2	2	2



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
33.75°	1	1	1	1	1	1	1	2	2	2	3
32.5°	1	1	1	1	1	1	1	2	2	2	3
31.25°	1	1	1	1	1	1	2	2	2	3	3
30°	1	1	1	1	1	1	2	2	2	3	3
28.75°	1	1	1	1	1	1	2	2	3	3	3
27.5°	1	1	1	1	1	2	2	2	3	3	3
26.25°	1	1	1	1	1	2	2	3	3	3	3
25°	1	1	1	1	1	2	2	3	3	3	3
23.75°	1	1	1	1	2	2	2	3	3	3	3
22.5°	1	1	1	1	2	2	3	3	3	3	3
21.25°	1	1	1	1	2	2	3	3	3	3	3
20°	1	1	1	2	2	2	3	3	3	3	3
18.75°	1	1	1	2	2	2	3	3	3	3	3
17.5°	1	1	1	2	2	3	3	3	3	3	3
16.25°	1	1	1	2	2	3	3	3	3	3	3
15°	1	1	1	2	2	3	3	3	3	3	3
13.75°	1	1	1	2	2	3	3	3	3	3	3
12.5°	1	1	2	2	2	3	3	3	3	3	3
11.25°	1	1	2	2	2	3	3	3	3	3	3
10°	1	1	2	2	3	3	3	3	3	3	3
8.75°	1	1	2	2	3	3	3	3	3	3	3
7.5°	1	1	2	2	3	3	3	3	3	3	3
6.25°	1	1	2	2	3	3	3	3	3	3	3
5°	1	1	2	2	3	3	3	3	3	3	3
3.75°	1	1	2	2	3	3	3	3	3	3	3
2.5°	1	1	2	2	3	3	3	3	3	3	3
1.25°	1	1	2	2	3	3	3	3	3	3	3
0°	1	1	2	2	3	3	3	3	3	3	4
-1.25°	1	1	2	2	3	3	3	3	3	3	3
-2.5°	1	1	2	2	3	3	3	3	3	3	3
-3.75°	1	1	2	2	3	3	3	3	3	3	3
-5°	1	1	2	2	3	3	3	3	3	3	3
-6.25°	1	1	2	2	3	3	3	3	3	3	3
-7.5°	1	1	2	2	3	3	3	3	3	3	3
-8.75°	1	1	2	2	3	3	3	3	3	3	3
-10°	1	1	2	2	3	3	3	3	3	3	3
-11.25°	1	1	2	2	2	3	3	3	3	3	3
-12.5°	1	1	2	2	2	3	3	3	3	3	3
-13.75°	1	1	1	2	2	3	3	3	3	3	3
-15°	1	1	1	2	2	3	3	3	3	3	3
-16.25°	1	1	1	2	2	3	3	3	3	3	3
-17.5°	1	1	1	2	2	3	3	3	3	3	3
-18.75°	1	1	1	2	2	2	3	3	3	3	3
-20°	1	1	1	2	2	2	3	3	3	3	3
-21.25°	1	1	1	1	2	2	3	3	3	3	3



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
-22.5°	1	1	1	1	2	2	3	3	3	3	3
-23.75°	1	1	1	1	2	2	2	3	3	3	3
-25°	1	1	1	1	1	2	2	3	3	3	3
-26.25°	1	1	1	1	1	2	2	3	3	3	3
-27.5°	1	1	1	1	1	2	2	2	3	3	3
-28.75°	1	1	1	1	1	1	2	2	3	3	3
-30°	1	1	1	1	1	1	2	2	2	3	3
-31.25°	1	1	1	1	1	1	2	2	2	3	3
-32.5°	1	1	1	1	1	1	1	2	2	2	3
-33.75°	1	1	1	1	1	1	1	2	2	2	3
-35°	1	1	1	1	1	1	1	1	2	2	2
-36.25°	1	1	1	1	1	1	1	1	2	2	2
-37.5°	1	1	1	1	1	1	1	1	1	2	2
-38.75°	1	1	1	1	1	1	1	1	1	2	2
-40°	1	1	1	1	1	1	1	1	1	1	2
-41.25°	1	1	1	1	1	1	1	1	1	1	1
-42.5°	1	1	1	1	1	1	1	1	1	1	1
-43.75°	1	1	1	1	1	1	1	1	1	1	1
-45°	1	1	1	1	1	1	1	1	1	1	1
-46.25°	0	1	1	1	1	1	1	1	1	1	1
-47.5°	0	1	1	1	1	1	1	1	1	1	1
-48.75°	0	0	1	1	1	1	1	1	1	1	1
-50°	0	0	0	1	1	1	1	1	1	1	1
-51.25°	0	0	0	1	1	1	1	1	1	1	1
-52.5°	0	0	0	0	1	1	1	1	1	1	1
-53.75°	0	0	0	0	0	1	1	1	1	1	1
-55°	0	0	0	0	0	0	1	1	1	1	1
-56.25°	0	0	0	0	0	0	0	1	1	1	1
-57.5°	0	0	0	0	0	0	0	0	1	1	1
-58.75°	0	0	0	0	0	0	0	0	0	1	1
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	1
65°	0	0	0	0	0	0	0	1	1	1	1
63.75°	0	0	0	0	0	1	1	1	1	1	1
62.5°	0	0	0	1	1	1	1	1	1	1	1
61.25°	0	1	1	1	1	1	1	1	1	1	1
60°	1	1	1	1	1	1	1	1	1	1	1
58.75°	1	1	1	1	1	1	1	1	1	1	1
57.5°	1	1	1	1	1	1	1	1	1	1	1
56.25°	1	1	1	1	1	1	1	1	1	1	1
55°	1	1	1	1	1	1	1	1	1	1	1
53.75°	1	1	1	1	1	1	1	1	1	1	1
52.5°	1	1	1	1	1	1	1	1	1	1	2
51.25°	1	1	1	1	1	1	1	1	2	2	2
50°	1	1	1	1	1	1	1	2	2	2	2
48.75°	1	1	1	1	1	1	2	2	2	2	3
47.5°	1	1	1	1	2	2	2	2	2	3	3
46.25°	1	1	1	2	2	2	2	3	3	3	3
45°	1	1	2	2	2	2	3	3	3	3	3
43.75°	1	2	2	2	2	3	3	3	3	3	3
42.5°	1	2	2	2	3	3	3	3	3	3	3
41.25°	2	2	2	3	3	3	3	3	3	3	3
40°	2	2	3	3	3	3	3	3	3	3	3
38.75°	2	2	3	3	3	3	3	3	3	3	3
37.5°	2	3	3	3	3	3	3	3	3	3	3
36.25°	3	3	3	3	3	3	3	3	3	3	4
35°	3	3	3	3	3	3	3	3	3	4	4



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
33.75°	3	3	3	3	3	3	3	3	4	4	4
32.5°	3	3	3	3	3	3	3	4	4	4	4
31.25°	3	3	3	3	3	3	3	4	4	4	4
30°	3	3	3	3	3	3	4	4	4	4	4
28.75°	3	3	3	3	3	4	4	4	4	4	4
27.5°	3	3	3	3	3	4	4	4	4	4	4
26.25°	3	3	3	3	4	4	4	4	4	4	4
25°	3	3	3	3	4	4	4	4	4	4	4
23.75°	3	3	3	4	4	4	4	4	4	4	4
22.5°	3	3	3	4	4	4	4	4	4	4	5
21.25°	3	3	4	4	4	4	4	4	4	4	5
20°	3	3	4	4	4	4	4	4	4	5	5
18.75°	3	3	4	4	4	4	4	4	4	5	5
17.5°	3	4	4	4	4	4	4	4	5	5	5
16.25°	3	4	4	4	4	4	4	4	5	5	6
15°	3	4	4	4	4	4	4	4	5	5	6
13.75°	3	4	4	4	4	4	4	5	5	6	6
12.5°	4	4	4	4	4	4	4	5	5	6	7
11.25°	4	4	4	4	4	4	4	5	5	6	7
10°	4	4	4	4	4	4	4	5	5	6	7
8.75°	4	4	4	4	4	4	5	5	6	6	7
7.5°	4	4	4	4	4	4	5	5	6	7	8
6.25°	4	4	4	4	4	4	5	5	6	7	8
5°	4	4	4	4	4	4	5	5	6	7	8
3.75°	4	4	4	4	4	4	5	5	6	7	8
2.5°	4	4	4	4	4	4	5	5	6	7	8
1.25°	4	4	4	4	4	4	5	5	6	7	8
0°	4	4	4	4	4	4	5	5	6	7	8
-1.25°	4	4	4	4	4	4	5	5	6	7	8
-2.5°	4	4	4	4	4	4	5	5	6	7	8
-3.75°	4	4	4	4	4	4	5	5	6	7	8
-5°	4	4	4	4	4	4	5	5	6	7	8
-6.25°	4	4	4	4	4	4	5	5	6	7	8
-7.5°	4	4	4	4	4	4	5	5	6	7	8
-8.75°	4	4	4	4	4	4	5	5	6	6	7
-10°	4	4	4	4	4	4	4	5	5	6	7
-11.25°	4	4	4	4	4	4	4	5	5	6	7
-12.5°	4	4	4	4	4	4	4	5	5	6	7
-13.75°	3	4	4	4	4	4	4	5	5	6	6
-15°	3	4	4	4	4	4	4	4	5	5	6
-16.25°	3	4	4	4	4	4	4	4	5	5	6
-17.5°	3	4	4	4	4	4	4	4	5	5	5
-18.75°	3	3	4	4	4	4	4	4	4	5	5
-20°	3	3	4	4	4	4	4	4	4	5	5
-21.25°	3	3	4	4	4	4	4	4	4	4	5



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
-22.5°	3	3	3	4	4	4	4	4	4	4	5
-23.75°	3	3	3	4	4	4	4	4	4	4	4
-25°	3	3	3	3	4	4	4	4	4	4	4
-26.25°	3	3	3	3	4	4	4	4	4	4	4
-27.5°	3	3	3	3	3	4	4	4	4	4	4
-28.75°	3	3	3	3	3	4	4	4	4	4	4
-30°	3	3	3	3	3	3	4	4	4	4	4
-31.25°	3	3	3	3	3	3	3	4	4	4	4
-32.5°	3	3	3	3	3	3	3	4	4	4	4
-33.75°	3	3	3	3	3	3	3	3	4	4	4
-35°	3	3	3	3	3	3	3	3	3	4	4
-36.25°	3	3	3	3	3	3	3	3	3	3	4
-37.5°	2	3	3	3	3	3	3	3	3	3	3
-38.75°	2	2	3	3	3	3	3	3	3	3	3
-40°	2	2	3	3	3	3	3	3	3	3	3
-41.25°	2	2	2	3	3	3	3	3	3	3	3
-42.5°	1	2	2	2	3	3	3	3	3	3	3
-43.75°	1	2	2	2	2	3	3	3	3	3	3
-45°	1	1	2	2	2	2	3	3	3	3	3
-46.25°	1	1	1	2	2	2	2	3	3	3	3
-47.5°	1	1	1	1	2	2	2	2	2	3	3
-48.75°	1	1	1	1	1	1	2	2	2	2	3
-50°	1	1	1	1	1	1	1	2	2	2	2
-51.25°	1	1	1	1	1	1	1	1	2	2	2
-52.5°	1	1	1	1	1	1	1	1	1	1	2
-53.75°	1	1	1	1	1	1	1	1	1	1	1
-55°	1	1	1	1	1	1	1	1	1	1	1
-56.25°	1	1	1	1	1	1	1	1	1	1	1
-57.5°	1	1	1	1	1	1	1	1	1	1	1
-58.75°	1	1	1	1	1	1	1	1	1	1	1
-60°	1	1	1	1	1	1	1	1	1	1	1
-61.25°	0	1	1	1	1	1	1	1	1	1	1
-62.5°	0	0	0	1	1	1	1	1	1	1	1
-63.75°	0	0	0	0	0	1	1	1	1	1	1
-65°	0	0	0	0	0	0	0	1	1	1	1
-66.25°	0	0	0	0	0	0	0	0	0	0	1
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	1	1	1	1
67.5°	0	0	0	1	1	1	1	1	1	1	1
66.25°	1	1	1	1	1	1	1	1	1	1	1
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	1	1	1	1	1	1	1	1	1	1	1
61.25°	1	1	1	1	1	1	1	1	1	1	1
60°	1	1	1	1	1	1	1	1	1	1	1
58.75°	1	1	1	1	1	1	1	1	1	1	1
57.5°	1	1	1	1	1	1	1	1	1	2	2
56.25°	1	1	1	1	1	1	2	2	2	2	2
55°	1	1	1	2	2	2	2	2	2	2	3
53.75°	1	2	2	2	2	2	2	3	3	3	3
52.5°	2	2	2	2	2	3	3	3	3	3	3
51.25°	2	2	2	3	3	3	3	3	3	3	3
50°	2	3	3	3	3	3	3	3	3	3	3
48.75°	3	3	3	3	3	3	3	3	3	3	3
47.5°	3	3	3	3	3	3	3	3	3	3	3
46.25°	3	3	3	3	3	3	3	3	3	3	3
45°	3	3	3	3	3	3	3	3	3	4	4
43.75°	3	3	3	3	3	3	3	4	4	4	4
42.5°	3	3	3	3	3	4	4	4	4	4	4
41.25°	3	3	3	3	4	4	4	4	4	4	4
40°	3	3	4	4	4	4	4	4	4	4	4
38.75°	3	4	4	4	4	4	4	4	4	4	4
37.5°	4	4	4	4	4	4	4	4	4	4	4
36.25°	4	4	4	4	4	4	4	4	4	4	5
35°	4	4	4	4	4	4	4	4	5	5	5



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
33.75°	4	4	4	4	4	4	4	5	5	5	5
32.5°	4	4	4	4	4	4	5	5	5	6	6
31.25°	4	4	4	4	4	5	5	5	6	6	7
30°	4	4	4	4	5	5	5	6	7	7	8
28.75°	4	4	4	5	5	5	6	7	7	8	9
27.5°	4	4	5	5	5	6	7	7	8	9	10
26.25°	4	5	5	5	6	7	7	8	9	10	11
25°	5	5	5	6	7	7	8	9	10	12	13
23.75°	5	5	6	6	7	8	9	10	12	13	15
22.5°	5	5	6	7	8	9	10	11	13	15	17
21.25°	5	6	7	7	9	10	11	13	15	17	20
20°	6	6	7	8	9	11	12	14	17	19	23
18.75°	6	7	8	9	10	12	14	16	19	22	30
17.5°	6	7	8	9	11	13	15	18	21	28	36
16.25°	7	8	9	10	12	14	17	20	25	33	42
15°	7	8	9	11	13	15	18	22	30	39	55
13.75°	7	9	10	12	14	17	20	26	35	47	68
12.5°	8	9	11	13	15	18	21	30	39	58	80
11.25°	8	9	11	13	16	19	25	34	46	69	91
10°	8	10	12	14	17	20	28	38	55	78	101
8.75°	9	10	12	15	18	22	31	41	64	87	110
7.5°	9	11	13	15	19	24	34	47	71	95	118
6.25°	9	11	13	16	20	26	36	53	77	101	125
5°	9	11	14	17	20	28	38	58	82	107	131
3.75°	10	12	14	17	21	30	40	62	86	111	136
2.5°	10	12	14	17	21	31	41	64	89	114	139
1.25°	10	12	14	18	21	31	41	66	91	116	141
0°	10	12	14	18	21	32	42	67	91	117	142
-1.25°	10	12	14	18	21	31	41	66	91	116	141
-2.5°	10	12	14	17	21	31	41	64	89	114	139
-3.75°	10	12	14	17	21	30	40	62	86	111	136
-5°	9	11	14	17	20	28	38	58	82	107	131
-6.25°	9	11	13	16	20	26	36	53	77	101	125
-7.5°	9	11	13	15	19	24	34	47	71	95	118
-8.75°	9	10	12	15	18	22	31	41	64	87	110
-10°	8	10	12	14	17	20	28	38	55	78	101
-11.25°	8	9	11	13	16	19	25	34	46	69	91
-12.5°	8	9	11	13	15	18	21	30	39	58	80
-13.75°	7	9	10	12	14	17	20	26	35	47	68
-15°	7	8	9	11	13	15	18	22	30	39	55
-16.25°	7	8	9	10	12	14	17	20	25	33	42
-17.5°	6	7	8	9	11	13	15	18	21	28	36
-18.75°	6	7	8	9	10	12	14	16	19	22	30
-20°	6	6	7	8	9	11	12	14	17	19	23
-21.25°	5	6	7	7	9	10	11	13	15	17	20



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
-22.5°	5	5	6	7	8	9	10	11	13	15	17
-23.75°	5	5	6	6	7	8	9	10	12	13	15
-25°	5	5	5	6	7	7	8	9	10	12	13
-26.25°	4	5	5	5	6	7	7	8	9	10	11
-27.5°	4	4	5	5	5	6	7	7	8	9	10
-28.75°	4	4	4	5	5	5	6	7	7	8	9
-30°	4	4	4	4	5	5	5	6	7	7	8
-31.25°	4	4	4	4	4	5	5	5	6	6	7
-32.5°	4	4	4	4	4	4	5	5	5	6	6
-33.75°	4	4	4	4	4	4	4	5	5	5	5
-35°	4	4	4	4	4	4	4	4	5	5	5
-36.25°	4	4	4	4	4	4	4	4	4	4	5
-37.5°	4	4	4	4	4	4	4	4	4	4	4
-38.75°	3	4	4	4	4	4	4	4	4	4	4
-40°	3	3	4	4	4	4	4	4	4	4	4
-41.25°	3	3	3	3	4	4	4	4	4	4	4
-42.5°	3	3	3	3	3	4	4	4	4	4	4
-43.75°	3	3	3	3	3	3	3	4	4	4	4
-45°	3	3	3	3	3	3	3	3	3	4	4
-46.25°	3	3	3	3	3	3	3	3	3	3	3
-47.5°	3	3	3	3	3	3	3	3	3	3	3
-48.75°	3	3	3	3	3	3	3	3	3	3	3
-50°	2	3	3	3	3	3	3	3	3	3	3
-51.25°	2	2	2	3	3	3	3	3	3	3	3
-52.5°	2	2	2	2	2	3	3	3	3	3	3
-53.75°	1	2	2	2	2	2	2	3	3	3	3
-55°	1	1	1	2	2	2	2	2	2	2	3
-56.25°	1	1	1	1	1	1	2	2	2	2	2
-57.5°	1	1	1	1	1	1	1	1	1	2	2
-58.75°	1	1	1	1	1	1	1	1	1	1	1
-60°	1	1	1	1	1	1	1	1	1	1	1
-61.25°	1	1	1	1	1	1	1	1	1	1	1
-62.5°	1	1	1	1	1	1	1	1	1	1	1
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	1
-67.5°	0	0	0	1	1	1	1	1	1	1	1
-68.75°	0	0	0	0	0	0	0	1	1	1	1
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	1	1	1	1	1	1	1	1	1
68.75°	1	1	1	1	1	1	1	1	1	1	1
67.5°	1	1	1	1	1	1	1	1	1	1	1
66.25°	1	1	1	1	1	1	1	1	1	1	1
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	1	1	1	1	1	1	1	1	1	1	1
61.25°	1	1	1	1	1	1	1	1	1	1	1
60°	1	1	1	1	1	1	1	2	2	2	2
58.75°	1	2	2	2	2	2	2	2	2	2	2
57.5°	2	2	2	2	2	2	2	2	2	3	3
56.25°	2	2	2	3	3	3	3	3	3	3	3
55°	3	3	3	3	3	3	3	3	3	3	3
53.75°	3	3	3	3	3	3	3	3	3	3	3
52.5°	3	3	3	3	3	3	3	3	3	3	3
51.25°	3	3	3	3	3	3	3	3	3	3	3
50°	3	3	3	3	3	3	3	3	3	3	3
48.75°	3	3	3	3	3	3	3	4	4	4	4
47.5°	3	3	3	4	4	4	4	4	4	4	4
46.25°	4	4	4	4	4	4	4	4	4	4	4
45°	4	4	4	4	4	4	4	4	4	4	4
43.75°	4	4	4	4	4	4	4	4	4	4	4
42.5°	4	4	4	4	4	4	4	4	4	4	4
41.25°	4	4	4	4	4	4	4	4	4	4	5
40°	4	4	4	4	4	4	5	5	5	5	5
38.75°	4	4	4	5	5	5	5	5	5	5	6
37.5°	4	5	5	5	5	5	6	6	6	6	6
36.25°	5	5	5	5	6	6	6	7	7	7	7
35°	5	6	6	6	7	7	7	8	8	8	9



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
33.75°	6	6	7	7	8	8	9	9	9	10	10
32.5°	7	7	8	8	9	9	10	11	11	12	12
31.25°	7	8	9	9	10	11	12	13	13	14	15
30°	9	9	10	11	12	13	14	15	16	17	18
28.75°	10	11	12	13	14	15	17	18	19	20	22
27.5°	11	12	14	15	17	18	20	21	25	28	31
26.25°	13	14	16	18	20	22	26	30	34	38	41
25°	15	17	19	21	25	30	35	39	46	55	64
23.75°	17	19	22	28	33	39	47	58	69	78	87
22.5°	20	23	30	36	42	55	68	80	91	101	110
21.25°	24	31	37	46	61	75	89	101	113	124	134
20°	31	38	49	65	80	95	109	123	135	149	164
18.75°	37	49	66	83	99	115	130	145	164	182	198
17.5°	46	65	83	100	117	134	153	175	195	214	237
16.25°	61	80	99	117	135	157	182	204	230	257	282
15°	75	95	115	134	157	184	209	240	271	300	329
13.75°	89	109	130	153	182	209	243	278	311	348	385
12.5°	101	123	145	175	204	240	278	315	358	400	439
11.25°	113	135	164	195	230	271	311	358	405	450	508
10°	124	149	182	214	257	300	348	400	450	516	578
8.75°	134	164	198	237	282	329	385	439	508	578	651
7.5°	142	177	212	258	305	359	417	484	561	636	751
6.25°	153	189	227	276	325	386	446	527	608	719	841
5°	163	199	242	291	346	409	479	564	658	790	919
3.75°	170	206	253	303	363	427	506	594	710	848	997
2.5°	175	212	261	312	375	440	526	616	749	892	1057
1.25°	178	215	266	317	382	448	538	629	773	918	1094
0°	179	216	268	319	385	450	542	634	781	927	1107
-1.25°	178	215	266	317	382	448	538	629	773	918	1094
-2.5°	175	212	261	312	375	440	526	616	749	892	1057
-3.75°	170	206	253	303	363	427	506	594	710	848	997
-5°	163	199	242	291	346	409	479	564	658	790	919
-6.25°	153	189	227	276	325	386	446	527	608	719	841
-7.5°	142	177	212	258	305	359	417	484	561	636	751
-8.75°	134	164	198	237	282	329	385	439	508	578	651
-10°	124	149	182	214	257	300	348	400	450	516	578
-11.25°	113	135	164	195	230	271	311	358	405	450	508
-12.5°	101	123	145	175	204	240	278	315	358	400	439
-13.75°	89	109	130	153	182	209	243	278	311	348	385
-15°	75	95	115	134	157	184	209	240	271	300	329
-16.25°	61	80	99	117	135	157	182	204	230	257	282
-17.5°	46	65	83	100	117	134	153	175	195	214	237
-18.75°	37	49	66	83	99	115	130	145	164	182	198
-20°	31	38	49	65	80	95	109	123	135	149	164
-21.25°	24	31	37	46	61	75	89	101	113	124	134



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
-22.5°	20	23	30	36	42	55	68	80	91	101	110
-23.75°	17	19	22	28	33	39	47	58	69	78	87
-25°	15	17	19	21	25	30	35	39	46	55	64
-26.25°	13	14	16	18	20	22	26	30	34	38	41
-27.5°	11	12	14	15	17	18	20	21	25	28	31
-28.75°	10	11	12	13	14	15	17	18	19	20	22
-30°	9	9	10	11	12	13	14	15	16	17	18
-31.25°	7	8	9	9	10	11	12	13	13	14	15
-32.5°	7	7	8	8	9	9	10	11	11	12	12
-33.75°	6	6	7	7	8	8	9	9	9	10	10
-35°	5	6	6	6	7	7	7	8	8	8	9
-36.25°	5	5	5	5	6	6	6	7	7	7	7
-37.5°	4	5	5	5	5	5	6	6	6	6	6
-38.75°	4	4	4	5	5	5	5	5	5	5	6
-40°	4	4	4	4	4	4	5	5	5	5	5
-41.25°	4	4	4	4	4	4	4	4	4	4	5
-42.5°	4	4	4	4	4	4	4	4	4	4	4
-43.75°	4	4	4	4	4	4	4	4	4	4	4
-45°	4	4	4	4	4	4	4	4	4	4	4
-46.25°	4	4	4	4	4	4	4	4	4	4	4
-47.5°	3	3	3	4	4	4	4	4	4	4	4
-48.75°	3	3	3	3	3	3	3	4	4	4	4
-50°	3	3	3	3	3	3	3	3	3	3	3
-51.25°	3	3	3	3	3	3	3	3	3	3	3
-52.5°	3	3	3	3	3	3	3	3	3	3	3
-53.75°	3	3	3	3	3	3	3	3	3	3	3
-55°	3	3	3	3	3	3	3	3	3	3	3
-56.25°	2	2	2	3	3	3	3	3	3	3	3
-57.5°	2	2	2	2	2	2	2	2	2	3	3
-58.75°	1	2	2	2	2	2	2	2	2	2	2
-60°	1	1	1	1	1	1	1	2	2	2	2
-61.25°	1	1	1	1	1	1	1	1	1	1	1
-62.5°	1	1	1	1	1	1	1	1	1	1	1
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	1
-67.5°	1	1	1	1	1	1	1	1	1	1	1
-68.75°	1	1	1	1	1	1	1	1	1	1	1
-70°	0	0	1	1	1	1	1	1	1	1	1
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	1	1	1	1	1	1	1	1	1	1	1
68.75°	1	1	1	1	1	1	1	1	1	1	1
67.5°	1	1	1	1	1	1	1	1	1	1	1
66.25°	1	1	1	1	1	1	1	1	1	1	1
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	1	1	1	1	1	1	1	1	1	1	1
61.25°	1	1	1	1	1	1	1	1	1	1	1
60°	2	2	2	2	2	2	2	2	2	2	2
58.75°	2	2	2	2	2	2	2	2	2	2	2
57.5°	3	3	3	3	3	3	3	3	3	3	3
56.25°	3	3	3	3	3	3	3	3	3	3	3
55°	3	3	3	3	3	3	3	3	3	3	3
53.75°	3	3	3	3	3	3	3	3	3	3	3
52.5°	3	3	3	3	3	3	3	3	3	3	3
51.25°	3	3	3	3	3	3	3	3	3	3	3
50°	3	3	3	3	3	3	4	3	3	3	3
48.75°	4	4	4	4	4	4	4	4	4	4	4
47.5°	4	4	4	4	4	4	4	4	4	4	4
46.25°	4	4	4	4	4	4	4	4	4	4	4
45°	4	4	4	4	4	4	4	4	4	4	4
43.75°	4	4	4	4	4	4	4	4	4	4	4
42.5°	4	4	4	4	4	4	4	4	4	4	4
41.25°	5	5	5	5	5	5	5	5	5	5	5
40°	5	5	5	5	5	5	5	5	5	5	5
38.75°	6	6	6	6	6	6	6	6	6	6	6
37.5°	7	7	7	7	7	7	7	7	7	7	7
36.25°	8	8	8	8	8	8	8	8	8	8	8
35°	9	9	9	10	10	10	10	10	10	10	9



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
33.75°	11	11	11	12	12	12	12	12	12	12	11
32.5°	13	13	14	14	14	14	14	14	14	14	14
31.25°	15	16	17	17	17	18	18	18	17	17	17
30°	19	20	20	21	21	21	21	21	21	21	20
28.75°	24	26	28	30	31	31	32	31	31	30	28
27.5°	34	36	38	40	41	41	42	41	41	40	38
26.25°	47	53	58	62	64	66	67	66	64	62	58
25°	71	77	82	86	89	91	91	91	89	86	82
23.75°	95	101	107	111	114	116	117	116	114	111	107
22.5°	118	125	131	136	139	141	142	141	139	136	131
21.25°	142	153	163	170	175	178	179	178	175	170	163
20°	177	189	199	206	212	215	216	215	212	206	199
18.75°	212	227	242	253	261	266	268	266	261	253	242
17.5°	258	276	291	303	312	317	319	317	312	303	291
16.25°	305	325	346	363	375	382	385	382	375	363	346
15°	359	386	409	427	440	448	450	448	440	427	409
13.75°	417	446	479	506	526	538	542	538	526	506	479
12.5°	484	527	564	594	616	629	634	629	616	594	564
11.25°	561	608	658	710	749	773	781	773	749	710	658
10°	636	719	790	848	892	918	927	918	892	848	790
8.75°	751	841	919	997	1057	1094	1107	1094	1057	997	919
7.5°	858	963	1070	1161	1231	1278	1293	1278	1231	1161	1070
6.25°	963	1096	1217	1327	1411	1466	1484	1466	1411	1327	1217
5°	1070	1217	1360	1485	1581	1644	1666	1644	1581	1485	1360
3.75°	1161	1327	1485	1622	1731	1804	1827	1804	1731	1622	1485
2.5°	1231	1411	1581	1731	1851	1930	1957	1930	1851	1731	1581
1.25°	1278	1466	1644	1804	1930	2015	2045	2015	1930	1804	1644
0°	1293	1484	1666	1827	1957	2045	2090	2045	1957	1827	1666
-1.25°	1278	1466	1644	1804	1930	2015	2045	2015	1930	1804	1644
-2.5°	1231	1411	1581	1731	1851	1930	1957	1930	1851	1731	1581
-3.75°	1161	1327	1485	1622	1731	1804	1827	1804	1731	1622	1485
-5°	1070	1217	1360	1485	1581	1644	1666	1644	1581	1485	1360
-6.25°	963	1096	1217	1327	1411	1466	1484	1466	1411	1327	1217
-7.5°	858	963	1070	1161	1231	1278	1293	1278	1231	1161	1070
-8.75°	751	841	919	997	1057	1094	1107	1094	1057	997	919
-10°	636	719	790	848	892	918	927	918	892	848	790
-11.25°	561	608	658	710	749	773	781	773	749	710	658
-12.5°	484	527	564	594	616	629	634	629	616	594	564
-13.75°	417	446	479	506	526	538	542	538	526	506	479
-15°	359	386	409	427	440	448	450	448	440	427	409
-16.25°	305	325	346	363	375	382	385	382	375	363	346
-17.5°	258	276	291	303	312	317	319	317	312	303	291
-18.75°	212	227	242	253	261	266	268	266	261	253	242
-20°	177	189	199	206	212	215	216	215	212	206	199
-21.25°	142	153	163	170	175	178	179	178	175	170	163



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
-22.5°	118	125	131	136	139	141	142	141	139	136	131
-23.75°	95	101	107	111	114	116	117	116	114	111	107
-25°	71	77	82	86	89	91	91	91	89	86	82
-26.25°	47	53	58	62	64	66	67	66	64	62	58
-27.5°	34	36	38	40	41	41	42	41	41	40	38
-28.75°	24	26	28	30	31	31	32	31	31	30	28
-30°	19	20	20	21	21	21	21	21	21	21	20
-31.25°	15	16	17	17	17	18	18	18	17	17	17
-32.5°	13	13	14	14	14	14	14	14	14	14	14
-33.75°	11	11	11	12	12	12	12	12	12	12	11
-35°	9	9	9	10	10	10	10	10	10	10	9
-36.25°	8	8	8	8	8	8	8	8	8	8	8
-37.5°	7	7	7	7	7	7	7	7	7	7	7
-38.75°	6	6	6	6	6	6	6	6	6	6	6
-40°	5	5	5	5	5	5	5	5	5	5	5
-41.25°	5	5	5	5	5	5	5	5	5	5	5
-42.5°	4	4	4	4	4	4	4	4	4	4	4
-43.75°	4	4	4	4	4	4	4	4	4	4	4
-45°	4	4	4	4	4	4	4	4	4	4	4
-46.25°	4	4	4	4	4	4	4	4	4	4	4
-47.5°	4	4	4	4	4	4	4	4	4	4	4
-48.75°	4	4	4	4	4	4	4	4	4	4	4
-50°	3	3	3	3	3	3	4	3	3	3	3
-51.25°	3	3	3	3	3	3	3	3	3	3	3
-52.5°	3	3	3	3	3	3	3	3	3	3	3
-53.75°	3	3	3	3	3	3	3	3	3	3	3
-55°	3	3	3	3	3	3	3	3	3	3	3
-56.25°	3	3	3	3	3	3	3	3	3	3	3
-57.5°	3	3	3	3	3	3	3	3	3	3	3
-58.75°	2	2	2	2	2	2	2	2	2	2	2
-60°	2	2	2	2	2	2	2	2	2	2	2
-61.25°	1	1	1	1	1	1	1	1	1	1	1
-62.5°	1	1	1	1	1	1	1	1	1	1	1
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	1
-67.5°	1	1	1	1	1	1	1	1	1	1	1
-68.75°	1	1	1	1	1	1	1	1	1	1	1
-70°	1	1	1	1	1	1	1	1	1	1	1
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	1	1	1	1	1	1	1	1	1	1	1
68.75°	1	1	1	1	1	1	1	1	1	1	1
67.5°	1	1	1	1	1	1	1	1	1	1	1
66.25°	1	1	1	1	1	1	1	1	1	1	1
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	1	1	1	1	1	1	1	1	1	1	1
61.25°	1	1	1	1	1	1	1	1	1	1	1
60°	2	2	2	2	2	2	1	1	1	1	1
58.75°	2	2	2	2	2	2	2	2	2	2	2
57.5°	3	3	3	3	2	2	2	2	2	2	2
56.25°	3	3	3	3	3	3	3	3	3	3	2
55°	3	3	3	3	3	3	3	3	3	3	3
53.75°	3	3	3	3	3	3	3	3	3	3	3
52.5°	3	3	3	3	3	3	3	3	3	3	3
51.25°	3	3	3	3	3	3	3	3	3	3	3
50°	3	3	3	3	3	3	3	3	3	3	3
48.75°	4	4	4	4	4	4	3	3	3	3	3
47.5°	4	4	4	4	4	4	4	4	4	4	3
46.25°	4	4	4	4	4	4	4	4	4	4	4
45°	4	4	4	4	4	4	4	4	4	4	4
43.75°	4	4	4	4	4	4	4	4	4	4	4
42.5°	4	4	4	4	4	4	4	4	4	4	4
41.25°	5	5	5	4	4	4	4	4	4	4	4
40°	5	5	5	5	5	5	5	4	4	4	4
38.75°	6	6	6	5	5	5	5	5	5	5	4
37.5°	7	7	6	6	6	6	6	5	5	5	5
36.25°	8	8	7	7	7	7	6	6	6	5	5
35°	9	9	9	8	8	8	7	7	7	6	6



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
33.75°	11	11	10	10	9	9	9	8	8	7	7
32.5°	13	13	12	12	11	11	10	9	9	8	8
31.25°	16	15	15	14	13	13	12	11	10	9	9
30°	20	19	18	17	16	15	14	13	12	11	10
28.75°	26	24	22	20	19	18	17	15	14	13	12
27.5°	36	34	31	28	25	21	20	18	17	15	14
26.25°	53	47	41	38	34	30	26	22	20	18	16
25°	77	71	64	55	46	39	35	30	25	21	19
23.75°	101	95	87	78	69	58	47	39	33	28	22
22.5°	125	118	110	101	91	80	68	55	42	36	30
21.25°	153	142	134	124	113	101	89	75	61	46	37
20°	189	177	164	149	135	123	109	95	80	65	49
18.75°	227	212	198	182	164	145	130	115	99	83	66
17.5°	276	258	237	214	195	175	153	134	117	100	83
16.25°	325	305	282	257	230	204	182	157	135	117	99
15°	386	359	329	300	271	240	209	184	157	134	115
13.75°	446	417	385	348	311	278	243	209	182	153	130
12.5°	527	484	439	400	358	315	278	240	204	175	145
11.25°	608	561	508	450	405	358	311	271	230	195	164
10°	719	636	578	516	450	400	348	300	257	214	182
8.75°	841	751	651	578	508	439	385	329	282	237	198
7.5°	963	858	751	636	561	484	417	359	305	258	212
6.25°	1096	963	841	719	608	527	446	386	325	276	227
5°	1217	1070	919	790	658	564	479	409	346	291	242
3.75°	1327	1161	997	848	710	594	506	427	363	303	253
2.5°	1411	1231	1057	892	749	616	526	440	375	312	261
1.25°	1466	1278	1094	918	773	629	538	448	382	317	266
0°	1484	1293	1107	927	781	634	542	450	385	319	268
-1.25°	1466	1278	1094	918	773	629	538	448	382	317	266
-2.5°	1411	1231	1057	892	749	616	526	440	375	312	261
-3.75°	1327	1161	997	848	710	594	506	427	363	303	253
-5°	1217	1070	919	790	658	564	479	409	346	291	242
-6.25°	1096	963	841	719	608	527	446	386	325	276	227
-7.5°	963	858	751	636	561	484	417	359	305	258	212
-8.75°	841	751	651	578	508	439	385	329	282	237	198
-10°	719	636	578	516	450	400	348	300	257	214	182
-11.25°	608	561	508	450	405	358	311	271	230	195	164
-12.5°	527	484	439	400	358	315	278	240	204	175	145
-13.75°	446	417	385	348	311	278	243	209	182	153	130
-15°	386	359	329	300	271	240	209	184	157	134	115
-16.25°	325	305	282	257	230	204	182	157	135	117	99
-17.5°	276	258	237	214	195	175	153	134	117	100	83
-18.75°	227	212	198	182	164	145	130	115	99	83	66
-20°	189	177	164	149	135	123	109	95	80	65	49
-21.25°	153	142	134	124	113	101	89	75	61	46	37



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
-22.5°	125	118	110	101	91	80	68	55	42	36	30
-23.75°	101	95	87	78	69	58	47	39	33	28	22
-25°	77	71	64	55	46	39	35	30	25	21	19
-26.25°	53	47	41	38	34	30	26	22	20	18	16
-27.5°	36	34	31	28	25	21	20	18	17	15	14
-28.75°	26	24	22	20	19	18	17	15	14	13	12
-30°	20	19	18	17	16	15	14	13	12	11	10
-31.25°	16	15	15	14	13	13	12	11	10	9	9
-32.5°	13	13	12	12	11	11	10	9	9	8	8
-33.75°	11	11	10	10	9	9	9	8	8	7	7
-35°	9	9	9	8	8	8	7	7	7	6	6
-36.25°	8	8	7	7	7	7	6	6	6	5	5
-37.5°	7	7	6	6	6	6	6	5	5	5	5
-38.75°	6	6	6	5	5	5	5	5	5	5	4
-40°	5	5	5	5	5	5	5	4	4	4	4
-41.25°	5	5	5	4	4	4	4	4	4	4	4
-42.5°	4	4	4	4	4	4	4	4	4	4	4
-43.75°	4	4	4	4	4	4	4	4	4	4	4
-45°	4	4	4	4	4	4	4	4	4	4	4
-46.25°	4	4	4	4	4	4	4	4	4	4	4
-47.5°	4	4	4	4	4	4	4	4	4	4	3
-48.75°	4	4	4	4	4	4	3	3	3	3	3
-50°	3	3	3	3	3	3	3	3	3	3	3
-51.25°	3	3	3	3	3	3	3	3	3	3	3
-52.5°	3	3	3	3	3	3	3	3	3	3	3
-53.75°	3	3	3	3	3	3	3	3	3	3	3
-55°	3	3	3	3	3	3	3	3	3	3	3
-56.25°	3	3	3	3	3	3	3	3	3	3	2
-57.5°	3	3	3	3	2	2	2	2	2	2	2
-58.75°	2	2	2	2	2	2	2	2	2	2	2
-60°	2	2	2	2	2	2	1	1	1	1	1
-61.25°	1	1	1	1	1	1	1	1	1	1	1
-62.5°	1	1	1	1	1	1	1	1	1	1	1
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	1
-67.5°	1	1	1	1	1	1	1	1	1	1	1
-68.75°	1	1	1	1	1	1	1	1	1	1	1
-70°	1	1	1	1	1	1	1	1	1	1	1
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	1	1	1	1	1	1	0	0	0	0	0
67.5°	1	1	1	1	1	1	1	1	1	1	0
66.25°	1	1	1	1	1	1	1	1	1	1	1
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	1	1	1	1	1	1	1	1	1	1	1
61.25°	1	1	1	1	1	1	1	1	1	1	1
60°	1	1	1	1	1	1	1	1	1	1	1
58.75°	2	1	1	1	1	1	1	1	1	1	1
57.5°	2	2	2	2	1	1	1	1	1	1	1
56.25°	2	2	2	2	2	2	2	1	1	1	1
55°	3	3	3	2	2	2	2	2	2	2	1
53.75°	3	3	3	3	3	3	2	2	2	2	2
52.5°	3	3	3	3	3	3	3	3	2	2	2
51.25°	3	3	3	3	3	3	3	3	3	3	2
50°	3	3	3	3	3	3	3	3	3	3	3
48.75°	3	3	3	3	3	3	3	3	3	3	3
47.5°	3	3	3	3	3	3	3	3	3	3	3
46.25°	4	4	3	3	3	3	3	3	3	3	3
45°	4	4	4	4	3	3	3	3	3	3	3
43.75°	4	4	4	4	4	4	3	3	3	3	3
42.5°	4	4	4	4	4	4	4	4	3	3	3
41.25°	4	4	4	4	4	4	4	4	4	3	3
40°	4	4	4	4	4	4	4	4	4	4	4
38.75°	4	4	4	4	4	4	4	4	4	4	4
37.5°	5	4	4	4	4	4	4	4	4	4	4
36.25°	5	5	5	4	4	4	4	4	4	4	4
35°	6	5	5	5	5	4	4	4	4	4	4



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
33.75°	6	6	5	5	5	5	4	4	4	4	4
32.5°	7	7	6	6	5	5	5	4	4	4	4
31.25°	8	7	7	6	6	5	5	5	4	4	4
30°	9	9	8	7	7	6	5	5	5	4	4
28.75°	11	10	9	8	7	7	6	5	5	5	4
27.5°	12	11	10	9	8	7	7	6	5	5	5
26.25°	14	13	11	10	9	8	7	7	6	5	5
25°	17	15	13	12	10	9	8	7	7	6	5
23.75°	19	17	15	13	12	10	9	8	7	6	6
22.5°	23	20	17	15	13	11	10	9	8	7	6
21.25°	31	24	20	17	15	13	11	10	9	7	7
20°	38	31	23	19	17	14	12	11	9	8	7
18.75°	49	37	30	22	19	16	14	12	10	9	8
17.5°	65	46	36	28	21	18	15	13	11	9	8
16.25°	80	61	42	33	25	20	17	14	12	10	9
15°	95	75	55	39	30	22	18	15	13	11	9
13.75°	109	89	68	47	35	26	20	17	14	12	10
12.5°	123	101	80	58	39	30	21	18	15	13	11
11.25°	135	113	91	69	46	34	25	19	16	13	11
10°	149	124	101	78	55	38	28	20	17	14	12
8.75°	164	134	110	87	64	41	31	22	18	15	12
7.5°	177	142	118	95	71	47	34	24	19	15	13
6.25°	189	153	125	101	77	53	36	26	20	16	13
5°	199	163	131	107	82	58	38	28	20	17	14
3.75°	206	170	136	111	86	62	40	30	21	17	14
2.5°	212	175	139	114	89	64	41	31	21	17	14
1.25°	215	178	141	116	91	66	41	31	21	18	14
0°	216	179	142	117	91	67	42	32	21	18	14
-1.25°	215	178	141	116	91	66	41	31	21	18	14
-2.5°	212	175	139	114	89	64	41	31	21	17	14
-3.75°	206	170	136	111	86	62	40	30	21	17	14
-5°	199	163	131	107	82	58	38	28	20	17	14
-6.25°	189	153	125	101	77	53	36	26	20	16	13
-7.5°	177	142	118	95	71	47	34	24	19	15	13
-8.75°	164	134	110	87	64	41	31	22	18	15	12
-10°	149	124	101	78	55	38	28	20	17	14	12
-11.25°	135	113	91	69	46	34	25	19	16	13	11
-12.5°	123	101	80	58	39	30	21	18	15	13	11
-13.75°	109	89	68	47	35	26	20	17	14	12	10
-15°	95	75	55	39	30	22	18	15	13	11	9
-16.25°	80	61	42	33	25	20	17	14	12	10	9
-17.5°	65	46	36	28	21	18	15	13	11	9	8
-18.75°	49	37	30	22	19	16	14	12	10	9	8
-20°	38	31	23	19	17	14	12	11	9	8	7
-21.25°	31	24	20	17	15	13	11	10	9	7	7



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
-22.5°	23	20	17	15	13	11	10	9	8	7	6
-23.75°	19	17	15	13	12	10	9	8	7	6	6
-25°	17	15	13	12	10	9	8	7	7	6	5
-26.25°	14	13	11	10	9	8	7	7	6	5	5
-27.5°	12	11	10	9	8	7	7	6	5	5	5
-28.75°	11	10	9	8	7	7	6	5	5	5	4
-30°	9	9	8	7	7	6	5	5	5	4	4
-31.25°	8	7	7	6	6	5	5	5	4	4	4
-32.5°	7	7	6	6	5	5	5	4	4	4	4
-33.75°	6	6	5	5	5	5	4	4	4	4	4
-35°	6	5	5	5	5	4	4	4	4	4	4
-36.25°	5	5	5	4	4	4	4	4	4	4	4
-37.5°	5	4	4	4	4	4	4	4	4	4	4
-38.75°	4	4	4	4	4	4	4	4	4	4	4
-40°	4	4	4	4	4	4	4	4	4	4	4
-41.25°	4	4	4	4	4	4	4	4	4	3	3
-42.5°	4	4	4	4	4	4	4	4	3	3	3
-43.75°	4	4	4	4	4	4	3	3	3	3	3
-45°	4	4	4	4	3	3	3	3	3	3	3
-46.25°	4	4	3	3	3	3	3	3	3	3	3
-47.5°	3	3	3	3	3	3	3	3	3	3	3
-48.75°	3	3	3	3	3	3	3	3	3	3	3
-50°	3	3	3	3	3	3	3	3	3	3	3
-51.25°	3	3	3	3	3	3	3	3	3	3	2
-52.5°	3	3	3	3	3	3	3	3	2	2	2
-53.75°	3	3	3	3	3	3	2	2	2	2	2
-55°	3	3	3	2	2	2	2	2	2	2	1
-56.25°	2	2	2	2	2	2	2	1	1	1	1
-57.5°	2	2	2	2	1	1	1	1	1	1	1
-58.75°	2	1	1	1	1	1	1	1	1	1	1
-60°	1	1	1	1	1	1	1	1	1	1	1
-61.25°	1	1	1	1	1	1	1	1	1	1	1
-62.5°	1	1	1	1	1	1	1	1	1	1	1
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	1
-67.5°	1	1	1	1	1	1	1	1	1	1	0
-68.75°	1	1	1	1	1	1	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	1	1	1	0	0	0	0	0	0	0	0
65°	1	1	1	1	1	1	0	0	0	0	0
63.75°	1	1	1	1	1	1	1	1	0	0	0
62.5°	1	1	1	1	1	1	1	1	1	1	0
61.25°	1	1	1	1	1	1	1	1	1	1	1
60°	1	1	1	1	1	1	1	1	1	1	1
58.75°	1	1	1	1	1	1	1	1	1	1	1
57.5°	1	1	1	1	1	1	1	1	1	1	1
56.25°	1	1	1	1	1	1	1	1	1	1	1
55°	1	1	1	1	1	1	1	1	1	1	1
53.75°	2	1	1	1	1	1	1	1	1	1	1
52.5°	2	2	2	1	1	1	1	1	1	1	1
51.25°	2	2	2	2	2	1	1	1	1	1	1
50°	3	2	2	2	2	2	1	1	1	1	1
48.75°	3	3	3	2	2	2	2	1	1	1	1
47.5°	3	3	3	3	2	2	2	2	2	1	1
46.25°	3	3	3	3	3	3	2	2	2	2	1
45°	3	3	3	3	3	3	3	2	2	2	2
43.75°	3	3	3	3	3	3	3	3	2	2	2
42.5°	3	3	3	3	3	3	3	3	3	2	2
41.25°	3	3	3	3	3	3	3	3	3	3	2
40°	3	3	3	3	3	3	3	3	3	3	3
38.75°	4	3	3	3	3	3	3	3	3	3	3
37.5°	4	4	3	3	3	3	3	3	3	3	3
36.25°	4	4	4	3	3	3	3	3	3	3	3
35°	4	4	4	4	3	3	3	3	3	3	3



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
33.75°	4	4	4	4	4	3	3	3	3	3	3
32.5°	4	4	4	4	4	4	3	3	3	3	3
31.25°	4	4	4	4	4	4	3	3	3	3	3
30°	4	4	4	4	4	4	4	3	3	3	3
28.75°	4	4	4	4	4	4	4	4	3	3	3
27.5°	4	4	4	4	4	4	4	4	3	3	3
26.25°	5	4	4	4	4	4	4	4	4	3	3
25°	5	5	4	4	4	4	4	4	4	3	3
23.75°	5	5	4	4	4	4	4	4	4	4	3
22.5°	5	5	5	4	4	4	4	4	4	4	3
21.25°	6	5	5	4	4	4	4	4	4	4	4
20°	6	6	5	5	4	4	4	4	4	4	4
18.75°	7	6	5	5	4	4	4	4	4	4	4
17.5°	7	6	5	5	5	4	4	4	4	4	4
16.25°	8	7	6	5	5	4	4	4	4	4	4
15°	8	7	6	5	5	4	4	4	4	4	4
13.75°	9	7	6	6	5	5	4	4	4	4	4
12.5°	9	8	7	6	5	5	4	4	4	4	4
11.25°	9	8	7	6	5	5	4	4	4	4	4
10°	10	8	7	6	5	5	4	4	4	4	4
8.75°	10	9	7	6	6	5	5	4	4	4	4
7.5°	11	9	8	7	6	5	5	4	4	4	4
6.25°	11	9	8	7	6	5	5	4	4	4	4
5°	11	9	8	7	6	5	5	4	4	4	4
3.75°	12	10	8	7	6	5	5	4	4	4	4
2.5°	12	10	8	7	6	5	5	4	4	4	4
1.25°	12	10	8	7	6	5	5	4	4	4	4
0°	12	10	8	7	6	5	5	4	4	4	4
-1.25°	12	10	8	7	6	5	5	4	4	4	4
-2.5°	12	10	8	7	6	5	5	4	4	4	4
-3.75°	12	10	8	7	6	5	5	4	4	4	4
-5°	11	9	8	7	6	5	5	4	4	4	4
-6.25°	11	9	8	7	6	5	5	4	4	4	4
-7.5°	11	9	8	7	6	5	5	4	4	4	4
-8.75°	10	9	7	6	6	5	5	4	4	4	4
-10°	10	8	7	6	5	5	4	4	4	4	4
-11.25°	9	8	7	6	5	5	4	4	4	4	4
-12.5°	9	8	7	6	5	5	4	4	4	4	4
-13.75°	9	7	6	6	5	5	4	4	4	4	4
-15°	8	7	6	5	5	4	4	4	4	4	4
-16.25°	8	7	6	5	5	4	4	4	4	4	4
-17.5°	7	6	5	5	5	4	4	4	4	4	4
-18.75°	7	6	5	5	4	4	4	4	4	4	4
-20°	6	6	5	5	4	4	4	4	4	4	4
-21.25°	6	5	5	4	4	4	4	4	4	4	4



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
-22.5°	5	5	5	4	4	4	4	4	4	4	3
-23.75°	5	5	4	4	4	4	4	4	4	4	3
-25°	5	5	4	4	4	4	4	4	4	3	3
-26.25°	5	4	4	4	4	4	4	4	4	3	3
-27.5°	4	4	4	4	4	4	4	4	3	3	3
-28.75°	4	4	4	4	4	4	4	4	3	3	3
-30°	4	4	4	4	4	4	4	3	3	3	3
-31.25°	4	4	4	4	4	4	3	3	3	3	3
-32.5°	4	4	4	4	4	4	3	3	3	3	3
-33.75°	4	4	4	4	4	3	3	3	3	3	3
-35°	4	4	4	4	3	3	3	3	3	3	3
-36.25°	4	4	4	3	3	3	3	3	3	3	3
-37.5°	4	4	3	3	3	3	3	3	3	3	3
-38.75°	4	3	3	3	3	3	3	3	3	3	3
-40°	3	3	3	3	3	3	3	3	3	3	3
-41.25°	3	3	3	3	3	3	3	3	3	3	2
-42.5°	3	3	3	3	3	3	3	3	3	2	2
-43.75°	3	3	3	3	3	3	3	3	2	2	2
-45°	3	3	3	3	3	3	3	2	2	2	2
-46.25°	3	3	3	3	3	3	2	2	2	2	1
-47.5°	3	3	3	3	2	2	2	2	2	1	1
-48.75°	3	3	3	2	2	2	2	1	1	1	1
-50°	3	2	2	2	2	2	1	1	1	1	1
-51.25°	2	2	2	2	2	1	1	1	1	1	1
-52.5°	2	2	2	1	1	1	1	1	1	1	1
-53.75°	2	1	1	1	1	1	1	1	1	1	1
-55°	1	1	1	1	1	1	1	1	1	1	1
-56.25°	1	1	1	1	1	1	1	1	1	1	1
-57.5°	1	1	1	1	1	1	1	1	1	1	1
-58.75°	1	1	1	1	1	1	1	1	1	1	1
-60°	1	1	1	1	1	1	1	1	1	1	1
-61.25°	1	1	1	1	1	1	1	1	1	1	1
-62.5°	1	1	1	1	1	1	1	1	1	1	0
-63.75°	1	1	1	1	1	1	1	1	0	0	0
-65°	1	1	1	1	1	1	0	0	0	0	0
-66.25°	1	1	1	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	1	0	0	0	0	0	0	0	0	0	0
60°	1	1	0	0	0	0	0	0	0	0	0
58.75°	1	1	1	1	0	0	0	0	0	0	0
57.5°	1	1	1	1	1	0	0	0	0	0	0
56.25°	1	1	1	1	1	1	0	0	0	0	0
55°	1	1	1	1	1	1	1	0	0	0	0
53.75°	1	1	1	1	1	1	1	1	0	0	0
52.5°	1	1	1	1	1	1	1	1	1	0	0
51.25°	1	1	1	1	1	1	1	1	1	1	0
50°	1	1	1	1	1	1	1	1	1	1	0
48.75°	1	1	1	1	1	1	1	1	1	1	1
47.5°	1	1	1	1	1	1	1	1	1	1	1
46.25°	1	1	1	1	1	1	1	1	1	1	1
45°	1	1	1	1	1	1	1	1	1	1	1
43.75°	2	1	1	1	1	1	1	1	1	1	1
42.5°	2	1	1	1	1	1	1	1	1	1	1
41.25°	2	2	1	1	1	1	1	1	1	1	1
40°	2	2	2	1	1	1	1	1	1	1	1
38.75°	2	2	2	2	1	1	1	1	1	1	1
37.5°	3	2	2	2	1	1	1	1	1	1	1
36.25°	3	3	2	2	2	1	1	1	1	1	1
35°	3	3	2	2	2	1	1	1	1	1	1



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
33.75°	3	3	3	2	2	2	1	1	1	1	1
32.5°	3	3	3	2	2	2	1	1	1	1	1
31.25°	3	3	3	3	2	2	2	1	1	1	1
30°	3	3	3	3	2	2	2	1	1	1	1
28.75°	3	3	3	3	3	2	2	1	1	1	1
27.5°	3	3	3	3	3	2	2	2	1	1	1
26.25°	3	3	3	3	3	3	2	2	1	1	1
25°	3	3	3	3	3	3	2	2	1	1	1
23.75°	3	3	3	3	3	3	2	2	2	1	1
22.5°	3	3	3	3	3	3	3	2	2	1	1
21.25°	3	3	3	3	3	3	3	2	2	1	1
20°	3	3	3	3	3	3	3	2	2	2	1
18.75°	3	3	3	3	3	3	3	2	2	2	1
17.5°	4	3	3	3	3	3	3	3	2	2	1
16.25°	4	3	3	3	3	3	3	3	2	2	1
15°	4	3	3	3	3	3	3	3	2	2	1
13.75°	4	3	3	3	3	3	3	3	2	2	1
12.5°	4	4	3	3	3	3	3	3	2	2	2
11.25°	4	4	3	3	3	3	3	3	2	2	2
10°	4	4	3	3	3	3	3	3	3	2	2
8.75°	4	4	3	3	3	3	3	3	3	2	2
7.5°	4	4	3	3	3	3	3	3	3	2	2
6.25°	4	4	3	3	3	3	3	3	3	2	2
5°	4	4	3	3	3	3	3	3	3	2	2
3.75°	4	4	3	3	3	3	3	3	3	2	2
2.5°	4	4	3	3	3	3	3	3	3	2	2
1.25°	4	4	3	3	3	3	3	3	3	2	2
0°	4	4	4	3	3	3	3	3	3	2	2
-1.25°	4	4	3	3	3	3	3	3	3	2	2
-2.5°	4	4	3	3	3	3	3	3	3	2	2
-3.75°	4	4	3	3	3	3	3	3	3	2	2
-5°	4	4	3	3	3	3	3	3	3	2	2
-6.25°	4	4	3	3	3	3	3	3	3	2	2
-7.5°	4	4	3	3	3	3	3	3	3	2	2
-8.75°	4	4	3	3	3	3	3	3	3	2	2
-10°	4	4	3	3	3	3	3	3	3	2	2
-11.25°	4	4	3	3	3	3	3	3	2	2	2
-12.5°	4	4	3	3	3	3	3	3	2	2	2
-13.75°	4	3	3	3	3	3	3	3	2	2	1
-15°	4	3	3	3	3	3	3	3	2	2	1
-16.25°	4	3	3	3	3	3	3	3	2	2	1
-17.5°	4	3	3	3	3	3	3	3	2	2	1
-18.75°	3	3	3	3	3	3	3	2	2	2	1
-20°	3	3	3	3	3	3	3	2	2	2	1
-21.25°	3	3	3	3	3	3	3	2	2	1	1



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
-22.5°	3	3	3	3	3	3	3	2	2	1	1
-23.75°	3	3	3	3	3	3	2	2	2	1	1
-25°	3	3	3	3	3	3	2	2	1	1	1
-26.25°	3	3	3	3	3	3	2	2	1	1	1
-27.5°	3	3	3	3	3	2	2	2	1	1	1
-28.75°	3	3	3	3	3	2	2	1	1	1	1
-30°	3	3	3	3	2	2	2	1	1	1	1
-31.25°	3	3	3	3	2	2	2	1	1	1	1
-32.5°	3	3	3	2	2	2	1	1	1	1	1
-33.75°	3	3	3	2	2	2	1	1	1	1	1
-35°	3	3	2	2	2	1	1	1	1	1	1
-36.25°	3	3	2	2	2	1	1	1	1	1	1
-37.5°	3	2	2	2	1	1	1	1	1	1	1
-38.75°	2	2	2	2	1	1	1	1	1	1	1
-40°	2	2	2	1	1	1	1	1	1	1	1
-41.25°	2	2	1	1	1	1	1	1	1	1	1
-42.5°	2	1	1	1	1	1	1	1	1	1	1
-43.75°	2	1	1	1	1	1	1	1	1	1	1
-45°	1	1	1	1	1	1	1	1	1	1	1
-46.25°	1	1	1	1	1	1	1	1	1	1	1
-47.5°	1	1	1	1	1	1	1	1	1	1	1
-48.75°	1	1	1	1	1	1	1	1	1	1	1
-50°	1	1	1	1	1	1	1	1	1	1	0
-51.25°	1	1	1	1	1	1	1	1	1	1	0
-52.5°	1	1	1	1	1	1	1	1	1	0	0
-53.75°	1	1	1	1	1	1	1	1	0	0	0
-55°	1	1	1	1	1	1	1	0	0	0	0
-56.25°	1	1	1	1	1	1	0	0	0	0	0
-57.5°	1	1	1	1	1	0	0	0	0	0	0
-58.75°	1	1	1	1	0	0	0	0	0	0	0
-60°	1	1	0	0	0	0	0	0	0	0	0
-61.25°	1	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	1	0	0	0	0	0	0	0	0	0	0
46.25°	1	0	0	0	0	0	0	0	0	0	0
45°	1	1	0	0	0	0	0	0	0	0	0
43.75°	1	1	0	0	0	0	0	0	0	0	0
42.5°	1	1	1	0	0	0	0	0	0	0	0
41.25°	1	1	1	0	0	0	0	0	0	0	0
40°	1	1	1	1	0	0	0	0	0	0	0
38.75°	1	1	1	1	0	0	0	0	0	0	0
37.5°	1	1	1	1	0	0	0	0	0	0	0
36.25°	1	1	1	1	1	0	0	0	0	0	0
35°	1	1	1	1	1	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
33.75°	1	1	1	1	1	0	0	0	0	0	0
32.5°	1	1	1	1	1	0	0	0	0	0	0
31.25°	1	1	1	1	1	1	0	0	0	0	0
30°	1	1	1	1	1	1	0	0	0	0	0
28.75°	1	1	1	1	1	1	0	0	0	0	0
27.5°	1	1	1	1	1	1	0	0	0	0	0
26.25°	1	1	1	1	1	1	1	0	0	0	0
25°	1	1	1	1	1	1	1	0	0	0	0
23.75°	1	1	1	1	1	1	1	0	0	0	0
22.5°	1	1	1	1	1	1	1	0	0	0	0
21.25°	1	1	1	1	1	1	1	0	0	0	0
20°	1	1	1	1	1	1	1	0	0	0	0
18.75°	1	1	1	1	1	1	1	1	0	0	0
17.5°	1	1	1	1	1	1	1	1	0	0	0
16.25°	1	1	1	1	1	1	1	1	0	0	0
15°	1	1	1	1	1	1	1	1	0	0	0
13.75°	1	1	1	1	1	1	1	1	0	0	0
12.5°	1	1	1	1	1	1	1	1	0	0	0
11.25°	1	1	1	1	1	1	1	1	0	0	0
10°	1	1	1	1	1	1	1	1	0	0	0
8.75°	1	1	1	1	1	1	1	1	0	0	0
7.5°	1	1	1	1	1	1	1	1	0	0	0
6.25°	1	1	1	1	1	1	1	1	0	0	0
5°	1	1	1	1	1	1	1	1	0	0	0
3.75°	1	1	1	1	1	1	1	1	0	0	0
2.5°	1	1	1	1	1	1	1	1	0	0	0
1.25°	1	1	1	1	1	1	1	1	0	0	0
0°	1	1	1	1	1	1	1	1	0	0	0
-1.25°	1	1	1	1	1	1	1	1	0	0	0
-2.5°	1	1	1	1	1	1	1	1	0	0	0
-3.75°	1	1	1	1	1	1	1	1	0	0	0
-5°	1	1	1	1	1	1	1	1	0	0	0
-6.25°	1	1	1	1	1	1	1	1	0	0	0
-7.5°	1	1	1	1	1	1	1	1	0	0	0
-8.75°	1	1	1	1	1	1	1	1	0	0	0
-10°	1	1	1	1	1	1	1	1	0	0	0
-11.25°	1	1	1	1	1	1	1	1	0	0	0
-12.5°	1	1	1	1	1	1	1	1	0	0	0
-13.75°	1	1	1	1	1	1	1	1	0	0	0
-15°	1	1	1	1	1	1	1	1	0	0	0
-16.25°	1	1	1	1	1	1	1	1	0	0	0
-17.5°	1	1	1	1	1	1	1	1	0	0	0
-18.75°	1	1	1	1	1	1	1	1	0	0	0
-20°	1	1	1	1	1	1	1	0	0	0	0
-21.25°	1	1	1	1	1	1	1	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
-22.5°	1	1	1	1	1	1	1	0	0	0	0
-23.75°	1	1	1	1	1	1	1	0	0	0	0
-25°	1	1	1	1	1	1	1	0	0	0	0
-26.25°	1	1	1	1	1	1	1	0	0	0	0
-27.5°	1	1	1	1	1	1	0	0	0	0	0
-28.75°	1	1	1	1	1	1	0	0	0	0	0
-30°	1	1	1	1	1	1	0	0	0	0	0
-31.25°	1	1	1	1	1	1	0	0	0	0	0
-32.5°	1	1	1	1	1	0	0	0	0	0	0
-33.75°	1	1	1	1	1	0	0	0	0	0	0
-35°	1	1	1	1	1	0	0	0	0	0	0
-36.25°	1	1	1	1	1	0	0	0	0	0	0
-37.5°	1	1	1	1	0	0	0	0	0	0	0
-38.75°	1	1	1	1	0	0	0	0	0	0	0
-40°	1	1	1	1	0	0	0	0	0	0	0
-41.25°	1	1	1	0	0	0	0	0	0	0	0
-42.5°	1	1	1	0	0	0	0	0	0	0	0
-43.75°	1	1	0	0	0	0	0	0	0	0	0
-45°	1	1	0	0	0	0	0	0	0	0	0
-46.25°	1	0	0	0	0	0	0	0	0	0	0
-47.5°	1	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
26.25°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
23.75°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
21.25°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
18.75°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
16.25°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
13.75°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
11.25°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
8.75°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
6.25°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
3.75°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
1.25°	0	0	0	0	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0	0	0	0	0
-1.25°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-3.75°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-6.25°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-8.75°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-11.25°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-13.75°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-16.25°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-18.75°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0
-21.25°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-23.75°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-26.25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	88.75°	90°
90°	0	0
88.75°	0	0
87.5°	0	0
86.25°	0	0
85°	0	0
83.75°	0	0
82.5°	0	0
81.25°	0	0
80°	0	0
78.75°	0	0
77.5°	0	0
76.25°	0	0
75°	0	0
73.75°	0	0
72.5°	0	0
71.25°	0	0
70°	0	0
68.75°	0	0
67.5°	0	0
66.25°	0	0
65°	0	0
63.75°	0	0
62.5°	0	0
61.25°	0	0
60°	0	0
58.75°	0	0
57.5°	0	0
56.25°	0	0
55°	0	0
53.75°	0	0
52.5°	0	0
51.25°	0	0
50°	0	0
48.75°	0	0
47.5°	0	0
46.25°	0	0
45°	0	0
43.75°	0	0
42.5°	0	0
41.25°	0	0
40°	0	0
38.75°	0	0
37.5°	0	0
36.25°	0	0
35°	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	88.75°	90°
33.75°	0	0
32.5°	0	0
31.25°	0	0
30°	0	0
28.75°	0	0
27.5°	0	0
26.25°	0	0
25°	0	0
23.75°	0	0
22.5°	0	0
21.25°	0	0
20°	0	0
18.75°	0	0
17.5°	0	0
16.25°	0	0
15°	0	0
13.75°	0	0
12.5°	0	0
11.25°	0	0
10°	0	0
8.75°	0	0
7.5°	0	0
6.25°	0	0
5°	0	0
3.75°	0	0
2.5°	0	0
1.25°	0	0
0°	0	0
-1.25°	0	0
-2.5°	0	0
-3.75°	0	0
-5°	0	0
-6.25°	0	0
-7.5°	0	0
-8.75°	0	0
-10°	0	0
-11.25°	0	0
-12.5°	0	0
-13.75°	0	0
-15°	0	0
-16.25°	0	0
-17.5°	0	0
-18.75°	0	0
-20°	0	0
-21.25°	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	88.75°	90°
-22.5°	0	0
-23.75°	0	0
-25°	0	0
-26.25°	0	0
-27.5°	0	0
-28.75°	0	0
-30°	0	0
-31.25°	0	0
-32.5°	0	0
-33.75°	0	0
-35°	0	0
-36.25°	0	0
-37.5°	0	0
-38.75°	0	0
-40°	0	0
-41.25°	0	0
-42.5°	0	0
-43.75°	0	0
-45°	0	0
-46.25°	0	0
-47.5°	0	0
-48.75°	0	0
-50°	0	0
-51.25°	0	0
-52.5°	0	0
-53.75°	0	0
-55°	0	0
-56.25°	0	0
-57.5°	0	0
-58.75°	0	0
-60°	0	0
-61.25°	0	0
-62.5°	0	0
-63.75°	0	0
-65°	0	0
-66.25°	0	0
-67.5°	0	0
-68.75°	0	0
-70°	0	0
-71.25°	0	0
-72.5°	0	0
-73.75°	0	0
-75°	0	0
-76.25°	0	0
-77.5°	0	0



REPORT NUMBER: P246978 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED3025-12-CS

CANDELA DISTRIBUTION (continued):

	88.75°	90°
-78.75°	0	0
-80°	0	0
-81.25°	0	0
-82.5°	0	0
-83.75°	0	0
-85°	0	0
-86.25°	0	0
-87.5°	0	0
-88.75°	0	0
-90°	0	0

(END OF REPORT)