

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: LUMIERE

Report Number: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)

Luminaire Tested: **203-SS-8LED4010-12-BK-LVR**

Test Date: 04/06/18

Test Information


Test Method: LM-79-08
Report Number: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1802-569-26)
Test Lab: INNOVATION CENTER(G2)
Test Date: 04/06/18
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 203-SS-8LED4010-12-BK-LVR
Description: CAMBRIA 203 LED LUMINAIRE, 8 WATT, 4000K CCT, 10 DEGREE SPOT OPTIC,
REGRESSED HOOD BLACK, HEX CELL LOUVER
Light Source: (1) SORAA 4000K 95 CRI 10°NSP LED
SM16-07-10D-940-03
Ballast/Driver: CHROMA POWER SUPPLY IN0004

Summary

Lumens per Lamp:	N/A	NEMA Type:	2H x 2V
Luminaire Lumens:	234.1 lumens	Max Intensity:	4838 candela
Efficiency:	N/A	Max Intensity Angle:	0°H x 0°V
Efficacy:	29.3 lumens/watt		
Luminous Opening:	Circular (Dia: 0.17' x H: 0')		
Beam Angle (50%):	11.9°H x 11.9°V	Field Angle (10%):	18.9°H x 18.9°V
Beam Lumens:	126.8 lumens	Field Lumens:	183.8 lumens
Beam Efficiency:	54.2%	Field Efficiency:	78.5%
Input Watts (W):	8		
Input Voltage (V):	12.0		
Input Current (A _{in}):	0.709		
Voltage Rise (V):	NR		
Power Factor:	0.9468		
Total Harmonic Distortion (THDi):	27.5		
Frequency (hertz):	60		
Stabilization Time:	0.5 HR		
Operation Time:	9 HR		
Ambient Temperature (°C):	24.9		
Test Distance:	25 FT		

REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

Iso-Candela Plot

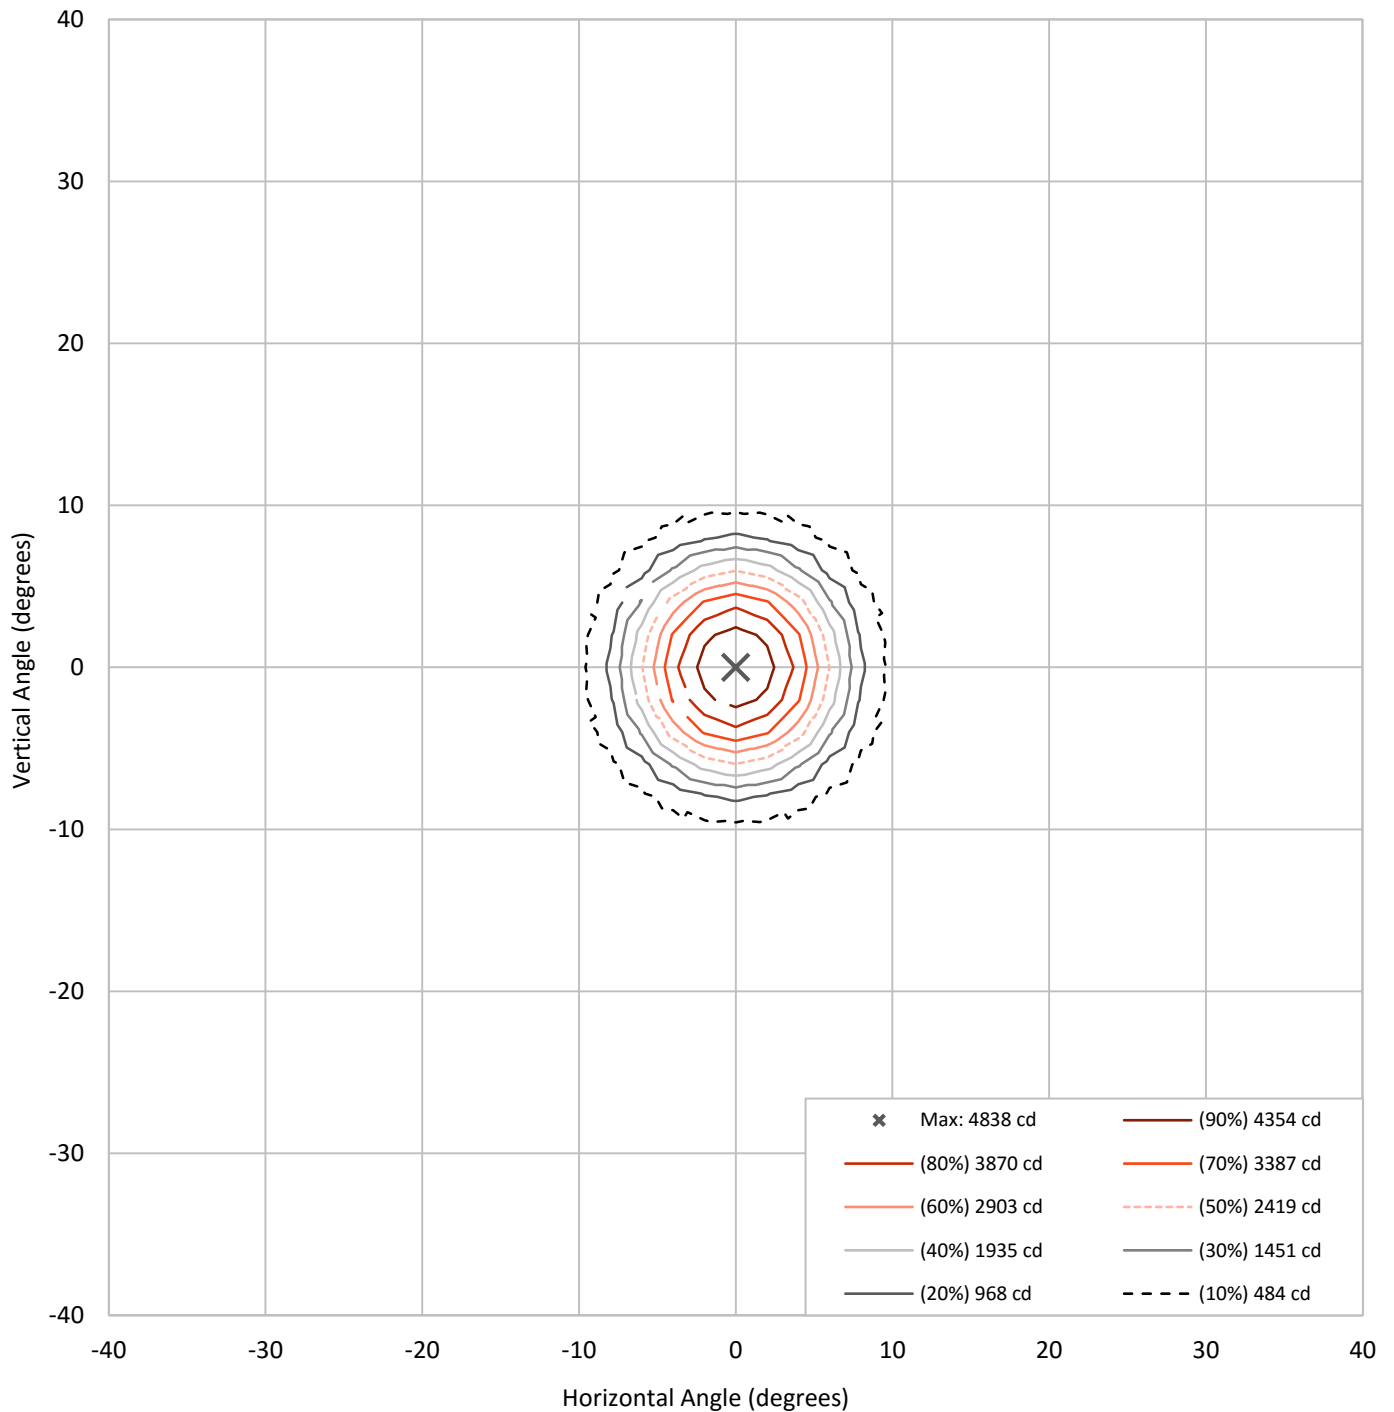




REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

Lumen Table

90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40		0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.2	0.1	0.1	0.0	0.0	0.0	0.0	0.0	
30	0.0	0.0	0.0	0.0	0.1	0.2	0.3	0.5	0.5	0.3	0.2	0.1	0.0	0.0	0.0	0.0	0.0
20		0.0	0.0	0.0	0.1	0.3	1.1	3.0	3.0	1.1	0.3	0.1	0.0	0.0	0.0	0.0	
10	0.0	0.0	0.0	0.0	0.2	0.5	2.9	48.7	48.7	2.9	0.5	0.2	0.0	0.0	0.0	0.0	0.0
0		0.0	0.0	0.0	0.2	0.5	2.9	48.7	48.7	2.9	0.5	0.2	0.0	0.0	0.0	0.0	
-10	0.0	0.0	0.0	0.0	0.1	0.3	1.1	3.0	3.0	1.1	0.3	0.1	0.0	0.0	0.0	0.0	0.0
-20		0.0	0.0	0.0	0.1	0.2	0.3	0.5	0.5	0.3	0.2	0.1	0.0	0.0	0.0	0.0	
-30	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.2	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0
-40		0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
-50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-60		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
-70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR


Luminous Intensity Polar Plot

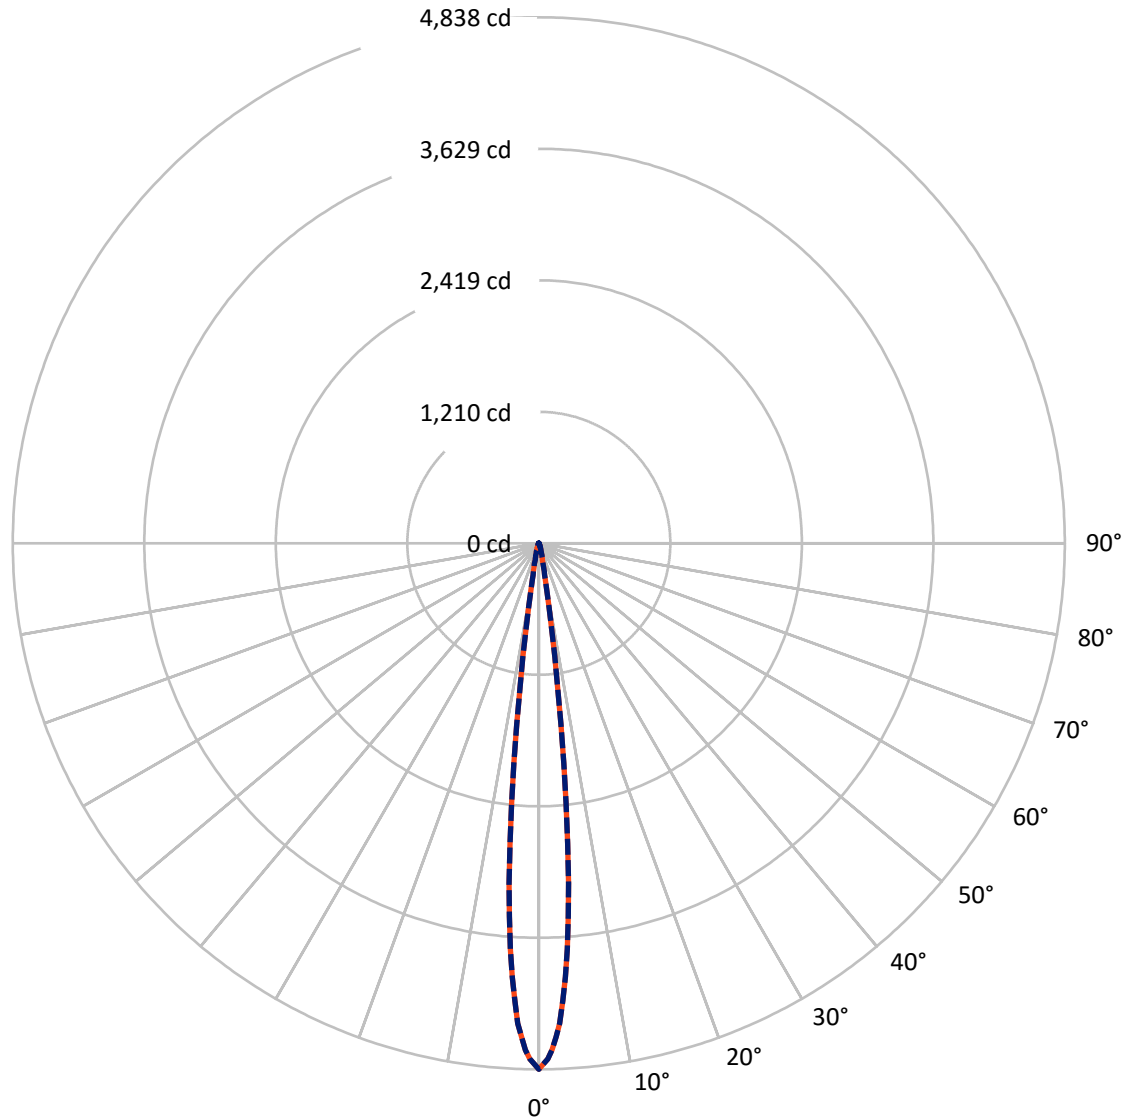

— Vertical Distribution Through 0-Deg - - - Horizontal Distribution Through 0-Deg

REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

Luminous Intensity Plot

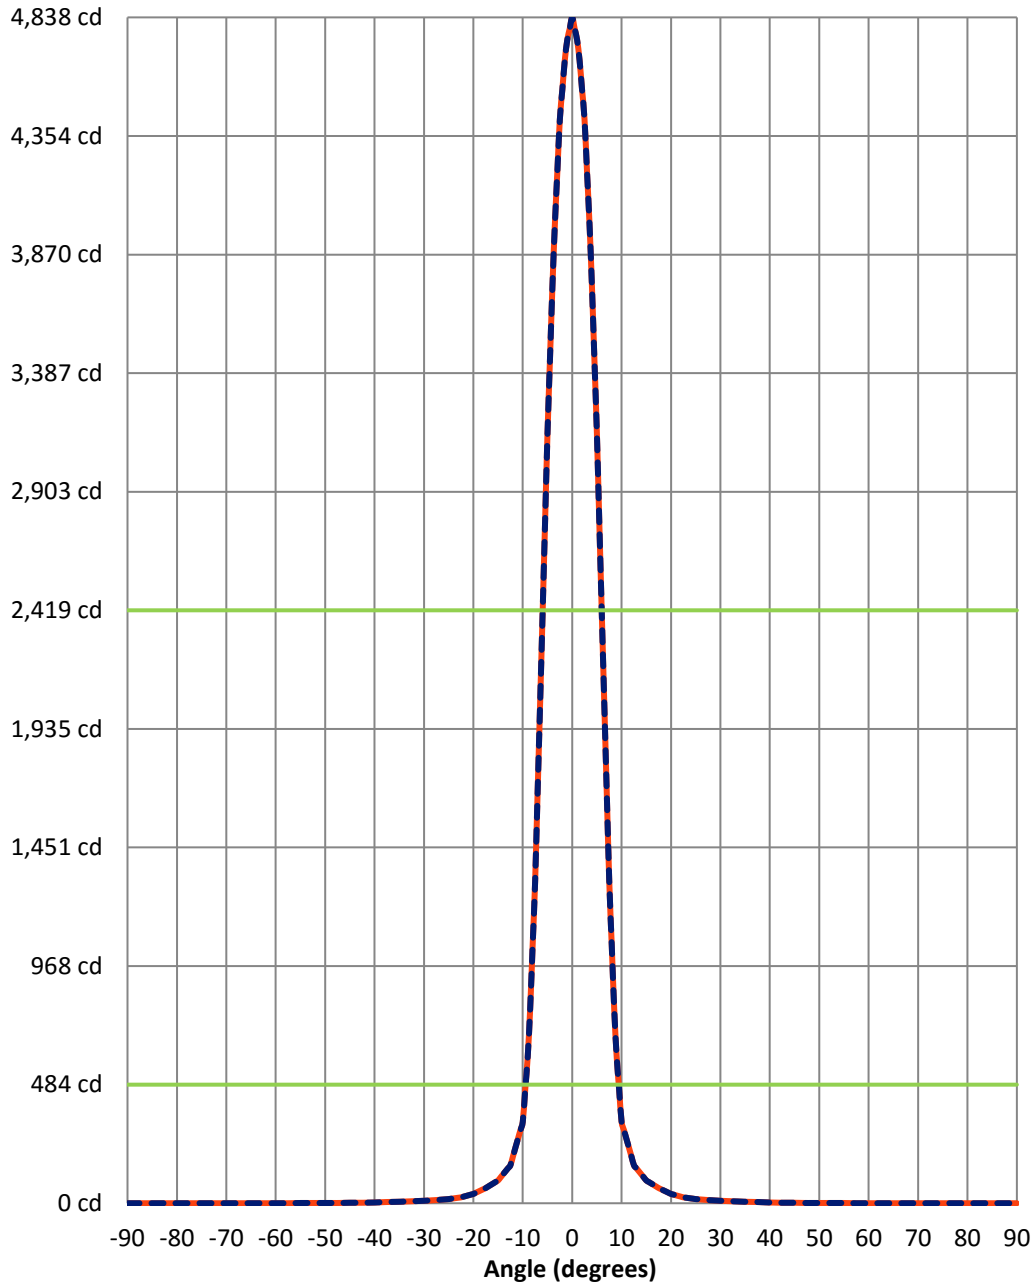

Beam:
H Angle: 11.9°
V Angle: 11.9°
Lumens: 126.8
Efficiency: 54.2%

Field:
H Angle: 18.9°
V Angle: 18.9°
Lumens: 183.8
Efficiency: 78.5%

Spill:
Lumens: 50.3
Efficiency: 21.5%

- Vertical Distribution through 0-Deg
- - Horizontal Distribution through 0-Deg



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

FIELD
 BEAM

CANDELA DISTRIBUTION:

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
26.25°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
23.75°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
21.25°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
18.75°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
16.25°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
13.75°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
11.25°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
8.75°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
6.25°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
3.75°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
1.25°	0	0	0	0	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0	0	0	0	0
-1.25°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-3.75°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-6.25°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-8.75°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-11.25°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-13.75°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-16.25°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-18.75°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0
-21.25°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-23.75°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-26.25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
26.25°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
23.75°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
21.25°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
18.75°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
16.25°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
13.75°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
11.25°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
8.75°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
6.25°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
3.75°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
1.25°	0	0	0	0	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0	0	0	0	0
-1.25°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-3.75°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-6.25°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-8.75°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-11.25°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-13.75°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-16.25°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-18.75°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0
-21.25°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-23.75°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-26.25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	1
28.75°	0	0	0	0	0	0	0	0	0	0	1
27.5°	0	0	0	0	0	0	0	0	0	0	1
26.25°	0	0	0	0	0	0	0	0	0	1	1
25°	0	0	0	0	0	0	0	0	0	1	1
23.75°	0	0	0	0	0	0	0	0	1	1	1
22.5°	0	0	0	0	0	0	0	0	1	1	1
21.25°	0	0	0	0	0	0	0	0	1	1	1
20°	0	0	0	0	0	0	0	1	1	1	1
18.75°	0	0	0	0	0	0	0	1	1	1	1
17.5°	0	0	0	0	0	0	0	1	1	1	1
16.25°	0	0	0	0	0	0	0	1	1	1	1
15°	0	0	0	0	0	0	0	1	1	1	1
13.75°	0	0	0	0	0	0	1	1	1	1	1
12.5°	0	0	0	0	0	0	1	1	1	1	1
11.25°	0	0	0	0	0	0	1	1	1	1	1
10°	0	0	0	0	0	0	1	1	1	1	1
8.75°	0	0	0	0	0	0	1	1	1	1	1
7.5°	0	0	0	0	0	0	1	1	1	1	1
6.25°	0	0	0	0	0	0	1	1	1	1	1
5°	0	0	0	0	0	0	1	1	1	1	1
3.75°	0	0	0	0	0	0	1	1	1	1	1
2.5°	0	0	0	0	0	0	1	1	1	1	1
1.25°	0	0	0	0	0	0	1	1	1	1	1
0°	0	0	0	0	0	1	1	1	1	1	1
-1.25°	0	0	0	0	0	0	1	1	1	1	1
-2.5°	0	0	0	0	0	0	1	1	1	1	1
-3.75°	0	0	0	0	0	0	1	1	1	1	1
-5°	0	0	0	0	0	0	1	1	1	1	1
-6.25°	0	0	0	0	0	0	1	1	1	1	1
-7.5°	0	0	0	0	0	0	1	1	1	1	1
-8.75°	0	0	0	0	0	0	1	1	1	1	1
-10°	0	0	0	0	0	0	1	1	1	1	1
-11.25°	0	0	0	0	0	0	1	1	1	1	1
-12.5°	0	0	0	0	0	0	1	1	1	1	1
-13.75°	0	0	0	0	0	0	1	1	1	1	1
-15°	0	0	0	0	0	0	0	1	1	1	1
-16.25°	0	0	0	0	0	0	0	1	1	1	1
-17.5°	0	0	0	0	0	0	0	1	1	1	1
-18.75°	0	0	0	0	0	0	0	1	1	1	1
-20°	0	0	0	0	0	0	0	1	1	1	1
-21.25°	0	0	0	0	0	0	0	0	1	1	1



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
-22.5°	0	0	0	0	0	0	0	0	1	1	1
-23.75°	0	0	0	0	0	0	0	0	1	1	1
-25°	0	0	0	0	0	0	0	0	0	1	1
-26.25°	0	0	0	0	0	0	0	0	0	1	1
-27.5°	0	0	0	0	0	0	0	0	0	0	1
-28.75°	0	0	0	0	0	0	0	0	0	0	1
-30°	0	0	0	0	0	0	0	0	0	0	1
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	1
45°	0	0	0	0	0	0	0	0	0	1	1
43.75°	0	0	0	0	0	0	0	0	1	1	1
42.5°	0	0	0	0	0	0	0	1	1	1	1
41.25°	0	0	0	0	0	0	1	1	1	1	1
40°	0	0	0	0	0	1	1	1	1	1	1
38.75°	0	0	0	0	1	1	1	1	1	1	1
37.5°	0	0	0	1	1	1	1	1	1	1	1
36.25°	0	0	1	1	1	1	1	1	1	1	1
35°	0	0	1	1	1	1	1	1	1	1	1



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
33.75°	0	1	1	1	1	1	1	1	1	1	1
32.5°	1	1	1	1	1	1	1	1	1	1	1
31.25°	1	1	1	1	1	1	1	1	1	1	1
30°	1	1	1	1	1	1	1	1	1	1	2
28.75°	1	1	1	1	1	1	1	1	1	2	2
27.5°	1	1	1	1	1	1	1	1	2	2	2
26.25°	1	1	1	1	1	1	1	1	2	2	2
25°	1	1	1	1	1	1	1	2	2	2	2
23.75°	1	1	1	1	1	1	1	2	2	2	2
22.5°	1	1	1	1	1	1	2	2	2	2	2
21.25°	1	1	1	1	1	1	2	2	2	2	2
20°	1	1	1	1	1	2	2	2	2	2	3
18.75°	1	1	1	1	1	2	2	2	2	2	3
17.5°	1	1	1	1	1	2	2	2	2	3	3
16.25°	1	1	1	1	2	2	2	2	2	3	4
15°	1	1	1	1	2	2	2	2	3	3	4
13.75°	1	1	1	1	2	2	2	2	3	3	4
12.5°	1	1	1	1	2	2	2	2	3	4	5
11.25°	1	1	1	2	2	2	2	2	3	4	5
10°	1	1	1	2	2	2	2	3	3	4	5
8.75°	1	1	1	2	2	2	2	3	3	4	5
7.5°	1	1	1	2	2	2	2	3	4	4	5
6.25°	1	1	1	2	2	2	2	3	4	5	5
5°	1	1	1	2	2	2	2	3	4	5	5
3.75°	1	1	1	2	2	2	2	3	4	5	5
2.5°	1	1	1	2	2	2	2	3	4	5	5
1.25°	1	1	1	2	2	2	2	3	4	5	5
0°	1	1	2	2	2	2	3	3	4	5	6
-1.25°	1	1	1	2	2	2	2	3	4	5	5
-2.5°	1	1	1	2	2	2	2	3	4	5	5
-3.75°	1	1	1	2	2	2	2	3	4	5	5
-5°	1	1	1	2	2	2	2	3	4	5	5
-6.25°	1	1	1	2	2	2	2	3	4	5	5
-7.5°	1	1	1	2	2	2	2	3	4	4	5
-8.75°	1	1	1	2	2	2	2	3	3	4	5
-10°	1	1	1	2	2	2	2	3	3	4	5
-11.25°	1	1	1	2	2	2	2	2	3	4	5
-12.5°	1	1	1	1	2	2	2	2	3	4	5
-13.75°	1	1	1	1	2	2	2	2	3	3	4
-15°	1	1	1	1	2	2	2	2	3	3	4
-16.25°	1	1	1	1	2	2	2	2	2	3	4
-17.5°	1	1	1	1	1	2	2	2	2	3	3
-18.75°	1	1	1	1	1	2	2	2	2	2	3
-20°	1	1	1	1	1	2	2	2	2	2	3
-21.25°	1	1	1	1	1	1	2	2	2	2	2



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
-22.5°	1	1	1	1	1	1	2	2	2	2	2
-23.75°	1	1	1	1	1	1	1	2	2	2	2
-25°	1	1	1	1	1	1	1	2	2	2	2
-26.25°	1	1	1	1	1	1	1	1	2	2	2
-27.5°	1	1	1	1	1	1	1	1	2	2	2
-28.75°	1	1	1	1	1	1	1	1	1	2	2
-30°	1	1	1	1	1	1	1	1	1	1	2
-31.25°	1	1	1	1	1	1	1	1	1	1	1
-32.5°	1	1	1	1	1	1	1	1	1	1	1
-33.75°	0	1	1	1	1	1	1	1	1	1	1
-35°	0	0	1	1	1	1	1	1	1	1	1
-36.25°	0	0	1	1	1	1	1	1	1	1	1
-37.5°	0	0	0	1	1	1	1	1	1	1	1
-38.75°	0	0	0	0	1	1	1	1	1	1	1
-40°	0	0	0	0	0	1	1	1	1	1	1
-41.25°	0	0	0	0	0	0	1	1	1	1	1
-42.5°	0	0	0	0	0	0	0	1	1	1	1
-43.75°	0	0	0	0	0	0	0	0	1	1	1
-45°	0	0	0	0	0	0	0	0	0	1	1
-46.25°	0	0	0	0	0	0	0	0	0	0	1
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	1	1
51.25°	0	0	0	0	0	0	0	1	1	1	1
50°	0	0	0	0	1	1	1	1	1	1	1
48.75°	0	0	1	1	1	1	1	1	1	1	1
47.5°	0	1	1	1	1	1	1	1	1	1	1
46.25°	1	1	1	1	1	1	1	1	1	1	1
45°	1	1	1	1	1	1	1	1	1	1	1
43.75°	1	1	1	1	1	1	1	1	1	1	1
42.5°	1	1	1	1	1	1	1	1	1	1	1
41.25°	1	1	1	1	1	1	1	1	1	1	2
40°	1	1	1	1	1	1	1	1	2	2	2
38.75°	1	1	1	1	1	1	2	2	2	2	2
37.5°	1	1	1	1	1	2	2	2	2	2	2
36.25°	1	1	1	1	2	2	2	2	2	2	2
35°	1	1	1	2	2	2	2	2	2	2	3



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
33.75°	1	1	2	2	2	2	2	2	3	3	3
32.5°	1	2	2	2	2	2	2	3	3	3	4
31.25°	2	2	2	2	2	2	3	3	4	4	5
30°	2	2	2	2	2	3	3	4	4	5	5
28.75°	2	2	2	2	3	3	4	4	5	5	6
27.5°	2	2	2	3	3	4	5	5	5	6	6
26.25°	2	2	3	3	4	4	5	5	6	6	7
25°	2	3	3	4	4	5	5	6	6	7	7
23.75°	2	3	3	4	5	5	6	6	7	8	8
22.5°	3	3	4	5	5	6	6	7	7	8	9
21.25°	3	4	4	5	6	6	7	7	8	9	10
20°	3	4	5	5	6	6	7	8	9	9	10
18.75°	4	5	5	6	6	7	8	9	9	10	11
17.5°	4	5	5	6	7	7	8	9	10	11	12
16.25°	4	5	6	6	7	8	9	10	11	12	13
15°	5	5	6	7	7	8	9	10	11	13	14
13.75°	5	6	6	7	8	9	10	11	12	13	15
12.5°	5	6	6	7	8	9	10	11	13	14	16
11.25°	5	6	7	8	9	9	11	12	13	15	17
10°	6	6	7	8	9	10	11	12	14	16	18
8.75°	6	6	7	8	9	10	11	13	15	17	20
7.5°	6	6	7	8	9	10	12	13	15	17	21
6.25°	6	7	8	9	10	11	12	14	16	18	22
5°	6	7	8	9	10	11	13	14	16	19	23
3.75°	6	7	8	9	10	11	13	15	17	20	23
2.5°	6	7	8	9	10	11	13	15	17	20	24
1.25°	6	7	8	9	10	11	13	15	17	20	24
0°	6	7	8	9	10	12	13	15	17	21	24
-1.25°	6	7	8	9	10	11	13	15	17	20	24
-2.5°	6	7	8	9	10	11	13	15	17	20	24
-3.75°	6	7	8	9	10	11	13	15	17	20	23
-5°	6	7	8	9	10	11	13	14	16	19	23
-6.25°	6	7	8	9	10	11	12	14	16	18	22
-7.5°	6	6	7	8	9	10	12	13	15	17	21
-8.75°	6	6	7	8	9	10	11	13	15	17	20
-10°	6	6	7	8	9	10	11	12	14	16	18
-11.25°	5	6	7	8	9	9	11	12	13	15	17
-12.5°	5	6	6	7	8	9	10	11	13	14	16
-13.75°	5	6	6	7	8	9	10	11	12	13	15
-15°	5	5	6	7	7	8	9	10	11	13	14
-16.25°	4	5	6	6	7	8	9	10	11	12	13
-17.5°	4	5	5	6	7	7	8	9	10	11	12
-18.75°	4	5	5	6	6	7	8	9	9	10	11
-20°	3	4	5	5	6	6	7	8	9	9	10
-21.25°	3	4	4	5	6	6	7	7	8	9	10



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
-22.5°	3	3	4	5	5	6	6	7	7	8	9
-23.75°	2	3	3	4	5	5	6	6	7	8	8
-25°	2	3	3	4	4	5	5	6	6	7	7
-26.25°	2	2	3	3	4	4	5	5	6	6	7
-27.5°	2	2	2	3	3	4	5	5	5	6	6
-28.75°	2	2	2	2	3	3	4	4	5	5	6
-30°	2	2	2	2	2	3	3	4	4	5	5
-31.25°	2	2	2	2	2	2	3	3	4	4	5
-32.5°	1	2	2	2	2	2	2	3	3	3	4
-33.75°	1	1	2	2	2	2	2	2	3	3	3
-35°	1	1	1	2	2	2	2	2	2	2	3
-36.25°	1	1	1	1	2	2	2	2	2	2	2
-37.5°	1	1	1	1	1	2	2	2	2	2	2
-38.75°	1	1	1	1	1	1	2	2	2	2	2
-40°	1	1	1	1	1	1	1	1	2	2	2
-41.25°	1	1	1	1	1	1	1	1	1	1	2
-42.5°	1	1	1	1	1	1	1	1	1	1	1
-43.75°	1	1	1	1	1	1	1	1	1	1	1
-45°	1	1	1	1	1	1	1	1	1	1	1
-46.25°	1	1	1	1	1	1	1	1	1	1	1
-47.5°	0	1	1	1	1	1	1	1	1	1	1
-48.75°	0	0	1	1	1	1	1	1	1	1	1
-50°	0	0	0	0	1	1	1	1	1	1	1
-51.25°	0	0	0	0	0	0	0	1	1	1	1
-52.5°	0	0	0	0	0	0	0	0	0	1	1
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	1	1	1	1	1
53.75°	0	1	1	1	1	1	1	1	1	1	1
52.5°	1	1	1	1	1	1	1	1	1	1	1
51.25°	1	1	1	1	1	1	1	1	1	1	1
50°	1	1	1	1	1	1	1	1	1	1	1
48.75°	1	1	1	1	1	1	1	1	1	1	1
47.5°	1	1	1	1	1	1	1	1	1	1	1
46.25°	1	1	1	1	1	1	1	1	1	1	1
45°	1	1	1	1	1	1	1	1	2	2	2
43.75°	1	1	1	1	2	2	2	2	2	2	2
42.5°	1	2	2	2	2	2	2	2	2	2	2
41.25°	2	2	2	2	2	2	2	2	2	2	2
40°	2	2	2	2	2	2	2	2	2	3	3
38.75°	2	2	2	2	2	3	3	3	3	3	3
37.5°	2	2	2	3	3	3	3	4	4	4	4
36.25°	2	3	3	3	4	4	4	5	5	5	5
35°	3	3	4	4	4	5	5	5	5	6	6



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
33.75°	4	4	5	5	5	5	6	6	6	6	6
32.5°	4	5	5	5	6	6	6	6	7	7	7
31.25°	5	5	6	6	6	7	7	7	8	8	8
30°	6	6	6	7	7	7	8	8	9	9	9
28.75°	6	6	7	7	8	8	9	9	9	10	10
27.5°	7	7	8	8	9	9	10	10	11	11	11
26.25°	7	8	9	9	10	10	11	11	12	12	13
25°	8	9	9	10	11	11	12	13	13	14	15
23.75°	9	9	10	11	12	13	13	14	15	16	17
22.5°	10	10	11	12	13	14	15	16	17	18	20
21.25°	10	11	12	13	15	16	17	18	20	22	23
20°	11	12	14	15	16	18	19	21	23	25	28
18.75°	12	14	15	16	18	20	22	25	28	31	35
17.5°	13	15	16	18	21	23	26	30	34	38	43
16.25°	15	16	18	21	23	27	31	36	41	48	53
15°	16	18	20	23	27	32	37	43	51	58	64
13.75°	17	19	22	26	31	37	44	52	60	69	77
12.5°	18	21	25	30	36	43	52	61	71	81	90
11.25°	20	23	28	34	41	51	60	71	82	93	112
10°	22	25	31	38	48	58	69	81	93	115	136
8.75°	23	28	35	43	53	64	77	90	112	136	166
7.5°	24	31	37	48	59	72	85	104	130	157	225
6.25°	26	33	41	52	63	78	92	119	146	206	280
5°	28	35	44	55	68	83	103	131	169	249	327
3.75°	29	36	47	58	72	87	112	142	201	284	441
2.5°	30	37	48	60	75	90	119	149	224	310	535
1.25°	31	38	50	62	77	92	123	153	239	327	627
0°	31	38	50	62	78	93	124	155	244	332	666
-1.25°	31	38	50	62	77	92	123	153	239	327	627
-2.5°	30	37	48	60	75	90	119	149	224	310	535
-3.75°	29	36	47	58	72	87	112	142	201	284	441
-5°	28	35	44	55	68	83	103	131	169	249	327
-6.25°	26	33	41	52	63	78	92	119	146	206	280
-7.5°	24	31	37	48	59	72	85	104	130	157	225
-8.75°	23	28	35	43	53	64	77	90	112	136	166
-10°	22	25	31	38	48	58	69	81	93	115	136
-11.25°	20	23	28	34	41	51	60	71	82	93	112
-12.5°	18	21	25	30	36	43	52	61	71	81	90
-13.75°	17	19	22	26	31	37	44	52	60	69	77
-15°	16	18	20	23	27	32	37	43	51	58	64
-16.25°	15	16	18	21	23	27	31	36	41	48	53
-17.5°	13	15	16	18	21	23	26	30	34	38	43
-18.75°	12	14	15	16	18	20	22	25	28	31	35
-20°	11	12	14	15	16	18	19	21	23	25	28
-21.25°	10	11	12	13	15	16	17	18	20	22	23



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
-22.5°	10	10	11	12	13	14	15	16	17	18	20
-23.75°	9	9	10	11	12	13	13	14	15	16	17
-25°	8	9	9	10	11	11	12	13	13	14	15
-26.25°	7	8	9	9	10	10	11	11	12	12	13
-27.5°	7	7	8	8	9	9	10	10	11	11	11
-28.75°	6	6	7	7	8	8	9	9	9	10	10
-30°	6	6	6	7	7	7	8	8	9	9	9
-31.25°	5	5	6	6	6	7	7	7	8	8	8
-32.5°	4	5	5	5	6	6	6	6	7	7	7
-33.75°	4	4	5	5	5	5	6	6	6	6	6
-35°	3	3	4	4	4	5	5	5	5	6	6
-36.25°	2	3	3	3	4	4	4	5	5	5	5
-37.5°	2	2	2	3	3	3	3	4	4	4	4
-38.75°	2	2	2	2	2	3	3	3	3	3	3
-40°	2	2	2	2	2	2	2	2	2	3	3
-41.25°	2	2	2	2	2	2	2	2	2	2	2
-42.5°	1	2	2	2	2	2	2	2	2	2	2
-43.75°	1	1	1	1	2	2	2	2	2	2	2
-45°	1	1	1	1	1	1	1	1	2	2	2
-46.25°	1	1	1	1	1	1	1	1	1	1	1
-47.5°	1	1	1	1	1	1	1	1	1	1	1
-48.75°	1	1	1	1	1	1	1	1	1	1	1
-50°	1	1	1	1	1	1	1	1	1	1	1
-51.25°	1	1	1	1	1	1	1	1	1	1	1
-52.5°	1	1	1	1	1	1	1	1	1	1	1
-53.75°	0	1	1	1	1	1	1	1	1	1	1
-55°	0	0	0	0	0	0	1	1	1	1	1
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	1	0	0	0	0
55°	1	1	1	1	1	1	1	1	1	1	1
53.75°	1	1	1	1	1	1	1	1	1	1	1
52.5°	1	1	1	1	1	1	1	1	1	1	1
51.25°	1	1	1	1	1	1	1	1	1	1	1
50°	1	1	1	1	1	1	1	1	1	1	1
48.75°	1	1	1	1	1	1	1	1	1	1	1
47.5°	1	1	1	1	1	1	1	1	1	1	1
46.25°	1	1	1	1	1	1	2	1	1	1	1
45°	2	2	2	2	2	2	2	2	2	2	2
43.75°	2	2	2	2	2	2	2	2	2	2	2
42.5°	2	2	2	2	2	2	2	2	2	2	2
41.25°	2	2	2	2	2	2	3	2	2	2	2
40°	3	3	3	3	3	3	3	3	3	3	3
38.75°	4	4	4	4	4	4	4	4	4	4	4
37.5°	4	5	5	5	5	5	5	5	5	5	5
36.25°	5	5	5	5	5	5	6	5	5	5	5
35°	6	6	6	6	6	6	6	6	6	6	6



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
33.75°	6	7	7	7	7	7	7	7	7	7	7
32.5°	7	8	8	8	8	8	8	8	8	8	8
31.25°	8	9	9	9	9	9	9	9	9	9	9
30°	9	10	10	10	10	10	10	10	10	10	10
28.75°	10	11	11	11	11	11	12	11	11	11	11
27.5°	12	12	13	13	13	13	13	13	13	13	13
26.25°	13	14	14	15	15	15	15	15	15	15	14
25°	15	16	16	17	17	17	17	17	17	17	16
23.75°	17	18	19	20	20	20	21	20	20	20	19
22.5°	21	22	23	23	24	24	24	24	24	23	23
21.25°	24	26	28	29	30	31	31	31	30	29	28
20°	31	33	35	36	37	38	38	38	37	36	35
18.75°	37	41	44	47	48	50	50	50	48	47	44
17.5°	48	52	55	58	60	62	62	62	60	58	55
16.25°	59	63	68	72	75	77	78	77	75	72	68
15°	72	78	83	87	90	92	93	92	90	87	83
13.75°	85	92	103	112	119	123	124	123	119	112	103
12.5°	104	119	131	142	149	153	155	153	149	142	131
11.25°	130	146	169	201	224	239	244	239	224	201	169
10°	157	206	249	284	310	327	332	327	310	284	249
8.75°	225	280	327	441	535	627	666	627	535	441	327
7.5°	290	388	556	826	1053	1248	1314	1248	1053	826	556
6.25°	388	631	992	1453	1845	2119	2214	2119	1845	1453	992
5°	556	992	1594	2216	2708	3027	3140	3027	2708	2216	1594
3.75°	826	1453	2216	2919	3450	3791	3891	3791	3450	2919	2216
2.5°	1053	1845	2708	3450	3996	4326	4422	4326	3996	3450	2708
1.25°	1248	2119	3027	3791	4326	4627	4722	4627	4326	3791	3027
0°	1314	2214	3140	3891	4422	4722	4838	4722	4422	3891	3140
-1.25°	1248	2119	3027	3791	4326	4627	4722	4627	4326	3791	3027
-2.5°	1053	1845	2708	3450	3996	4326	4422	4326	3996	3450	2708
-3.75°	826	1453	2216	2919	3450	3791	3891	3791	3450	2919	2216
-5°	556	992	1594	2216	2708	3027	3140	3027	2708	2216	1594
-6.25°	388	631	992	1453	1845	2119	2214	2119	1845	1453	992
-7.5°	290	388	556	826	1053	1248	1314	1248	1053	826	556
-8.75°	225	280	327	441	535	627	666	627	535	441	327
-10°	157	206	249	284	310	327	332	327	310	284	249
-11.25°	130	146	169	201	224	239	244	239	224	201	169
-12.5°	104	119	131	142	149	153	155	153	149	142	131
-13.75°	85	92	103	112	119	123	124	123	119	112	103
-15°	72	78	83	87	90	92	93	92	90	87	83
-16.25°	59	63	68	72	75	77	78	77	75	72	68
-17.5°	48	52	55	58	60	62	62	62	60	58	55
-18.75°	37	41	44	47	48	50	50	50	48	47	44
-20°	31	33	35	36	37	38	38	38	37	36	35
-21.25°	24	26	28	29	30	31	31	31	30	29	28



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
-22.5°	21	22	23	23	24	24	24	24	24	23	23
-23.75°	17	18	19	20	20	20	21	20	20	20	19
-25°	15	16	16	17	17	17	17	17	17	17	16
-26.25°	13	14	14	15	15	15	15	15	15	15	14
-27.5°	12	12	13	13	13	13	13	13	13	13	13
-28.75°	10	11	11	11	11	11	12	11	11	11	11
-30°	9	10	10	10	10	10	10	10	10	10	10
-31.25°	8	9	9	9	9	9	9	9	9	9	9
-32.5°	7	8	8	8	8	8	8	8	8	8	8
-33.75°	6	7	7	7	7	7	7	7	7	7	7
-35°	6	6	6	6	6	6	6	6	6	6	6
-36.25°	5	5	5	5	5	5	6	5	5	5	5
-37.5°	4	5	5	5	5	5	5	5	5	5	5
-38.75°	4	4	4	4	4	4	4	4	4	4	4
-40°	3	3	3	3	3	3	3	3	3	3	3
-41.25°	2	2	2	2	2	2	3	2	2	2	2
-42.5°	2	2	2	2	2	2	2	2	2	2	2
-43.75°	2	2	2	2	2	2	2	2	2	2	2
-45°	2	2	2	2	2	2	2	2	2	2	2
-46.25°	1	1	1	1	1	1	2	1	1	1	1
-47.5°	1	1	1	1	1	1	1	1	1	1	1
-48.75°	1	1	1	1	1	1	1	1	1	1	1
-50°	1	1	1	1	1	1	1	1	1	1	1
-51.25°	1	1	1	1	1	1	1	1	1	1	1
-52.5°	1	1	1	1	1	1	1	1	1	1	1
-53.75°	1	1	1	1	1	1	1	1	1	1	1
-55°	1	1	1	1	1	1	1	1	1	1	1
-56.25°	0	0	0	0	0	0	1	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	1	1	1	1	1	1	1	0	0	0	0
53.75°	1	1	1	1	1	1	1	1	1	1	1
52.5°	1	1	1	1	1	1	1	1	1	1	1
51.25°	1	1	1	1	1	1	1	1	1	1	1
50°	1	1	1	1	1	1	1	1	1	1	1
48.75°	1	1	1	1	1	1	1	1	1	1	1
47.5°	1	1	1	1	1	1	1	1	1	1	1
46.25°	1	1	1	1	1	1	1	1	1	1	1
45°	2	2	2	2	2	1	1	1	1	1	1
43.75°	2	2	2	2	2	2	2	2	2	1	1
42.5°	2	2	2	2	2	2	2	2	2	2	2
41.25°	2	2	2	2	2	2	2	2	2	2	2
40°	3	3	3	3	2	2	2	2	2	2	2
38.75°	4	4	3	3	3	3	3	3	2	2	2
37.5°	5	4	4	4	4	4	3	3	3	3	2
36.25°	5	5	5	5	5	5	4	4	4	3	3
35°	6	6	6	6	5	5	5	5	4	4	4



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
33.75°	7	6	6	6	6	6	6	5	5	5	5
32.5°	8	7	7	7	7	6	6	6	6	5	5
31.25°	9	8	8	8	8	7	7	7	6	6	6
30°	10	9	9	9	9	8	8	7	7	7	6
28.75°	11	10	10	10	9	9	9	8	8	7	7
27.5°	12	12	11	11	11	10	10	9	9	8	8
26.25°	14	13	13	12	12	11	11	10	10	9	9
25°	16	15	15	14	13	13	12	11	11	10	9
23.75°	18	17	17	16	15	14	13	13	12	11	10
22.5°	22	21	20	18	17	16	15	14	13	12	11
21.25°	26	24	23	22	20	18	17	16	15	13	12
20°	33	31	28	25	23	21	19	18	16	15	14
18.75°	41	37	35	31	28	25	22	20	18	16	15
17.5°	52	48	43	38	34	30	26	23	21	18	16
16.25°	63	59	53	48	41	36	31	27	23	21	18
15°	78	72	64	58	51	43	37	32	27	23	20
13.75°	92	85	77	69	60	52	44	37	31	26	22
12.5°	119	104	90	81	71	61	52	43	36	30	25
11.25°	146	130	112	93	82	71	60	51	41	34	28
10°	206	157	136	115	93	81	69	58	48	38	31
8.75°	280	225	166	136	112	90	77	64	53	43	35
7.5°	388	290	225	157	130	104	85	72	59	48	37
6.25°	631	388	280	206	146	119	92	78	63	52	41
5°	992	556	327	249	169	131	103	83	68	55	44
3.75°	1453	826	441	284	201	142	112	87	72	58	47
2.5°	1845	1053	535	310	224	149	119	90	75	60	48
1.25°	2119	1248	627	327	239	153	123	92	77	62	50
0°	2214	1314	666	332	244	155	124	93	78	62	50
-1.25°	2119	1248	627	327	239	153	123	92	77	62	50
-2.5°	1845	1053	535	310	224	149	119	90	75	60	48
-3.75°	1453	826	441	284	201	142	112	87	72	58	47
-5°	992	556	327	249	169	131	103	83	68	55	44
-6.25°	631	388	280	206	146	119	92	78	63	52	41
-7.5°	388	290	225	157	130	104	85	72	59	48	37
-8.75°	280	225	166	136	112	90	77	64	53	43	35
-10°	206	157	136	115	93	81	69	58	48	38	31
-11.25°	146	130	112	93	82	71	60	51	41	34	28
-12.5°	119	104	90	81	71	61	52	43	36	30	25
-13.75°	92	85	77	69	60	52	44	37	31	26	22
-15°	78	72	64	58	51	43	37	32	27	23	20
-16.25°	63	59	53	48	41	36	31	27	23	21	18
-17.5°	52	48	43	38	34	30	26	23	21	18	16
-18.75°	41	37	35	31	28	25	22	20	18	16	15
-20°	33	31	28	25	23	21	19	18	16	15	14
-21.25°	26	24	23	22	20	18	17	16	15	13	12



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
-22.5°	22	21	20	18	17	16	15	14	13	12	11
-23.75°	18	17	17	16	15	14	13	13	12	11	10
-25°	16	15	15	14	13	13	12	11	11	10	9
-26.25°	14	13	13	12	12	11	11	10	10	9	9
-27.5°	12	12	11	11	11	10	10	9	9	8	8
-28.75°	11	10	10	10	9	9	9	8	8	7	7
-30°	10	9	9	9	9	8	8	7	7	7	6
-31.25°	9	8	8	8	8	7	7	7	6	6	6
-32.5°	8	7	7	7	7	6	6	6	6	5	5
-33.75°	7	6	6	6	6	6	6	5	5	5	5
-35°	6	6	6	6	5	5	5	5	4	4	4
-36.25°	5	5	5	5	5	5	4	4	4	3	3
-37.5°	5	4	4	4	4	4	3	3	3	3	2
-38.75°	4	4	3	3	3	3	3	3	2	2	2
-40°	3	3	3	3	2	2	2	2	2	2	2
-41.25°	2	2	2	2	2	2	2	2	2	2	2
-42.5°	2	2	2	2	2	2	2	2	2	2	2
-43.75°	2	2	2	2	2	2	2	2	2	1	1
-45°	2	2	2	2	2	1	1	1	1	1	1
-46.25°	1	1	1	1	1	1	1	1	1	1	1
-47.5°	1	1	1	1	1	1	1	1	1	1	1
-48.75°	1	1	1	1	1	1	1	1	1	1	1
-50°	1	1	1	1	1	1	1	1	1	1	1
-51.25°	1	1	1	1	1	1	1	1	1	1	1
-52.5°	1	1	1	1	1	1	1	1	1	1	1
-53.75°	1	1	1	1	1	1	1	1	1	1	1
-55°	1	1	1	1	1	1	1	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	1	0	0	0	0	0	0	0	0	0	0
52.5°	1	1	1	1	0	0	0	0	0	0	0
51.25°	1	1	1	1	1	1	0	0	0	0	0
50°	1	1	1	1	1	1	1	1	1	0	0
48.75°	1	1	1	1	1	1	1	1	1	1	1
47.5°	1	1	1	1	1	1	1	1	1	1	1
46.25°	1	1	1	1	1	1	1	1	1	1	1
45°	1	1	1	1	1	1	1	1	1	1	1
43.75°	1	1	1	1	1	1	1	1	1	1	1
42.5°	2	1	1	1	1	1	1	1	1	1	1
41.25°	2	2	2	1	1	1	1	1	1	1	1
40°	2	2	2	2	2	1	1	1	1	1	1
38.75°	2	2	2	2	2	2	2	1	1	1	1
37.5°	2	2	2	2	2	2	2	2	1	1	1
36.25°	3	2	2	2	2	2	2	2	2	1	1
35°	3	3	3	2	2	2	2	2	2	2	1



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
33.75°	4	4	3	3	3	2	2	2	2	2	2
32.5°	5	4	4	3	3	3	2	2	2	2	2
31.25°	5	5	5	4	4	3	3	2	2	2	2
30°	6	6	5	5	4	4	3	3	2	2	2
28.75°	6	6	6	5	5	4	4	3	3	2	2
27.5°	7	7	6	6	5	5	5	4	3	3	2
26.25°	8	7	7	6	6	5	5	4	4	3	3
25°	9	8	7	7	6	6	5	5	4	4	3
23.75°	9	9	8	8	7	6	6	5	5	4	3
22.5°	10	10	9	8	7	7	6	6	5	5	4
21.25°	11	10	10	9	8	7	7	6	6	5	4
20°	12	11	10	9	9	8	7	6	6	5	5
18.75°	14	12	11	10	9	9	8	7	6	6	5
17.5°	15	13	12	11	10	9	8	7	7	6	5
16.25°	16	15	13	12	11	10	9	8	7	6	6
15°	18	16	14	13	11	10	9	8	7	7	6
13.75°	19	17	15	13	12	11	10	9	8	7	6
12.5°	21	18	16	14	13	11	10	9	8	7	6
11.25°	23	20	17	15	13	12	11	9	9	8	7
10°	25	22	18	16	14	12	11	10	9	8	7
8.75°	28	23	20	17	15	13	11	10	9	8	7
7.5°	31	24	21	17	15	13	12	10	9	8	7
6.25°	33	26	22	18	16	14	12	11	10	9	8
5°	35	28	23	19	16	14	13	11	10	9	8
3.75°	36	29	23	20	17	15	13	11	10	9	8
2.5°	37	30	24	20	17	15	13	11	10	9	8
1.25°	38	31	24	20	17	15	13	11	10	9	8
0°	38	31	24	21	17	15	13	12	10	9	8
-1.25°	38	31	24	20	17	15	13	11	10	9	8
-2.5°	37	30	24	20	17	15	13	11	10	9	8
-3.75°	36	29	23	20	17	15	13	11	10	9	8
-5°	35	28	23	19	16	14	13	11	10	9	8
-6.25°	33	26	22	18	16	14	12	11	10	9	8
-7.5°	31	24	21	17	15	13	12	10	9	8	7
-8.75°	28	23	20	17	15	13	11	10	9	8	7
-10°	25	22	18	16	14	12	11	10	9	8	7
-11.25°	23	20	17	15	13	12	11	9	9	8	7
-12.5°	21	18	16	14	13	11	10	9	8	7	6
-13.75°	19	17	15	13	12	11	10	9	8	7	6
-15°	18	16	14	13	11	10	9	8	7	7	6
-16.25°	16	15	13	12	11	10	9	8	7	6	6
-17.5°	15	13	12	11	10	9	8	7	7	6	5
-18.75°	14	12	11	10	9	9	8	7	6	6	5
-20°	12	11	10	9	9	8	7	6	6	5	5
-21.25°	11	10	10	9	8	7	7	6	6	5	4



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
-22.5°	10	10	9	8	7	7	6	6	5	5	4
-23.75°	9	9	8	8	7	6	6	5	5	4	3
-25°	9	8	7	7	6	6	5	5	4	4	3
-26.25°	8	7	7	6	6	5	5	4	4	3	3
-27.5°	7	7	6	6	5	5	5	4	3	3	2
-28.75°	6	6	6	5	5	4	4	3	3	2	2
-30°	6	6	5	5	4	4	3	3	2	2	2
-31.25°	5	5	5	4	4	3	3	2	2	2	2
-32.5°	5	4	4	3	3	3	2	2	2	2	2
-33.75°	4	4	3	3	3	2	2	2	2	2	2
-35°	3	3	3	2	2	2	2	2	2	2	1
-36.25°	3	2	2	2	2	2	2	2	2	1	1
-37.5°	2	2	2	2	2	2	2	2	1	1	1
-38.75°	2	2	2	2	2	2	2	1	1	1	1
-40°	2	2	2	2	2	1	1	1	1	1	1
-41.25°	2	2	2	1	1	1	1	1	1	1	1
-42.5°	2	1	1	1	1	1	1	1	1	1	1
-43.75°	1	1	1	1	1	1	1	1	1	1	1
-45°	1	1	1	1	1	1	1	1	1	1	1
-46.25°	1	1	1	1	1	1	1	1	1	1	1
-47.5°	1	1	1	1	1	1	1	1	1	1	1
-48.75°	1	1	1	1	1	1	1	1	1	1	1
-50°	1	1	1	1	1	1	1	1	1	0	0
-51.25°	1	1	1	1	1	1	0	0	0	0	0
-52.5°	1	1	1	1	0	0	0	0	0	0	0
-53.75°	1	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	1	0	0	0	0	0	0	0	0	0	0
46.25°	1	1	1	0	0	0	0	0	0	0	0
45°	1	1	1	1	0	0	0	0	0	0	0
43.75°	1	1	1	1	1	0	0	0	0	0	0
42.5°	1	1	1	1	1	1	0	0	0	0	0
41.25°	1	1	1	1	1	1	1	0	0	0	0
40°	1	1	1	1	1	1	1	1	0	0	0
38.75°	1	1	1	1	1	1	1	1	1	0	0
37.5°	1	1	1	1	1	1	1	1	1	1	0
36.25°	1	1	1	1	1	1	1	1	1	1	1
35°	1	1	1	1	1	1	1	1	1	1	1



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
33.75°	1	1	1	1	1	1	1	1	1	1	1
32.5°	2	1	1	1	1	1	1	1	1	1	1
31.25°	2	2	1	1	1	1	1	1	1	1	1
30°	2	2	2	1	1	1	1	1	1	1	1
28.75°	2	2	2	2	1	1	1	1	1	1	1
27.5°	2	2	2	2	2	1	1	1	1	1	1
26.25°	2	2	2	2	2	1	1	1	1	1	1
25°	3	2	2	2	2	2	1	1	1	1	1
23.75°	3	2	2	2	2	2	1	1	1	1	1
22.5°	3	3	2	2	2	2	2	1	1	1	1
21.25°	4	3	2	2	2	2	2	1	1	1	1
20°	4	3	3	2	2	2	2	2	1	1	1
18.75°	5	4	3	2	2	2	2	2	1	1	1
17.5°	5	4	3	3	2	2	2	2	1	1	1
16.25°	5	4	4	3	2	2	2	2	2	1	1
15°	5	5	4	3	3	2	2	2	2	1	1
13.75°	6	5	4	3	3	2	2	2	2	1	1
12.5°	6	5	5	4	3	2	2	2	2	1	1
11.25°	6	5	5	4	3	2	2	2	2	2	1
10°	6	6	5	4	3	3	2	2	2	2	1
8.75°	6	6	5	4	3	3	2	2	2	2	1
7.5°	6	6	5	4	4	3	2	2	2	2	1
6.25°	7	6	5	5	4	3	2	2	2	2	1
5°	7	6	5	5	4	3	2	2	2	2	1
3.75°	7	6	5	5	4	3	2	2	2	2	1
2.5°	7	6	5	5	4	3	2	2	2	2	1
1.25°	7	6	5	5	4	3	2	2	2	2	1
0°	7	6	6	5	4	3	3	2	2	2	2
-1.25°	7	6	5	5	4	3	2	2	2	2	1
-2.5°	7	6	5	5	4	3	2	2	2	2	1
-3.75°	7	6	5	5	4	3	2	2	2	2	1
-5°	7	6	5	5	4	3	2	2	2	2	1
-6.25°	7	6	5	5	4	3	2	2	2	2	1
-7.5°	6	6	5	4	4	3	2	2	2	2	1
-8.75°	6	6	5	4	3	3	2	2	2	2	1
-10°	6	6	5	4	3	3	2	2	2	2	1
-11.25°	6	5	5	4	3	2	2	2	2	2	1
-12.5°	6	5	5	4	3	2	2	2	2	1	1
-13.75°	6	5	4	3	3	2	2	2	2	1	1
-15°	5	5	4	3	3	2	2	2	2	1	1
-16.25°	5	4	4	3	2	2	2	2	2	1	1
-17.5°	5	4	3	3	2	2	2	2	1	1	1
-18.75°	5	4	3	2	2	2	2	2	1	1	1
-20°	4	3	3	2	2	2	2	2	1	1	1
-21.25°	4	3	2	2	2	2	2	1	1	1	1



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
-22.5°	3	3	2	2	2	2	2	1	1	1	1
-23.75°	3	2	2	2	2	2	1	1	1	1	1
-25°	3	2	2	2	2	2	1	1	1	1	1
-26.25°	2	2	2	2	2	1	1	1	1	1	1
-27.5°	2	2	2	2	2	1	1	1	1	1	1
-28.75°	2	2	2	2	1	1	1	1	1	1	1
-30°	2	2	2	1	1	1	1	1	1	1	1
-31.25°	2	2	1	1	1	1	1	1	1	1	1
-32.5°	2	1	1	1	1	1	1	1	1	1	1
-33.75°	1	1	1	1	1	1	1	1	1	1	1
-35°	1	1	1	1	1	1	1	1	1	1	1
-36.25°	1	1	1	1	1	1	1	1	1	1	1
-37.5°	1	1	1	1	1	1	1	1	1	1	0
-38.75°	1	1	1	1	1	1	1	1	1	0	0
-40°	1	1	1	1	1	1	1	1	0	0	0
-41.25°	1	1	1	1	1	1	1	0	0	0	0
-42.5°	1	1	1	1	1	1	0	0	0	0	0
-43.75°	1	1	1	1	1	0	0	0	0	0	0
-45°	1	1	1	1	0	0	0	0	0	0	0
-46.25°	1	1	1	0	0	0	0	0	0	0	0
-47.5°	1	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
33.75°	1	0	0	0	0	0	0	0	0	0	0
32.5°	1	1	0	0	0	0	0	0	0	0	0
31.25°	1	1	0	0	0	0	0	0	0	0	0
30°	1	1	1	0	0	0	0	0	0	0	0
28.75°	1	1	1	0	0	0	0	0	0	0	0
27.5°	1	1	1	0	0	0	0	0	0	0	0
26.25°	1	1	1	1	0	0	0	0	0	0	0
25°	1	1	1	1	0	0	0	0	0	0	0
23.75°	1	1	1	1	1	0	0	0	0	0	0
22.5°	1	1	1	1	1	0	0	0	0	0	0
21.25°	1	1	1	1	1	0	0	0	0	0	0
20°	1	1	1	1	1	1	0	0	0	0	0
18.75°	1	1	1	1	1	1	0	0	0	0	0
17.5°	1	1	1	1	1	1	0	0	0	0	0
16.25°	1	1	1	1	1	1	0	0	0	0	0
15°	1	1	1	1	1	1	0	0	0	0	0
13.75°	1	1	1	1	1	1	1	0	0	0	0
12.5°	1	1	1	1	1	1	1	0	0	0	0
11.25°	1	1	1	1	1	1	1	0	0	0	0
10°	1	1	1	1	1	1	1	0	0	0	0
8.75°	1	1	1	1	1	1	1	0	0	0	0
7.5°	1	1	1	1	1	1	1	0	0	0	0
6.25°	1	1	1	1	1	1	1	0	0	0	0
5°	1	1	1	1	1	1	1	0	0	0	0
3.75°	1	1	1	1	1	1	1	0	0	0	0
2.5°	1	1	1	1	1	1	1	0	0	0	0
1.25°	1	1	1	1	1	1	1	0	0	0	0
0°	1	1	1	1	1	1	1	1	0	0	0
-1.25°	1	1	1	1	1	1	1	0	0	0	0
-2.5°	1	1	1	1	1	1	1	0	0	0	0
-3.75°	1	1	1	1	1	1	1	0	0	0	0
-5°	1	1	1	1	1	1	1	0	0	0	0
-6.25°	1	1	1	1	1	1	1	0	0	0	0
-7.5°	1	1	1	1	1	1	1	0	0	0	0
-8.75°	1	1	1	1	1	1	1	0	0	0	0
-10°	1	1	1	1	1	1	1	0	0	0	0
-11.25°	1	1	1	1	1	1	1	0	0	0	0
-12.5°	1	1	1	1	1	1	1	0	0	0	0
-13.75°	1	1	1	1	1	1	1	0	0	0	0
-15°	1	1	1	1	1	1	0	0	0	0	0
-16.25°	1	1	1	1	1	1	0	0	0	0	0
-17.5°	1	1	1	1	1	1	0	0	0	0	0
-18.75°	1	1	1	1	1	1	0	0	0	0	0
-20°	1	1	1	1	1	1	0	0	0	0	0
-21.25°	1	1	1	1	1	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
-22.5°	1	1	1	1	1	0	0	0	0	0	0
-23.75°	1	1	1	1	1	0	0	0	0	0	0
-25°	1	1	1	1	0	0	0	0	0	0	0
-26.25°	1	1	1	1	0	0	0	0	0	0	0
-27.5°	1	1	1	0	0	0	0	0	0	0	0
-28.75°	1	1	1	0	0	0	0	0	0	0	0
-30°	1	1	1	0	0	0	0	0	0	0	0
-31.25°	1	1	0	0	0	0	0	0	0	0	0
-32.5°	1	1	0	0	0	0	0	0	0	0	0
-33.75°	1	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
26.25°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
23.75°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
21.25°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
18.75°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
16.25°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
13.75°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
11.25°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
8.75°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
6.25°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
3.75°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
1.25°	0	0	0	0	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0	0	0	0	0
-1.25°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-3.75°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-6.25°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-8.75°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-11.25°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-13.75°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-16.25°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-18.75°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0
-21.25°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-23.75°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-26.25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
26.25°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
23.75°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
21.25°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
18.75°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
16.25°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
13.75°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
11.25°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
8.75°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
6.25°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
3.75°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
1.25°	0	0	0	0	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0	0	0	0	0
-1.25°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-3.75°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-6.25°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-8.75°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-11.25°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-13.75°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-16.25°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-18.75°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0
-21.25°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-23.75°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-26.25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	88.75°	90°
90°	0	0
88.75°	0	0
87.5°	0	0
86.25°	0	0
85°	0	0
83.75°	0	0
82.5°	0	0
81.25°	0	0
80°	0	0
78.75°	0	0
77.5°	0	0
76.25°	0	0
75°	0	0
73.75°	0	0
72.5°	0	0
71.25°	0	0
70°	0	0
68.75°	0	0
67.5°	0	0
66.25°	0	0
65°	0	0
63.75°	0	0
62.5°	0	0
61.25°	0	0
60°	0	0
58.75°	0	0
57.5°	0	0
56.25°	0	0
55°	0	0
53.75°	0	0
52.5°	0	0
51.25°	0	0
50°	0	0
48.75°	0	0
47.5°	0	0
46.25°	0	0
45°	0	0
43.75°	0	0
42.5°	0	0
41.25°	0	0
40°	0	0
38.75°	0	0
37.5°	0	0
36.25°	0	0
35°	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	88.75°	90°
33.75°	0	0
32.5°	0	0
31.25°	0	0
30°	0	0
28.75°	0	0
27.5°	0	0
26.25°	0	0
25°	0	0
23.75°	0	0
22.5°	0	0
21.25°	0	0
20°	0	0
18.75°	0	0
17.5°	0	0
16.25°	0	0
15°	0	0
13.75°	0	0
12.5°	0	0
11.25°	0	0
10°	0	0
8.75°	0	0
7.5°	0	0
6.25°	0	0
5°	0	0
3.75°	0	0
2.5°	0	0
1.25°	0	0
0°	0	0
-1.25°	0	0
-2.5°	0	0
-3.75°	0	0
-5°	0	0
-6.25°	0	0
-7.5°	0	0
-8.75°	0	0
-10°	0	0
-11.25°	0	0
-12.5°	0	0
-13.75°	0	0
-15°	0	0
-16.25°	0	0
-17.5°	0	0
-18.75°	0	0
-20°	0	0
-21.25°	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	88.75°	90°
-22.5°	0	0
-23.75°	0	0
-25°	0	0
-26.25°	0	0
-27.5°	0	0
-28.75°	0	0
-30°	0	0
-31.25°	0	0
-32.5°	0	0
-33.75°	0	0
-35°	0	0
-36.25°	0	0
-37.5°	0	0
-38.75°	0	0
-40°	0	0
-41.25°	0	0
-42.5°	0	0
-43.75°	0	0
-45°	0	0
-46.25°	0	0
-47.5°	0	0
-48.75°	0	0
-50°	0	0
-51.25°	0	0
-52.5°	0	0
-53.75°	0	0
-55°	0	0
-56.25°	0	0
-57.5°	0	0
-58.75°	0	0
-60°	0	0
-61.25°	0	0
-62.5°	0	0
-63.75°	0	0
-65°	0	0
-66.25°	0	0
-67.5°	0	0
-68.75°	0	0
-70°	0	0
-71.25°	0	0
-72.5°	0	0
-73.75°	0	0
-75°	0	0
-76.25°	0	0
-77.5°	0	0



REPORT NUMBER: G2-1802-569-26 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

CANDELA DISTRIBUTION (continued):

	88.75°	90°
-78.75°	0	0
-80°	0	0
-81.25°	0	0
-82.5°	0	0
-83.75°	0	0
-85°	0	0
-86.25°	0	0
-87.5°	0	0
-88.75°	0	0
-90°	0	0

(END OF REPORT)