

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: LUMIERE

Report Number: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)

Luminaire Tested: **203-SS-8LED4025-12-BK-DIFF**

Test Date: 04/06/18

Test Information


Test Method: LM-79-08
Report Number: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1802-569-28)
Test Lab: INNOVATION CENTER(G2)
Test Date: 04/06/18
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 203-SS-8LED4025-12-BK-DIFF
Description: CAMBRIA 203 LED LUMINAIRE, 8 WATT, 4000K CCT, 25 DEGREE NARROW OPTIC, REGRESSED HOOD BLACK, DIFFUSED LENS
Light Source: (1) SORAA 4000K 95 CRI 25°NFL LED
SM16-07-25D-940-03
Ballast/Driver: CHROMA POWER SUPPLY IN0004

Summary

Lumens per Lamp:	N/A	NEMA Type:	4H x 4V
Luminaire Lumens:	267.2 lumens	Max Intensity:	729 candela
Efficiency:	N/A	Max Intensity Angle:	0°H x 0°V
Efficacy:	33.8 lumens/watt		
Luminous Opening:	Circular (Dia: 0.17' x H: 0')		
Beam Angle (50%):	31°H x 31°V	Field Angle (10%):	62°H x 62°V
Beam Lumens:	117.9 lumens	Field Lumens:	237 lumens
Beam Efficiency:	44.1%	Field Efficiency:	88.7%
Input Watts (W):	7.9		
Input Voltage (V):	12.0		
Input Current (A _{in}):	0.693		
Voltage Rise (V):	NR		
Power Factor:	0.9491		
Total Harmonic Distortion (THDi):	26.9%		
Frequency (hertz):	60		
Stabilization Time:	0.5 HR		
Operation Time:	9 HR		
Ambient Temperature (°C):	25.1		
Test Distance:	25 FT		

REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

Iso-Candela Plot

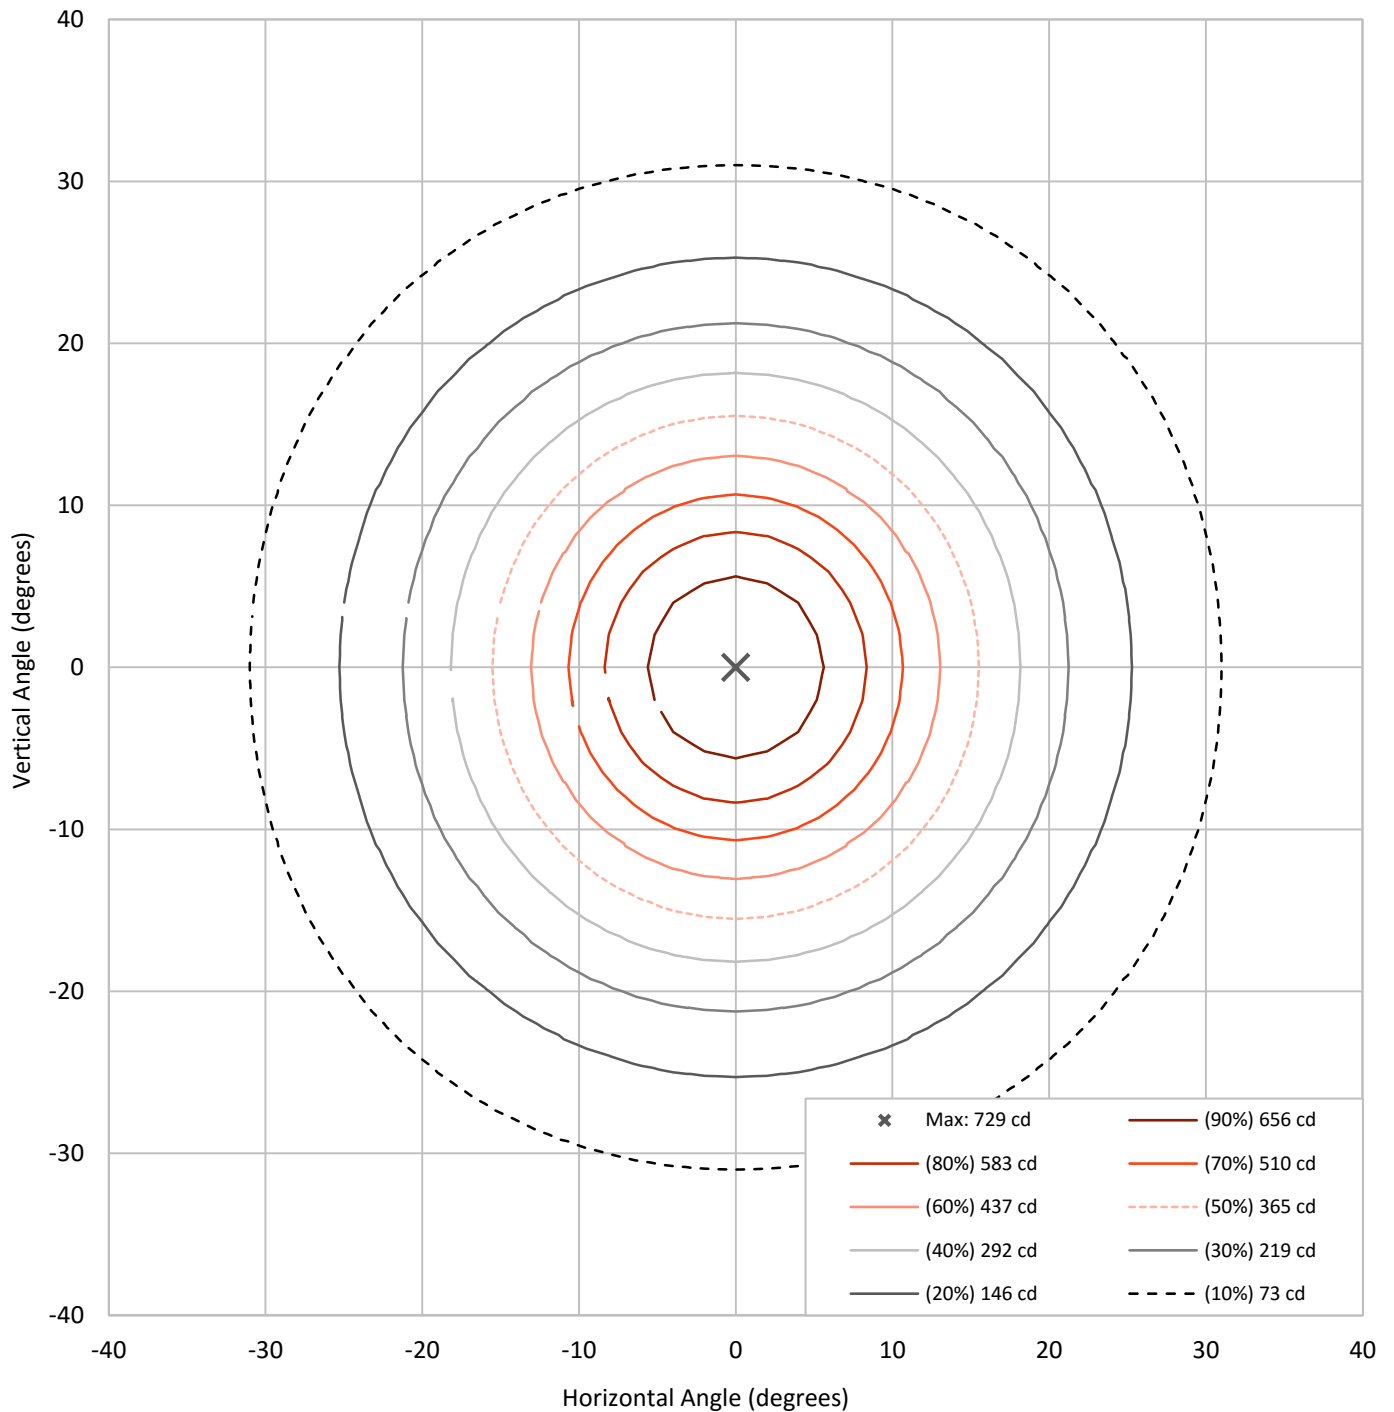


REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

Lumen Table

90	0.0																		
80	0.0																		
70	0.0																		
60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
50	0.0																		
40	0.0	0.0	0.0	0.0	0.1	0.2	0.2	0.2	0.2	0.1	0.0	0.0	0.0	0.0	0.0				
30	0.0																		
20	0.0	0.0	0.1	0.3	1.2	2.9	4.4	4.4	2.9	1.2	0.3	0.1	0.0	0.0	0.0				
10	0.0																		
0	0.0	0.0	0.2	1.0	4.0	10.4	18.0	18.0	10.4	4.0	1.0	0.2	0.0	0.0	0.0				
-10	0.0																		
-20	0.0	0.0	0.1	0.7	2.7	6.6	10.7	10.7	6.6	2.7	0.7	0.1	0.0	0.0	0.0				
-30	0.0																		
-40	0.0	0.0	0.0	0.1	0.4	0.8	1.3	1.3	0.8	0.4	0.1	0.0	0.0	0.0	0.0				
-50	0.0																		
-60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
-70	0.0																		
-80	0.0																		
-90	0.0																		
	-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90


REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

Luminous Intensity Polar Plot

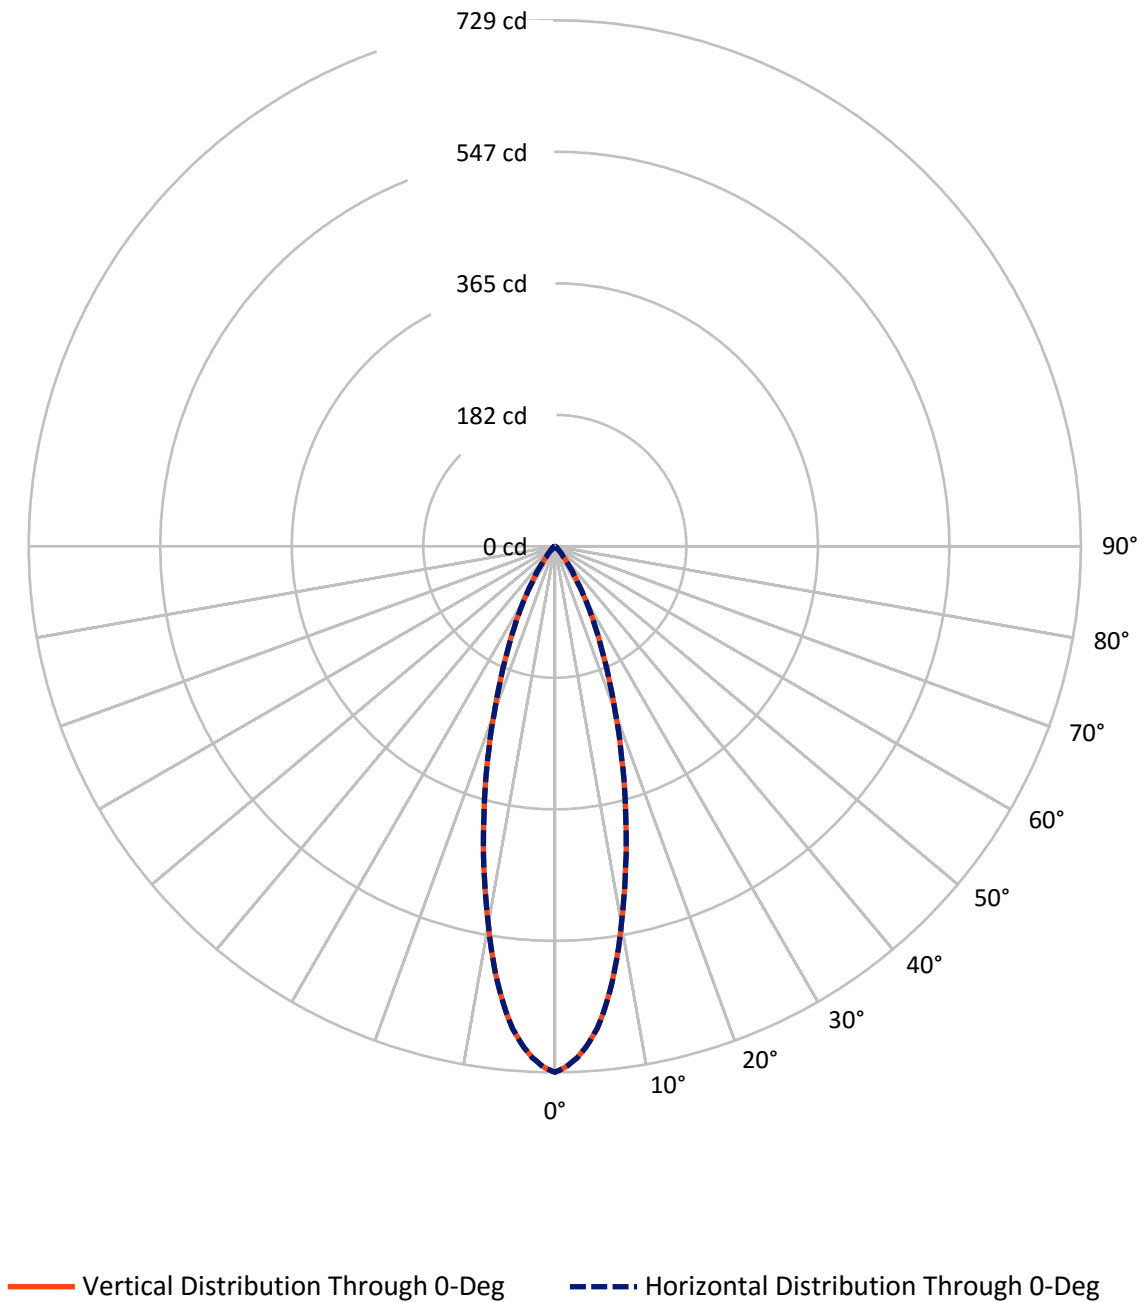

REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

Luminous Intensity Plot

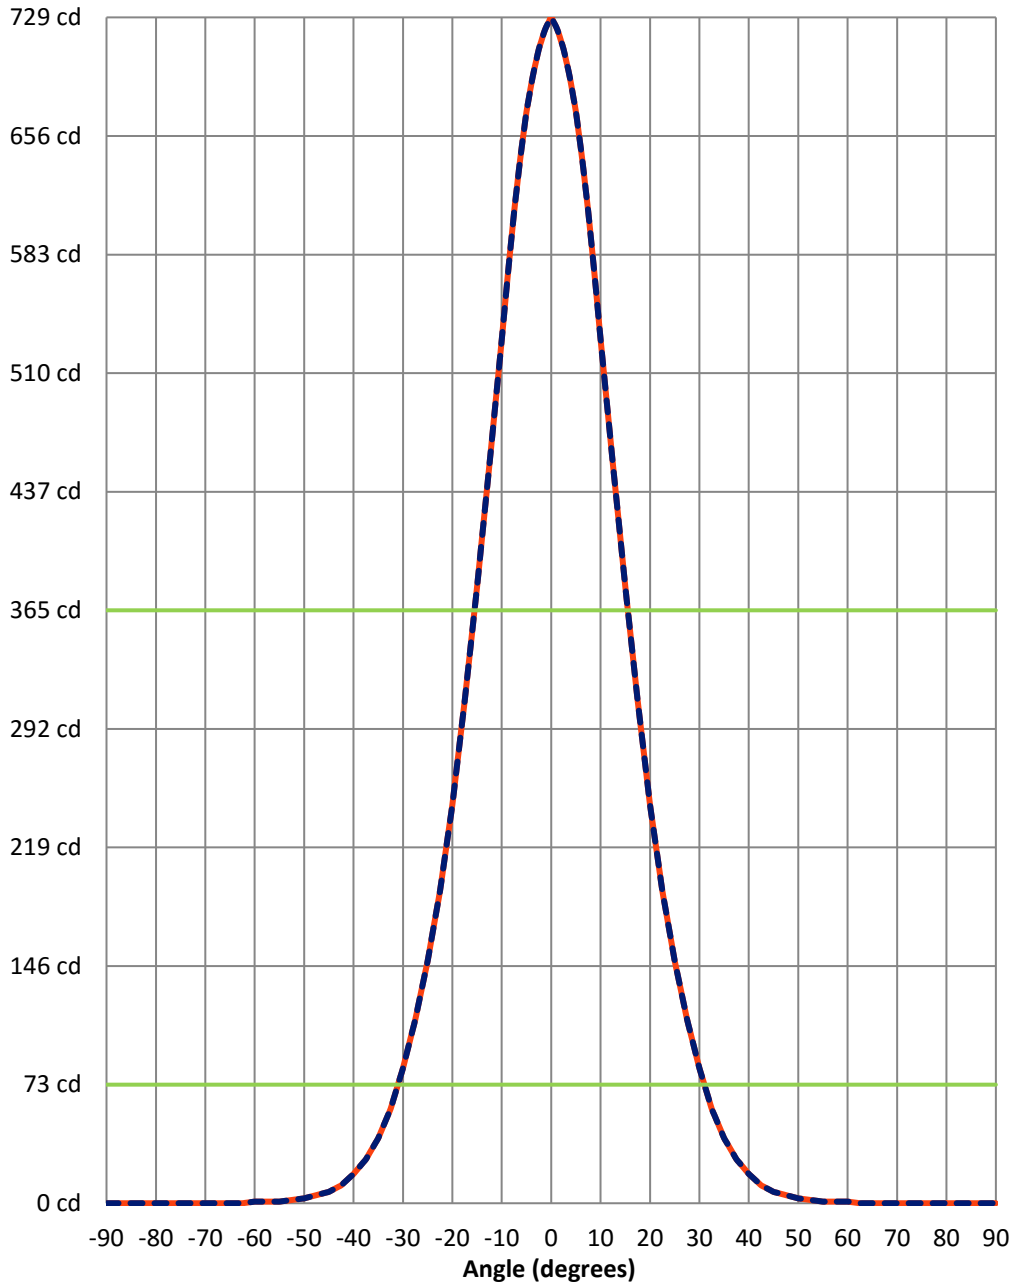

Beam:
H Angle: 31°
V Angle: 31°
Lumens: 117.9
Efficiency: 44.1%

Field:
H Angle: 62°
V Angle: 62°
Lumens: 237
Efficiency: 88.7%

Spill:
Lumens: 30.2
Efficiency: 11.3%

- Vertical Distribution through 0-Deg
- - Horizontal Distribution through 0-Deg



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

FIELD
 BEAM

CANDELA DISTRIBUTION:

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
26.25°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
23.75°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
21.25°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
18.75°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
16.25°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
13.75°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
11.25°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
8.75°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
6.25°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
3.75°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
1.25°	0	0	0	0	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0	0	0	0	0
-1.25°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-3.75°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-6.25°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-8.75°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-11.25°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-13.75°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-16.25°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-18.75°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0
-21.25°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-23.75°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-26.25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
26.25°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
23.75°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
21.25°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
18.75°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
16.25°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
13.75°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
11.25°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
8.75°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
6.25°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
3.75°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
1.25°	0	0	0	0	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0	0	0	0	0
-1.25°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-3.75°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-6.25°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-8.75°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-11.25°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-13.75°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-16.25°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-18.75°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0
-21.25°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-23.75°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-26.25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	1
40°	0	0	0	0	0	0	0	0	0	0	1
38.75°	0	0	0	0	0	0	0	0	0	1	1
37.5°	0	0	0	0	0	0	0	0	1	1	1
36.25°	0	0	0	0	0	0	0	0	1	1	1
35°	0	0	0	0	0	0	0	1	1	1	1



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
33.75°	0	0	0	0	0	0	0	1	1	1	1
32.5°	0	0	0	0	0	0	1	1	1	1	1
31.25°	0	0	0	0	0	0	1	1	1	1	1
30°	0	0	0	0	0	1	1	1	1	1	1
28.75°	0	0	0	0	0	1	1	1	1	1	1
27.5°	0	0	0	0	0	1	1	1	1	1	1
26.25°	0	0	0	0	1	1	1	1	1	1	1
25°	0	0	0	0	1	1	1	1	1	1	1
23.75°	0	0	0	0	1	1	1	1	1	1	1
22.5°	0	0	0	0	1	1	1	1	1	1	2
21.25°	0	0	0	1	1	1	1	1	1	1	2
20°	0	0	0	1	1	1	1	1	1	1	2
18.75°	0	0	0	1	1	1	1	1	1	2	2
17.5°	0	0	0	1	1	1	1	1	1	2	2
16.25°	0	0	0	1	1	1	1	1	1	2	2
15°	0	0	1	1	1	1	1	1	1	2	2
13.75°	0	0	1	1	1	1	1	1	2	2	2
12.5°	0	0	1	1	1	1	1	1	2	2	3
11.25°	0	0	1	1	1	1	1	1	2	2	3
10°	0	0	1	1	1	1	1	1	2	2	3
8.75°	0	0	1	1	1	1	1	1	2	2	3
7.5°	0	0	1	1	1	1	1	1	2	2	3
6.25°	0	0	1	1	1	1	1	1	2	2	3
5°	0	0	1	1	1	1	1	1	2	2	3
3.75°	0	0	1	1	1	1	1	1	2	2	3
2.5°	0	0	1	1	1	1	1	1	2	2	3
1.25°	0	0	1	1	1	1	1	1	2	2	3
0°	0	1	1	1	1	1	1	2	2	3	3
-1.25°	0	0	1	1	1	1	1	1	2	2	3
-2.5°	0	0	1	1	1	1	1	1	2	2	3
-3.75°	0	0	1	1	1	1	1	1	2	2	3
-5°	0	0	1	1	1	1	1	1	2	2	3
-6.25°	0	0	1	1	1	1	1	1	2	2	3
-7.5°	0	0	1	1	1	1	1	1	2	2	3
-8.75°	0	0	1	1	1	1	1	1	2	2	3
-10°	0	0	1	1	1	1	1	1	2	2	3
-11.25°	0	0	1	1	1	1	1	1	2	2	3
-12.5°	0	0	1	1	1	1	1	1	2	2	3
-13.75°	0	0	1	1	1	1	1	1	2	2	2
-15°	0	0	1	1	1	1	1	1	1	2	2
-16.25°	0	0	0	1	1	1	1	1	1	2	2
-17.5°	0	0	0	1	1	1	1	1	1	2	2
-18.75°	0	0	0	1	1	1	1	1	1	2	2
-20°	0	0	0	1	1	1	1	1	1	1	2
-21.25°	0	0	0	1	1	1	1	1	1	1	2



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
-22.5°	0	0	0	0	1	1	1	1	1	1	2
-23.75°	0	0	0	0	1	1	1	1	1	1	1
-25°	0	0	0	0	1	1	1	1	1	1	1
-26.25°	0	0	0	0	1	1	1	1	1	1	1
-27.5°	0	0	0	0	0	1	1	1	1	1	1
-28.75°	0	0	0	0	0	1	1	1	1	1	1
-30°	0	0	0	0	0	1	1	1	1	1	1
-31.25°	0	0	0	0	0	0	1	1	1	1	1
-32.5°	0	0	0	0	0	0	1	1	1	1	1
-33.75°	0	0	0	0	0	0	0	1	1	1	1
-35°	0	0	0	0	0	0	0	1	1	1	1
-36.25°	0	0	0	0	0	0	0	0	1	1	1
-37.5°	0	0	0	0	0	0	0	0	1	1	1
-38.75°	0	0	0	0	0	0	0	0	0	1	1
-40°	0	0	0	0	0	0	0	0	0	0	1
-41.25°	0	0	0	0	0	0	0	0	0	0	1
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	1	1
51.25°	0	0	0	0	0	0	0	0	1	1	1
50°	0	0	0	0	0	0	1	1	1	1	1
48.75°	0	0	0	0	0	1	1	1	1	1	1
47.5°	0	0	0	0	1	1	1	1	1	1	1
46.25°	0	0	0	1	1	1	1	1	1	1	1
45°	0	0	1	1	1	1	1	1	1	1	1
43.75°	0	1	1	1	1	1	1	1	1	1	1
42.5°	1	1	1	1	1	1	1	1	1	1	2
41.25°	1	1	1	1	1	1	1	1	1	2	2
40°	1	1	1	1	1	1	1	1	2	2	2
38.75°	1	1	1	1	1	1	1	2	2	2	3
37.5°	1	1	1	1	1	1	2	2	2	3	3
36.25°	1	1	1	1	1	2	2	2	3	3	3
35°	1	1	1	1	2	2	2	3	3	3	4



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
33.75°	1	1	1	1	2	2	2	3	3	4	5
32.5°	1	1	1	2	2	2	3	3	4	5	5
31.25°	1	1	1	2	2	3	3	4	4	5	6
30°	1	1	2	2	2	3	4	4	5	6	6
28.75°	1	2	2	2	3	3	4	5	6	6	7
27.5°	1	2	2	3	3	4	4	5	6	7	8
26.25°	2	2	2	3	3	4	5	6	7	8	9
25°	2	2	3	3	4	5	5	6	7	9	10
23.75°	2	2	3	3	4	5	6	7	8	10	11
22.5°	2	2	3	4	4	5	6	7	9	10	13
21.25°	2	3	3	4	5	6	7	8	10	12	14
20°	2	3	3	4	5	6	7	9	10	13	16
18.75°	2	3	4	5	6	6	8	9	11	14	17
17.5°	3	3	4	5	6	7	8	10	13	16	19
16.25°	3	3	4	5	6	7	9	11	14	17	21
15°	3	4	5	5	6	8	10	12	15	18	22
13.75°	3	4	5	6	7	8	10	13	16	19	24
12.5°	3	4	5	6	7	9	11	14	17	21	25
11.25°	3	4	5	6	7	9	11	14	18	22	26
10°	3	4	5	6	8	9	12	15	19	23	27
8.75°	4	5	5	6	8	10	12	16	20	24	29
7.5°	4	5	6	7	8	10	13	16	20	25	30
6.25°	4	5	6	7	8	10	13	17	21	25	31
5°	4	5	6	7	9	11	14	17	22	26	32
3.75°	4	5	6	7	9	11	14	18	22	26	33
2.5°	4	5	6	7	9	11	14	18	22	27	33
1.25°	4	5	6	7	9	11	14	18	22	27	33
0°	4	5	6	7	9	11	15	18	23	27	34
-1.25°	4	5	6	7	9	11	14	18	22	27	33
-2.5°	4	5	6	7	9	11	14	18	22	27	33
-3.75°	4	5	6	7	9	11	14	18	22	26	33
-5°	4	5	6	7	9	11	14	17	22	26	32
-6.25°	4	5	6	7	8	10	13	17	21	25	31
-7.5°	4	5	6	7	8	10	13	16	20	25	30
-8.75°	4	5	5	6	8	10	12	16	20	24	29
-10°	3	4	5	6	8	9	12	15	19	23	27
-11.25°	3	4	5	6	7	9	11	14	18	22	26
-12.5°	3	4	5	6	7	9	11	14	17	21	25
-13.75°	3	4	5	6	7	8	10	13	16	19	24
-15°	3	4	5	5	6	8	10	12	15	18	22
-16.25°	3	3	4	5	6	7	9	11	14	17	21
-17.5°	3	3	4	5	6	7	8	10	13	16	19
-18.75°	2	3	4	5	6	6	8	9	11	14	17
-20°	2	3	3	4	5	6	7	9	10	13	16
-21.25°	2	3	3	4	5	6	7	8	10	12	14



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
-22.5°	2	2	3	4	4	5	6	7	9	10	13
-23.75°	2	2	3	3	4	5	6	7	8	10	11
-25°	2	2	3	3	4	5	5	6	7	9	10
-26.25°	2	2	2	3	3	4	5	6	7	8	9
-27.5°	1	2	2	3	3	4	4	5	6	7	8
-28.75°	1	2	2	2	3	3	4	5	6	6	7
-30°	1	1	2	2	2	3	4	4	5	6	6
-31.25°	1	1	1	2	2	3	3	4	4	5	6
-32.5°	1	1	1	2	2	2	3	3	4	5	5
-33.75°	1	1	1	1	2	2	2	3	3	4	5
-35°	1	1	1	1	2	2	2	3	3	3	4
-36.25°	1	1	1	1	1	2	2	2	3	3	3
-37.5°	1	1	1	1	1	1	2	2	2	3	3
-38.75°	1	1	1	1	1	1	1	2	2	2	3
-40°	1	1	1	1	1	1	1	1	2	2	2
-41.25°	1	1	1	1	1	1	1	1	1	2	2
-42.5°	1	1	1	1	1	1	1	1	1	1	2
-43.75°	0	1	1	1	1	1	1	1	1	1	1
-45°	0	0	1	1	1	1	1	1	1	1	1
-46.25°	0	0	0	1	1	1	1	1	1	1	1
-47.5°	0	0	0	0	1	1	1	1	1	1	1
-48.75°	0	0	0	0	0	1	1	1	1	1	1
-50°	0	0	0	0	0	0	1	1	1	1	1
-51.25°	0	0	0	0	0	0	0	0	1	1	1
-52.5°	0	0	0	0	0	0	0	0	0	1	1
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	1	1	1	1
56.25°	0	0	0	0	1	1	1	1	1	1	1
55°	0	0	1	1	1	1	1	1	1	1	1
53.75°	1	1	1	1	1	1	1	1	1	1	1
52.5°	1	1	1	1	1	1	1	1	1	1	1
51.25°	1	1	1	1	1	1	1	1	1	1	1
50°	1	1	1	1	1	1	1	1	1	1	2
48.75°	1	1	1	1	1	1	1	2	2	2	2
47.5°	1	1	1	1	1	2	2	2	2	2	2
46.25°	1	1	1	1	2	2	2	2	3	3	3
45°	1	1	2	2	2	2	3	3	3	3	4
43.75°	2	2	2	2	2	3	3	3	4	4	4
42.5°	2	2	2	3	3	3	4	4	5	5	5
41.25°	2	2	3	3	4	4	4	5	5	6	6
40°	3	3	3	4	4	5	5	6	6	7	7
38.75°	3	3	4	4	5	6	6	7	7	8	9
37.5°	3	4	5	5	6	6	7	8	9	10	10
36.25°	4	5	5	6	6	7	8	9	10	11	13
35°	5	5	6	7	7	8	10	11	12	14	16



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
33.75°	5	6	7	7	9	10	11	13	15	17	19
32.5°	6	7	8	9	10	12	14	16	18	20	22
31.25°	7	7	9	10	12	14	16	18	21	23	26
30°	7	9	10	12	14	16	19	21	24	27	30
28.75°	8	10	12	14	16	19	22	25	28	32	35
27.5°	10	11	14	16	19	22	25	28	32	36	40
26.25°	11	13	16	18	21	25	28	32	37	41	47
25°	12	15	18	21	24	28	32	37	42	48	53
23.75°	14	17	20	23	27	32	36	41	48	54	60
22.5°	16	19	22	26	30	35	40	47	53	60	69
21.25°	17	21	25	29	34	39	45	52	59	68	77
20°	19	23	27	32	37	43	51	58	67	76	86
18.75°	21	25	30	35	41	48	55	64	74	84	95
17.5°	23	27	32	38	45	52	61	71	81	93	104
16.25°	25	29	35	41	49	57	67	77	89	101	113
15°	26	32	38	45	53	62	73	83	96	109	123
13.75°	28	34	40	48	56	67	78	90	103	117	132
12.5°	30	36	43	51	60	72	83	96	110	125	141
11.25°	32	38	46	54	64	76	88	102	116	133	149
10°	34	40	48	57	68	80	93	107	123	140	157
8.75°	35	42	51	60	72	84	98	112	129	146	165
7.5°	36	44	53	63	75	87	102	117	134	152	172
6.25°	37	45	54	65	77	91	105	121	139	157	178
5°	38	47	56	67	79	93	108	125	142	162	183
3.75°	39	48	57	68	81	95	110	127	145	166	187
2.5°	40	48	57	70	82	97	112	129	147	168	190
1.25°	40	49	58	70	83	98	113	131	149	170	191
0°	40	49	58	71	83	98	113	131	149	171	192
-1.25°	40	49	58	70	83	98	113	131	149	170	191
-2.5°	40	48	57	70	82	97	112	129	147	168	190
-3.75°	39	48	57	68	81	95	110	127	145	166	187
-5°	38	47	56	67	79	93	108	125	142	162	183
-6.25°	37	45	54	65	77	91	105	121	139	157	178
-7.5°	36	44	53	63	75	87	102	117	134	152	172
-8.75°	35	42	51	60	72	84	98	112	129	146	165
-10°	34	40	48	57	68	80	93	107	123	140	157
-11.25°	32	38	46	54	64	76	88	102	116	133	149
-12.5°	30	36	43	51	60	72	83	96	110	125	141
-13.75°	28	34	40	48	56	67	78	90	103	117	132
-15°	26	32	38	45	53	62	73	83	96	109	123
-16.25°	25	29	35	41	49	57	67	77	89	101	113
-17.5°	23	27	32	38	45	52	61	71	81	93	104
-18.75°	21	25	30	35	41	48	55	64	74	84	95
-20°	19	23	27	32	37	43	51	58	67	76	86
-21.25°	17	21	25	29	34	39	45	52	59	68	77



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
-22.5°	16	19	22	26	30	35	40	47	53	60	69
-23.75°	14	17	20	23	27	32	36	41	48	54	60
-25°	12	15	18	21	24	28	32	37	42	48	53
-26.25°	11	13	16	18	21	25	28	32	37	41	47
-27.5°	10	11	14	16	19	22	25	28	32	36	40
-28.75°	8	10	12	14	16	19	22	25	28	32	35
-30°	7	9	10	12	14	16	19	21	24	27	30
-31.25°	7	7	9	10	12	14	16	18	21	23	26
-32.5°	6	7	8	9	10	12	14	16	18	20	22
-33.75°	5	6	7	7	9	10	11	13	15	17	19
-35°	5	5	6	7	7	8	10	11	12	14	16
-36.25°	4	5	5	6	6	7	8	9	10	11	13
-37.5°	3	4	5	5	6	6	7	8	9	10	10
-38.75°	3	3	4	4	5	6	6	7	7	8	9
-40°	3	3	3	4	4	5	5	6	6	7	7
-41.25°	2	2	3	3	4	4	4	5	5	6	6
-42.5°	2	2	2	3	3	3	4	4	5	5	5
-43.75°	2	2	2	2	2	3	3	3	4	4	4
-45°	1	1	2	2	2	2	3	3	3	3	4
-46.25°	1	1	1	1	2	2	2	2	3	3	3
-47.5°	1	1	1	1	1	2	2	2	2	2	2
-48.75°	1	1	1	1	1	1	1	2	2	2	2
-50°	1	1	1	1	1	1	1	1	1	1	2
-51.25°	1	1	1	1	1	1	1	1	1	1	1
-52.5°	1	1	1	1	1	1	1	1	1	1	1
-53.75°	1	1	1	1	1	1	1	1	1	1	1
-55°	0	0	1	1	1	1	1	1	1	1	1
-56.25°	0	0	0	0	1	1	1	1	1	1	1
-57.5°	0	0	0	0	0	0	0	1	1	1	1
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	1	1	1	1	1	1
58.75°	1	1	1	1	1	1	1	1	1	1	1
57.5°	1	1	1	1	1	1	1	1	1	1	1
56.25°	1	1	1	1	1	1	1	1	1	1	1
55°	1	1	1	1	1	1	1	1	1	1	1
53.75°	1	1	1	1	1	1	1	1	1	1	1
52.5°	1	1	1	1	1	1	2	2	2	2	2
51.25°	1	1	2	2	2	2	2	2	2	2	2
50°	2	2	2	2	2	2	2	3	3	3	3
48.75°	2	2	2	3	3	3	3	3	3	3	4
47.5°	3	3	3	3	3	4	4	4	4	4	5
46.25°	3	3	4	4	4	5	5	5	5	5	5
45°	4	4	5	5	5	5	6	6	6	6	6
43.75°	5	5	6	6	6	6	7	7	7	8	8
42.5°	6	6	6	7	7	8	8	9	9	9	10
41.25°	7	7	8	8	9	10	10	11	11	12	12
40°	8	9	9	10	11	12	13	14	14	15	16
38.75°	10	10	11	13	14	15	16	17	18	19	20
37.5°	12	13	14	16	17	18	19	21	22	23	24
36.25°	14	16	17	19	21	22	24	25	26	27	29
35°	17	19	21	23	25	26	28	30	32	34	35



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
33.75°	21	23	25	27	29	32	34	36	38	40	42
32.5°	25	27	30	32	35	38	40	43	46	48	51
31.25°	29	32	35	38	41	45	48	51	54	57	60
30°	34	37	41	45	49	53	56	60	64	68	72
28.75°	39	43	48	52	57	62	67	72	76	80	84
27.5°	45	51	55	61	67	73	78	83	88	93	98
26.25°	52	58	64	71	77	83	90	96	102	107	112
25°	59	67	74	81	89	96	103	110	116	123	129
23.75°	68	76	84	93	101	109	117	125	133	140	146
22.5°	77	86	95	104	113	123	132	141	149	157	165
21.25°	87	97	106	116	127	137	147	157	168	177	185
20°	97	107	118	130	141	152	164	176	186	197	208
18.75°	106	118	131	143	156	169	182	194	208	220	232
17.5°	116	130	143	157	171	185	200	216	230	243	258
16.25°	127	141	156	171	186	203	220	237	253	270	286
15°	137	152	169	185	203	222	240	260	279	297	314
13.75°	147	164	182	200	220	240	262	283	304	325	344
12.5°	157	176	194	216	237	260	283	306	330	352	373
11.25°	168	186	208	230	253	279	304	330	355	379	402
10°	177	197	220	243	270	297	325	352	379	406	431
8.75°	185	208	232	258	286	314	344	373	402	431	459
7.5°	192	217	242	271	300	331	361	393	424	455	485
6.25°	200	226	252	282	312	345	377	410	444	476	508
5°	207	232	261	292	324	357	391	426	460	495	529
3.75°	212	238	268	299	332	366	402	438	474	510	547
2.5°	216	242	273	305	339	373	410	447	484	522	561
1.25°	218	244	276	308	343	378	415	452	490	529	569
0°	219	245	277	309	344	379	417	454	493	531	572
-1.25°	218	244	276	308	343	378	415	452	490	529	569
-2.5°	216	242	273	305	339	373	410	447	484	522	561
-3.75°	212	238	268	299	332	366	402	438	474	510	547
-5°	207	232	261	292	324	357	391	426	460	495	529
-6.25°	200	226	252	282	312	345	377	410	444	476	508
-7.5°	192	217	242	271	300	331	361	393	424	455	485
-8.75°	185	208	232	258	286	314	344	373	402	431	459
-10°	177	197	220	243	270	297	325	352	379	406	431
-11.25°	168	186	208	230	253	279	304	330	355	379	402
-12.5°	157	176	194	216	237	260	283	306	330	352	373
-13.75°	147	164	182	200	220	240	262	283	304	325	344
-15°	137	152	169	185	203	222	240	260	279	297	314
-16.25°	127	141	156	171	186	203	220	237	253	270	286
-17.5°	116	130	143	157	171	185	200	216	230	243	258
-18.75°	106	118	131	143	156	169	182	194	208	220	232
-20°	97	107	118	130	141	152	164	176	186	197	208
-21.25°	87	97	106	116	127	137	147	157	168	177	185



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
-22.5°	77	86	95	104	113	123	132	141	149	157	165
-23.75°	68	76	84	93	101	109	117	125	133	140	146
-25°	59	67	74	81	89	96	103	110	116	123	129
-26.25°	52	58	64	71	77	83	90	96	102	107	112
-27.5°	45	51	55	61	67	73	78	83	88	93	98
-28.75°	39	43	48	52	57	62	67	72	76	80	84
-30°	34	37	41	45	49	53	56	60	64	68	72
-31.25°	29	32	35	38	41	45	48	51	54	57	60
-32.5°	25	27	30	32	35	38	40	43	46	48	51
-33.75°	21	23	25	27	29	32	34	36	38	40	42
-35°	17	19	21	23	25	26	28	30	32	34	35
-36.25°	14	16	17	19	21	22	24	25	26	27	29
-37.5°	12	13	14	16	17	18	19	21	22	23	24
-38.75°	10	10	11	13	14	15	16	17	18	19	20
-40°	8	9	9	10	11	12	13	14	14	15	16
-41.25°	7	7	8	8	9	10	10	11	11	12	12
-42.5°	6	6	6	7	7	8	8	9	9	9	10
-43.75°	5	5	6	6	6	6	7	7	7	8	8
-45°	4	4	5	5	5	5	6	6	6	6	6
-46.25°	3	3	4	4	4	5	5	5	5	5	5
-47.5°	3	3	3	3	3	4	4	4	4	4	5
-48.75°	2	2	2	3	3	3	3	3	3	3	4
-50°	2	2	2	2	2	2	2	3	3	3	3
-51.25°	1	1	2	2	2	2	2	2	2	2	2
-52.5°	1	1	1	1	1	1	2	2	2	2	2
-53.75°	1	1	1	1	1	1	1	1	1	1	1
-55°	1	1	1	1	1	1	1	1	1	1	1
-56.25°	1	1	1	1	1	1	1	1	1	1	1
-57.5°	1	1	1	1	1	1	1	1	1	1	1
-58.75°	1	1	1	1	1	1	1	1	1	1	1
-60°	0	0	0	0	0	1	1	1	1	1	1
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	1	0	0	0	0
60°	1	1	1	1	1	1	1	1	1	1	1
58.75°	1	1	1	1	1	1	1	1	1	1	1
57.5°	1	1	1	1	1	1	1	1	1	1	1
56.25°	1	1	1	1	1	1	1	1	1	1	1
55°	1	1	1	1	1	1	1	1	1	1	1
53.75°	1	1	1	1	1	1	2	1	1	1	1
52.5°	2	2	2	2	2	2	2	2	2	2	2
51.25°	2	2	2	2	2	2	3	2	2	2	2
50°	3	3	3	3	3	3	3	3	3	3	3
48.75°	4	4	4	4	4	4	4	4	4	4	4
47.5°	5	5	5	5	5	5	5	5	5	5	5
46.25°	6	6	6	6	6	6	6	6	6	6	6
45°	7	7	7	7	7	7	7	7	7	7	7
43.75°	8	8	9	9	9	9	9	9	9	9	9
42.5°	10	10	11	11	11	11	11	11	11	11	11
41.25°	13	13	14	14	14	14	15	14	14	14	14
40°	16	17	17	18	18	18	18	18	18	18	17
38.75°	20	21	22	22	22	22	23	22	22	22	22
37.5°	25	25	26	26	27	27	27	27	27	26	26
36.25°	30	31	32	33	33	33	34	33	33	33	32
35°	36	37	38	39	40	40	40	40	40	39	38



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
33.75°	44	45	47	48	48	49	49	49	48	48	47
32.5°	53	54	56	57	57	58	58	58	57	57	56
31.25°	63	65	67	68	70	70	71	70	70	68	67
30°	75	77	79	81	82	83	83	83	82	81	79
28.75°	87	91	93	95	97	98	98	98	97	95	93
27.5°	102	105	108	110	112	113	113	113	112	110	108
26.25°	117	121	125	127	129	131	131	131	129	127	125
25°	134	139	142	145	147	149	149	149	147	145	142
23.75°	152	157	162	166	168	170	171	170	168	166	162
22.5°	172	178	183	187	190	191	192	191	190	187	183
21.25°	192	200	207	212	216	218	219	218	216	212	207
20°	217	226	232	238	242	244	245	244	242	238	232
18.75°	242	252	261	268	273	276	277	276	273	268	261
17.5°	271	282	292	299	305	308	309	308	305	299	292
16.25°	300	312	324	332	339	343	344	343	339	332	324
15°	331	345	357	366	373	378	379	378	373	366	357
13.75°	361	377	391	402	410	415	417	415	410	402	391
12.5°	393	410	426	438	447	452	454	452	447	438	426
11.25°	424	444	460	474	484	490	493	490	484	474	460
10°	455	476	495	510	522	529	531	529	522	510	495
8.75°	485	508	529	547	561	569	572	569	561	547	529
7.5°	513	539	564	583	598	607	610	607	598	583	564
6.25°	539	569	595	616	631	640	643	640	631	616	595
5°	564	595	622	643	658	668	671	668	658	643	622
3.75°	583	616	643	664	680	690	693	690	680	664	643
2.5°	598	631	658	680	696	706	710	706	696	680	658
1.25°	607	640	668	690	706	717	722	717	706	690	668
0°	610	643	671	693	710	722	729	722	710	693	671
-1.25°	607	640	668	690	706	717	722	717	706	690	668
-2.5°	598	631	658	680	696	706	710	706	696	680	658
-3.75°	583	616	643	664	680	690	693	690	680	664	643
-5°	564	595	622	643	658	668	671	668	658	643	622
-6.25°	539	569	595	616	631	640	643	640	631	616	595
-7.5°	513	539	564	583	598	607	610	607	598	583	564
-8.75°	485	508	529	547	561	569	572	569	561	547	529
-10°	455	476	495	510	522	529	531	529	522	510	495
-11.25°	424	444	460	474	484	490	493	490	484	474	460
-12.5°	393	410	426	438	447	452	454	452	447	438	426
-13.75°	361	377	391	402	410	415	417	415	410	402	391
-15°	331	345	357	366	373	378	379	378	373	366	357
-16.25°	300	312	324	332	339	343	344	343	339	332	324
-17.5°	271	282	292	299	305	308	309	308	305	299	292
-18.75°	242	252	261	268	273	276	277	276	273	268	261
-20°	217	226	232	238	242	244	245	244	242	238	232
-21.25°	192	200	207	212	216	218	219	218	216	212	207



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
-22.5°	172	178	183	187	190	191	192	191	190	187	183
-23.75°	152	157	162	166	168	170	171	170	168	166	162
-25°	134	139	142	145	147	149	149	149	147	145	142
-26.25°	117	121	125	127	129	131	131	131	129	127	125
-27.5°	102	105	108	110	112	113	113	113	112	110	108
-28.75°	87	91	93	95	97	98	98	98	97	95	93
-30°	75	77	79	81	82	83	83	83	82	81	79
-31.25°	63	65	67	68	70	70	71	70	70	68	67
-32.5°	53	54	56	57	57	58	58	58	57	57	56
-33.75°	44	45	47	48	48	49	49	49	48	48	47
-35°	36	37	38	39	40	40	40	40	40	39	38
-36.25°	30	31	32	33	33	33	34	33	33	33	32
-37.5°	25	25	26	26	27	27	27	27	27	26	26
-38.75°	20	21	22	22	22	22	23	22	22	22	22
-40°	16	17	17	18	18	18	18	18	18	18	17
-41.25°	13	13	14	14	14	14	15	14	14	14	14
-42.5°	10	10	11	11	11	11	11	11	11	11	11
-43.75°	8	8	9	9	9	9	9	9	9	9	9
-45°	7	7	7	7	7	7	7	7	7	7	7
-46.25°	6	6	6	6	6	6	6	6	6	6	6
-47.5°	5	5	5	5	5	5	5	5	5	5	5
-48.75°	4	4	4	4	4	4	4	4	4	4	4
-50°	3	3	3	3	3	3	3	3	3	3	3
-51.25°	2	2	2	2	2	2	3	2	2	2	2
-52.5°	2	2	2	2	2	2	2	2	2	2	2
-53.75°	1	1	1	1	1	1	2	1	1	1	1
-55°	1	1	1	1	1	1	1	1	1	1	1
-56.25°	1	1	1	1	1	1	1	1	1	1	1
-57.5°	1	1	1	1	1	1	1	1	1	1	1
-58.75°	1	1	1	1	1	1	1	1	1	1	1
-60°	1	1	1	1	1	1	1	1	1	1	1
-61.25°	0	0	0	0	0	0	1	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	1	1	1	1	1	1	1	1	0	0	0
58.75°	1	1	1	1	1	1	1	1	1	1	1
57.5°	1	1	1	1	1	1	1	1	1	1	1
56.25°	1	1	1	1	1	1	1	1	1	1	1
55°	1	1	1	1	1	1	1	1	1	1	1
53.75°	1	1	1	1	1	1	1	1	1	1	1
52.5°	2	2	2	2	2	2	2	1	1	1	1
51.25°	2	2	2	2	2	2	2	2	2	2	2
50°	3	3	3	3	3	3	2	2	2	2	2
48.75°	4	4	4	3	3	3	3	3	3	3	2
47.5°	5	5	5	4	4	4	4	4	3	3	3
46.25°	6	6	5	5	5	5	5	5	4	4	4
45°	7	7	6	6	6	6	6	5	5	5	5
43.75°	8	8	8	8	7	7	7	6	6	6	6
42.5°	10	10	10	9	9	9	8	8	7	7	6
41.25°	13	13	12	12	11	11	10	10	9	8	8
40°	17	16	16	15	14	14	13	12	11	10	9
38.75°	21	20	20	19	18	17	16	15	14	13	11
37.5°	25	25	24	23	22	21	19	18	17	16	14
36.25°	31	30	29	27	26	25	24	22	21	19	17
35°	37	36	35	34	32	30	28	26	25	23	21



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
33.75°	45	44	42	40	38	36	34	32	29	27	25
32.5°	54	53	51	48	46	43	40	38	35	32	30
31.25°	65	63	60	57	54	51	48	45	41	38	35
30°	77	75	72	68	64	60	56	53	49	45	41
28.75°	91	87	84	80	76	72	67	62	57	52	48
27.5°	105	102	98	93	88	83	78	73	67	61	55
26.25°	121	117	112	107	102	96	90	83	77	71	64
25°	139	134	129	123	116	110	103	96	89	81	74
23.75°	157	152	146	140	133	125	117	109	101	93	84
22.5°	178	172	165	157	149	141	132	123	113	104	95
21.25°	200	192	185	177	168	157	147	137	127	116	106
20°	226	217	208	197	186	176	164	152	141	130	118
18.75°	252	242	232	220	208	194	182	169	156	143	131
17.5°	282	271	258	243	230	216	200	185	171	157	143
16.25°	312	300	286	270	253	237	220	203	186	171	156
15°	345	331	314	297	279	260	240	222	203	185	169
13.75°	377	361	344	325	304	283	262	240	220	200	182
12.5°	410	393	373	352	330	306	283	260	237	216	194
11.25°	444	424	402	379	355	330	304	279	253	230	208
10°	476	455	431	406	379	352	325	297	270	243	220
8.75°	508	485	459	431	402	373	344	314	286	258	232
7.5°	539	513	485	455	424	393	361	331	300	271	242
6.25°	569	539	508	476	444	410	377	345	312	282	252
5°	595	564	529	495	460	426	391	357	324	292	261
3.75°	616	583	547	510	474	438	402	366	332	299	268
2.5°	631	598	561	522	484	447	410	373	339	305	273
1.25°	640	607	569	529	490	452	415	378	343	308	276
0°	643	610	572	531	493	454	417	379	344	309	277
-1.25°	640	607	569	529	490	452	415	378	343	308	276
-2.5°	631	598	561	522	484	447	410	373	339	305	273
-3.75°	616	583	547	510	474	438	402	366	332	299	268
-5°	595	564	529	495	460	426	391	357	324	292	261
-6.25°	569	539	508	476	444	410	377	345	312	282	252
-7.5°	539	513	485	455	424	393	361	331	300	271	242
-8.75°	508	485	459	431	402	373	344	314	286	258	232
-10°	476	455	431	406	379	352	325	297	270	243	220
-11.25°	444	424	402	379	355	330	304	279	253	230	208
-12.5°	410	393	373	352	330	306	283	260	237	216	194
-13.75°	377	361	344	325	304	283	262	240	220	200	182
-15°	345	331	314	297	279	260	240	222	203	185	169
-16.25°	312	300	286	270	253	237	220	203	186	171	156
-17.5°	282	271	258	243	230	216	200	185	171	157	143
-18.75°	252	242	232	220	208	194	182	169	156	143	131
-20°	226	217	208	197	186	176	164	152	141	130	118
-21.25°	200	192	185	177	168	157	147	137	127	116	106



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
-22.5°	178	172	165	157	149	141	132	123	113	104	95
-23.75°	157	152	146	140	133	125	117	109	101	93	84
-25°	139	134	129	123	116	110	103	96	89	81	74
-26.25°	121	117	112	107	102	96	90	83	77	71	64
-27.5°	105	102	98	93	88	83	78	73	67	61	55
-28.75°	91	87	84	80	76	72	67	62	57	52	48
-30°	77	75	72	68	64	60	56	53	49	45	41
-31.25°	65	63	60	57	54	51	48	45	41	38	35
-32.5°	54	53	51	48	46	43	40	38	35	32	30
-33.75°	45	44	42	40	38	36	34	32	29	27	25
-35°	37	36	35	34	32	30	28	26	25	23	21
-36.25°	31	30	29	27	26	25	24	22	21	19	17
-37.5°	25	25	24	23	22	21	19	18	17	16	14
-38.75°	21	20	20	19	18	17	16	15	14	13	11
-40°	17	16	16	15	14	14	13	12	11	10	9
-41.25°	13	13	12	12	11	11	10	10	9	8	8
-42.5°	10	10	10	9	9	9	8	8	7	7	6
-43.75°	8	8	8	8	7	7	7	6	6	6	6
-45°	7	7	6	6	6	6	6	5	5	5	5
-46.25°	6	6	5	5	5	5	5	5	4	4	4
-47.5°	5	5	5	4	4	4	4	4	3	3	3
-48.75°	4	4	4	3	3	3	3	3	3	3	2
-50°	3	3	3	3	3	3	2	2	2	2	2
-51.25°	2	2	2	2	2	2	2	2	2	2	2
-52.5°	2	2	2	2	2	2	2	1	1	1	1
-53.75°	1	1	1	1	1	1	1	1	1	1	1
-55°	1	1	1	1	1	1	1	1	1	1	1
-56.25°	1	1	1	1	1	1	1	1	1	1	1
-57.5°	1	1	1	1	1	1	1	1	1	1	1
-58.75°	1	1	1	1	1	1	1	1	1	1	1
-60°	1	1	1	1	1	1	1	1	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	1	1	0	0	0	0	0	0	0	0	0
57.5°	1	1	1	1	1	1	0	0	0	0	0
56.25°	1	1	1	1	1	1	1	1	1	0	0
55°	1	1	1	1	1	1	1	1	1	1	1
53.75°	1	1	1	1	1	1	1	1	1	1	1
52.5°	1	1	1	1	1	1	1	1	1	1	1
51.25°	1	1	1	1	1	1	1	1	1	1	1
50°	2	2	2	1	1	1	1	1	1	1	1
48.75°	2	2	2	2	2	2	1	1	1	1	1
47.5°	3	3	2	2	2	2	2	2	1	1	1
46.25°	3	3	3	3	3	2	2	2	2	1	1
45°	4	4	4	3	3	3	3	2	2	2	2
43.75°	5	5	4	4	4	3	3	3	2	2	2
42.5°	6	6	5	5	5	4	4	3	3	3	2
41.25°	7	7	6	6	5	5	4	4	4	3	3
40°	9	8	7	7	6	6	5	5	4	4	3
38.75°	10	10	9	8	7	7	6	6	5	4	4
37.5°	13	12	10	10	9	8	7	6	6	5	5
36.25°	16	14	13	11	10	9	8	7	6	6	5
35°	19	17	16	14	12	11	10	8	7	7	6



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
33.75°	23	21	19	17	15	13	11	10	9	7	7
32.5°	27	25	22	20	18	16	14	12	10	9	8
31.25°	32	29	26	23	21	18	16	14	12	10	9
30°	37	34	30	27	24	21	19	16	14	12	10
28.75°	43	39	35	32	28	25	22	19	16	14	12
27.5°	51	45	40	36	32	28	25	22	19	16	14
26.25°	58	52	47	41	37	32	28	25	21	18	16
25°	67	59	53	48	42	37	32	28	24	21	18
23.75°	76	68	60	54	48	41	36	32	27	23	20
22.5°	86	77	69	60	53	47	40	35	30	26	22
21.25°	97	87	77	68	59	52	45	39	34	29	25
20°	107	97	86	76	67	58	51	43	37	32	27
18.75°	118	106	95	84	74	64	55	48	41	35	30
17.5°	130	116	104	93	81	71	61	52	45	38	32
16.25°	141	127	113	101	89	77	67	57	49	41	35
15°	152	137	123	109	96	83	73	62	53	45	38
13.75°	164	147	132	117	103	90	78	67	56	48	40
12.5°	176	157	141	125	110	96	83	72	60	51	43
11.25°	186	168	149	133	116	102	88	76	64	54	46
10°	197	177	157	140	123	107	93	80	68	57	48
8.75°	208	185	165	146	129	112	98	84	72	60	51
7.5°	217	192	172	152	134	117	102	87	75	63	53
6.25°	226	200	178	157	139	121	105	91	77	65	54
5°	232	207	183	162	142	125	108	93	79	67	56
3.75°	238	212	187	166	145	127	110	95	81	68	57
2.5°	242	216	190	168	147	129	112	97	82	70	57
1.25°	244	218	191	170	149	131	113	98	83	70	58
0°	245	219	192	171	149	131	113	98	83	71	58
-1.25°	244	218	191	170	149	131	113	98	83	70	58
-2.5°	242	216	190	168	147	129	112	97	82	70	57
-3.75°	238	212	187	166	145	127	110	95	81	68	57
-5°	232	207	183	162	142	125	108	93	79	67	56
-6.25°	226	200	178	157	139	121	105	91	77	65	54
-7.5°	217	192	172	152	134	117	102	87	75	63	53
-8.75°	208	185	165	146	129	112	98	84	72	60	51
-10°	197	177	157	140	123	107	93	80	68	57	48
-11.25°	186	168	149	133	116	102	88	76	64	54	46
-12.5°	176	157	141	125	110	96	83	72	60	51	43
-13.75°	164	147	132	117	103	90	78	67	56	48	40
-15°	152	137	123	109	96	83	73	62	53	45	38
-16.25°	141	127	113	101	89	77	67	57	49	41	35
-17.5°	130	116	104	93	81	71	61	52	45	38	32
-18.75°	118	106	95	84	74	64	55	48	41	35	30
-20°	107	97	86	76	67	58	51	43	37	32	27
-21.25°	97	87	77	68	59	52	45	39	34	29	25



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
-22.5°	86	77	69	60	53	47	40	35	30	26	22
-23.75°	76	68	60	54	48	41	36	32	27	23	20
-25°	67	59	53	48	42	37	32	28	24	21	18
-26.25°	58	52	47	41	37	32	28	25	21	18	16
-27.5°	51	45	40	36	32	28	25	22	19	16	14
-28.75°	43	39	35	32	28	25	22	19	16	14	12
-30°	37	34	30	27	24	21	19	16	14	12	10
-31.25°	32	29	26	23	21	18	16	14	12	10	9
-32.5°	27	25	22	20	18	16	14	12	10	9	8
-33.75°	23	21	19	17	15	13	11	10	9	7	7
-35°	19	17	16	14	12	11	10	8	7	7	6
-36.25°	16	14	13	11	10	9	8	7	6	6	5
-37.5°	13	12	10	10	9	8	7	6	6	5	5
-38.75°	10	10	9	8	7	7	6	6	5	4	4
-40°	9	8	7	7	6	6	5	5	4	4	3
-41.25°	7	7	6	6	5	5	4	4	4	3	3
-42.5°	6	6	5	5	5	4	4	3	3	3	2
-43.75°	5	5	4	4	4	3	3	3	2	2	2
-45°	4	4	4	3	3	3	3	2	2	2	2
-46.25°	3	3	3	3	3	2	2	2	2	1	1
-47.5°	3	3	2	2	2	2	2	2	1	1	1
-48.75°	2	2	2	2	2	2	1	1	1	1	1
-50°	2	2	2	1	1	1	1	1	1	1	1
-51.25°	1	1	1	1	1	1	1	1	1	1	1
-52.5°	1	1	1	1	1	1	1	1	1	1	1
-53.75°	1	1	1	1	1	1	1	1	1	1	1
-55°	1	1	1	1	1	1	1	1	1	1	1
-56.25°	1	1	1	1	1	1	1	1	1	0	0
-57.5°	1	1	1	1	1	1	0	0	0	0	0
-58.75°	1	1	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	1	1	0	0	0	0	0	0	0	0	0
52.5°	1	1	1	1	0	0	0	0	0	0	0
51.25°	1	1	1	1	1	0	0	0	0	0	0
50°	1	1	1	1	1	1	1	0	0	0	0
48.75°	1	1	1	1	1	1	1	1	0	0	0
47.5°	1	1	1	1	1	1	1	1	1	0	0
46.25°	1	1	1	1	1	1	1	1	1	1	0
45°	1	1	1	1	1	1	1	1	1	1	1
43.75°	2	2	1	1	1	1	1	1	1	1	1
42.5°	2	2	2	1	1	1	1	1	1	1	1
41.25°	2	2	2	2	1	1	1	1	1	1	1
40°	3	3	2	2	2	1	1	1	1	1	1
38.75°	3	3	3	2	2	2	1	1	1	1	1
37.5°	4	3	3	3	2	2	2	1	1	1	1
36.25°	5	4	3	3	3	2	2	2	1	1	1
35°	5	5	4	3	3	3	2	2	2	1	1



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
33.75°	6	5	5	4	3	3	2	2	2	1	1
32.5°	7	6	5	5	4	3	3	2	2	2	1
31.25°	7	7	6	5	4	4	3	3	2	2	1
30°	9	7	6	6	5	4	4	3	2	2	2
28.75°	10	8	7	6	6	5	4	3	3	2	2
27.5°	11	10	8	7	6	5	4	4	3	3	2
26.25°	13	11	9	8	7	6	5	4	3	3	2
25°	15	12	10	9	7	6	5	5	4	3	3
23.75°	17	14	11	10	8	7	6	5	4	3	3
22.5°	19	16	13	10	9	7	6	5	4	4	3
21.25°	21	17	14	12	10	8	7	6	5	4	3
20°	23	19	16	13	10	9	7	6	5	4	3
18.75°	25	21	17	14	11	9	8	6	6	5	4
17.5°	27	23	19	16	13	10	8	7	6	5	4
16.25°	29	25	21	17	14	11	9	7	6	5	4
15°	32	26	22	18	15	12	10	8	6	5	5
13.75°	34	28	24	19	16	13	10	8	7	6	5
12.5°	36	30	25	21	17	14	11	9	7	6	5
11.25°	38	32	26	22	18	14	11	9	7	6	5
10°	40	34	27	23	19	15	12	9	8	6	5
8.75°	42	35	29	24	20	16	12	10	8	6	5
7.5°	44	36	30	25	20	16	13	10	8	7	6
6.25°	45	37	31	25	21	17	13	10	8	7	6
5°	47	38	32	26	22	17	14	11	9	7	6
3.75°	48	39	33	26	22	18	14	11	9	7	6
2.5°	48	40	33	27	22	18	14	11	9	7	6
1.25°	49	40	33	27	22	18	14	11	9	7	6
0°	49	40	34	27	23	18	15	11	9	7	6
-1.25°	49	40	33	27	22	18	14	11	9	7	6
-2.5°	48	40	33	27	22	18	14	11	9	7	6
-3.75°	48	39	33	26	22	18	14	11	9	7	6
-5°	47	38	32	26	22	17	14	11	9	7	6
-6.25°	45	37	31	25	21	17	13	10	8	7	6
-7.5°	44	36	30	25	20	16	13	10	8	7	6
-8.75°	42	35	29	24	20	16	12	10	8	6	5
-10°	40	34	27	23	19	15	12	9	8	6	5
-11.25°	38	32	26	22	18	14	11	9	7	6	5
-12.5°	36	30	25	21	17	14	11	9	7	6	5
-13.75°	34	28	24	19	16	13	10	8	7	6	5
-15°	32	26	22	18	15	12	10	8	6	5	5
-16.25°	29	25	21	17	14	11	9	7	6	5	4
-17.5°	27	23	19	16	13	10	8	7	6	5	4
-18.75°	25	21	17	14	11	9	8	6	6	5	4
-20°	23	19	16	13	10	9	7	6	5	4	3
-21.25°	21	17	14	12	10	8	7	6	5	4	3



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
-22.5°	19	16	13	10	9	7	6	5	4	4	3
-23.75°	17	14	11	10	8	7	6	5	4	3	3
-25°	15	12	10	9	7	6	5	5	4	3	3
-26.25°	13	11	9	8	7	6	5	4	3	3	2
-27.5°	11	10	8	7	6	5	4	4	3	3	2
-28.75°	10	8	7	6	6	5	4	3	3	2	2
-30°	9	7	6	6	5	4	4	3	2	2	2
-31.25°	7	7	6	5	4	4	3	3	2	2	1
-32.5°	7	6	5	5	4	3	3	2	2	2	1
-33.75°	6	5	5	4	3	3	2	2	2	1	1
-35°	5	5	4	3	3	3	2	2	2	1	1
-36.25°	5	4	3	3	3	2	2	2	1	1	1
-37.5°	4	3	3	3	2	2	2	1	1	1	1
-38.75°	3	3	3	2	2	2	1	1	1	1	1
-40°	3	3	2	2	2	1	1	1	1	1	1
-41.25°	2	2	2	2	1	1	1	1	1	1	1
-42.5°	2	2	2	1	1	1	1	1	1	1	1
-43.75°	2	2	1	1	1	1	1	1	1	1	1
-45°	1	1	1	1	1	1	1	1	1	1	1
-46.25°	1	1	1	1	1	1	1	1	1	1	0
-47.5°	1	1	1	1	1	1	1	1	1	0	0
-48.75°	1	1	1	1	1	1	1	1	0	0	0
-50°	1	1	1	1	1	1	1	0	0	0	0
-51.25°	1	1	1	1	1	0	0	0	0	0	0
-52.5°	1	1	1	1	0	0	0	0	0	0	0
-53.75°	1	1	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	1	0	0	0	0	0	0	0	0	0	0
42.5°	1	1	0	0	0	0	0	0	0	0	0
41.25°	1	1	1	0	0	0	0	0	0	0	0
40°	1	1	1	0	0	0	0	0	0	0	0
38.75°	1	1	1	1	0	0	0	0	0	0	0
37.5°	1	1	1	1	1	0	0	0	0	0	0
36.25°	1	1	1	1	1	0	0	0	0	0	0
35°	1	1	1	1	1	1	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
33.75°	1	1	1	1	1	1	0	0	0	0	0
32.5°	1	1	1	1	1	1	1	0	0	0	0
31.25°	1	1	1	1	1	1	1	0	0	0	0
30°	1	1	1	1	1	1	1	1	0	0	0
28.75°	2	1	1	1	1	1	1	1	0	0	0
27.5°	2	1	1	1	1	1	1	1	0	0	0
26.25°	2	2	1	1	1	1	1	1	1	0	0
25°	2	2	1	1	1	1	1	1	1	0	0
23.75°	2	2	1	1	1	1	1	1	1	0	0
22.5°	2	2	2	1	1	1	1	1	1	0	0
21.25°	3	2	2	1	1	1	1	1	1	1	0
20°	3	2	2	1	1	1	1	1	1	1	0
18.75°	3	2	2	2	1	1	1	1	1	1	0
17.5°	3	3	2	2	1	1	1	1	1	1	0
16.25°	3	3	2	2	1	1	1	1	1	1	0
15°	4	3	2	2	1	1	1	1	1	1	1
13.75°	4	3	2	2	2	1	1	1	1	1	1
12.5°	4	3	3	2	2	1	1	1	1	1	1
11.25°	4	3	3	2	2	1	1	1	1	1	1
10°	4	3	3	2	2	1	1	1	1	1	1
8.75°	5	4	3	2	2	1	1	1	1	1	1
7.5°	5	4	3	2	2	1	1	1	1	1	1
6.25°	5	4	3	2	2	1	1	1	1	1	1
5°	5	4	3	2	2	1	1	1	1	1	1
3.75°	5	4	3	2	2	1	1	1	1	1	1
2.5°	5	4	3	2	2	1	1	1	1	1	1
1.25°	5	4	3	2	2	1	1	1	1	1	1
0°	5	4	3	3	2	2	1	1	1	1	1
-1.25°	5	4	3	2	2	1	1	1	1	1	1
-2.5°	5	4	3	2	2	1	1	1	1	1	1
-3.75°	5	4	3	2	2	1	1	1	1	1	1
-5°	5	4	3	2	2	1	1	1	1	1	1
-6.25°	5	4	3	2	2	1	1	1	1	1	1
-7.5°	5	4	3	2	2	1	1	1	1	1	1
-8.75°	5	4	3	2	2	1	1	1	1	1	1
-10°	4	3	3	2	2	1	1	1	1	1	1
-11.25°	4	3	3	2	2	1	1	1	1	1	1
-12.5°	4	3	3	2	2	1	1	1	1	1	1
-13.75°	4	3	2	2	2	1	1	1	1	1	1
-15°	4	3	2	2	1	1	1	1	1	1	1
-16.25°	3	3	2	2	1	1	1	1	1	1	0
-17.5°	3	3	2	2	1	1	1	1	1	1	0
-18.75°	3	2	2	2	1	1	1	1	1	1	0
-20°	3	2	2	1	1	1	1	1	1	1	0
-21.25°	3	2	2	1	1	1	1	1	1	1	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
-22.5°	2	2	2	1	1	1	1	1	1	0	0
-23.75°	2	2	1	1	1	1	1	1	1	0	0
-25°	2	2	1	1	1	1	1	1	1	0	0
-26.25°	2	2	1	1	1	1	1	1	1	0	0
-27.5°	2	1	1	1	1	1	1	1	0	0	0
-28.75°	2	1	1	1	1	1	1	1	0	0	0
-30°	1	1	1	1	1	1	1	1	0	0	0
-31.25°	1	1	1	1	1	1	1	0	0	0	0
-32.5°	1	1	1	1	1	1	1	0	0	0	0
-33.75°	1	1	1	1	1	1	0	0	0	0	0
-35°	1	1	1	1	1	1	0	0	0	0	0
-36.25°	1	1	1	1	1	0	0	0	0	0	0
-37.5°	1	1	1	1	1	0	0	0	0	0	0
-38.75°	1	1	1	1	0	0	0	0	0	0	0
-40°	1	1	1	0	0	0	0	0	0	0	0
-41.25°	1	1	1	0	0	0	0	0	0	0	0
-42.5°	1	1	0	0	0	0	0	0	0	0	0
-43.75°	1	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
26.25°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
23.75°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
21.25°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
18.75°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
16.25°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
13.75°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
11.25°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
8.75°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
6.25°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
3.75°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
1.25°	0	0	0	0	0	0	0	0	0	0	0
0°	1	0	0	0	0	0	0	0	0	0	0
-1.25°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-3.75°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-6.25°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-8.75°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-11.25°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-13.75°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-16.25°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-18.75°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0
-21.25°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-23.75°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-26.25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
26.25°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
23.75°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
21.25°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
18.75°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
16.25°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
13.75°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
11.25°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
8.75°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
6.25°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
3.75°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
1.25°	0	0	0	0	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0	0	0	0	0
-1.25°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-3.75°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-6.25°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-8.75°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-11.25°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-13.75°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-16.25°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-18.75°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0
-21.25°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-23.75°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-26.25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	88.75°	90°
90°	0	0
88.75°	0	0
87.5°	0	0
86.25°	0	0
85°	0	0
83.75°	0	0
82.5°	0	0
81.25°	0	0
80°	0	0
78.75°	0	0
77.5°	0	0
76.25°	0	0
75°	0	0
73.75°	0	0
72.5°	0	0
71.25°	0	0
70°	0	0
68.75°	0	0
67.5°	0	0
66.25°	0	0
65°	0	0
63.75°	0	0
62.5°	0	0
61.25°	0	0
60°	0	0
58.75°	0	0
57.5°	0	0
56.25°	0	0
55°	0	0
53.75°	0	0
52.5°	0	0
51.25°	0	0
50°	0	0
48.75°	0	0
47.5°	0	0
46.25°	0	0
45°	0	0
43.75°	0	0
42.5°	0	0
41.25°	0	0
40°	0	0
38.75°	0	0
37.5°	0	0
36.25°	0	0
35°	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	88.75°	90°
33.75°	0	0
32.5°	0	0
31.25°	0	0
30°	0	0
28.75°	0	0
27.5°	0	0
26.25°	0	0
25°	0	0
23.75°	0	0
22.5°	0	0
21.25°	0	0
20°	0	0
18.75°	0	0
17.5°	0	0
16.25°	0	0
15°	0	0
13.75°	0	0
12.5°	0	0
11.25°	0	0
10°	0	0
8.75°	0	0
7.5°	0	0
6.25°	0	0
5°	0	0
3.75°	0	0
2.5°	0	0
1.25°	0	0
0°	0	0
-1.25°	0	0
-2.5°	0	0
-3.75°	0	0
-5°	0	0
-6.25°	0	0
-7.5°	0	0
-8.75°	0	0
-10°	0	0
-11.25°	0	0
-12.5°	0	0
-13.75°	0	0
-15°	0	0
-16.25°	0	0
-17.5°	0	0
-18.75°	0	0
-20°	0	0
-21.25°	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	88.75°	90°
-22.5°	0	0
-23.75°	0	0
-25°	0	0
-26.25°	0	0
-27.5°	0	0
-28.75°	0	0
-30°	0	0
-31.25°	0	0
-32.5°	0	0
-33.75°	0	0
-35°	0	0
-36.25°	0	0
-37.5°	0	0
-38.75°	0	0
-40°	0	0
-41.25°	0	0
-42.5°	0	0
-43.75°	0	0
-45°	0	0
-46.25°	0	0
-47.5°	0	0
-48.75°	0	0
-50°	0	0
-51.25°	0	0
-52.5°	0	0
-53.75°	0	0
-55°	0	0
-56.25°	0	0
-57.5°	0	0
-58.75°	0	0
-60°	0	0
-61.25°	0	0
-62.5°	0	0
-63.75°	0	0
-65°	0	0
-66.25°	0	0
-67.5°	0	0
-68.75°	0	0
-70°	0	0
-71.25°	0	0
-72.5°	0	0
-73.75°	0	0
-75°	0	0
-76.25°	0	0
-77.5°	0	0



REPORT NUMBER: G2-1802-569-28 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED4025-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

	88.75°	90°
-78.75°	0	0
-80°	0	0
-81.25°	0	0
-82.5°	0	0
-83.75°	0	0
-85°	0	0
-86.25°	0	0
-87.5°	0	0
-88.75°	0	0
-90°	0	0

(END OF REPORT)