

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: LUMIERE

Report Number: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)

Luminaire Tested: **203-SS-8LED4025-12-CS-OSL**

Test Date: 04/05/18

Test Information


Test Method: LM-79-08
Report Number: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1802-569-43)
Test Lab: INNOVATION CENTER(G2)
Test Date: 04/05/18
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 203-SS-8LED4025-12-CS-OSL
Description: CAMBRIA 203 LED LUMINAIRE, 8 WATT, 4000K CCT, 25 DEGREE NARROW OPTIC, REGRESSED HOOD SILVER, OVERALL SPREAD LENS
Light Source: (1) SORAA 4000K 90 CRI LED
SM16-07-25D-940-03
Ballast/Driver: (1) CHROMA POWER SUPPLY IN0004

Summary

Lumens per Lamp:	N/A	NEMA Type:	4H x 4V
Luminaire Lumens:	340.9 lumens	Max Intensity:	1328 candela
Efficiency:	N/A	Max Intensity Angle:	0°H x 0°V
Efficacy:	44.9 lumens/watt		
Luminous Opening:	Circular (Dia: 0.17' x H: 0')		
Beam Angle (50%):	26.4°H x 26.4°V	Field Angle (10%):	50.5°H x 50.5°V
Beam Lumens:	160.4 lumens	Field Lumens:	297.7 lumens
Beam Efficiency:	47.0%	Field Efficiency:	87.3%
Input Watts (W):	7.6		
Input Voltage (V):	12.0		
Input Current (A _{in}):	0.662		
Voltage Rise (V):	NR		
Power Factor:	0.9909		
Total Harmonic Distortion (THDi):	27.1%		
Frequency (hertz):	60		
Stabilization Time:	0.5 HR		
Operation Time:	3 HR		
Ambient Temperature (°C):	25.2		
Test Distance:	25 FT		


REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

Iso-Candela Plot

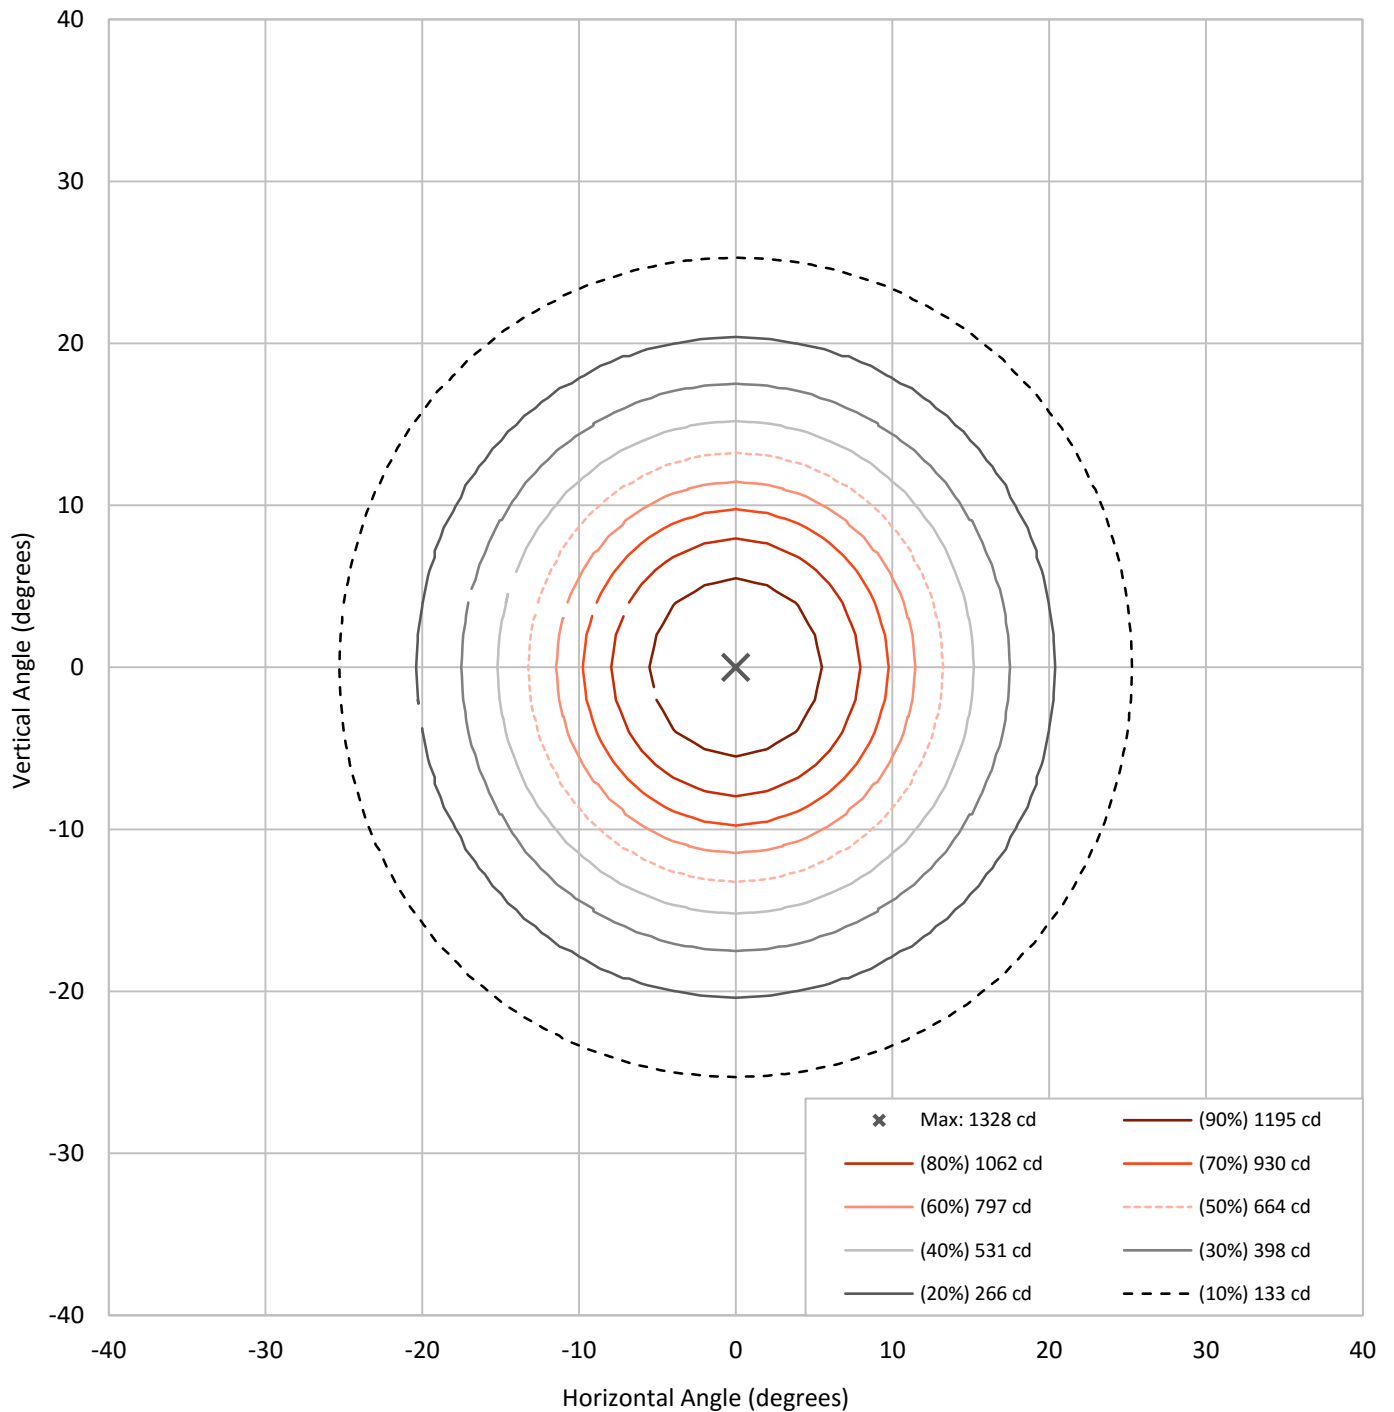


REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

Lumen Table

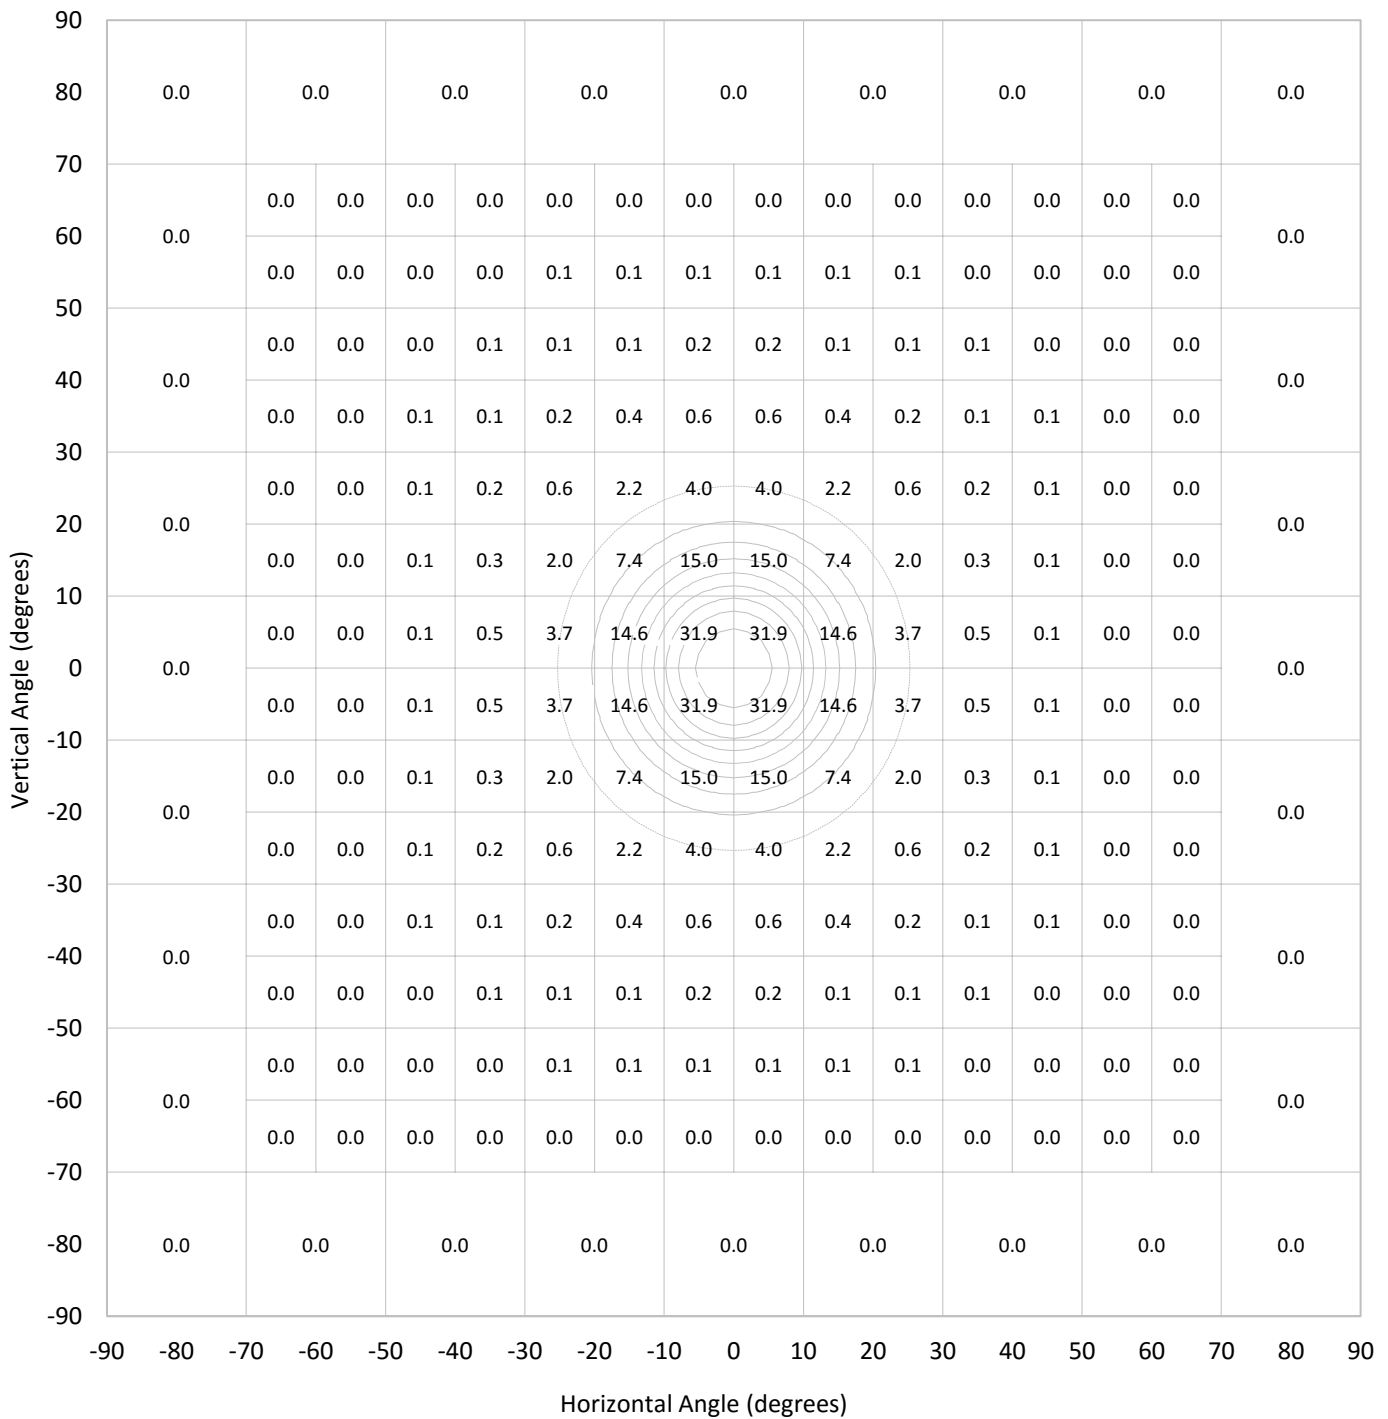


REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

Luminous Intensity Polar Plot

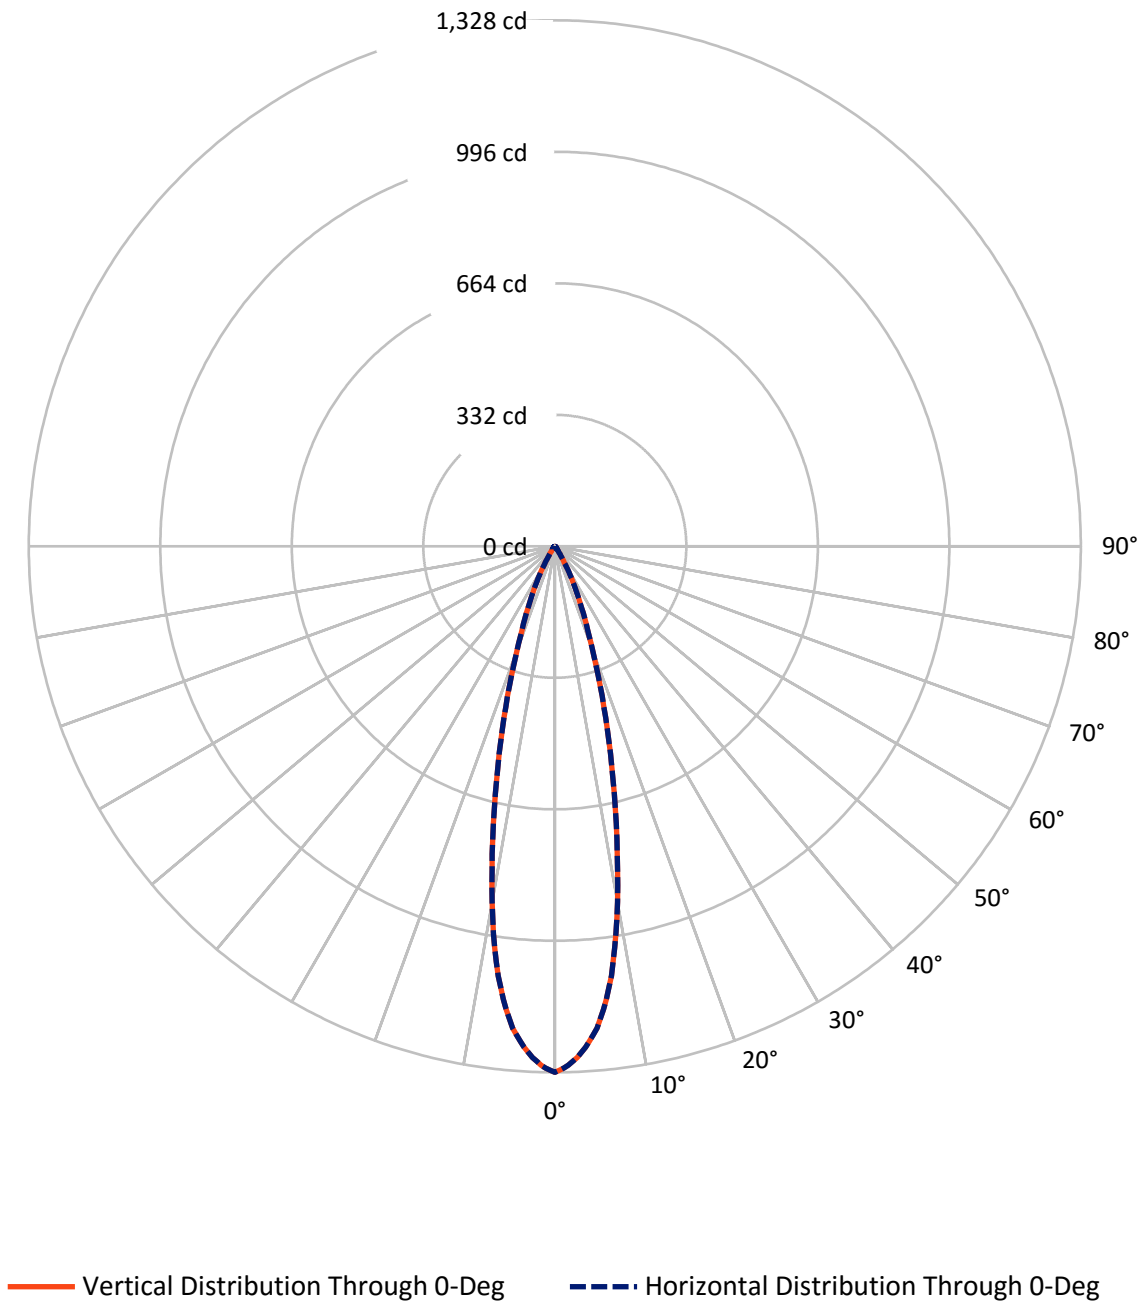

REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

Luminous Intensity Plot

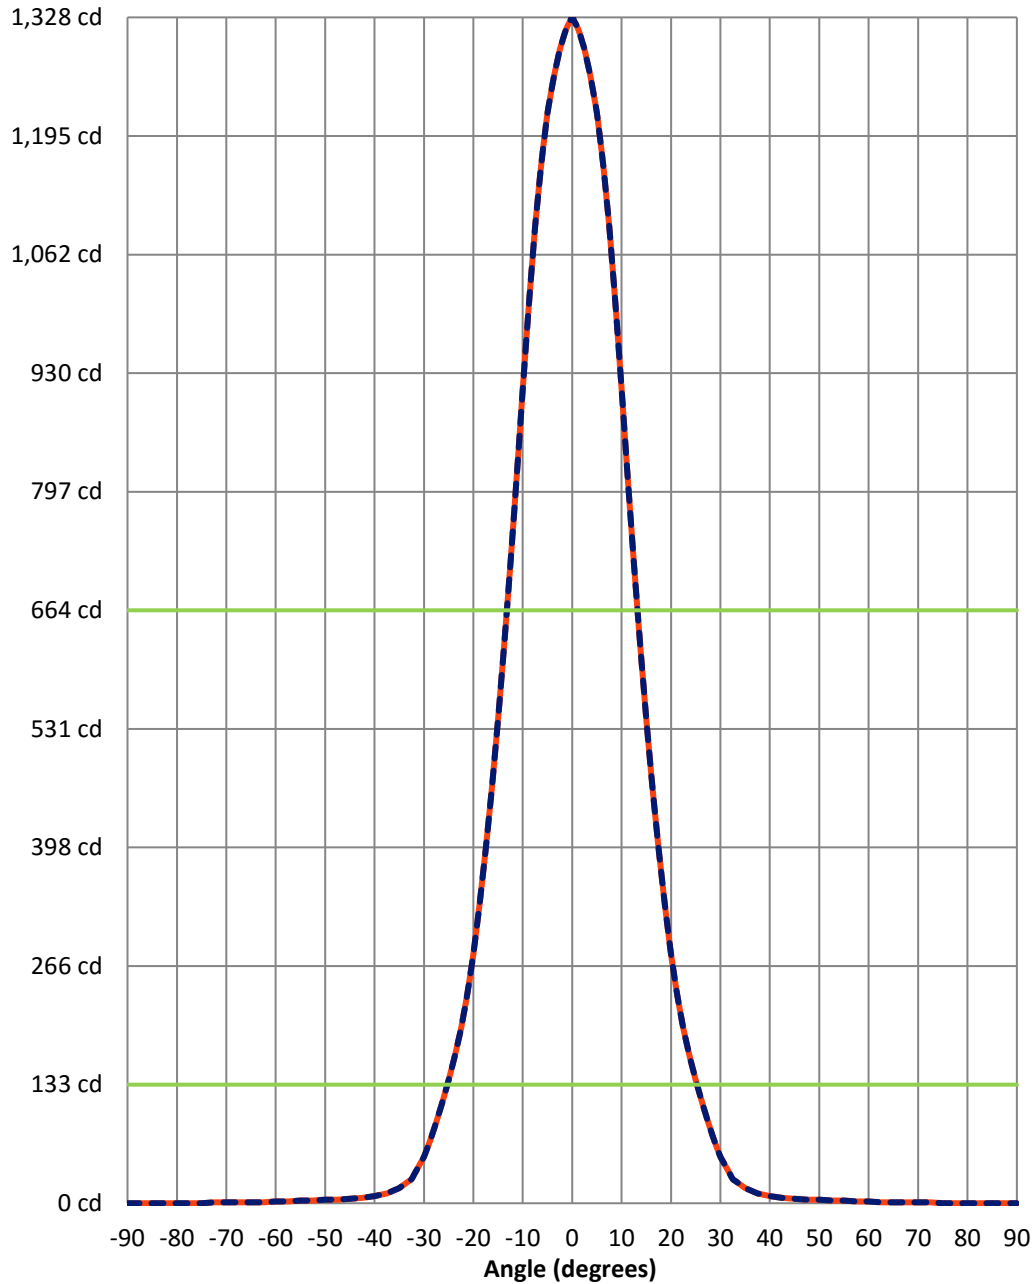

Beam:
 H Angle: 26.4°
 V Angle: 26.4°
 Lumens: 160.4
 Efficiency: 47.0%

Field:
 H Angle: 50.5°
 V Angle: 50.5°
 Lumens: 297.7
 Efficiency: 87.3%

Spill:
 Lumens: 43.2
 Efficiency: 12.7%

- Vertical Distribution through 0-Deg
- - - Horizontal Distribution through 0-Deg



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

FIELD
 BEAM

CANDELA DISTRIBUTION:

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
26.25°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
23.75°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
21.25°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
18.75°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
16.25°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
13.75°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
11.25°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
8.75°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
6.25°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
3.75°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
1.25°	0	0	0	0	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0	0	0	0	0
-1.25°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-3.75°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-6.25°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-8.75°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-11.25°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-13.75°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-16.25°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-18.75°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0
-21.25°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-23.75°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-26.25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	1
48.75°	0	0	0	0	0	0	0	0	0	0	1
47.5°	0	0	0	0	0	0	0	0	0	1	1
46.25°	0	0	0	0	0	0	0	0	0	1	1
45°	0	0	0	0	0	0	0	0	1	1	1
43.75°	0	0	0	0	0	0	0	0	1	1	1
42.5°	0	0	0	0	0	0	0	1	1	1	1
41.25°	0	0	0	0	0	0	0	1	1	1	1
40°	0	0	0	0	0	0	0	1	1	1	1
38.75°	0	0	0	0	0	0	1	1	1	1	1
37.5°	0	0	0	0	0	0	1	1	1	1	1
36.25°	0	0	0	0	0	0	1	1	1	1	1
35°	0	0	0	0	0	1	1	1	1	1	1



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
33.75°	0	0	0	0	0	1	1	1	1	1	1
32.5°	0	0	0	0	0	1	1	1	1	1	1
31.25°	0	0	0	0	0	1	1	1	1	1	1
30°	0	0	0	0	0	1	1	1	1	1	1
28.75°	0	0	0	0	1	1	1	1	1	1	1
27.5°	0	0	0	0	1	1	1	1	1	1	1
26.25°	0	0	0	0	1	1	1	1	1	1	1
25°	0	0	0	0	1	1	1	1	1	1	1
23.75°	0	0	0	0	1	1	1	1	1	1	1
22.5°	0	0	0	0	1	1	1	1	1	1	1
21.25°	0	0	0	1	1	1	1	1	1	1	1
20°	0	0	0	1	1	1	1	1	1	1	1
18.75°	0	0	0	1	1	1	1	1	1	1	1
17.5°	0	0	0	1	1	1	1	1	1	1	1
16.25°	0	0	0	1	1	1	1	1	1	1	1
15°	0	0	0	1	1	1	1	1	1	1	1
13.75°	0	0	0	1	1	1	1	1	1	1	1
12.5°	0	0	0	1	1	1	1	1	1	1	1
11.25°	0	0	0	1	1	1	1	1	1	1	1
10°	0	0	0	1	1	1	1	1	1	1	1
8.75°	0	0	0	1	1	1	1	1	1	1	1
7.5°	0	0	0	1	1	1	1	1	1	1	1
6.25°	0	0	0	1	1	1	1	1	1	1	1
5°	0	0	0	1	1	1	1	1	1	1	1
3.75°	0	0	0	1	1	1	1	1	1	1	1
2.5°	0	0	0	1	1	1	1	1	1	1	1
1.25°	0	0	0	1	1	1	1	1	1	1	1
0°	0	0	1	1	1	1	1	1	1	1	1
-1.25°	0	0	0	1	1	1	1	1	1	1	1
-2.5°	0	0	0	1	1	1	1	1	1	1	1
-3.75°	0	0	0	1	1	1	1	1	1	1	1
-5°	0	0	0	1	1	1	1	1	1	1	1
-6.25°	0	0	0	1	1	1	1	1	1	1	1
-7.5°	0	0	0	1	1	1	1	1	1	1	1
-8.75°	0	0	0	1	1	1	1	1	1	1	1
-10°	0	0	0	1	1	1	1	1	1	1	1
-11.25°	0	0	0	1	1	1	1	1	1	1	1
-12.5°	0	0	0	1	1	1	1	1	1	1	1
-13.75°	0	0	0	1	1	1	1	1	1	1	1
-15°	0	0	0	1	1	1	1	1	1	1	1
-16.25°	0	0	0	1	1	1	1	1	1	1	1
-17.5°	0	0	0	1	1	1	1	1	1	1	1
-18.75°	0	0	0	1	1	1	1	1	1	1	1
-20°	0	0	0	1	1	1	1	1	1	1	1
-21.25°	0	0	0	1	1	1	1	1	1	1	1



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
-22.5°	0	0	0	0	1	1	1	1	1	1	1
-23.75°	0	0	0	0	1	1	1	1	1	1	1
-25°	0	0	0	0	1	1	1	1	1	1	1
-26.25°	0	0	0	0	1	1	1	1	1	1	1
-27.5°	0	0	0	0	1	1	1	1	1	1	1
-28.75°	0	0	0	0	1	1	1	1	1	1	1
-30°	0	0	0	0	0	1	1	1	1	1	1
-31.25°	0	0	0	0	0	1	1	1	1	1	1
-32.5°	0	0	0	0	0	1	1	1	1	1	1
-33.75°	0	0	0	0	0	1	1	1	1	1	1
-35°	0	0	0	0	0	1	1	1	1	1	1
-36.25°	0	0	0	0	0	0	1	1	1	1	1
-37.5°	0	0	0	0	0	0	1	1	1	1	1
-38.75°	0	0	0	0	0	0	1	1	1	1	1
-40°	0	0	0	0	0	0	0	1	1	1	1
-41.25°	0	0	0	0	0	0	0	1	1	1	1
-42.5°	0	0	0	0	0	0	0	1	1	1	1
-43.75°	0	0	0	0	0	0	0	0	1	1	1
-45°	0	0	0	0	0	0	0	0	1	1	1
-46.25°	0	0	0	0	0	0	0	0	0	1	1
-47.5°	0	0	0	0	0	0	0	0	0	1	1
-48.75°	0	0	0	0	0	0	0	0	0	0	1
-50°	0	0	0	0	0	0	0	0	0	0	1
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	1
62.5°	0	0	0	0	0	0	0	0	1	1	1
61.25°	0	0	0	0	0	0	0	1	1	1	1
60°	0	0	0	0	0	0	1	1	1	1	1
58.75°	0	0	0	0	0	1	1	1	1	1	1
57.5°	0	0	0	0	1	1	1	1	1	1	1
56.25°	0	0	0	1	1	1	1	1	1	1	1
55°	0	0	1	1	1	1	1	1	1	1	1
53.75°	0	1	1	1	1	1	1	1	1	1	1
52.5°	1	1	1	1	1	1	1	1	1	1	1
51.25°	1	1	1	1	1	1	1	1	1	1	1
50°	1	1	1	1	1	1	1	1	1	1	1
48.75°	1	1	1	1	1	1	1	1	1	1	1
47.5°	1	1	1	1	1	1	1	1	1	1	1
46.25°	1	1	1	1	1	1	1	1	1	1	1
45°	1	1	1	1	1	1	1	1	1	1	1
43.75°	1	1	1	1	1	1	1	1	1	1	1
42.5°	1	1	1	1	1	1	1	1	1	1	1
41.25°	1	1	1	1	1	1	1	1	1	1	2
40°	1	1	1	1	1	1	1	1	1	1	2
38.75°	1	1	1	1	1	1	1	1	1	2	2
37.5°	1	1	1	1	1	1	1	1	2	2	2
36.25°	1	1	1	1	1	1	1	1	2	2	2
35°	1	1	1	1	1	1	1	2	2	2	2



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
33.75°	1	1	1	1	1	1	1	2	2	2	2
32.5°	1	1	1	1	1	1	2	2	2	2	2
31.25°	1	1	1	1	1	1	2	2	2	2	2
30°	1	1	1	1	1	2	2	2	2	2	3
28.75°	1	1	1	1	1	2	2	2	2	2	3
27.5°	1	1	1	1	1	2	2	2	2	2	3
26.25°	1	1	1	1	2	2	2	2	2	3	3
25°	1	1	1	1	2	2	2	2	2	3	3
23.75°	1	1	1	1	2	2	2	2	3	3	3
22.5°	1	1	1	1	2	2	2	2	3	3	3
21.25°	1	1	1	2	2	2	2	2	3	3	3
20°	1	1	1	2	2	2	2	3	3	3	3
18.75°	1	1	1	2	2	2	2	3	3	3	3
17.5°	1	1	1	2	2	2	2	3	3	3	3
16.25°	1	1	1	2	2	2	2	3	3	3	3
15°	1	1	2	2	2	2	2	3	3	3	3
13.75°	1	1	2	2	2	2	3	3	3	3	3
12.5°	1	1	2	2	2	2	3	3	3	3	4
11.25°	1	1	2	2	2	2	3	3	3	3	4
10°	1	1	2	2	2	2	3	3	3	3	4
8.75°	1	1	2	2	2	2	3	3	3	3	4
7.5°	1	1	2	2	2	2	3	3	3	3	4
6.25°	1	1	2	2	2	2	3	3	3	3	4
5°	1	1	2	2	2	2	3	3	3	3	4
3.75°	1	1	2	2	2	2	3	3	3	3	4
2.5°	1	1	2	2	2	2	3	3	3	3	4
1.25°	1	1	2	2	2	2	3	3	3	3	4
0°	1	2	2	2	2	3	3	3	3	4	4
-1.25°	1	1	2	2	2	2	3	3	3	3	4
-2.5°	1	1	2	2	2	2	3	3	3	3	4
-3.75°	1	1	2	2	2	2	3	3	3	3	4
-5°	1	1	2	2	2	2	3	3	3	3	4
-6.25°	1	1	2	2	2	2	3	3	3	3	4
-7.5°	1	1	2	2	2	2	3	3	3	3	4
-8.75°	1	1	2	2	2	2	3	3	3	3	4
-10°	1	1	2	2	2	2	3	3	3	3	4
-11.25°	1	1	2	2	2	2	3	3	3	3	4
-12.5°	1	1	2	2	2	2	3	3	3	3	4
-13.75°	1	1	2	2	2	2	3	3	3	3	3
-15°	1	1	2	2	2	2	2	3	3	3	3
-16.25°	1	1	1	2	2	2	2	3	3	3	3
-17.5°	1	1	1	2	2	2	2	3	3	3	3
-18.75°	1	1	1	2	2	2	2	3	3	3	3
-20°	1	1	1	2	2	2	2	3	3	3	3
-21.25°	1	1	1	2	2	2	2	2	3	3	3



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
-22.5°	1	1	1	1	2	2	2	2	3	3	3
-23.75°	1	1	1	1	2	2	2	2	3	3	3
-25°	1	1	1	1	2	2	2	2	2	3	3
-26.25°	1	1	1	1	2	2	2	2	2	3	3
-27.5°	1	1	1	1	1	2	2	2	2	2	3
-28.75°	1	1	1	1	1	2	2	2	2	2	3
-30°	1	1	1	1	1	2	2	2	2	2	3
-31.25°	1	1	1	1	1	1	2	2	2	2	2
-32.5°	1	1	1	1	1	1	2	2	2	2	2
-33.75°	1	1	1	1	1	1	1	2	2	2	2
-35°	1	1	1	1	1	1	1	2	2	2	2
-36.25°	1	1	1	1	1	1	1	1	2	2	2
-37.5°	1	1	1	1	1	1	1	1	2	2	2
-38.75°	1	1	1	1	1	1	1	1	1	2	2
-40°	1	1	1	1	1	1	1	1	1	1	2
-41.25°	1	1	1	1	1	1	1	1	1	1	2
-42.5°	1	1	1	1	1	1	1	1	1	1	1
-43.75°	1	1	1	1	1	1	1	1	1	1	1
-45°	1	1	1	1	1	1	1	1	1	1	1
-46.25°	1	1	1	1	1	1	1	1	1	1	1
-47.5°	1	1	1	1	1	1	1	1	1	1	1
-48.75°	1	1	1	1	1	1	1	1	1	1	1
-50°	1	1	1	1	1	1	1	1	1	1	1
-51.25°	1	1	1	1	1	1	1	1	1	1	1
-52.5°	1	1	1	1	1	1	1	1	1	1	1
-53.75°	0	1	1	1	1	1	1	1	1	1	1
-55°	0	0	1	1	1	1	1	1	1	1	1
-56.25°	0	0	0	1	1	1	1	1	1	1	1
-57.5°	0	0	0	0	1	1	1	1	1	1	1
-58.75°	0	0	0	0	0	1	1	1	1	1	1
-60°	0	0	0	0	0	0	1	1	1	1	1
-61.25°	0	0	0	0	0	0	0	1	1	1	1
-62.5°	0	0	0	0	0	0	0	0	1	1	1
-63.75°	0	0	0	0	0	0	0	0	0	0	1
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	1	1	1
67.5°	0	0	0	0	0	1	1	1	1	1	1
66.25°	0	0	0	1	1	1	1	1	1	1	1
65°	0	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	1	1	1	1	1	1	1	1	1	1	1
61.25°	1	1	1	1	1	1	1	1	1	1	1
60°	1	1	1	1	1	1	1	1	1	1	1
58.75°	1	1	1	1	1	1	1	1	1	1	1
57.5°	1	1	1	1	1	1	1	1	1	1	1
56.25°	1	1	1	1	1	1	1	1	1	1	1
55°	1	1	1	1	1	1	1	1	1	1	1
53.75°	1	1	1	1	1	1	1	1	1	1	1
52.5°	1	1	1	1	1	1	1	1	1	2	2
51.25°	1	1	1	1	1	1	1	1	2	2	2
50°	1	1	1	1	1	1	2	2	2	2	2
48.75°	1	1	1	1	1	2	2	2	2	2	2
47.5°	1	1	1	1	2	2	2	2	2	2	2
46.25°	1	1	1	2	2	2	2	2	2	2	3
45°	1	1	2	2	2	2	2	2	2	3	3
43.75°	1	2	2	2	2	2	2	2	3	3	3
42.5°	2	2	2	2	2	2	2	3	3	3	3
41.25°	2	2	2	2	2	2	3	3	3	3	3
40°	2	2	2	2	2	3	3	3	3	3	3
38.75°	2	2	2	2	3	3	3	3	3	3	4
37.5°	2	2	2	3	3	3	3	3	3	4	4
36.25°	2	2	3	3	3	3	3	3	4	4	4
35°	2	2	3	3	3	3	3	4	4	4	4



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
33.75°	2	3	3	3	3	3	3	4	4	4	4
32.5°	3	3	3	3	3	3	4	4	4	4	4
31.25°	3	3	3	3	3	4	4	4	4	4	4
30°	3	3	3	3	3	4	4	4	4	4	5
28.75°	3	3	3	3	4	4	4	4	4	5	5
27.5°	3	3	3	4	4	4	4	4	5	5	5
26.25°	3	3	3	4	4	4	4	4	5	5	6
25°	3	3	4	4	4	4	4	5	5	5	6
23.75°	3	3	4	4	4	4	4	5	5	6	6
22.5°	3	3	4	4	4	4	5	5	5	6	7
21.25°	3	4	4	4	4	4	5	5	6	6	7
20°	3	4	4	4	4	5	5	5	6	7	7
18.75°	3	4	4	4	4	5	5	6	6	7	8
17.5°	4	4	4	4	4	5	5	6	6	7	8
16.25°	4	4	4	4	5	5	5	6	7	8	9
15°	4	4	4	4	5	5	6	6	7	8	9
13.75°	4	4	4	4	5	5	6	6	7	8	10
12.5°	4	4	4	4	5	5	6	7	8	9	10
11.25°	4	4	4	5	5	6	6	7	8	9	11
10°	4	4	4	5	5	6	6	7	8	10	11
8.75°	4	4	4	5	5	6	6	7	9	10	12
7.5°	4	4	4	5	5	6	7	8	9	10	12
6.25°	4	4	4	5	5	6	7	8	9	10	13
5°	4	4	4	5	5	6	7	8	9	11	13
3.75°	4	4	4	5	5	6	7	8	9	11	14
2.5°	4	4	4	5	5	6	7	8	9	11	14
1.25°	4	4	4	5	5	6	7	8	9	11	14
0°	4	4	5	5	6	6	7	8	10	11	14
-1.25°	4	4	4	5	5	6	7	8	9	11	14
-2.5°	4	4	4	5	5	6	7	8	9	11	14
-3.75°	4	4	4	5	5	6	7	8	9	11	14
-5°	4	4	4	5	5	6	7	8	9	11	13
-6.25°	4	4	4	5	5	6	7	8	9	10	13
-7.5°	4	4	4	5	5	6	7	8	9	10	12
-8.75°	4	4	4	5	5	6	6	7	9	10	12
-10°	4	4	4	5	5	6	6	7	8	10	11
-11.25°	4	4	4	5	5	6	6	7	8	9	11
-12.5°	4	4	4	4	5	5	6	7	8	9	10
-13.75°	4	4	4	4	5	5	6	6	7	8	10
-15°	4	4	4	4	5	5	6	6	7	8	9
-16.25°	4	4	4	4	5	5	5	6	7	8	9
-17.5°	4	4	4	4	4	5	5	6	6	7	8
-18.75°	3	4	4	4	4	5	5	6	6	7	8
-20°	3	4	4	4	4	5	5	5	6	7	7
-21.25°	3	4	4	4	4	4	5	5	6	6	7



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
-22.5°	3	3	4	4	4	4	5	5	5	6	7
-23.75°	3	3	4	4	4	4	4	5	5	6	6
-25°	3	3	4	4	4	4	4	5	5	5	6
-26.25°	3	3	3	4	4	4	4	4	5	5	6
-27.5°	3	3	3	4	4	4	4	4	5	5	5
-28.75°	3	3	3	3	4	4	4	4	4	5	5
-30°	3	3	3	3	3	4	4	4	4	4	5
-31.25°	3	3	3	3	3	4	4	4	4	4	4
-32.5°	3	3	3	3	3	3	4	4	4	4	4
-33.75°	2	3	3	3	3	3	3	4	4	4	4
-35°	2	2	3	3	3	3	3	4	4	4	4
-36.25°	2	2	3	3	3	3	3	3	4	4	4
-37.5°	2	2	2	3	3	3	3	3	3	4	4
-38.75°	2	2	2	2	3	3	3	3	3	3	4
-40°	2	2	2	2	2	3	3	3	3	3	3
-41.25°	2	2	2	2	2	2	3	3	3	3	3
-42.5°	2	2	2	2	2	2	2	3	3	3	3
-43.75°	1	2	2	2	2	2	2	2	3	3	3
-45°	1	1	2	2	2	2	2	2	2	3	3
-46.25°	1	1	1	2	2	2	2	2	2	2	3
-47.5°	1	1	1	1	2	2	2	2	2	2	2
-48.75°	1	1	1	1	1	2	2	2	2	2	2
-50°	1	1	1	1	1	1	2	2	2	2	2
-51.25°	1	1	1	1	1	1	1	1	2	2	2
-52.5°	1	1	1	1	1	1	1	1	1	2	2
-53.75°	1	1	1	1	1	1	1	1	1	1	1
-55°	1	1	1	1	1	1	1	1	1	1	1
-56.25°	1	1	1	1	1	1	1	1	1	1	1
-57.5°	1	1	1	1	1	1	1	1	1	1	1
-58.75°	1	1	1	1	1	1	1	1	1	1	1
-60°	1	1	1	1	1	1	1	1	1	1	1
-61.25°	1	1	1	1	1	1	1	1	1	1	1
-62.5°	1	1	1	1	1	1	1	1	1	1	1
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	0	1	1	1	1	1	1	1	1	1	1
-66.25°	0	0	0	1	1	1	1	1	1	1	1
-67.5°	0	0	0	0	0	1	1	1	1	1	1
-68.75°	0	0	0	0	0	0	0	0	1	1	1
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	1	1	1	1	1	1
70°	1	1	1	1	1	1	1	1	1	1	1
68.75°	1	1	1	1	1	1	1	1	1	1	1
67.5°	1	1	1	1	1	1	1	1	1	1	1
66.25°	1	1	1	1	1	1	1	1	1	1	1
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	1	1	1	1	1	1	1	1	1	1	1
61.25°	1	1	1	1	1	1	1	1	1	1	1
60°	1	1	1	1	1	1	1	1	1	1	1
58.75°	1	1	1	1	1	1	1	1	1	1	1
57.5°	1	1	1	1	1	1	1	2	2	2	2
56.25°	1	1	1	1	2	2	2	2	2	2	2
55°	1	1	2	2	2	2	2	2	2	2	2
53.75°	2	2	2	2	2	2	2	2	2	2	2
52.5°	2	2	2	2	2	2	2	2	2	3	3
51.25°	2	2	2	2	2	2	2	3	3	3	3
50°	2	2	2	2	3	3	3	3	3	3	3
48.75°	2	2	3	3	3	3	3	3	3	3	3
47.5°	2	3	3	3	3	3	3	3	3	3	3
46.25°	3	3	3	3	3	3	3	3	4	4	4
45°	3	3	3	3	3	3	4	4	4	4	4
43.75°	3	3	3	3	3	4	4	4	4	4	4
42.5°	3	3	3	4	4	4	4	4	4	4	4
41.25°	3	3	4	4	4	4	4	4	4	4	5
40°	4	4	4	4	4	4	4	4	5	5	5
38.75°	4	4	4	4	4	4	5	5	5	5	5
37.5°	4	4	4	4	4	5	5	5	5	6	6
36.25°	4	4	4	4	5	5	5	6	6	6	7
35°	4	4	4	5	5	5	6	6	6	7	7



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
33.75°	4	4	5	5	5	6	6	7	7	8	8
32.5°	4	5	5	5	6	6	7	7	8	9	9
31.25°	5	5	5	6	6	7	7	8	9	10	11
30°	5	5	6	6	7	8	8	9	10	11	13
28.75°	5	6	6	7	8	8	9	10	11	13	15
27.5°	6	6	7	7	8	9	10	11	13	15	17
26.25°	6	7	7	8	9	10	11	14	15	18	21
25°	6	7	8	9	10	11	13	15	18	21	24
23.75°	7	8	9	10	11	13	15	18	21	25	29
22.5°	7	8	9	11	13	15	17	21	24	29	38
21.25°	8	9	10	12	14	17	20	24	28	37	46
20°	8	10	11	13	16	19	23	27	36	45	55
18.75°	9	10	12	15	17	21	26	33	43	53	66
17.5°	10	11	14	16	20	24	30	40	50	63	78
16.25°	10	12	15	18	22	26	36	46	59	74	91
15°	11	13	16	20	24	31	42	52	68	85	103
13.75°	12	14	17	22	26	36	47	60	77	96	115
12.5°	12	15	19	23	29	41	52	68	86	106	126
11.25°	13	16	20	25	33	45	58	76	95	115	138
10°	14	17	22	26	37	49	64	83	103	125	148
8.75°	15	18	23	29	41	53	70	90	111	134	158
7.5°	15	19	24	32	44	57	75	96	117	141	167
6.25°	16	20	25	34	46	61	80	101	124	148	175
5°	16	21	26	36	48	64	84	106	129	154	182
3.75°	17	21	26	37	50	66	87	109	133	158	188
2.5°	17	22	27	39	51	68	89	112	136	162	192
1.25°	17	22	27	39	52	70	91	113	137	164	195
0°	17	22	27	40	52	70	91	114	138	165	196
-1.25°	17	22	27	39	52	70	91	113	137	164	195
-2.5°	17	22	27	39	51	68	89	112	136	162	192
-3.75°	17	21	26	37	50	66	87	109	133	158	188
-5°	16	21	26	36	48	64	84	106	129	154	182
-6.25°	16	20	25	34	46	61	80	101	124	148	175
-7.5°	15	19	24	32	44	57	75	96	117	141	167
-8.75°	15	18	23	29	41	53	70	90	111	134	158
-10°	14	17	22	26	37	49	64	83	103	125	148
-11.25°	13	16	20	25	33	45	58	76	95	115	138
-12.5°	12	15	19	23	29	41	52	68	86	106	126
-13.75°	12	14	17	22	26	36	47	60	77	96	115
-15°	11	13	16	20	24	31	42	52	68	85	103
-16.25°	10	12	15	18	22	26	36	46	59	74	91
-17.5°	10	11	14	16	20	24	30	40	50	63	78
-18.75°	9	10	12	15	17	21	26	33	43	53	66
-20°	8	10	11	13	16	19	23	27	36	45	55
-21.25°	8	9	10	12	14	17	20	24	28	37	46



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
-22.5°	7	8	9	11	13	15	17	21	24	29	38
-23.75°	7	8	9	10	11	13	15	18	21	25	29
-25°	6	7	8	9	10	11	13	15	18	21	24
-26.25°	6	7	7	8	9	10	11	14	15	18	21
-27.5°	6	6	7	7	8	9	10	11	13	15	17
-28.75°	5	6	6	7	8	8	9	10	11	13	15
-30°	5	5	6	6	7	8	8	9	10	11	13
-31.25°	5	5	5	6	6	7	7	8	9	10	11
-32.5°	4	5	5	5	6	6	7	7	8	9	9
-33.75°	4	4	5	5	5	6	6	7	7	8	8
-35°	4	4	4	5	5	5	6	6	6	7	7
-36.25°	4	4	4	4	5	5	5	6	6	6	7
-37.5°	4	4	4	4	4	5	5	5	5	6	6
-38.75°	4	4	4	4	4	4	5	5	5	5	5
-40°	4	4	4	4	4	4	4	4	5	5	5
-41.25°	3	3	4	4	4	4	4	4	4	4	5
-42.5°	3	3	3	4	4	4	4	4	4	4	4
-43.75°	3	3	3	3	3	4	4	4	4	4	4
-45°	3	3	3	3	3	3	4	4	4	4	4
-46.25°	3	3	3	3	3	3	3	3	4	4	4
-47.5°	2	3	3	3	3	3	3	3	3	3	3
-48.75°	2	2	3	3	3	3	3	3	3	3	3
-50°	2	2	2	2	3	3	3	3	3	3	3
-51.25°	2	2	2	2	2	2	2	3	3	3	3
-52.5°	2	2	2	2	2	2	2	2	2	3	3
-53.75°	2	2	2	2	2	2	2	2	2	2	2
-55°	1	1	2	2	2	2	2	2	2	2	2
-56.25°	1	1	1	1	2	2	2	2	2	2	2
-57.5°	1	1	1	1	1	1	1	2	2	2	2
-58.75°	1	1	1	1	1	1	1	1	1	1	1
-60°	1	1	1	1	1	1	1	1	1	1	1
-61.25°	1	1	1	1	1	1	1	1	1	1	1
-62.5°	1	1	1	1	1	1	1	1	1	1	1
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	1
-67.5°	1	1	1	1	1	1	1	1	1	1	1
-68.75°	1	1	1	1	1	1	1	1	1	1	1
-70°	1	1	1	1	1	1	1	1	1	1	1
-71.25°	0	0	0	0	0	1	1	1	1	1	1
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	1	1	1	1	1	1	1	1	1	1	1
71.25°	1	1	1	1	1	1	1	1	1	1	1
70°	1	1	1	1	1	1	1	1	1	1	1
68.75°	1	1	1	1	1	1	1	1	1	1	1
67.5°	1	1	1	1	1	1	1	1	1	1	1
66.25°	1	1	1	1	1	1	1	1	1	1	1
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	1	1	1	1	1	1	1	1	1	1	1
61.25°	1	1	1	1	1	1	1	1	1	1	1
60°	1	1	1	1	1	2	2	2	2	2	2
58.75°	2	2	2	2	2	2	2	2	2	2	2
57.5°	2	2	2	2	2	2	2	2	2	2	2
56.25°	2	2	2	2	2	2	2	2	2	2	2
55°	2	2	2	2	2	2	3	3	3	3	3
53.75°	2	3	3	3	3	3	3	3	3	3	3
52.5°	3	3	3	3	3	3	3	3	3	3	3
51.25°	3	3	3	3	3	3	3	3	3	3	3
50°	3	3	3	3	3	3	3	4	4	4	4
48.75°	3	3	3	4	4	4	4	4	4	4	4
47.5°	4	4	4	4	4	4	4	4	4	4	4
46.25°	4	4	4	4	4	4	4	4	4	4	4
45°	4	4	4	4	4	4	4	4	5	5	5
43.75°	4	4	4	4	5	5	5	5	5	5	5
42.5°	4	5	5	5	5	5	5	5	6	6	6
41.25°	5	5	5	5	5	6	6	6	6	6	6
40°	5	5	6	6	6	6	6	7	7	7	7
38.75°	6	6	6	6	7	7	7	8	8	8	9
37.5°	6	7	7	7	8	8	8	9	9	10	10
36.25°	7	7	8	8	9	9	10	10	11	11	12
35°	8	8	9	10	10	11	12	12	13	14	15



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
33.75°	9	10	10	11	12	13	14	15	16	17	18
32.5°	10	11	12	14	15	16	17	19	20	22	23
31.25°	12	13	15	16	18	20	22	23	25	26	29
30°	14	16	17	20	22	24	26	29	33	37	41
28.75°	17	19	21	24	26	31	36	41	45	49	53
27.5°	20	23	26	30	36	42	47	52	58	64	70
26.25°	24	27	33	40	46	52	60	68	76	83	90
25°	28	36	43	50	59	68	77	86	95	103	111
23.75°	37	45	53	63	74	85	96	106	115	125	134
22.5°	46	55	66	78	91	103	115	126	138	148	158
21.25°	56	68	81	95	109	122	135	148	161	173	185
20°	68	82	97	112	127	142	157	172	186	202	217
18.75°	81	97	113	129	146	163	180	198	217	236	255
17.5°	95	112	129	147	166	185	206	228	252	276	300
16.25°	109	127	146	166	187	210	236	264	293	322	351
15°	122	142	163	185	210	238	270	303	338	373	406
13.75°	135	157	180	206	236	270	307	346	386	425	465
12.5°	148	172	198	228	264	303	346	391	436	482	528
11.25°	161	186	217	252	293	338	386	436	488	541	594
10°	173	202	236	276	322	373	425	482	541	601	661
8.75°	185	217	255	300	351	406	465	528	594	661	727
7.5°	196	231	274	322	378	437	502	572	644	718	792
6.25°	206	244	291	344	403	466	537	611	690	771	852
5°	215	257	306	362	423	492	567	647	731	818	906
3.75°	223	266	317	377	441	514	592	676	765	857	950
2.5°	229	273	326	388	454	529	610	698	790	887	982
1.25°	232	278	332	394	462	539	622	711	806	906	1002
0°	233	279	334	397	465	542	626	716	812	912	1008
-1.25°	232	278	332	394	462	539	622	711	806	906	1002
-2.5°	229	273	326	388	454	529	610	698	790	887	982
-3.75°	223	266	317	377	441	514	592	676	765	857	950
-5°	215	257	306	362	423	492	567	647	731	818	906
-6.25°	206	244	291	344	403	466	537	611	690	771	852
-7.5°	196	231	274	322	378	437	502	572	644	718	792
-8.75°	185	217	255	300	351	406	465	528	594	661	727
-10°	173	202	236	276	322	373	425	482	541	601	661
-11.25°	161	186	217	252	293	338	386	436	488	541	594
-12.5°	148	172	198	228	264	303	346	391	436	482	528
-13.75°	135	157	180	206	236	270	307	346	386	425	465
-15°	122	142	163	185	210	238	270	303	338	373	406
-16.25°	109	127	146	166	187	210	236	264	293	322	351
-17.5°	95	112	129	147	166	185	206	228	252	276	300
-18.75°	81	97	113	129	146	163	180	198	217	236	255
-20°	68	82	97	112	127	142	157	172	186	202	217
-21.25°	56	68	81	95	109	122	135	148	161	173	185



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
-22.5°	46	55	66	78	91	103	115	126	138	148	158
-23.75°	37	45	53	63	74	85	96	106	115	125	134
-25°	28	36	43	50	59	68	77	86	95	103	111
-26.25°	24	27	33	40	46	52	60	68	76	83	90
-27.5°	20	23	26	30	36	42	47	52	58	64	70
-28.75°	17	19	21	24	26	31	36	41	45	49	53
-30°	14	16	17	20	22	24	26	29	33	37	41
-31.25°	12	13	15	16	18	20	22	23	25	26	29
-32.5°	10	11	12	14	15	16	17	19	20	22	23
-33.75°	9	10	10	11	12	13	14	15	16	17	18
-35°	8	8	9	10	10	11	12	12	13	14	15
-36.25°	7	7	8	8	9	9	10	10	11	11	12
-37.5°	6	7	7	7	8	8	8	9	9	10	10
-38.75°	6	6	6	6	7	7	7	8	8	8	9
-40°	5	5	6	6	6	6	6	7	7	7	7
-41.25°	5	5	5	5	5	6	6	6	6	6	6
-42.5°	4	5	5	5	5	5	5	5	6	6	6
-43.75°	4	4	4	4	5	5	5	5	5	5	5
-45°	4	4	4	4	4	4	4	4	5	5	5
-46.25°	4	4	4	4	4	4	4	4	4	4	4
-47.5°	4	4	4	4	4	4	4	4	4	4	4
-48.75°	3	3	3	4	4	4	4	4	4	4	4
-50°	3	3	3	3	3	3	3	4	4	4	4
-51.25°	3	3	3	3	3	3	3	3	3	3	3
-52.5°	3	3	3	3	3	3	3	3	3	3	3
-53.75°	2	3	3	3	3	3	3	3	3	3	3
-55°	2	2	2	2	2	2	3	3	3	3	3
-56.25°	2	2	2	2	2	2	2	2	2	2	2
-57.5°	2	2	2	2	2	2	2	2	2	2	2
-58.75°	2	2	2	2	2	2	2	2	2	2	2
-60°	1	1	1	1	1	2	2	2	2	2	2
-61.25°	1	1	1	1	1	1	1	1	1	1	1
-62.5°	1	1	1	1	1	1	1	1	1	1	1
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	1
-67.5°	1	1	1	1	1	1	1	1	1	1	1
-68.75°	1	1	1	1	1	1	1	1	1	1	1
-70°	1	1	1	1	1	1	1	1	1	1	1
-71.25°	1	1	1	1	1	1	1	1	1	1	1
-72.5°	1	1	1	1	1	1	1	1	1	1	1
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	1	0	0	0	0
72.5°	1	1	1	1	1	1	1	1	1	1	1
71.25°	1	1	1	1	1	1	1	1	1	1	1
70°	1	1	1	1	1	1	1	1	1	1	1
68.75°	1	1	1	1	1	1	1	1	1	1	1
67.5°	1	1	1	1	1	1	1	1	1	1	1
66.25°	1	1	1	1	1	1	1	1	1	1	1
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	1	1	1	1	1	1	1	1	1	1	1
61.25°	1	1	1	1	1	1	2	1	1	1	1
60°	2	2	2	2	2	2	2	2	2	2	2
58.75°	2	2	2	2	2	2	2	2	2	2	2
57.5°	2	2	2	2	2	2	2	2	2	2	2
56.25°	2	2	2	2	2	2	3	2	2	2	2
55°	3	3	3	3	3	3	3	3	3	3	3
53.75°	3	3	3	3	3	3	3	3	3	3	3
52.5°	3	3	3	3	3	3	3	3	3	3	3
51.25°	3	3	3	3	3	3	4	3	3	3	3
50°	4	4	4	4	4	4	4	4	4	4	4
48.75°	4	4	4	4	4	4	4	4	4	4	4
47.5°	4	4	4	4	4	4	4	4	4	4	4
46.25°	4	4	4	4	4	4	5	4	4	4	4
45°	5	5	5	5	5	5	5	5	5	5	5
43.75°	5	5	5	5	5	5	6	5	5	5	5
42.5°	6	6	6	6	6	6	6	6	6	6	6
41.25°	7	7	7	7	7	7	7	7	7	7	7
40°	8	8	8	8	8	8	8	8	8	8	8
38.75°	9	9	9	9	9	9	10	9	9	9	9
37.5°	10	10	11	11	11	11	11	11	11	11	11
36.25°	12	13	13	14	14	14	14	14	14	14	13
35°	15	16	16	17	17	17	17	17	17	17	16



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
33.75°	19	20	21	21	22	22	22	22	22	21	21
32.5°	24	25	26	26	27	27	27	27	27	26	26
31.25°	32	34	36	37	39	39	40	39	39	37	36
30°	44	46	48	50	51	52	52	52	51	50	48
28.75°	57	61	64	66	68	70	70	70	68	66	64
27.5°	75	80	84	87	89	91	91	91	89	87	84
26.25°	96	101	106	109	112	113	114	113	112	109	106
25°	117	124	129	133	136	137	138	137	136	133	129
23.75°	141	148	154	158	162	164	165	164	162	158	154
22.5°	167	175	182	188	192	195	196	195	192	188	182
21.25°	196	206	215	223	229	232	233	232	229	223	215
20°	231	244	257	266	273	278	279	278	273	266	257
18.75°	274	291	306	317	326	332	334	332	326	317	306
17.5°	322	344	362	377	388	394	397	394	388	377	362
16.25°	378	403	423	441	454	462	465	462	454	441	423
15°	437	466	492	514	529	539	542	539	529	514	492
13.75°	502	537	567	592	610	622	626	622	610	592	567
12.5°	572	611	647	676	698	711	716	711	698	676	647
11.25°	644	690	731	765	790	806	812	806	790	765	731
10°	718	771	818	857	887	906	912	906	887	857	818
8.75°	792	852	906	950	982	1002	1008	1002	982	950	906
7.5°	864	931	990	1035	1068	1087	1094	1087	1068	1035	990
6.25°	931	1002	1062	1108	1140	1159	1165	1159	1140	1108	1062
5°	990	1062	1122	1165	1196	1214	1221	1214	1196	1165	1122
3.75°	1035	1108	1165	1208	1237	1255	1261	1255	1237	1208	1165
2.5°	1068	1140	1196	1237	1267	1286	1292	1286	1267	1237	1196
1.25°	1087	1159	1214	1255	1286	1307	1315	1307	1286	1255	1214
0°	1094	1165	1221	1261	1292	1315	1328	1315	1292	1261	1221
-1.25°	1087	1159	1214	1255	1286	1307	1315	1307	1286	1255	1214
-2.5°	1068	1140	1196	1237	1267	1286	1292	1286	1267	1237	1196
-3.75°	1035	1108	1165	1208	1237	1255	1261	1255	1237	1208	1165
-5°	990	1062	1122	1165	1196	1214	1221	1214	1196	1165	1122
-6.25°	931	1002	1062	1108	1140	1159	1165	1159	1140	1108	1062
-7.5°	864	931	990	1035	1068	1087	1094	1087	1068	1035	990
-8.75°	792	852	906	950	982	1002	1008	1002	982	950	906
-10°	718	771	818	857	887	906	912	906	887	857	818
-11.25°	644	690	731	765	790	806	812	806	790	765	731
-12.5°	572	611	647	676	698	711	716	711	698	676	647
-13.75°	502	537	567	592	610	622	626	622	610	592	567
-15°	437	466	492	514	529	539	542	539	529	514	492
-16.25°	378	403	423	441	454	462	465	462	454	441	423
-17.5°	322	344	362	377	388	394	397	394	388	377	362
-18.75°	274	291	306	317	326	332	334	332	326	317	306
-20°	231	244	257	266	273	278	279	278	273	266	257
-21.25°	196	206	215	223	229	232	233	232	229	223	215



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
-22.5°	167	175	182	188	192	195	196	195	192	188	182
-23.75°	141	148	154	158	162	164	165	164	162	158	154
-25°	117	124	129	133	136	137	138	137	136	133	129
-26.25°	96	101	106	109	112	113	114	113	112	109	106
-27.5°	75	80	84	87	89	91	91	91	89	87	84
-28.75°	57	61	64	66	68	70	70	70	68	66	64
-30°	44	46	48	50	51	52	52	52	51	50	48
-31.25°	32	34	36	37	39	39	40	39	39	37	36
-32.5°	24	25	26	26	27	27	27	27	27	26	26
-33.75°	19	20	21	21	22	22	22	22	22	21	21
-35°	15	16	16	17	17	17	17	17	17	17	16
-36.25°	12	13	13	14	14	14	14	14	14	14	13
-37.5°	10	10	11	11	11	11	11	11	11	11	11
-38.75°	9	9	9	9	9	9	10	9	9	9	9
-40°	8	8	8	8	8	8	8	8	8	8	8
-41.25°	7	7	7	7	7	7	7	7	7	7	7
-42.5°	6	6	6	6	6	6	6	6	6	6	6
-43.75°	5	5	5	5	5	5	6	5	5	5	5
-45°	5	5	5	5	5	5	5	5	5	5	5
-46.25°	4	4	4	4	4	4	5	4	4	4	4
-47.5°	4	4	4	4	4	4	4	4	4	4	4
-48.75°	4	4	4	4	4	4	4	4	4	4	4
-50°	4	4	4	4	4	4	4	4	4	4	4
-51.25°	3	3	3	3	3	3	4	3	3	3	3
-52.5°	3	3	3	3	3	3	3	3	3	3	3
-53.75°	3	3	3	3	3	3	3	3	3	3	3
-55°	3	3	3	3	3	3	3	3	3	3	3
-56.25°	2	2	2	2	2	2	3	2	2	2	2
-57.5°	2	2	2	2	2	2	2	2	2	2	2
-58.75°	2	2	2	2	2	2	2	2	2	2	2
-60°	2	2	2	2	2	2	2	2	2	2	2
-61.25°	1	1	1	1	1	1	2	1	1	1	1
-62.5°	1	1	1	1	1	1	1	1	1	1	1
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	1
-67.5°	1	1	1	1	1	1	1	1	1	1	1
-68.75°	1	1	1	1	1	1	1	1	1	1	1
-70°	1	1	1	1	1	1	1	1	1	1	1
-71.25°	1	1	1	1	1	1	1	1	1	1	1
-72.5°	1	1	1	1	1	1	1	1	1	1	1
-73.75°	0	0	0	0	0	0	1	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	1	1	1	1	1	1	1	1	1	1	1
71.25°	1	1	1	1	1	1	1	1	1	1	1
70°	1	1	1	1	1	1	1	1	1	1	1
68.75°	1	1	1	1	1	1	1	1	1	1	1
67.5°	1	1	1	1	1	1	1	1	1	1	1
66.25°	1	1	1	1	1	1	1	1	1	1	1
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	1	1	1	1	1	1	1	1	1	1	1
61.25°	1	1	1	1	1	1	1	1	1	1	1
60°	2	2	2	2	2	2	2	2	1	1	1
58.75°	2	2	2	2	2	2	2	2	2	2	2
57.5°	2	2	2	2	2	2	2	2	2	2	2
56.25°	2	2	2	2	2	2	2	2	2	2	2
55°	3	3	3	3	3	3	3	2	2	2	2
53.75°	3	3	3	3	3	3	3	3	3	3	3
52.5°	3	3	3	3	3	3	3	3	3	3	3
51.25°	3	3	3	3	3	3	3	3	3	3	3
50°	4	4	4	4	4	4	3	3	3	3	3
48.75°	4	4	4	4	4	4	4	4	4	4	3
47.5°	4	4	4	4	4	4	4	4	4	4	4
46.25°	4	4	4	4	4	4	4	4	4	4	4
45°	5	5	5	5	5	4	4	4	4	4	4
43.75°	5	5	5	5	5	5	5	5	5	4	4
42.5°	6	6	6	6	6	5	5	5	5	5	5
41.25°	7	7	6	6	6	6	6	6	5	5	5
40°	8	8	7	7	7	7	6	6	6	6	6
38.75°	9	9	9	8	8	8	7	7	7	6	6
37.5°	10	10	10	10	9	9	8	8	8	7	7
36.25°	13	12	12	11	11	10	10	9	9	8	8
35°	16	15	15	14	13	12	12	11	10	10	9



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
33.75°	20	19	18	17	16	15	14	13	12	11	10
32.5°	25	24	23	22	20	19	17	16	15	14	12
31.25°	34	32	29	26	25	23	22	20	18	16	15
30°	46	44	41	37	33	29	26	24	22	20	17
28.75°	61	57	53	49	45	41	36	31	26	24	21
27.5°	80	75	70	64	58	52	47	42	36	30	26
26.25°	101	96	90	83	76	68	60	52	46	40	33
25°	124	117	111	103	95	86	77	68	59	50	43
23.75°	148	141	134	125	115	106	96	85	74	63	53
22.5°	175	167	158	148	138	126	115	103	91	78	66
21.25°	206	196	185	173	161	148	135	122	109	95	81
20°	244	231	217	202	186	172	157	142	127	112	97
18.75°	291	274	255	236	217	198	180	163	146	129	113
17.5°	344	322	300	276	252	228	206	185	166	147	129
16.25°	403	378	351	322	293	264	236	210	187	166	146
15°	466	437	406	373	338	303	270	238	210	185	163
13.75°	537	502	465	425	386	346	307	270	236	206	180
12.5°	611	572	528	482	436	391	346	303	264	228	198
11.25°	690	644	594	541	488	436	386	338	293	252	217
10°	771	718	661	601	541	482	425	373	322	276	236
8.75°	852	792	727	661	594	528	465	406	351	300	255
7.5°	931	864	792	718	644	572	502	437	378	322	274
6.25°	1002	931	852	771	690	611	537	466	403	344	291
5°	1062	990	906	818	731	647	567	492	423	362	306
3.75°	1108	1035	950	857	765	676	592	514	441	377	317
2.5°	1140	1068	982	887	790	698	610	529	454	388	326
1.25°	1159	1087	1002	906	806	711	622	539	462	394	332
0°	1165	1094	1008	912	812	716	626	542	465	397	334
-1.25°	1159	1087	1002	906	806	711	622	539	462	394	332
-2.5°	1140	1068	982	887	790	698	610	529	454	388	326
-3.75°	1108	1035	950	857	765	676	592	514	441	377	317
-5°	1062	990	906	818	731	647	567	492	423	362	306
-6.25°	1002	931	852	771	690	611	537	466	403	344	291
-7.5°	931	864	792	718	644	572	502	437	378	322	274
-8.75°	852	792	727	661	594	528	465	406	351	300	255
-10°	771	718	661	601	541	482	425	373	322	276	236
-11.25°	690	644	594	541	488	436	386	338	293	252	217
-12.5°	611	572	528	482	436	391	346	303	264	228	198
-13.75°	537	502	465	425	386	346	307	270	236	206	180
-15°	466	437	406	373	338	303	270	238	210	185	163
-16.25°	403	378	351	322	293	264	236	210	187	166	146
-17.5°	344	322	300	276	252	228	206	185	166	147	129
-18.75°	291	274	255	236	217	198	180	163	146	129	113
-20°	244	231	217	202	186	172	157	142	127	112	97
-21.25°	206	196	185	173	161	148	135	122	109	95	81



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
-22.5°	175	167	158	148	138	126	115	103	91	78	66
-23.75°	148	141	134	125	115	106	96	85	74	63	53
-25°	124	117	111	103	95	86	77	68	59	50	43
-26.25°	101	96	90	83	76	68	60	52	46	40	33
-27.5°	80	75	70	64	58	52	47	42	36	30	26
-28.75°	61	57	53	49	45	41	36	31	26	24	21
-30°	46	44	41	37	33	29	26	24	22	20	17
-31.25°	34	32	29	26	25	23	22	20	18	16	15
-32.5°	25	24	23	22	20	19	17	16	15	14	12
-33.75°	20	19	18	17	16	15	14	13	12	11	10
-35°	16	15	15	14	13	12	12	11	10	10	9
-36.25°	13	12	12	11	11	10	10	9	9	8	8
-37.5°	10	10	10	10	9	9	8	8	8	7	7
-38.75°	9	9	9	8	8	8	7	7	7	6	6
-40°	8	8	7	7	7	7	6	6	6	6	6
-41.25°	7	7	6	6	6	6	6	6	5	5	5
-42.5°	6	6	6	6	6	5	5	5	5	5	5
-43.75°	5	5	5	5	5	5	5	5	5	4	4
-45°	5	5	5	5	5	4	4	4	4	4	4
-46.25°	4	4	4	4	4	4	4	4	4	4	4
-47.5°	4	4	4	4	4	4	4	4	4	4	4
-48.75°	4	4	4	4	4	4	4	4	4	4	3
-50°	4	4	4	4	4	4	3	3	3	3	3
-51.25°	3	3	3	3	3	3	3	3	3	3	3
-52.5°	3	3	3	3	3	3	3	3	3	3	3
-53.75°	3	3	3	3	3	3	3	3	3	3	3
-55°	3	3	3	3	3	3	3	2	2	2	2
-56.25°	2	2	2	2	2	2	2	2	2	2	2
-57.5°	2	2	2	2	2	2	2	2	2	2	2
-58.75°	2	2	2	2	2	2	2	2	2	2	2
-60°	2	2	2	2	2	2	2	2	1	1	1
-61.25°	1	1	1	1	1	1	1	1	1	1	1
-62.5°	1	1	1	1	1	1	1	1	1	1	1
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	1
-67.5°	1	1	1	1	1	1	1	1	1	1	1
-68.75°	1	1	1	1	1	1	1	1	1	1	1
-70°	1	1	1	1	1	1	1	1	1	1	1
-71.25°	1	1	1	1	1	1	1	1	1	1	1
-72.5°	1	1	1	1	1	1	1	1	1	1	1
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	1	1	0	0	0	0	0	0	0	0	0
71.25°	1	1	1	1	1	1	1	1	0	0	0
70°	1	1	1	1	1	1	1	1	1	1	1
68.75°	1	1	1	1	1	1	1	1	1	1	1
67.5°	1	1	1	1	1	1	1	1	1	1	1
66.25°	1	1	1	1	1	1	1	1	1	1	1
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	1	1	1	1	1	1	1	1	1	1	1
61.25°	1	1	1	1	1	1	1	1	1	1	1
60°	1	1	1	1	1	1	1	1	1	1	1
58.75°	2	2	1	1	1	1	1	1	1	1	1
57.5°	2	2	2	2	2	2	1	1	1	1	1
56.25°	2	2	2	2	2	2	2	2	2	1	1
55°	2	2	2	2	2	2	2	2	2	2	2
53.75°	3	2	2	2	2	2	2	2	2	2	2
52.5°	3	3	3	3	2	2	2	2	2	2	2
51.25°	3	3	3	3	3	3	2	2	2	2	2
50°	3	3	3	3	3	3	3	3	3	2	2
48.75°	3	3	3	3	3	3	3	3	3	3	3
47.5°	4	4	3	3	3	3	3	3	3	3	3
46.25°	4	4	4	4	4	3	3	3	3	3	3
45°	4	4	4	4	4	4	4	3	3	3	3
43.75°	4	4	4	4	4	4	4	4	3	3	3
42.5°	5	4	4	4	4	4	4	4	4	4	3
41.25°	5	5	5	4	4	4	4	4	4	4	4
40°	5	5	5	5	5	4	4	4	4	4	4
38.75°	6	6	5	5	5	5	5	4	4	4	4
37.5°	7	6	6	6	5	5	5	5	4	4	4
36.25°	7	7	7	6	6	6	5	5	5	4	4
35°	8	8	7	7	6	6	6	5	5	5	4



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
33.75°	10	9	8	8	7	7	6	6	5	5	5
32.5°	11	10	9	9	8	7	7	6	6	5	5
31.25°	13	12	11	10	9	8	7	7	6	6	5
30°	16	14	13	11	10	9	8	8	7	6	6
28.75°	19	17	15	13	11	10	9	8	8	7	6
27.5°	23	20	17	15	13	11	10	9	8	7	7
26.25°	27	24	21	18	15	14	11	10	9	8	7
25°	36	28	24	21	18	15	13	11	10	9	8
23.75°	45	37	29	25	21	18	15	13	11	10	9
22.5°	55	46	38	29	24	21	17	15	13	11	9
21.25°	68	56	46	37	28	24	20	17	14	12	10
20°	82	68	55	45	36	27	23	19	16	13	11
18.75°	97	81	66	53	43	33	26	21	17	15	12
17.5°	112	95	78	63	50	40	30	24	20	16	14
16.25°	127	109	91	74	59	46	36	26	22	18	15
15°	142	122	103	85	68	52	42	31	24	20	16
13.75°	157	135	115	96	77	60	47	36	26	22	17
12.5°	172	148	126	106	86	68	52	41	29	23	19
11.25°	186	161	138	115	95	76	58	45	33	25	20
10°	202	173	148	125	103	83	64	49	37	26	22
8.75°	217	185	158	134	111	90	70	53	41	29	23
7.5°	231	196	167	141	117	96	75	57	44	32	24
6.25°	244	206	175	148	124	101	80	61	46	34	25
5°	257	215	182	154	129	106	84	64	48	36	26
3.75°	266	223	188	158	133	109	87	66	50	37	26
2.5°	273	229	192	162	136	112	89	68	51	39	27
1.25°	278	232	195	164	137	113	91	70	52	39	27
0°	279	233	196	165	138	114	91	70	52	40	27
-1.25°	278	232	195	164	137	113	91	70	52	39	27
-2.5°	273	229	192	162	136	112	89	68	51	39	27
-3.75°	266	223	188	158	133	109	87	66	50	37	26
-5°	257	215	182	154	129	106	84	64	48	36	26
-6.25°	244	206	175	148	124	101	80	61	46	34	25
-7.5°	231	196	167	141	117	96	75	57	44	32	24
-8.75°	217	185	158	134	111	90	70	53	41	29	23
-10°	202	173	148	125	103	83	64	49	37	26	22
-11.25°	186	161	138	115	95	76	58	45	33	25	20
-12.5°	172	148	126	106	86	68	52	41	29	23	19
-13.75°	157	135	115	96	77	60	47	36	26	22	17
-15°	142	122	103	85	68	52	42	31	24	20	16
-16.25°	127	109	91	74	59	46	36	26	22	18	15
-17.5°	112	95	78	63	50	40	30	24	20	16	14
-18.75°	97	81	66	53	43	33	26	21	17	15	12
-20°	82	68	55	45	36	27	23	19	16	13	11
-21.25°	68	56	46	37	28	24	20	17	14	12	10



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
-22.5°	55	46	38	29	24	21	17	15	13	11	9
-23.75°	45	37	29	25	21	18	15	13	11	10	9
-25°	36	28	24	21	18	15	13	11	10	9	8
-26.25°	27	24	21	18	15	14	11	10	9	8	7
-27.5°	23	20	17	15	13	11	10	9	8	7	7
-28.75°	19	17	15	13	11	10	9	8	8	7	6
-30°	16	14	13	11	10	9	8	8	7	6	6
-31.25°	13	12	11	10	9	8	7	7	6	6	5
-32.5°	11	10	9	9	8	7	7	6	6	5	5
-33.75°	10	9	8	8	7	7	6	6	5	5	5
-35°	8	8	7	7	6	6	6	5	5	5	4
-36.25°	7	7	7	6	6	6	5	5	5	4	4
-37.5°	7	6	6	6	5	5	5	5	4	4	4
-38.75°	6	6	5	5	5	5	5	4	4	4	4
-40°	5	5	5	5	5	4	4	4	4	4	4
-41.25°	5	5	5	4	4	4	4	4	4	4	4
-42.5°	5	4	4	4	4	4	4	4	4	4	3
-43.75°	4	4	4	4	4	4	4	4	3	3	3
-45°	4	4	4	4	4	4	4	3	3	3	3
-46.25°	4	4	4	4	4	3	3	3	3	3	3
-47.5°	4	4	3	3	3	3	3	3	3	3	3
-48.75°	3	3	3	3	3	3	3	3	3	3	3
-50°	3	3	3	3	3	3	3	3	3	2	2
-51.25°	3	3	3	3	3	3	2	2	2	2	2
-52.5°	3	3	3	3	2	2	2	2	2	2	2
-53.75°	3	2	2	2	2	2	2	2	2	2	2
-55°	2	2	2	2	2	2	2	2	2	2	2
-56.25°	2	2	2	2	2	2	2	2	2	1	1
-57.5°	2	2	2	2	2	2	1	1	1	1	1
-58.75°	2	2	1	1	1	1	1	1	1	1	1
-60°	1	1	1	1	1	1	1	1	1	1	1
-61.25°	1	1	1	1	1	1	1	1	1	1	1
-62.5°	1	1	1	1	1	1	1	1	1	1	1
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	1
-67.5°	1	1	1	1	1	1	1	1	1	1	1
-68.75°	1	1	1	1	1	1	1	1	1	1	1
-70°	1	1	1	1	1	1	1	1	1	1	1
-71.25°	1	1	1	1	1	1	1	1	0	0	0
-72.5°	1	1	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	1	1	0	0	0	0	0	0	0	0	0
68.75°	1	1	1	1	1	0	0	0	0	0	0
67.5°	1	1	1	1	1	1	1	1	0	0	0
66.25°	1	1	1	1	1	1	1	1	1	1	0
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	1	1	1	1	1	1	1	1	1	1	1
61.25°	1	1	1	1	1	1	1	1	1	1	1
60°	1	1	1	1	1	1	1	1	1	1	1
58.75°	1	1	1	1	1	1	1	1	1	1	1
57.5°	1	1	1	1	1	1	1	1	1	1	1
56.25°	1	1	1	1	1	1	1	1	1	1	1
55°	1	1	1	1	1	1	1	1	1	1	1
53.75°	2	2	1	1	1	1	1	1	1	1	1
52.5°	2	2	2	2	1	1	1	1	1	1	1
51.25°	2	2	2	2	2	1	1	1	1	1	1
50°	2	2	2	2	2	2	2	1	1	1	1
48.75°	2	2	2	2	2	2	2	2	1	1	1
47.5°	3	2	2	2	2	2	2	2	2	1	1
46.25°	3	3	3	2	2	2	2	2	2	2	1
45°	3	3	3	3	2	2	2	2	2	2	2
43.75°	3	3	3	3	3	2	2	2	2	2	2
42.5°	3	3	3	3	3	3	2	2	2	2	2
41.25°	3	3	3	3	3	3	3	2	2	2	2
40°	4	4	3	3	3	3	3	3	2	2	2
38.75°	4	4	4	3	3	3	3	3	3	2	2
37.5°	4	4	4	4	3	3	3	3	3	3	2
36.25°	4	4	4	4	4	3	3	3	3	3	3
35°	4	4	4	4	4	4	3	3	3	3	3



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
33.75°	4	4	4	4	4	4	3	3	3	3	3
32.5°	5	4	4	4	4	4	4	3	3	3	3
31.25°	5	5	4	4	4	4	4	4	3	3	3
30°	5	5	5	4	4	4	4	4	3	3	3
28.75°	6	5	5	5	4	4	4	4	4	3	3
27.5°	6	6	5	5	5	4	4	4	4	4	3
26.25°	7	6	6	5	5	4	4	4	4	4	3
25°	7	6	6	5	5	5	4	4	4	4	4
23.75°	8	7	6	6	5	5	4	4	4	4	4
22.5°	8	7	7	6	5	5	5	4	4	4	4
21.25°	9	8	7	6	6	5	5	4	4	4	4
20°	10	8	7	7	6	5	5	5	4	4	4
18.75°	10	9	8	7	6	6	5	5	4	4	4
17.5°	11	10	8	7	6	6	5	5	4	4	4
16.25°	12	10	9	8	7	6	5	5	5	4	4
15°	13	11	9	8	7	6	6	5	5	4	4
13.75°	14	12	10	8	7	6	6	5	5	4	4
12.5°	15	12	10	9	8	7	6	5	5	4	4
11.25°	16	13	11	9	8	7	6	6	5	5	4
10°	17	14	11	10	8	7	6	6	5	5	4
8.75°	18	15	12	10	9	7	6	6	5	5	4
7.5°	19	15	12	10	9	8	7	6	5	5	4
6.25°	20	16	13	10	9	8	7	6	5	5	4
5°	21	16	13	11	9	8	7	6	5	5	4
3.75°	21	17	14	11	9	8	7	6	5	5	4
2.5°	22	17	14	11	9	8	7	6	5	5	4
1.25°	22	17	14	11	9	8	7	6	5	5	4
0°	22	17	14	11	10	8	7	6	6	5	5
-1.25°	22	17	14	11	9	8	7	6	5	5	4
-2.5°	22	17	14	11	9	8	7	6	5	5	4
-3.75°	21	17	14	11	9	8	7	6	5	5	4
-5°	21	16	13	11	9	8	7	6	5	5	4
-6.25°	20	16	13	10	9	8	7	6	5	5	4
-7.5°	19	15	12	10	9	8	7	6	5	5	4
-8.75°	18	15	12	10	9	7	6	6	5	5	4
-10°	17	14	11	10	8	7	6	6	5	5	4
-11.25°	16	13	11	9	8	7	6	6	5	5	4
-12.5°	15	12	10	9	8	7	6	5	5	4	4
-13.75°	14	12	10	8	7	6	6	5	5	4	4
-15°	13	11	9	8	7	6	6	5	5	4	4
-16.25°	12	10	9	8	7	6	5	5	5	4	4
-17.5°	11	10	8	7	6	6	5	5	4	4	4
-18.75°	10	9	8	7	6	6	5	5	4	4	4
-20°	10	8	7	7	6	5	5	5	4	4	4
-21.25°	9	8	7	6	6	5	5	4	4	4	4



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
-22.5°	8	7	7	6	5	5	5	4	4	4	4
-23.75°	8	7	6	6	5	5	4	4	4	4	4
-25°	7	6	6	5	5	5	4	4	4	4	4
-26.25°	7	6	6	5	5	4	4	4	4	4	3
-27.5°	6	6	5	5	5	4	4	4	4	4	3
-28.75°	6	5	5	5	4	4	4	4	4	3	3
-30°	5	5	5	4	4	4	4	4	3	3	3
-31.25°	5	5	4	4	4	4	4	4	3	3	3
-32.5°	5	4	4	4	4	4	4	3	3	3	3
-33.75°	4	4	4	4	4	4	3	3	3	3	3
-35°	4	4	4	4	4	4	3	3	3	3	3
-36.25°	4	4	4	4	4	3	3	3	3	3	3
-37.5°	4	4	4	4	3	3	3	3	3	3	2
-38.75°	4	4	4	3	3	3	3	3	3	2	2
-40°	4	4	3	3	3	3	3	3	2	2	2
-41.25°	3	3	3	3	3	3	3	2	2	2	2
-42.5°	3	3	3	3	3	3	2	2	2	2	2
-43.75°	3	3	3	3	3	2	2	2	2	2	2
-45°	3	3	3	3	2	2	2	2	2	2	2
-46.25°	3	3	3	2	2	2	2	2	2	2	1
-47.5°	3	2	2	2	2	2	2	2	2	1	1
-48.75°	2	2	2	2	2	2	2	2	1	1	1
-50°	2	2	2	2	2	2	2	1	1	1	1
-51.25°	2	2	2	2	2	1	1	1	1	1	1
-52.5°	2	2	2	2	1	1	1	1	1	1	1
-53.75°	2	2	1	1	1	1	1	1	1	1	1
-55°	1	1	1	1	1	1	1	1	1	1	1
-56.25°	1	1	1	1	1	1	1	1	1	1	1
-57.5°	1	1	1	1	1	1	1	1	1	1	1
-58.75°	1	1	1	1	1	1	1	1	1	1	1
-60°	1	1	1	1	1	1	1	1	1	1	1
-61.25°	1	1	1	1	1	1	1	1	1	1	1
-62.5°	1	1	1	1	1	1	1	1	1	1	1
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	0
-67.5°	1	1	1	1	1	1	1	1	0	0	0
-68.75°	1	1	1	1	1	0	0	0	0	0	0
-70°	1	1	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	1	0	0	0	0	0	0	0	0	0	0
63.75°	1	1	1	0	0	0	0	0	0	0	0
62.5°	1	1	1	1	1	0	0	0	0	0	0
61.25°	1	1	1	1	1	1	0	0	0	0	0
60°	1	1	1	1	1	1	1	0	0	0	0
58.75°	1	1	1	1	1	1	1	1	0	0	0
57.5°	1	1	1	1	1	1	1	1	1	0	0
56.25°	1	1	1	1	1	1	1	1	1	1	0
55°	1	1	1	1	1	1	1	1	1	1	1
53.75°	1	1	1	1	1	1	1	1	1	1	1
52.5°	1	1	1	1	1	1	1	1	1	1	1
51.25°	1	1	1	1	1	1	1	1	1	1	1
50°	1	1	1	1	1	1	1	1	1	1	1
48.75°	1	1	1	1	1	1	1	1	1	1	1
47.5°	1	1	1	1	1	1	1	1	1	1	1
46.25°	1	1	1	1	1	1	1	1	1	1	1
45°	1	1	1	1	1	1	1	1	1	1	1
43.75°	2	1	1	1	1	1	1	1	1	1	1
42.5°	2	2	1	1	1	1	1	1	1	1	1
41.25°	2	2	2	1	1	1	1	1	1	1	1
40°	2	2	2	1	1	1	1	1	1	1	1
38.75°	2	2	2	2	1	1	1	1	1	1	1
37.5°	2	2	2	2	2	1	1	1	1	1	1
36.25°	2	2	2	2	2	1	1	1	1	1	1
35°	2	2	2	2	2	2	1	1	1	1	1



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
33.75°	3	2	2	2	2	2	1	1	1	1	1
32.5°	3	3	2	2	2	2	2	1	1	1	1
31.25°	3	3	2	2	2	2	2	1	1	1	1
30°	3	3	3	2	2	2	2	2	1	1	1
28.75°	3	3	3	2	2	2	2	2	1	1	1
27.5°	3	3	3	2	2	2	2	2	1	1	1
26.25°	3	3	3	3	2	2	2	2	2	1	1
25°	3	3	3	3	2	2	2	2	2	1	1
23.75°	3	3	3	3	3	2	2	2	2	1	1
22.5°	3	3	3	3	3	2	2	2	2	1	1
21.25°	4	3	3	3	3	2	2	2	2	2	1
20°	4	3	3	3	3	3	2	2	2	2	1
18.75°	4	3	3	3	3	3	2	2	2	2	1
17.5°	4	4	3	3	3	3	2	2	2	2	1
16.25°	4	4	3	3	3	3	2	2	2	2	1
15°	4	4	3	3	3	3	2	2	2	2	2
13.75°	4	4	3	3	3	3	3	2	2	2	2
12.5°	4	4	4	3	3	3	3	2	2	2	2
11.25°	4	4	4	3	3	3	3	2	2	2	2
10°	4	4	4	3	3	3	3	2	2	2	2
8.75°	4	4	4	3	3	3	3	2	2	2	2
7.5°	4	4	4	3	3	3	3	2	2	2	2
6.25°	4	4	4	3	3	3	3	2	2	2	2
5°	4	4	4	3	3	3	3	2	2	2	2
3.75°	4	4	4	3	3	3	3	2	2	2	2
2.5°	4	4	4	3	3	3	3	2	2	2	2
1.25°	4	4	4	3	3	3	3	2	2	2	2
0°	4	4	4	4	3	3	3	3	2	2	2
-1.25°	4	4	4	3	3	3	3	2	2	2	2
-2.5°	4	4	4	3	3	3	3	2	2	2	2
-3.75°	4	4	4	3	3	3	3	2	2	2	2
-5°	4	4	4	3	3	3	3	2	2	2	2
-6.25°	4	4	4	3	3	3	3	2	2	2	2
-7.5°	4	4	4	3	3	3	3	2	2	2	2
-8.75°	4	4	4	3	3	3	3	2	2	2	2
-10°	4	4	4	3	3	3	3	2	2	2	2
-11.25°	4	4	4	3	3	3	3	2	2	2	2
-12.5°	4	4	4	3	3	3	3	2	2	2	2
-13.75°	4	4	3	3	3	3	3	2	2	2	2
-15°	4	4	3	3	3	3	2	2	2	2	2
-16.25°	4	4	3	3	3	3	2	2	2	2	1
-17.5°	4	4	3	3	3	3	2	2	2	2	1
-18.75°	4	3	3	3	3	3	2	2	2	2	1
-20°	4	3	3	3	3	3	2	2	2	2	1
-21.25°	4	3	3	3	3	2	2	2	2	2	1



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
-22.5°	3	3	3	3	3	2	2	2	2	1	1
-23.75°	3	3	3	3	3	2	2	2	2	1	1
-25°	3	3	3	3	2	2	2	2	2	1	1
-26.25°	3	3	3	3	2	2	2	2	2	1	1
-27.5°	3	3	3	2	2	2	2	2	1	1	1
-28.75°	3	3	3	2	2	2	2	2	1	1	1
-30°	3	3	3	2	2	2	2	2	1	1	1
-31.25°	3	3	2	2	2	2	2	1	1	1	1
-32.5°	3	3	2	2	2	2	2	1	1	1	1
-33.75°	3	2	2	2	2	2	1	1	1	1	1
-35°	2	2	2	2	2	2	1	1	1	1	1
-36.25°	2	2	2	2	2	1	1	1	1	1	1
-37.5°	2	2	2	2	2	1	1	1	1	1	1
-38.75°	2	2	2	2	1	1	1	1	1	1	1
-40°	2	2	2	1	1	1	1	1	1	1	1
-41.25°	2	2	2	1	1	1	1	1	1	1	1
-42.5°	2	2	1	1	1	1	1	1	1	1	1
-43.75°	2	1	1	1	1	1	1	1	1	1	1
-45°	1	1	1	1	1	1	1	1	1	1	1
-46.25°	1	1	1	1	1	1	1	1	1	1	1
-47.5°	1	1	1	1	1	1	1	1	1	1	1
-48.75°	1	1	1	1	1	1	1	1	1	1	1
-50°	1	1	1	1	1	1	1	1	1	1	1
-51.25°	1	1	1	1	1	1	1	1	1	1	1
-52.5°	1	1	1	1	1	1	1	1	1	1	1
-53.75°	1	1	1	1	1	1	1	1	1	1	1
-55°	1	1	1	1	1	1	1	1	1	1	1
-56.25°	1	1	1	1	1	1	1	1	1	1	0
-57.5°	1	1	1	1	1	1	1	1	1	0	0
-58.75°	1	1	1	1	1	1	1	1	0	0	0
-60°	1	1	1	1	1	1	1	0	0	0	0
-61.25°	1	1	1	1	1	1	0	0	0	0	0
-62.5°	1	1	1	1	1	0	0	0	0	0	0
-63.75°	1	1	1	0	0	0	0	0	0	0	0
-65°	1	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	1	0	0	0	0	0	0	0	0	0	0
52.5°	1	1	0	0	0	0	0	0	0	0	0
51.25°	1	1	0	0	0	0	0	0	0	0	0
50°	1	1	1	0	0	0	0	0	0	0	0
48.75°	1	1	1	0	0	0	0	0	0	0	0
47.5°	1	1	1	1	0	0	0	0	0	0	0
46.25°	1	1	1	1	0	0	0	0	0	0	0
45°	1	1	1	1	1	0	0	0	0	0	0
43.75°	1	1	1	1	1	0	0	0	0	0	0
42.5°	1	1	1	1	1	1	0	0	0	0	0
41.25°	1	1	1	1	1	1	0	0	0	0	0
40°	1	1	1	1	1	1	0	0	0	0	0
38.75°	1	1	1	1	1	1	1	0	0	0	0
37.5°	1	1	1	1	1	1	1	0	0	0	0
36.25°	1	1	1	1	1	1	1	0	0	0	0
35°	1	1	1	1	1	1	1	1	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
33.75°	1	1	1	1	1	1	1	1	0	0	0
32.5°	1	1	1	1	1	1	1	1	0	0	0
31.25°	1	1	1	1	1	1	1	1	0	0	0
30°	1	1	1	1	1	1	1	1	0	0	0
28.75°	1	1	1	1	1	1	1	1	1	0	0
27.5°	1	1	1	1	1	1	1	1	1	0	0
26.25°	1	1	1	1	1	1	1	1	1	0	0
25°	1	1	1	1	1	1	1	1	1	0	0
23.75°	1	1	1	1	1	1	1	1	1	0	0
22.5°	1	1	1	1	1	1	1	1	1	0	0
21.25°	1	1	1	1	1	1	1	1	1	1	0
20°	1	1	1	1	1	1	1	1	1	1	0
18.75°	1	1	1	1	1	1	1	1	1	1	0
17.5°	1	1	1	1	1	1	1	1	1	1	0
16.25°	1	1	1	1	1	1	1	1	1	1	0
15°	1	1	1	1	1	1	1	1	1	1	0
13.75°	1	1	1	1	1	1	1	1	1	1	0
12.5°	1	1	1	1	1	1	1	1	1	1	0
11.25°	1	1	1	1	1	1	1	1	1	1	0
10°	1	1	1	1	1	1	1	1	1	1	0
8.75°	1	1	1	1	1	1	1	1	1	1	0
7.5°	1	1	1	1	1	1	1	1	1	1	0
6.25°	1	1	1	1	1	1	1	1	1	1	0
5°	1	1	1	1	1	1	1	1	1	1	0
3.75°	1	1	1	1	1	1	1	1	1	1	0
2.5°	1	1	1	1	1	1	1	1	1	1	0
1.25°	1	1	1	1	1	1	1	1	1	1	0
0°	2	1	1	1	1	1	1	1	1	1	1
-1.25°	1	1	1	1	1	1	1	1	1	1	0
-2.5°	1	1	1	1	1	1	1	1	1	1	0
-3.75°	1	1	1	1	1	1	1	1	1	1	0
-5°	1	1	1	1	1	1	1	1	1	1	0
-6.25°	1	1	1	1	1	1	1	1	1	1	0
-7.5°	1	1	1	1	1	1	1	1	1	1	0
-8.75°	1	1	1	1	1	1	1	1	1	1	0
-10°	1	1	1	1	1	1	1	1	1	1	0
-11.25°	1	1	1	1	1	1	1	1	1	1	0
-12.5°	1	1	1	1	1	1	1	1	1	1	0
-13.75°	1	1	1	1	1	1	1	1	1	1	0
-15°	1	1	1	1	1	1	1	1	1	1	0
-16.25°	1	1	1	1	1	1	1	1	1	1	0
-17.5°	1	1	1	1	1	1	1	1	1	1	0
-18.75°	1	1	1	1	1	1	1	1	1	1	0
-20°	1	1	1	1	1	1	1	1	1	1	0
-21.25°	1	1	1	1	1	1	1	1	1	1	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
-22.5°	1	1	1	1	1	1	1	1	1	0	0
-23.75°	1	1	1	1	1	1	1	1	1	0	0
-25°	1	1	1	1	1	1	1	1	1	0	0
-26.25°	1	1	1	1	1	1	1	1	1	0	0
-27.5°	1	1	1	1	1	1	1	1	1	0	0
-28.75°	1	1	1	1	1	1	1	1	1	0	0
-30°	1	1	1	1	1	1	1	1	0	0	0
-31.25°	1	1	1	1	1	1	1	1	0	0	0
-32.5°	1	1	1	1	1	1	1	1	0	0	0
-33.75°	1	1	1	1	1	1	1	1	0	0	0
-35°	1	1	1	1	1	1	1	1	0	0	0
-36.25°	1	1	1	1	1	1	1	0	0	0	0
-37.5°	1	1	1	1	1	1	1	0	0	0	0
-38.75°	1	1	1	1	1	1	1	0	0	0	0
-40°	1	1	1	1	1	1	0	0	0	0	0
-41.25°	1	1	1	1	1	1	0	0	0	0	0
-42.5°	1	1	1	1	1	1	0	0	0	0	0
-43.75°	1	1	1	1	1	0	0	0	0	0	0
-45°	1	1	1	1	1	0	0	0	0	0	0
-46.25°	1	1	1	1	0	0	0	0	0	0	0
-47.5°	1	1	1	1	0	0	0	0	0	0	0
-48.75°	1	1	1	0	0	0	0	0	0	0	0
-50°	1	1	1	0	0	0	0	0	0	0	0
-51.25°	1	1	0	0	0	0	0	0	0	0	0
-52.5°	1	1	0	0	0	0	0	0	0	0	0
-53.75°	1	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
26.25°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
23.75°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
21.25°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
18.75°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
16.25°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
13.75°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
11.25°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
8.75°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
6.25°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
3.75°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
1.25°	0	0	0	0	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0	0	0	0	0
-1.25°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-3.75°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-6.25°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-8.75°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-11.25°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-13.75°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-16.25°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-18.75°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0
-21.25°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-23.75°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-26.25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	88.75°	90°
90°	0	0
88.75°	0	0
87.5°	0	0
86.25°	0	0
85°	0	0
83.75°	0	0
82.5°	0	0
81.25°	0	0
80°	0	0
78.75°	0	0
77.5°	0	0
76.25°	0	0
75°	0	0
73.75°	0	0
72.5°	0	0
71.25°	0	0
70°	0	0
68.75°	0	0
67.5°	0	0
66.25°	0	0
65°	0	0
63.75°	0	0
62.5°	0	0
61.25°	0	0
60°	0	0
58.75°	0	0
57.5°	0	0
56.25°	0	0
55°	0	0
53.75°	0	0
52.5°	0	0
51.25°	0	0
50°	0	0
48.75°	0	0
47.5°	0	0
46.25°	0	0
45°	0	0
43.75°	0	0
42.5°	0	0
41.25°	0	0
40°	0	0
38.75°	0	0
37.5°	0	0
36.25°	0	0
35°	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	88.75°	90°
33.75°	0	0
32.5°	0	0
31.25°	0	0
30°	0	0
28.75°	0	0
27.5°	0	0
26.25°	0	0
25°	0	0
23.75°	0	0
22.5°	0	0
21.25°	0	0
20°	0	0
18.75°	0	0
17.5°	0	0
16.25°	0	0
15°	0	0
13.75°	0	0
12.5°	0	0
11.25°	0	0
10°	0	0
8.75°	0	0
7.5°	0	0
6.25°	0	0
5°	0	0
3.75°	0	0
2.5°	0	0
1.25°	0	0
0°	0	0
-1.25°	0	0
-2.5°	0	0
-3.75°	0	0
-5°	0	0
-6.25°	0	0
-7.5°	0	0
-8.75°	0	0
-10°	0	0
-11.25°	0	0
-12.5°	0	0
-13.75°	0	0
-15°	0	0
-16.25°	0	0
-17.5°	0	0
-18.75°	0	0
-20°	0	0
-21.25°	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	88.75°	90°
-22.5°	0	0
-23.75°	0	0
-25°	0	0
-26.25°	0	0
-27.5°	0	0
-28.75°	0	0
-30°	0	0
-31.25°	0	0
-32.5°	0	0
-33.75°	0	0
-35°	0	0
-36.25°	0	0
-37.5°	0	0
-38.75°	0	0
-40°	0	0
-41.25°	0	0
-42.5°	0	0
-43.75°	0	0
-45°	0	0
-46.25°	0	0
-47.5°	0	0
-48.75°	0	0
-50°	0	0
-51.25°	0	0
-52.5°	0	0
-53.75°	0	0
-55°	0	0
-56.25°	0	0
-57.5°	0	0
-58.75°	0	0
-60°	0	0
-61.25°	0	0
-62.5°	0	0
-63.75°	0	0
-65°	0	0
-66.25°	0	0
-67.5°	0	0
-68.75°	0	0
-70°	0	0
-71.25°	0	0
-72.5°	0	0
-73.75°	0	0
-75°	0	0
-76.25°	0	0
-77.5°	0	0



REPORT NUMBER: G2-1802-569-43 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 203-SS-8LED4025-12-CS-OSL

CANDELA DISTRIBUTION (continued):

	88.75°	90°
-78.75°	0	0
-80°	0	0
-81.25°	0	0
-82.5°	0	0
-83.75°	0	0
-85°	0	0
-86.25°	0	0
-87.5°	0	0
-88.75°	0	0
-90°	0	0

(END OF REPORT)