

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: LUMIERE

Report Number: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)

Luminaire Tested: **303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE**

Issue Date: 4/9/2020

Test Information

Test Method: LM-79-2019
Report Number: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2001-623-1)
Test Lab: INNOVATION CENTER
Issue Date: 4/9/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE
Description: LUMIERE EON LED LUMINAIRE
CEILING WALL MOUNT, TWO LIGHTBARS, TYPE 2 WITH EDGE GLOW
Light Source: 2700K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER


Summary

Lumens per Lamp:	N/A	NEMA Type:	7H x 7V
Luminaire Lumens:	978.1 lumens	Max Intensity:	304.1 candela
Efficiency:	N/A	Max Intensity Angle:	-35°H x 23.75°V
Efficacy:	63.1 lumens/watt		
Luminous Opening:	Rectangular w/ Sides (W: 0.38' x L: 0.42' x H: 0.01')		
Beam Angle (50%):	139.1°H x 103.6°V	Field Angle (10%):	166.9°H x 147.3°V
Beam Lumens:	822.2 lumens	Field Lumens:	963.8 lumens
Beam Efficiency:	84.1%	Field Efficiency:	98.5%
Input Watts (W):	15.5		
Input Voltage (V):	120		
Input Current (Ain):	NR		
Voltage Rise (V):	NR		
Power Factor:	NR		
Total Harmonic Distortion (THDi):	NR		
Frequency (hertz):	60		
Stabilization Time:	NR		
Operation Time:	NR		
Ambient Temperature (°C):	NR		
Test Distance:	25 FT		



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE


Iso-Candela Plot

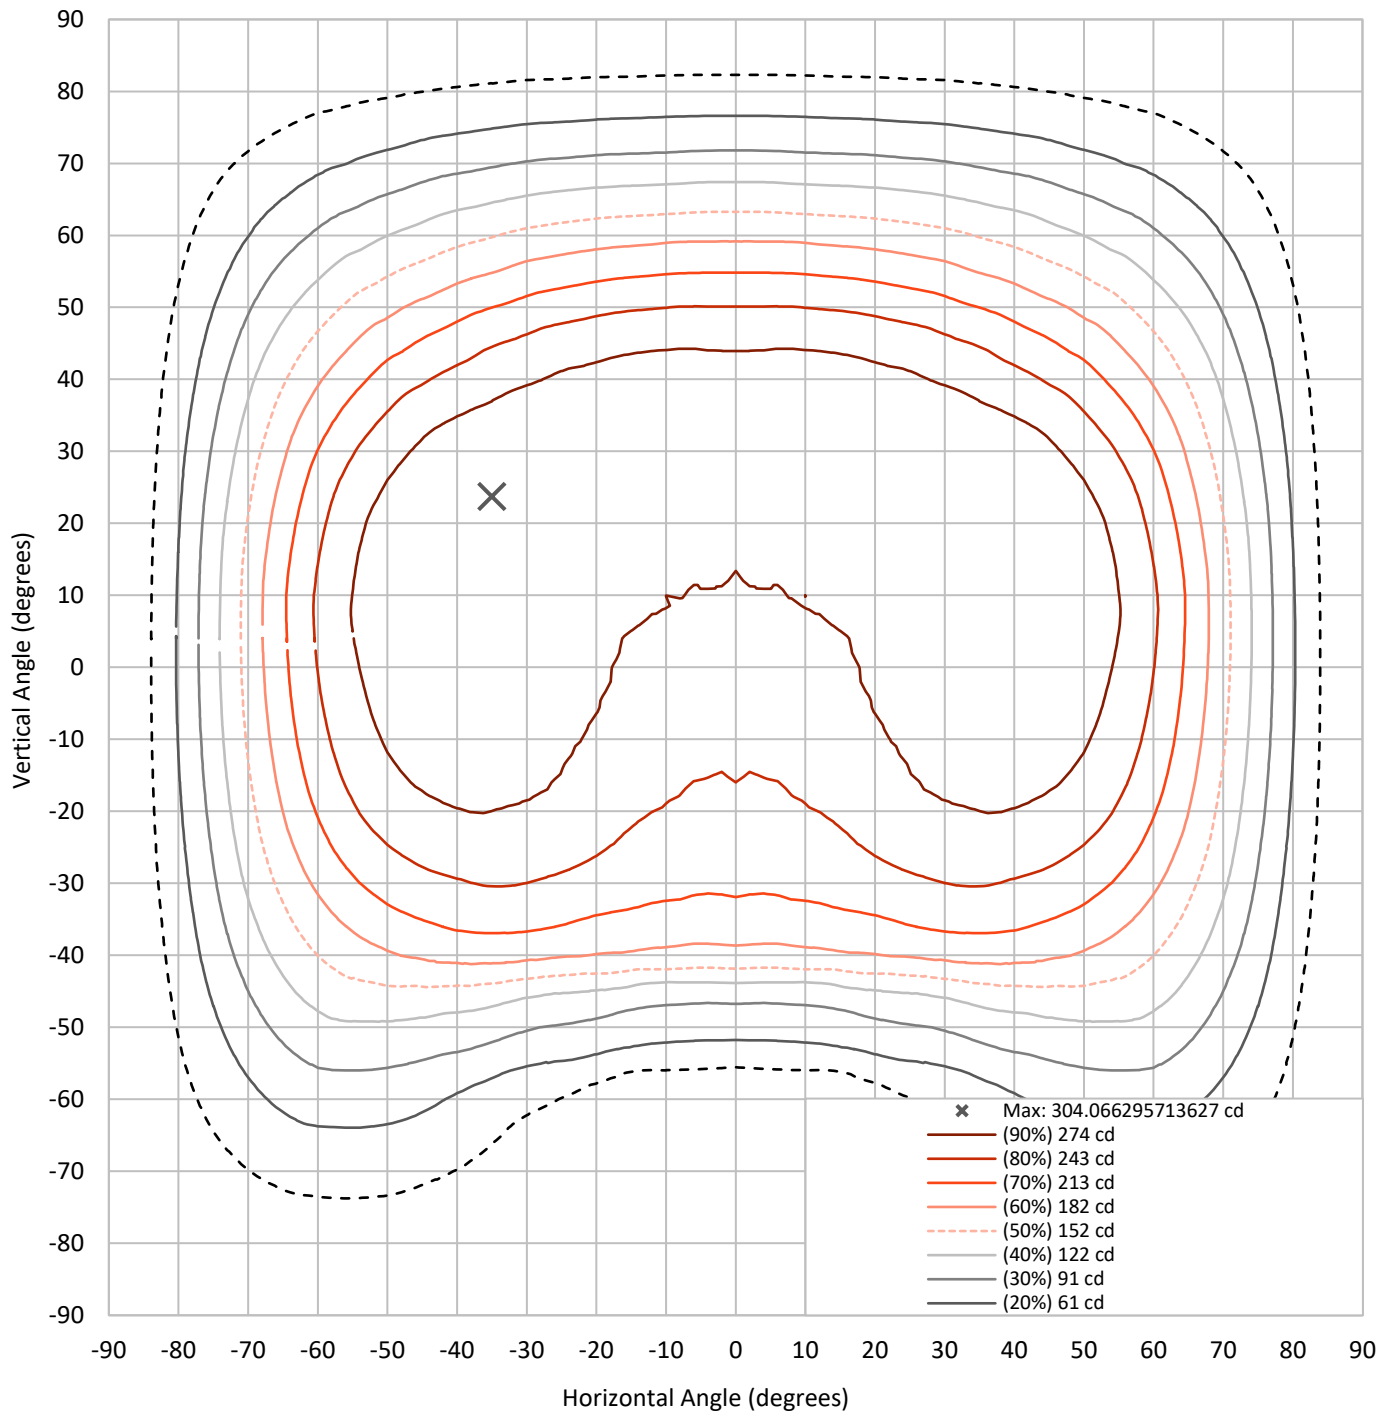




REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

Lumen Table

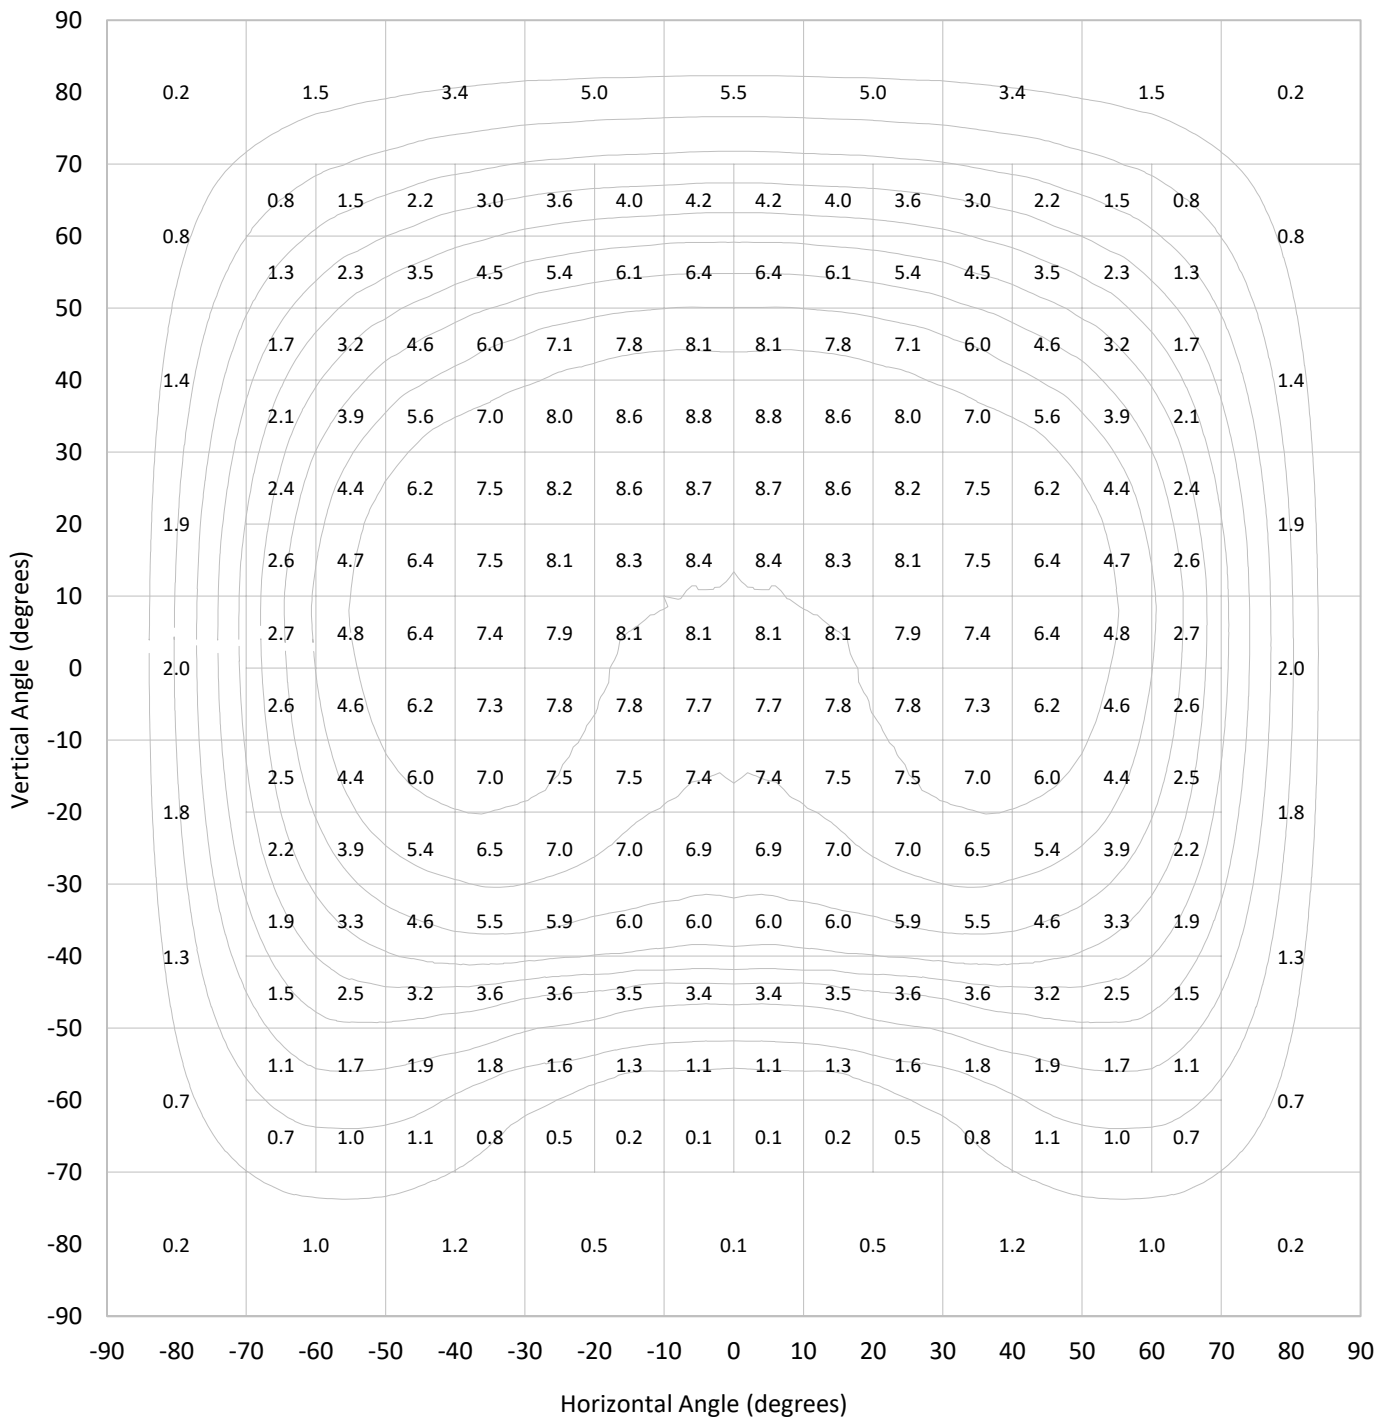


REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

Luminous Intensity Polar Plot

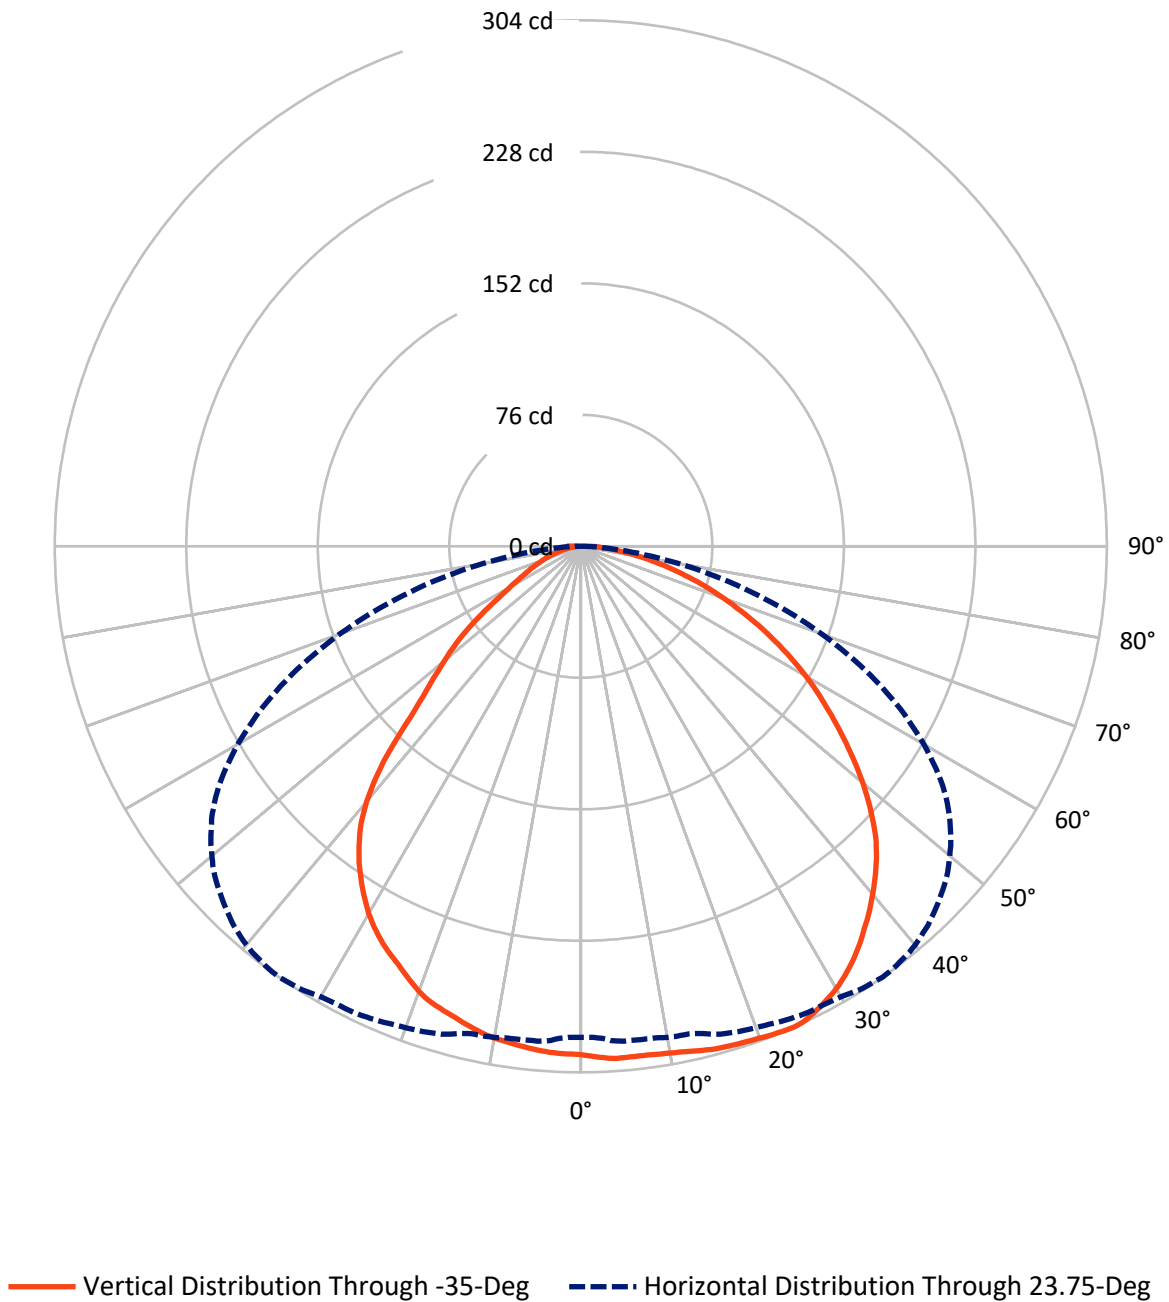

REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

Luminous Intensity Plot

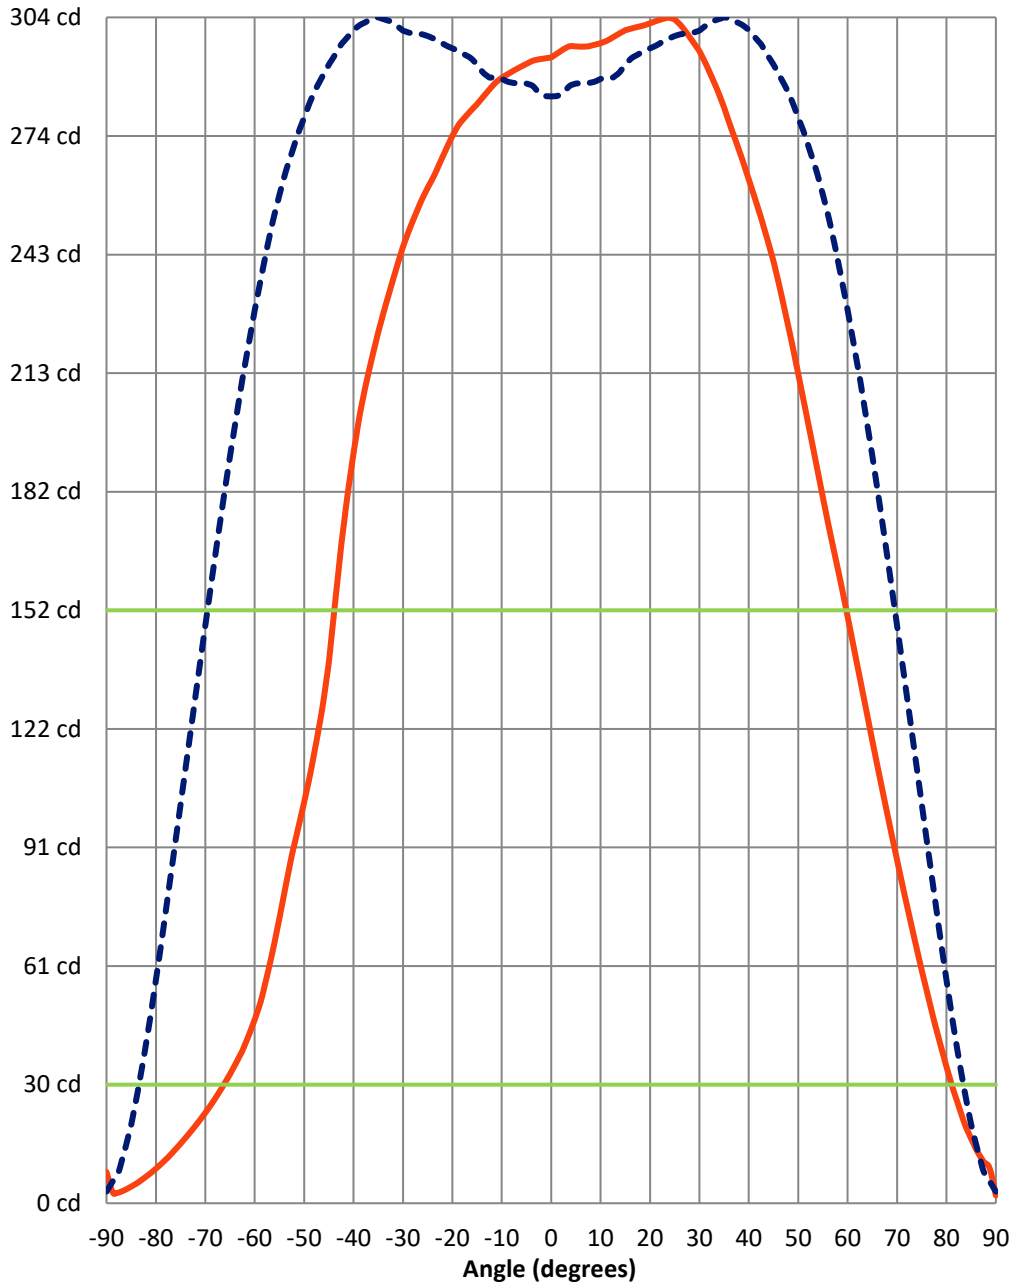

Beam:
 H Angle: 139.1°
 V Angle: 103.6°
 Lumens: 822.2
 Efficiency: 84.1%

Field:
 H Angle: 166.9°
 V Angle: 147.3°
 Lumens: 963.8
 Efficiency: 98.5%

Spill:
 Lumens: 14.3
 Efficiency: 1.5%

— Vertical Distribution through -35-Deg
 - - - Horizontal Distribution through 23.75-Deg



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

FIELD
 BEAM

CANDELA DISTRIBUTION:

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
90°	3.0	3.0	3.0	3.0	3.0	3.1	3.1	3.2	3.2	3.3	3.3
88.75°	3.0	3.2	3.3	3.5	3.6	3.8	4.0	4.2	4.4	4.6	4.8
87.5°	3.0	3.2	3.4	3.7	3.9	4.1	4.3	4.6	4.8	5.1	5.3
86.25°	3.0	3.3	3.6	3.8	4.1	4.4	4.7	5.0	5.3	5.6	5.9
85°	3.0	3.3	3.7	4.0	4.4	4.7	5.0	5.4	5.7	6.1	6.4
83.75°	3.0	3.4	3.8	4.2	4.6	5.0	5.4	5.8	6.1	6.6	7.0
82.5°	3.0	3.5	3.9	4.4	4.8	5.3	5.7	6.2	6.6	7.1	7.6
81.25°	3.0	3.5	4.0	4.6	5.1	5.6	6.1	6.6	7.0	7.6	8.1
80°	3.0	3.6	4.2	4.7	5.3	5.9	6.4	7.0	7.5	8.1	8.7
78.75°	3.0	3.6	4.3	4.9	5.5	6.2	6.8	7.4	7.9	8.6	9.2
77.5°	3.0	3.7	4.4	5.1	5.8	6.4	7.1	7.7	8.4	9.1	10.4
76.25°	3.0	3.8	4.5	5.3	6.0	6.7	7.4	8.1	8.8	10.1	11.8
75°	3.0	3.8	4.6	5.4	6.2	7.0	7.8	8.5	9.5	11.4	13.2
73.75°	3.0	3.9	4.7	5.6	6.5	7.3	8.1	8.9	10.7	12.7	14.6
72.5°	3.0	3.9	4.9	5.8	6.7	7.6	8.4	9.7	11.8	13.9	16.1
71.25°	3.0	4.0	5.0	5.9	6.9	7.9	8.8	10.7	12.9	15.2	17.5
70°	3.0	4.0	5.1	6.1	7.1	8.1	9.3	11.7	14.1	16.5	18.8
68.75°	3.0	4.1	5.2	6.3	7.4	8.4	10.2	12.7	15.2	17.7	20.2
67.5°	3.0	4.2	5.3	6.5	7.6	8.7	11.0	13.7	16.3	19.0	21.6
66.25°	3.0	4.2	5.4	6.6	7.8	9.0	11.8	14.6	17.4	20.2	23.0
65°	3.0	4.3	5.5	6.8	8.0	9.7	12.7	15.6	18.5	21.4	24.8
63.75°	3.0	4.3	5.6	6.9	8.2	10.4	13.5	16.6	19.6	22.6	26.7
62.5°	3.0	4.4	5.7	7.1	8.4	11.1	14.3	17.5	20.7	24.2	28.5
61.25°	3.0	4.4	5.8	7.3	8.6	11.7	15.1	18.4	21.7	25.8	30.4
60°	3.0	4.5	6.0	7.4	8.9	12.4	15.9	19.4	22.8	27.5	32.2
58.75°	3.0	4.5	6.1	7.6	9.4	13.0	16.7	20.3	24.2	29.1	33.9
57.5°	3.0	4.6	6.2	7.7	9.9	13.7	17.4	21.2	25.6	30.7	35.7
56.25°	3.0	4.6	6.3	7.9	10.4	14.3	18.2	22.1	27.0	32.3	37.4
55°	3.0	4.7	6.4	8.0	10.9	15.0	19.0	22.9	28.4	33.8	39.2
53.75°	3.0	4.7	6.4	8.2	11.4	15.6	19.7	24.1	29.8	35.4	40.9
52.5°	3.0	4.8	6.5	8.3	11.9	16.2	20.4	25.3	31.1	36.9	42.6
51.25°	3.0	4.8	6.6	8.4	12.3	16.8	21.1	26.5	32.5	38.4	44.6
50°	3.0	4.9	6.7	8.6	12.8	17.3	21.9	27.6	33.8	39.8	46.5
48.75°	3.0	4.9	6.8	8.7	13.2	17.9	22.5	28.8	35.1	41.3	48.4
47.5°	3.0	5.0	6.9	8.9	13.7	18.5	23.4	29.9	36.3	42.8	50.3
46.25°	3.0	5.0	7.0	9.3	14.1	19.0	24.3	31.0	37.6	44.4	52.1
45°	3.0	5.0	7.1	9.6	14.6	19.6	25.2	32.0	38.8	46.1	53.9
43.75°	3.0	5.1	7.2	9.9	15.0	20.1	26.1	33.1	40.0	47.6	55.7
42.5°	3.0	5.1	7.2	10.2	15.4	20.6	27.0	34.1	41.1	49.2	57.4
41.25°	3.0	5.2	7.3	10.5	15.8	21.1	27.8	35.1	42.3	50.7	59.1
40°	3.0	5.2	7.4	10.8	16.2	21.6	28.6	36.1	43.6	52.2	60.7
38.75°	3.0	5.2	7.5	11.1	16.5	22.0	29.4	37.0	44.9	53.6	62.3
37.5°	3.0	5.3	7.5	11.4	16.9	22.5	30.2	37.9	46.1	55.0	63.9
36.25°	3.0	5.3	7.6	11.6	17.2	23.0	30.9	38.9	47.3	56.4	65.5
35°	3.0	5.3	7.7	11.9	17.6	23.6	31.7	39.7	48.5	57.8	67.1



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
33.75°	3.0	5.4	7.7	12.1	17.9	24.2	32.4	40.6	49.7	59.0	68.7
32.5°	3.0	5.4	7.8	12.4	18.2	24.7	33.0	41.3	50.8	60.3	70.2
31.25°	3.0	5.4	7.9	12.6	18.5	25.3	33.7	42.1	51.9	61.5	71.7
30°	3.0	5.5	7.9	12.8	18.8	25.8	34.3	42.9	52.9	62.7	73.1
28.75°	3.0	5.5	8.0	13.0	19.1	26.3	34.9	43.7	53.9	63.8	74.5
27.5°	3.0	5.5	8.0	13.2	19.4	26.8	35.5	44.5	54.8	64.9	75.8
26.25°	3.0	5.6	8.1	13.4	19.7	27.3	36.0	45.3	55.6	66.1	77.1
25°	3.0	5.6	8.1	13.6	19.9	27.7	36.5	46.0	56.5	67.1	78.4
23.75°	3.0	5.6	8.2	13.8	20.1	28.1	37.0	46.7	57.2	68.0	79.5
22.5°	3.0	5.6	8.2	14.0	20.4	28.5	37.5	47.3	58.0	68.9	80.6
21.25°	3.0	5.6	8.3	14.1	20.6	28.9	37.9	47.9	58.7	69.8	81.5
20°	3.0	5.7	8.3	14.3	20.8	29.2	38.4	48.5	59.3	70.6	82.3
18.75°	3.0	5.7	8.4	14.4	21.0	29.5	38.7	49.1	60.0	71.3	83.1
17.5°	3.0	5.7	8.4	14.6	21.1	29.9	39.1	49.6	60.5	71.9	83.8
16.25°	3.0	5.7	8.4	14.7	21.3	30.1	39.4	50.0	61.1	72.6	84.4
15°	3.0	5.7	8.4	14.8	21.4	30.4	39.8	50.5	61.5	73.1	85.0
13.75°	3.0	5.7	8.5	14.9	21.6	30.6	40.0	50.9	62.0	73.6	85.5
12.5°	3.0	5.8	8.5	15.0	21.7	30.9	40.3	51.2	62.4	74.1	86.0
11.25°	3.0	5.8	8.5	15.1	21.8	31.0	40.5	51.5	62.7	74.5	86.3
10°	3.0	5.8	8.5	15.2	21.9	31.2	40.7	51.8	63.1	74.8	86.7
8.75°	3.0	5.8	8.6	15.2	22.0	31.4	40.9	52.0	63.3	75.1	86.9
7.5°	3.0	5.8	8.6	15.3	22.1	31.5	41.0	52.2	63.6	75.3	87.1
6.25°	3.0	5.8	8.6	15.3	22.1	31.6	41.1	52.4	63.7	75.5	87.3
5°	3.0	5.8	8.6	15.4	22.2	31.7	41.2	52.5	63.9	75.6	87.4
3.75°	3.0	5.8	8.6	15.4	22.2	31.7	41.3	52.6	64.0	75.7	87.4
2.5°	3.0	5.8	8.6	15.4	22.2	31.8	41.3	52.7	64.0	75.7	87.3
1.25°	3.0	5.8	8.6	15.4	22.2	31.8	41.3	52.7	64.0	75.6	87.2
0°	3.0	5.8	8.6	15.4	22.2	31.8	41.3	52.7	64.0	75.6	87.1
-1.25°	3.0	5.8	8.6	15.4	22.2	31.7	41.2	52.5	63.9	75.4	86.9
-2.5°	3.0	5.8	8.6	15.4	22.2	31.6	41.1	52.4	63.7	75.2	86.7
-3.75°	3.0	5.8	8.6	15.3	22.1	31.6	41.0	52.2	63.4	74.9	86.4
-5°	3.0	5.8	8.6	15.3	22.1	31.5	40.9	52.0	63.2	74.6	86.1
-6.25°	3.0	5.8	8.6	15.3	22.0	31.3	40.7	51.8	62.9	74.3	85.7
-7.5°	3.0	5.8	8.6	15.2	21.9	31.2	40.5	51.5	62.5	73.9	85.3
-8.75°	3.0	5.8	8.5	15.1	21.8	31.0	40.3	51.2	62.1	73.4	84.8
-10°	3.0	5.8	8.5	15.1	21.7	30.8	40.0	50.8	61.7	72.9	84.2
-11.25°	3.0	5.7	8.5	15.0	21.6	30.6	39.7	50.4	61.2	72.4	83.6
-12.5°	3.0	5.7	8.5	14.9	21.5	30.4	39.4	50.0	60.7	71.8	82.9
-13.75°	3.0	5.7	8.4	14.8	21.3	30.1	39.1	49.5	60.1	71.1	82.2
-15°	3.0	5.7	8.4	14.7	21.2	29.8	38.8	49.0	59.5	70.4	81.4
-16.25°	3.0	5.7	8.4	14.5	21.0	29.5	38.4	48.5	58.9	69.7	80.6
-17.5°	3.0	5.7	8.3	14.4	20.8	29.2	38.0	47.9	58.2	68.9	79.7
-18.75°	3.0	5.7	8.3	14.3	20.6	28.9	37.6	47.3	57.5	68.0	78.8
-20°	3.0	5.6	8.3	14.1	20.4	28.5	37.1	46.7	56.8	67.1	77.8
-21.25°	3.0	5.6	8.2	14.0	20.2	28.1	36.6	46.0	56.0	66.2	76.8



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
-22.5°	3.0	5.6	8.2	13.8	20.0	27.7	36.2	45.3	55.2	65.2	75.7
-23.75°	3.0	5.6	8.1	13.6	19.8	27.3	35.6	44.6	54.4	64.2	74.6
-25°	3.0	5.5	8.1	13.4	19.5	26.9	35.1	43.8	53.5	63.1	73.4
-26.25°	3.0	5.5	8.0	13.2	19.2	26.4	34.5	43.0	52.6	62.0	72.2
-27.5°	3.0	5.5	8.0	13.0	19.0	26.0	34.0	42.2	51.6	60.9	71.0
-28.75°	3.0	5.5	7.9	12.8	18.7	25.5	33.4	41.4	50.6	59.9	69.7
-30°	3.0	5.4	7.8	12.6	18.4	25.0	32.7	40.5	49.6	58.8	68.4
-31.25°	3.0	5.4	7.8	12.4	18.1	24.4	32.1	39.6	48.6	57.7	67.0
-32.5°	3.0	5.4	7.7	12.2	17.8	23.9	31.4	38.9	47.6	56.5	65.6
-33.75°	3.0	5.3	7.7	11.9	17.5	23.3	30.8	38.1	46.5	55.3	64.2
-35°	3.0	5.3	7.6	11.7	17.1	22.8	30.1	37.3	45.5	54.1	62.7
-36.25°	3.0	5.3	7.5	11.4	16.8	22.2	29.4	36.4	44.3	52.8	61.2
-37.5°	3.0	5.2	7.4	11.1	16.4	21.7	28.6	35.6	43.2	51.5	59.7
-38.75°	3.0	5.2	7.4	10.9	16.1	21.2	27.9	34.8	42.0	50.2	58.2
-40°	3.0	5.1	7.3	10.6	15.7	20.7	27.1	33.9	40.8	48.8	56.7
-41.25°	3.0	5.1	7.2	10.3	15.3	20.3	26.3	33.0	39.6	47.4	55.2
-42.5°	3.0	5.1	7.1	10.0	14.9	19.8	25.5	32.0	38.5	46.0	53.6
-43.75°	3.0	5.0	7.0	9.7	14.5	19.3	24.7	31.1	37.4	44.6	52.0
-45°	3.0	5.0	7.0	9.4	14.1	18.7	23.9	30.1	36.3	43.1	50.3
-46.25°	3.0	4.9	6.9	9.1	13.7	18.2	23.1	29.2	35.2	41.6	48.7
-47.5°	3.0	4.9	6.8	8.8	13.3	17.7	22.2	28.2	34.1	40.1	47.0
-48.75°	3.0	4.8	6.7	8.5	12.8	17.1	21.4	27.1	32.9	38.6	45.2
-50°	3.0	4.8	6.6	8.4	12.4	16.6	20.8	26.1	31.7	37.3	43.5
-51.25°	3.0	4.8	6.5	8.3	11.9	16.0	20.1	25.0	30.5	35.9	41.7
-52.5°	3.0	4.7	6.4	8.1	11.5	15.5	19.4	24.0	29.3	34.6	39.9
-53.75°	3.0	4.7	6.3	8.0	11.0	14.9	18.7	22.9	28.0	33.2	38.2
-55°	3.0	4.6	6.2	7.8	10.5	14.3	18.0	21.8	26.8	31.7	36.6
-56.25°	3.0	4.6	6.1	7.7	10.1	13.7	17.3	20.9	25.5	30.3	34.9
-57.5°	3.0	4.5	6.0	7.5	9.6	13.1	16.6	20.1	24.2	28.8	33.3
-58.75°	3.0	4.5	5.9	7.4	9.1	12.5	15.9	19.2	22.9	27.3	31.6
-60°	3.0	4.4	5.8	7.2	8.6	11.9	15.2	18.4	21.6	25.8	29.9
-61.25°	3.0	4.3	5.7	7.0	8.4	11.3	14.4	17.5	20.6	24.3	28.2
-62.5°	3.0	4.3	5.6	6.9	8.2	10.6	13.7	16.6	19.6	22.8	26.5
-63.75°	3.0	4.2	5.5	6.7	7.9	10.0	12.9	15.8	18.6	21.3	24.8
-65°	3.0	4.2	5.4	6.5	7.7	9.3	12.1	14.9	17.6	20.2	23.1
-66.25°	3.0	4.1	5.3	6.4	7.5	8.7	11.4	14.0	16.5	19.0	21.3
-67.5°	3.0	4.1	5.1	6.2	7.3	8.4	10.6	13.1	15.5	17.9	20.0
-68.75°	3.0	4.0	5.0	6.0	7.1	8.1	9.8	12.1	14.5	16.7	18.8
-70°	3.0	4.0	4.9	5.9	6.8	7.8	9.0	11.2	13.4	15.5	17.5
-71.25°	3.0	3.9	4.8	5.7	6.6	7.5	8.5	10.3	12.4	14.3	16.2
-72.5°	3.0	3.8	4.7	5.5	6.4	7.2	8.1	9.4	11.3	13.1	14.9
-73.75°	3.0	3.8	4.6	5.3	6.1	7.0	7.8	8.6	10.2	12.0	13.6
-75°	3.0	3.7	4.4	5.2	5.9	6.7	7.4	8.2	9.2	10.8	12.3
-76.25°	3.0	3.7	4.3	5.0	5.7	6.4	7.1	7.8	8.5	9.6	11.0
-77.5°	3.0	3.6	4.2	4.8	5.4	6.1	6.7	7.4	8.0	8.6	9.6



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
-78.75°	3.0	3.5	4.1	4.6	5.2	5.8	6.4	7.0	7.5	8.1	8.5
-80°	3.0	3.5	4.0	4.5	4.9	5.5	6.0	6.5	7.1	7.5	8.0
-81.25°	3.0	3.4	3.9	4.3	4.7	5.2	5.6	6.1	6.6	7.0	7.4
-82.5°	3.0	3.4	3.7	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.8
-83.75°	3.0	3.3	3.6	3.9	4.2	4.6	4.9	5.3	5.6	5.9	6.2
-85°	3.0	3.2	3.5	3.7	4.0	4.3	4.6	4.9	5.1	5.4	5.6
-86.25°	3.0	3.2	3.4	3.5	3.7	4.0	4.2	4.4	4.7	4.9	5.1
-87.5°	3.0	3.1	3.2	3.4	3.5	3.7	3.8	4.0	4.2	4.3	4.5
-88.75°	3.0	3.1	3.1	3.2	3.2	3.4	3.5	3.6	3.7	3.8	3.9
-90°	3.0	3.1	3.2	3.3	3.4	3.5	3.7	3.8	3.9	4.1	4.2



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
90°	3.4	3.4	3.5	3.5	3.6	3.6	3.6	3.5	3.5	3.4	3.4
88.75°	5.0	5.2	5.3	5.5	5.7	5.8	6.0	6.2	6.4	6.6	6.8
87.5°	5.6	5.8	6.0	6.2	6.4	6.6	6.8	7.1	7.3	7.5	7.7
86.25°	6.2	6.5	6.8	7.0	7.2	7.4	7.7	7.9	8.2	8.4	8.7
85°	6.8	7.2	7.5	7.7	8.0	8.2	8.5	8.8	9.1	9.3	9.6
83.75°	7.4	7.8	8.2	8.5	8.7	9.0	9.3	9.6	10.0	10.6	11.3
82.5°	8.0	8.5	8.9	9.2	9.5	10.0	10.8	11.6	12.3	13.0	13.8
81.25°	8.6	9.2	9.6	10.3	11.2	12.0	12.9	13.8	14.6	15.5	16.3
80°	9.2	10.1	11.2	12.2	13.2	14.1	15.1	16.0	17.0	17.9	18.8
78.75°	10.4	11.8	13.0	14.1	15.2	16.2	17.2	18.3	19.3	20.3	21.3
77.5°	11.9	13.5	14.8	16.0	17.2	18.2	19.3	20.5	21.6	23.2	24.7
76.25°	13.5	15.2	16.6	17.9	19.2	20.3	21.5	23.2	24.9	26.6	28.2
75°	15.1	16.8	18.4	19.8	21.1	22.5	24.4	26.4	28.2	30.0	31.6
73.75°	16.6	18.5	20.2	21.7	23.5	25.5	27.5	29.6	31.5	33.4	35.1
72.5°	18.1	20.2	22.0	24.0	26.3	28.5	30.6	32.8	34.8	36.8	38.8
71.25°	19.7	21.8	24.2	26.7	29.1	31.4	33.7	36.0	38.1	40.6	42.9
70°	21.2	23.7	26.7	29.3	31.9	34.4	36.8	39.2	42.0	44.6	47.1
68.75°	22.7	25.9	29.1	32.0	34.7	37.3	39.9	43.0	46.0	48.7	51.3
67.5°	24.7	28.2	31.6	34.6	37.5	40.3	43.6	46.8	49.9	52.8	55.5
66.25°	26.7	30.4	34.0	37.2	40.3	43.7	47.2	50.6	53.8	56.9	60.0
65°	28.8	32.6	36.4	39.8	43.4	47.1	50.8	54.4	57.8	61.2	64.6
63.75°	30.8	34.8	38.8	42.5	46.5	50.4	54.4	58.2	61.9	65.6	69.2
62.5°	32.8	37.0	41.2	45.5	49.6	53.8	57.9	62.1	66.1	70.1	73.8
61.25°	34.8	39.2	43.7	48.3	52.7	57.1	61.4	66.1	70.4	74.5	78.4
60°	36.8	41.3	46.4	51.2	55.7	60.3	65.2	70.1	74.6	78.9	83.1
58.75°	38.7	43.7	49.0	54.0	58.8	63.7	69.0	74.0	78.8	83.3	87.8
57.5°	40.7	46.1	51.5	56.8	61.8	67.3	72.7	78.0	83.0	87.9	92.6
56.25°	42.7	48.5	54.1	59.5	65.0	70.8	76.5	81.9	87.3	92.4	97.3
55°	44.9	50.9	56.7	62.2	68.3	74.3	80.2	85.9	91.6	96.9	102.0
53.75°	47.1	53.3	59.2	65.2	71.6	77.8	83.8	90.0	95.9	101.4	106.7
52.5°	49.2	55.6	61.7	68.3	74.9	81.3	87.7	94.1	100.2	105.9	111.5
51.25°	51.4	57.9	64.3	71.3	78.1	84.7	91.6	98.2	104.4	110.4	116.2
50°	53.5	60.2	67.1	74.2	81.3	88.3	95.4	102.2	108.7	114.9	121.0
48.75°	55.6	62.5	69.8	77.1	84.4	92.0	99.3	106.3	112.9	119.3	125.6
47.5°	57.7	64.8	72.5	80.0	87.5	95.6	103.2	110.4	117.0	123.7	130.3
46.25°	59.7	67.2	75.1	82.9	90.8	99.1	107.0	114.2	121.1	128.0	134.9
45°	61.7	69.6	77.7	85.6	94.0	102.5	110.8	118.0	125.1	132.2	139.4
43.75°	63.6	72.0	80.2	88.4	97.1	105.9	114.4	121.8	129.1	136.4	143.8
42.5°	65.6	74.3	82.7	91.3	100.2	109.1	117.7	125.4	132.9	140.6	148.2
41.25°	67.6	76.6	85.2	94.1	103.2	112.3	120.9	129.0	136.8	144.7	152.5
40°	69.6	78.7	87.6	96.8	106.1	115.3	124.0	132.5	140.6	148.8	156.8
38.75°	71.5	80.8	90.0	99.4	108.9	118.2	127.1	135.8	144.4	152.8	161.0
37.5°	73.4	82.9	92.4	102.0	111.7	121.1	130.2	139.1	148.1	156.7	165.1
36.25°	75.2	84.9	94.7	104.5	114.4	123.9	133.2	142.4	151.6	160.6	169.2
35°	77.0	86.8	96.9	107.0	116.9	126.7	136.2	145.6	155.0	164.4	173.3



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
33.75°	78.7	88.8	99.0	109.3	119.4	129.4	139.1	148.8	158.3	167.9	177.3
32.5°	80.4	90.6	101.1	111.6	121.9	132.1	142.0	151.8	161.6	171.3	181.1
31.25°	82.1	92.5	103.1	113.7	124.3	134.7	144.8	154.8	164.7	174.6	184.6
30°	83.7	94.3	105.1	115.8	126.6	137.2	147.5	157.7	167.8	177.8	187.9
28.75°	85.2	96.0	107.0	117.9	128.8	139.7	150.1	160.5	170.7	180.8	190.8
27.5°	86.7	97.7	108.8	119.9	130.9	141.9	152.7	163.2	173.5	183.7	193.6
26.25°	88.1	99.3	110.5	121.8	133.0	144.1	155.1	165.8	176.1	186.6	196.3
25°	89.5	100.9	112.2	123.6	134.9	146.1	157.3	168.3	178.7	189.2	198.9
23.75°	90.8	102.3	113.8	125.3	136.8	148.1	159.4	170.4	181.2	191.6	201.4
22.5°	92.1	103.8	115.4	127.0	138.6	150.0	161.4	172.5	183.4	193.9	203.8
21.25°	93.3	105.1	116.8	128.6	140.3	151.8	163.3	174.4	185.4	196.0	206.1
20°	94.3	106.4	118.2	130.1	141.9	153.5	165.1	176.3	187.4	197.9	208.2
18.75°	95.2	107.5	119.6	131.5	143.4	155.1	166.8	178.1	189.3	199.7	210.1
17.5°	95.9	108.3	120.8	132.8	144.8	156.7	168.4	179.7	191.0	201.4	211.9
16.25°	96.6	109.1	121.6	134.1	146.2	158.1	169.9	181.3	192.5	203.1	213.5
15°	97.3	109.8	122.3	134.9	147.4	159.5	171.3	182.8	194.0	204.6	215.0
13.75°	97.8	110.4	122.9	135.6	148.1	160.6	172.5	184.1	195.3	206.0	216.3
12.5°	98.3	110.9	123.5	136.2	148.7	161.2	173.5	185.4	196.5	207.2	217.6
11.25°	98.7	111.3	124.0	136.6	149.2	161.7	173.9	186.0	197.5	208.4	218.7
10°	99.1	111.7	124.3	137.0	149.6	162.1	174.3	186.3	197.8	208.9	219.6
8.75°	99.4	112.0	124.6	137.3	149.9	162.4	174.5	186.6	197.9	209.1	219.6
7.5°	99.6	112.2	124.9	137.6	150.1	162.6	174.7	186.7	197.9	209.1	219.5
6.25°	99.8	112.3	125.0	137.7	150.2	162.7	174.7	186.7	197.9	209.0	219.3
5°	99.8	112.4	125.0	137.7	150.2	162.7	174.7	186.6	197.7	208.7	219.0
3.75°	99.9	112.4	125.0	137.7	150.1	162.6	174.5	186.4	197.4	208.4	218.6
2.5°	99.8	112.3	124.9	137.5	150.0	162.4	174.2	186.1	197.0	207.9	218.0
1.25°	99.7	112.1	124.7	137.3	149.7	162.1	173.9	185.6	196.5	207.4	217.4
0°	99.5	111.9	124.5	137.0	149.4	161.7	173.4	185.1	195.9	206.7	216.7
-1.25°	99.3	111.6	124.2	136.6	148.9	161.2	172.8	184.5	195.2	206.0	215.9
-2.5°	99.0	111.3	123.8	136.2	148.4	160.6	172.2	183.8	194.5	205.2	215.0
-3.75°	98.7	110.9	123.3	135.7	147.8	159.9	171.5	183.0	193.6	204.3	214.0
-5°	98.3	110.5	122.8	135.1	147.1	159.1	170.6	182.0	192.7	203.3	213.0
-6.25°	97.8	109.9	122.2	134.4	146.4	158.3	169.7	181.0	191.6	202.1	211.8
-7.5°	97.3	109.3	121.5	133.6	145.5	157.3	168.6	179.9	190.5	200.9	210.5
-8.75°	96.7	108.7	120.7	132.8	144.6	156.3	167.5	178.7	189.2	199.6	209.1
-10°	96.0	107.9	119.9	131.9	143.5	155.1	166.3	177.3	187.8	198.1	207.7
-11.25°	95.3	107.1	119.0	130.8	142.4	153.9	165.0	175.9	186.4	196.6	206.0
-12.5°	94.5	106.2	118.0	129.8	141.3	152.6	163.6	174.4	184.8	194.9	204.3
-13.75°	93.7	105.3	116.9	128.6	140.0	151.2	162.1	172.8	183.2	193.1	202.5
-15°	92.8	104.3	115.8	127.4	138.7	149.7	160.6	171.1	181.4	191.2	200.6
-16.25°	91.8	103.2	114.6	126.0	137.3	148.2	158.9	169.4	179.6	189.2	198.7
-17.5°	90.8	102.1	113.4	124.7	135.8	146.6	157.2	167.5	177.7	187.2	196.6
-18.75°	89.8	100.9	112.1	123.2	134.2	144.9	155.4	165.6	175.6	185.0	194.3
-20°	88.6	99.7	110.7	121.7	132.6	143.1	153.5	163.5	173.4	182.8	191.9
-21.25°	87.4	98.4	109.3	120.1	130.9	141.3	151.5	161.4	171.2	180.5	189.4



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
-22.5°	86.2	97.0	107.8	118.5	129.1	139.4	149.5	159.3	168.8	178.0	186.4
-23.75°	85.0	95.6	106.2	116.8	127.3	137.4	147.3	157.0	166.4	175.2	183.4
-25°	83.6	94.2	104.6	115.0	125.3	135.4	145.1	154.7	163.6	172.2	180.3
-26.25°	82.3	92.6	103.0	113.2	123.4	133.3	142.9	152.0	160.6	169.1	177.1
-27.5°	80.9	91.1	101.2	111.3	121.3	131.1	140.4	149.2	157.7	166.0	173.9
-28.75°	79.5	89.4	99.4	109.4	119.2	128.9	137.7	146.3	154.6	162.7	170.6
-30°	78.0	87.7	97.6	107.4	117.0	126.3	134.9	143.3	151.6	159.5	167.2
-31.25°	76.5	86.0	95.7	105.3	114.8	123.6	132.1	140.3	148.4	156.1	163.7
-32.5°	75.0	84.2	93.8	103.2	112.3	120.9	129.2	137.3	145.2	152.7	160.1
-33.75°	73.4	82.4	91.8	101.0	109.7	118.1	126.3	134.1	141.9	149.3	156.3
-35°	71.7	80.6	89.7	98.6	107.0	115.2	123.2	131.0	138.5	145.8	152.4
-36.25°	70.0	78.8	87.6	96.2	104.3	112.3	120.2	127.7	135.1	142.1	148.5
-37.5°	68.3	76.9	85.4	93.6	101.6	109.4	117.0	124.4	131.6	138.3	144.5
-38.75°	66.6	75.0	83.0	91.1	98.9	106.4	113.9	121.1	127.9	134.4	140.6
-40°	64.8	73.0	80.7	88.5	96.1	103.4	110.7	117.7	124.3	130.5	136.5
-41.25°	62.9	71.0	78.4	85.9	93.2	100.4	107.4	114.2	120.5	126.6	132.4
-42.5°	61.1	68.8	76.0	83.2	90.4	97.3	104.1	110.6	116.8	122.7	128.3
-43.75°	59.2	66.6	73.7	80.5	87.5	94.3	100.8	107.0	113.0	118.7	124.1
-45°	57.4	64.4	71.3	77.9	84.6	91.2	97.4	103.4	109.2	114.7	119.9
-46.25°	55.6	62.1	68.8	75.3	81.7	88.1	94.0	99.8	105.4	110.7	115.8
-47.5°	53.6	59.9	66.4	72.6	78.7	84.9	90.6	96.1	101.5	106.7	111.6
-48.75°	51.7	57.7	63.9	70.0	75.9	81.7	87.2	92.5	97.7	102.6	107.2
-50°	49.7	55.5	61.4	67.3	73.0	78.4	83.8	88.9	93.8	98.6	102.8
-51.25°	47.6	53.3	58.8	64.6	70.1	75.2	80.4	85.3	90.0	94.5	98.5
-52.5°	45.6	51.1	56.4	61.8	67.2	72.1	76.9	81.7	86.2	90.4	94.1
-53.75°	43.5	48.8	54.0	59.1	64.2	69.0	73.5	78.0	82.4	86.3	89.8
-55°	41.4	46.6	51.5	56.3	61.2	65.8	70.2	74.4	78.6	82.3	85.6
-56.25°	39.3	44.3	49.1	53.7	58.2	62.6	66.8	70.8	74.7	78.2	81.4
-57.5°	37.4	42.0	46.6	51.1	55.2	59.4	63.5	67.3	70.9	74.2	77.2
-58.75°	35.6	39.7	44.2	48.4	52.4	56.2	60.1	63.8	67.1	70.2	73.1
-60°	33.8	37.5	41.7	45.8	49.5	53.1	56.7	60.3	63.4	66.3	69.0
-61.25°	31.9	35.5	39.2	43.1	46.7	50.1	53.4	56.7	59.7	62.5	65.0
-62.5°	30.1	33.5	36.7	40.4	43.8	47.1	50.2	53.2	56.1	58.7	61.1
-63.75°	28.2	31.5	34.6	37.7	41.0	44.1	47.1	49.8	52.4	54.9	57.2
-65°	26.3	29.4	32.4	35.2	38.1	41.1	44.0	46.5	48.8	51.1	53.3
-66.25°	24.4	27.4	30.3	32.9	35.3	38.1	40.8	43.3	45.5	47.5	49.5
-67.5°	22.5	25.4	28.1	30.6	32.9	35.1	37.7	40.0	42.1	44.0	45.8
-68.75°	20.7	23.3	25.9	28.3	30.5	32.6	34.6	36.7	38.7	40.5	42.2
-70°	19.3	21.3	23.7	25.9	28.0	30.0	31.9	33.5	35.4	37.1	38.6
-71.25°	17.9	19.6	21.5	23.6	25.6	27.5	29.2	30.7	32.1	33.6	35.1
-72.5°	16.5	18.1	19.6	21.3	23.1	24.9	26.5	27.9	29.2	30.4	31.5
-73.75°	15.1	16.6	18.0	19.2	20.7	22.3	23.8	25.2	26.4	27.5	28.4
-75°	13.7	15.1	16.4	17.5	18.6	19.8	21.2	22.4	23.6	24.6	25.4
-76.25°	12.3	13.6	14.7	15.8	16.8	17.7	18.6	19.7	20.7	21.7	22.5
-77.5°	10.9	12.0	13.1	14.1	15.0	15.9	16.6	17.3	17.9	18.8	19.5



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
-78.75°	9.4	10.5	11.5	12.3	13.2	14.0	14.7	15.3	15.9	16.4	16.7
-80°	8.4	9.0	9.8	10.6	11.4	12.1	12.7	13.3	13.8	14.3	14.6
-81.25°	7.7	8.1	8.4	8.9	9.6	10.2	10.8	11.3	11.8	12.2	12.5
-82.5°	7.1	7.4	7.6	7.8	8.0	8.3	8.8	9.3	9.7	10.1	10.4
-83.75°	6.5	6.8	6.9	7.1	7.2	7.4	7.5	7.6	7.7	8.1	8.3
-85°	5.9	6.1	6.2	6.4	6.5	6.6	6.7	6.8	6.8	6.9	6.9
-86.25°	5.2	5.4	5.5	5.7	5.8	5.9	5.9	5.9	6.0	6.0	6.0
-87.5°	4.6	4.7	4.8	4.9	5.0	5.1	5.1	5.1	5.1	5.1	5.1
-88.75°	4.0	4.1	4.1	4.2	4.3	4.4	4.3	4.3	4.3	4.3	4.2
-90°	4.4	4.5	4.6	4.8	4.9	5.0	5.2	5.4	5.5	5.7	5.9



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
90°	3.3	3.3	3.2	3.2	3.1	3.1	3.0	3.0	3.0	2.9	2.9
88.75°	7.0	7.1	7.3	7.3	7.4	7.6	7.7	7.9	8.0	8.1	8.2
87.5°	7.9	8.1	8.3	8.3	8.4	8.6	8.9	9.0	9.1	9.2	9.3
86.25°	8.9	9.1	9.4	9.3	9.4	9.7	10.0	10.1	10.2	10.2	10.3
85°	9.9	10.1	10.4	10.6	10.8	11.4	12.0	12.3	12.6	12.8	13.1
83.75°	11.9	12.5	13.1	13.3	13.5	14.2	14.9	15.2	15.5	15.8	16.0
82.5°	14.5	15.2	15.9	16.1	16.3	17.0	17.7	18.2	18.5	18.8	19.0
81.25°	17.1	17.9	18.7	18.9	19.0	19.8	20.6	21.3	21.9	22.5	23.0
80°	19.7	20.6	21.4	21.9	22.3	23.5	24.6	25.4	26.1	26.6	27.2
78.75°	22.6	23.9	25.2	25.9	26.2	27.4	28.6	29.5	30.2	30.8	31.4
77.5°	26.2	27.6	28.9	29.8	30.2	31.4	32.6	33.6	34.4	35.4	36.3
76.25°	29.7	31.3	32.7	33.7	34.2	35.4	37.1	38.5	39.6	40.7	41.7
75°	33.3	34.9	36.5	37.9	38.7	40.2	41.9	43.4	44.7	45.9	47.1
73.75°	36.9	38.9	40.9	42.7	43.5	44.9	46.7	48.4	49.8	51.2	52.5
72.5°	41.1	43.4	45.5	47.5	48.4	49.6	51.5	53.5	55.2	56.7	58.0
71.25°	45.4	47.8	50.0	52.2	53.2	54.6	56.9	59.0	60.8	62.3	63.6
70°	49.7	52.2	54.6	57.0	58.6	59.9	62.2	64.5	66.3	67.9	69.4
68.75°	54.0	56.7	59.5	62.2	64.1	65.3	67.6	70.0	72.1	74.0	75.8
67.5°	58.4	61.6	64.5	67.4	69.5	70.8	73.1	75.8	78.2	80.2	82.1
66.25°	63.2	66.5	69.6	72.5	75.1	76.7	78.9	81.7	84.2	86.4	88.5
65°	67.9	71.3	74.6	77.7	80.9	82.7	84.7	87.6	90.2	92.7	95.0
63.75°	72.7	76.2	79.7	83.2	86.5	88.7	90.5	93.5	96.5	99.1	101.6
62.5°	77.4	81.2	85.0	88.6	92.0	94.7	96.6	99.6	102.7	105.6	108.1
61.25°	82.3	86.3	90.2	94.0	97.6	100.8	102.9	105.6	108.9	112.1	114.8
60°	87.2	91.3	95.4	99.4	103.3	107.1	109.2	111.7	115.2	118.6	121.5
58.75°	92.2	96.3	100.6	104.9	109.0	113.0	115.6	117.8	121.5	125.1	128.2
57.5°	97.1	101.4	105.9	110.4	114.7	118.9	122.2	124.4	127.8	131.5	134.9
56.25°	102.0	106.6	111.2	115.9	120.4	124.8	128.7	131.1	134.2	138.0	141.7
55°	106.9	111.8	116.5	121.3	126.1	130.6	135.0	137.9	140.5	144.6	148.3
53.75°	111.9	116.9	121.7	126.8	131.7	136.5	141.1	144.7	147.3	151.1	155.0
52.5°	116.9	122.1	127.1	132.3	137.4	142.3	147.1	151.5	154.3	157.6	161.7
51.25°	121.8	127.2	132.5	137.7	143.0	148.1	153.1	157.9	161.3	164.1	168.3
50°	126.8	132.4	137.9	143.1	148.6	153.9	159.1	164.1	168.2	171.0	174.8
48.75°	131.7	137.6	143.2	148.7	154.1	159.6	165.0	170.1	175.0	178.1	181.3
47.5°	136.6	142.7	148.6	154.1	159.6	165.3	170.7	175.9	181.0	185.1	187.8
46.25°	141.5	147.8	153.8	159.5	165.1	170.9	176.4	181.8	187.1	191.7	194.7
45°	146.3	152.8	159.0	164.9	170.7	176.2	181.9	187.5	192.7	197.6	201.4
43.75°	151.1	157.8	164.1	170.2	176.1	181.6	187.4	193.1	198.3	203.4	208.1
42.5°	155.7	162.6	169.1	175.5	181.4	187.1	192.8	198.4	203.8	209.1	213.9
41.25°	160.2	167.4	174.1	180.5	186.6	192.5	198.1	203.7	209.4	214.5	219.5
40°	164.6	172.0	179.1	185.5	191.8	197.8	203.4	209.0	214.7	219.9	225.0
38.75°	168.9	176.6	183.8	190.4	196.9	202.9	208.7	214.4	219.8	225.2	230.5
37.5°	173.3	181.2	188.3	195.3	201.9	207.9	213.9	219.5	224.9	230.5	235.5
36.25°	177.6	185.5	192.8	200.1	206.6	212.8	219.0	224.5	230.0	235.4	240.5
35°	181.9	189.7	197.2	204.6	211.3	217.7	223.7	229.5	235.2	240.2	245.3



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
33.75°	186.1	193.9	201.6	208.8	215.7	222.4	228.4	234.3	239.8	244.9	250.0
32.5°	190.0	197.9	205.8	212.9	220.0	226.8	233.0	239.1	244.3	249.6	254.5
31.25°	193.7	201.9	209.7	217.0	224.2	230.9	237.4	243.4	248.8	254.2	258.7
30°	197.0	205.8	213.5	220.9	228.1	234.8	241.6	247.5	253.1	258.2	262.6
28.75°	200.1	209.4	217.2	224.8	231.9	238.7	245.4	251.3	257.2	261.9	266.4
27.5°	203.0	212.2	220.7	228.5	235.5	242.4	248.9	254.9	260.8	265.4	270.0
26.25°	205.9	215.0	223.6	232.0	239.0	246.0	252.2	258.4	263.8	268.6	273.2
25°	208.6	217.6	226.3	234.6	242.3	249.3	255.4	261.7	266.6	271.5	275.9
23.75°	211.3	220.1	229.0	237.1	245.0	252.3	258.5	264.5	269.3	274.3	278.4
22.5°	213.6	222.6	231.5	239.5	247.5	254.6	261.5	267.0	271.9	276.6	280.7
21.25°	215.8	224.9	233.7	241.7	249.8	256.7	263.6	269.4	274.4	278.7	282.8
20°	217.9	227.1	235.8	243.9	251.7	258.6	265.5	271.0	276.5	280.7	284.8
18.75°	219.8	229.2	237.7	245.9	253.5	260.4	266.9	272.5	277.8	282.2	286.6
17.5°	221.5	231.0	239.5	247.8	255.1	262.1	268.3	273.9	278.9	283.4	287.5
16.25°	223.1	232.7	241.1	249.5	256.7	263.7	269.6	275.2	280.0	284.4	288.2
15°	224.7	234.1	242.5	250.9	258.0	265.1	270.8	276.4	280.9	285.3	288.8
13.75°	226.1	235.4	243.9	252.0	259.2	266.1	271.8	277.4	281.8	286.2	289.4
12.5°	227.4	236.6	245.1	253.1	260.2	267.0	272.7	278.1	282.5	286.7	289.8
11.25°	228.6	237.7	246.2	254.0	261.2	267.7	273.5	278.7	283.1	287.1	290.2
10°	229.7	238.7	247.2	254.9	262.0	268.4	274.2	279.3	283.7	287.5	290.6
8.75°	229.9	239.2	248.0	255.6	262.8	269.0	274.8	279.8	284.2	287.8	291.0
7.5°	229.8	239.0	247.8	255.6	263.1	269.5	275.4	280.2	284.5	288.1	291.3
6.25°	229.6	238.6	247.4	255.1	262.6	268.9	275.0	279.9	284.6	288.3	291.5
5°	229.2	238.1	246.9	254.5	262.0	268.2	274.2	279.0	283.7	287.3	290.7
3.75°	228.7	237.6	246.4	253.9	261.3	267.4	273.4	278.1	282.7	286.2	289.6
2.5°	228.1	236.9	245.6	253.1	260.5	266.5	272.4	277.0	281.6	285.1	288.5
1.25°	227.4	236.1	244.8	252.2	259.6	265.5	271.3	275.9	280.5	283.9	287.3
0°	226.6	235.3	243.9	251.3	258.6	264.4	270.2	274.8	279.3	282.7	286.0
-1.25°	225.7	234.4	243.0	250.3	257.6	263.4	269.2	273.8	278.3	281.7	285.1
-2.5°	224.8	233.4	241.9	249.2	256.5	262.3	268.1	272.7	277.2	280.7	284.1
-3.75°	223.7	232.3	240.8	248.0	255.2	261.1	266.9	271.5	276.1	279.6	283.0
-5°	222.5	231.1	239.5	246.8	253.9	259.8	265.6	270.3	274.8	278.4	281.9
-6.25°	221.3	229.8	238.2	245.4	252.5	258.5	264.3	269.0	273.5	277.2	280.6
-7.5°	219.9	228.4	236.7	244.0	251.0	257.0	262.8	267.6	272.1	275.8	279.2
-8.75°	218.4	226.9	235.1	242.4	249.3	255.4	261.1	266.1	270.5	274.3	277.7
-10°	216.8	225.3	233.4	240.7	247.4	253.6	259.4	264.5	268.9	272.8	276.2
-11.25°	215.0	223.5	231.5	238.9	245.5	251.7	257.5	262.8	267.1	271.2	274.5
-12.5°	213.1	221.6	229.6	237.1	243.6	249.8	255.6	261.1	265.3	269.5	272.7
-13.75°	211.2	219.6	227.5	235.2	241.5	247.7	253.5	259.3	263.3	267.3	270.4
-15°	209.1	217.5	225.4	233.2	239.4	245.5	251.1	256.7	260.8	264.7	268.0
-16.25°	207.0	215.3	223.1	230.9	237.1	242.9	248.5	253.9	258.2	262.1	265.6
-17.5°	204.8	212.9	220.7	228.2	234.4	240.2	245.7	251.0	255.6	259.4	263.1
-18.75°	202.6	210.5	217.9	225.2	231.6	237.3	242.9	248.0	252.9	256.6	260.4
-20°	200.2	207.7	215.0	222.0	228.6	234.3	239.9	245.0	250.0	253.6	256.9
-21.25°	197.4	204.7	212.0	218.8	225.6	231.2	236.8	241.9	246.4	250.1	253.4



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
-22.5°	194.5	201.7	208.9	215.6	222.2	227.9	233.5	238.3	242.6	246.5	249.7
-23.75°	191.5	198.6	205.6	212.3	218.7	224.5	229.6	234.5	238.7	242.9	246.0
-25°	188.2	195.4	202.3	208.9	215.1	220.7	225.7	230.6	234.7	238.8	242.2
-26.25°	184.9	192.1	198.8	205.4	211.1	216.8	221.7	226.4	230.7	234.6	238.2
-27.5°	181.5	188.7	195.3	201.5	207.1	212.6	217.6	222.2	226.6	230.3	233.8
-28.75°	178.0	185.3	191.4	197.4	203.0	208.4	213.5	217.9	222.2	225.7	229.2
-30°	174.4	181.3	187.5	193.3	198.9	204.0	209.1	213.5	217.4	221.1	224.4
-31.25°	170.8	177.3	183.4	189.0	194.6	199.6	204.6	208.8	212.5	216.3	219.5
-32.5°	166.9	173.2	179.3	184.8	190.1	195.2	199.6	203.9	207.5	211.2	214.6
-33.75°	162.9	169.0	174.9	180.4	185.6	190.5	194.6	198.7	202.5	205.9	209.4
-35°	158.8	164.8	170.5	176.0	181.0	185.4	189.6	193.5	197.2	200.6	203.7
-36.25°	154.7	160.6	166.1	171.4	176.0	180.3	184.5	188.2	191.8	195.0	197.9
-37.5°	150.5	156.3	161.6	166.6	171.0	175.1	179.1	182.8	186.2	189.1	191.9
-38.75°	146.3	151.9	157.1	161.6	165.8	169.8	173.6	177.4	180.0	182.6	185.9
-40°	142.1	147.5	152.4	156.5	160.6	164.5	168.1	171.3	173.4	175.8	179.0
-41.25°	137.9	143.0	147.4	151.4	155.3	159.0	162.5	164.5	166.4	168.7	171.5
-42.5°	133.6	138.4	142.5	146.3	149.9	153.4	156.2	157.6	159.2	161.2	163.7
-43.75°	129.3	133.6	137.5	141.1	144.5	147.9	149.5	150.5	151.9	153.5	155.4
-45°	124.8	128.8	132.5	136.0	139.2	141.8	142.9	143.5	144.3	145.7	146.8
-46.25°	120.2	124.1	127.6	130.8	133.8	135.4	136.3	136.8	136.8	137.7	138.7
-47.5°	115.7	119.4	122.7	125.7	128.3	129.3	129.9	130.2	130.1	130.0	131.0
-48.75°	111.1	114.7	117.8	120.6	122.5	123.4	123.7	123.8	123.5	123.7	123.6
-50°	106.6	110.0	113.0	115.7	116.8	117.5	117.8	117.5	117.4	117.5	117.2
-51.25°	102.1	105.4	108.3	110.4	111.3	111.8	111.9	111.6	111.5	111.5	111.1
-52.5°	97.6	100.7	103.5	105.1	105.8	106.2	106.2	105.9	105.9	105.6	105.2
-53.75°	93.1	96.1	98.8	99.9	100.5	100.7	100.6	100.5	100.5	100.1	99.4
-55°	88.7	91.5	93.7	94.7	95.2	95.4	95.2	95.2	95.1	94.6	93.9
-56.25°	84.3	87.0	88.7	89.6	90.0	90.1	90.0	90.1	89.8	89.3	88.5
-57.5°	80.0	82.5	83.8	84.6	84.9	84.9	84.9	85.0	84.7	84.1	83.2
-58.75°	75.7	78.0	78.9	79.6	80.0	79.9	80.0	80.0	79.7	79.1	78.3
-60°	71.5	73.4	74.3	74.8	75.1	75.0	75.3	75.2	74.8	74.2	73.4
-61.25°	67.3	68.9	69.7	70.2	70.3	70.4	70.6	70.5	70.1	69.5	68.7
-62.5°	63.2	64.4	65.2	65.6	65.7	65.8	66.0	65.9	65.5	64.9	64.2
-63.75°	59.2	60.1	60.8	61.2	61.2	61.5	61.6	61.4	61.0	60.5	59.8
-65°	55.1	56.0	56.5	56.8	56.8	57.2	57.3	57.1	56.7	56.2	55.5
-66.25°	51.0	51.9	52.4	52.6	52.6	53.0	53.1	52.9	52.5	52.0	51.4
-67.5°	47.0	47.8	48.4	48.6	48.7	48.9	48.9	48.8	48.4	48.0	47.3
-68.75°	43.2	43.9	44.4	44.6	44.9	45.0	45.0	44.8	44.4	44.0	43.4
-70°	39.6	40.2	40.5	40.7	41.0	41.2	41.2	41.0	40.6	40.1	39.5
-71.25°	35.9	36.5	36.9	37.1	37.3	37.4	37.4	37.3	37.0	36.6	36.0
-72.5°	32.3	32.9	33.3	33.5	33.8	33.9	33.8	33.6	33.5	33.1	32.6
-73.75°	28.9	29.4	29.8	30.0	30.3	30.4	30.4	30.2	30.0	29.7	29.3
-75°	25.9	26.2	26.4	26.6	26.9	27.0	27.0	26.9	26.8	26.6	26.2
-76.25°	22.9	23.2	23.4	23.5	23.7	23.7	23.8	23.7	23.7	23.5	23.2
-77.5°	20.0	20.3	20.5	20.7	20.8	20.8	20.8	20.7	20.6	20.5	20.3



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
-78.75°	17.1	17.4	17.7	17.9	18.0	18.1	18.0	18.0	17.9	17.8	17.6
-80°	14.7	14.8	14.8	15.0	15.2	15.3	15.3	15.4	15.3	15.3	15.1
-81.25°	12.7	12.8	12.8	12.8	12.8	12.8	12.7	12.7	12.8	12.7	12.7
-82.5°	10.6	10.7	10.8	10.8	10.8	10.8	10.7	10.7	10.6	10.5	10.4
-83.75°	8.5	8.7	8.8	8.8	8.9	8.8	8.8	8.8	8.8	8.7	8.7
-85°	6.9	6.8	6.8	6.9	6.9	6.9	6.9	6.9	7.0	7.0	6.9
-86.25°	6.0	5.9	5.9	5.8	5.7	5.6	5.5	5.5	5.4	5.4	5.3
-87.5°	5.1	5.0	5.0	4.9	4.8	4.8	4.7	4.6	4.6	4.6	4.5
-88.75°	4.2	4.1	4.1	4.0	4.0	3.9	3.8	3.8	3.8	3.7	3.7
-90°	6.0	6.2	6.3	6.3	6.4	6.5	6.6	6.8	6.9	7.1	7.2



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
90°	2.8	2.7	2.6	2.5	2.5	2.4	2.4	2.3	2.2	2.2	2.1
88.75°	8.4	8.5	8.7	8.8	8.9	9.0	9.1	9.2	9.2	9.3	9.3
87.5°	9.5	9.7	9.9	10.2	10.3	10.4	10.4	10.5	10.6	10.6	10.7
86.25°	10.6	11.0	11.4	11.8	12.0	12.2	12.4	12.6	12.7	12.9	13.0
85°	13.5	14.0	14.5	15.0	15.2	15.4	15.6	15.8	16.0	16.2	16.4
83.75°	16.6	17.1	17.6	18.1	18.4	18.6	18.8	19.0	19.2	19.5	19.7
82.5°	19.6	20.2	20.9	21.6	22.1	22.5	22.9	23.3	23.7	24.1	24.5
81.25°	23.7	24.5	25.2	26.0	26.5	27.0	27.5	27.9	28.4	28.8	29.2
80°	27.9	28.7	29.5	30.3	30.9	31.5	32.0	32.7	33.3	33.9	34.5
78.75°	32.1	33.1	34.2	35.2	36.1	36.9	37.6	38.3	39.0	39.6	40.2
77.5°	37.4	38.5	39.6	40.7	41.6	42.4	43.2	44.0	44.7	45.4	46.0
76.25°	42.8	44.0	45.1	46.1	47.1	48.1	49.1	50.0	50.8	51.7	52.5
75°	48.2	49.5	50.8	52.1	53.4	54.4	55.4	56.3	57.1	58.0	58.9
73.75°	53.7	55.2	56.7	58.2	59.8	60.8	61.8	62.7	63.5	64.6	65.6
72.5°	59.2	60.9	62.6	64.4	66.1	67.4	68.4	69.4	70.2	71.4	72.5
71.25°	64.8	66.5	68.7	70.8	72.7	74.0	75.1	76.1	77.0	78.2	79.4
70°	71.0	73.0	75.2	77.3	79.2	80.7	81.9	83.0	84.0	85.3	86.7
68.75°	77.5	79.5	81.7	83.9	85.9	87.7	89.0	90.2	91.2	92.5	94.0
67.5°	84.0	86.0	88.3	90.6	92.8	94.8	96.2	97.4	98.5	99.7	101.4
66.25°	90.6	92.5	94.9	97.4	99.7	101.9	103.4	104.8	106.1	107.3	109.1
65°	97.2	99.1	101.6	104.1	106.6	109.1	110.9	112.4	113.8	115.1	116.8
63.75°	103.8	105.8	108.2	111.0	113.7	116.3	118.4	120.0	121.5	122.9	124.6
62.5°	110.5	112.7	115.0	117.9	120.8	123.5	125.8	127.5	129.1	130.6	132.3
61.25°	117.3	119.6	121.7	124.8	127.8	130.5	133.1	134.9	136.6	138.3	140.1
60°	124.1	126.5	128.8	131.7	134.7	137.6	140.1	142.3	144.3	146.2	148.1
58.75°	130.9	133.5	136.0	138.7	141.8	144.6	147.4	149.9	152.1	154.2	156.1
57.5°	137.9	140.6	143.2	145.7	148.8	151.9	154.8	157.5	159.9	162.0	163.8
56.25°	144.8	147.7	150.4	152.9	156.0	159.1	162.2	165.0	167.4	169.5	171.4
55°	151.7	154.7	157.6	160.2	163.1	166.4	169.5	172.4	175.0	177.1	179.1
53.75°	158.6	161.8	164.8	167.5	170.1	173.5	176.7	179.8	182.6	184.8	187.0
52.5°	165.5	168.9	172.0	174.8	177.4	180.6	184.0	187.1	190.1	192.6	194.8
51.25°	172.3	176.0	179.1	182.0	184.8	187.7	191.1	194.4	197.5	200.3	202.7
50°	179.0	182.9	186.1	189.2	192.1	194.8	198.2	201.6	204.9	208.0	210.4
48.75°	185.5	189.5	193.1	196.3	199.2	202.1	205.3	208.7	212.0	215.3	218.1
47.5°	191.8	196.1	199.9	203.1	206.2	209.3	212.1	215.6	219.1	222.5	225.5
46.25°	198.1	202.4	206.3	209.8	213.1	216.0	219.0	222.4	225.9	229.0	232.2
45°	204.5	208.4	212.5	216.4	219.5	222.6	225.8	228.7	231.9	235.2	238.6
43.75°	211.1	214.4	218.7	222.4	225.8	229.1	232.1	234.6	237.7	241.2	244.2
42.5°	217.7	220.6	224.4	228.3	232.0	235.2	238.0	240.7	243.2	246.4	249.5
41.25°	224.3	227.2	230.2	234.2	237.8	240.9	243.9	246.6	248.8	251.5	254.8
40°	229.9	233.7	236.5	240.0	243.4	246.7	249.7	252.2	254.5	256.7	259.6
38.75°	235.2	239.9	243.0	245.5	249.1	252.4	255.1	257.8	260.2	262.1	264.4
37.5°	240.4	245.3	249.1	251.7	254.7	257.7	260.6	263.4	265.4	267.4	269.5
36.25°	245.5	250.1	254.4	257.8	260.1	262.9	266.0	268.3	270.5	272.6	274.4
35°	250.3	254.8	259.2	263.2	265.6	268.1	270.8	273.1	275.4	277.3	279.1



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
33.75°	254.7	259.3	263.8	267.3	270.7	273.2	275.4	277.8	279.9	281.7	283.5
32.5°	259.0	263.7	267.7	271.3	275.0	277.9	280.1	282.2	284.0	285.9	287.5
31.25°	263.2	267.7	271.4	275.2	278.6	282.0	284.9	286.2	288.0	289.8	290.9
30°	267.3	271.3	275.1	278.8	282.0	285.5	288.5	290.3	292.0	293.1	294.3
28.75°	270.8	274.7	278.7	281.9	285.2	288.4	291.1	293.9	295.2	296.4	297.7
27.5°	274.0	278.0	281.7	284.8	288.1	290.8	293.6	296.1	298.2	299.5	299.9
26.25°	277.1	281.1	284.3	287.4	290.5	293.1	295.9	297.9	299.9	301.7	301.8
25°	280.0	283.8	286.7	289.9	292.5	295.2	297.6	299.4	301.5	302.4	303.4
23.75°	282.6	286.1	289.0	291.9	294.5	297.1	299.0	300.8	302.1	302.9	303.9
22.5°	284.9	288.0	291.2	293.7	296.2	298.4	300.2	302.0	302.5	303.2	303.7
21.25°	286.6	289.7	292.8	295.3	297.8	299.6	301.3	302.4	302.9	303.3	303.3
20°	288.1	291.2	294.0	296.5	298.9	300.6	302.3	302.8	303.3	303.3	302.7
18.75°	289.6	292.7	295.1	297.5	299.5	301.3	302.8	303.2	303.6	303.1	302.5
17.5°	290.8	293.9	296.0	298.4	300.1	301.8	302.8	303.5	303.6	302.8	302.1
16.25°	291.5	294.5	296.9	298.9	300.5	302.1	302.7	303.3	303.1	302.5	301.8
15°	292.1	294.8	297.2	299.2	300.8	302.0	302.5	302.9	302.3	301.7	301.2
13.75°	292.6	295.0	297.4	299.2	300.8	301.8	302.3	302.2	301.5	300.9	300.4
12.5°	292.9	295.2	297.6	299.2	300.8	301.4	302.0	301.5	300.8	300.1	299.5
11.25°	293.1	295.4	297.6	299.1	300.6	301.1	301.6	301.0	300.2	299.4	298.7
10°	293.4	295.7	297.7	299.1	300.3	300.8	301.1	300.4	299.7	299.0	298.2
8.75°	293.6	295.9	297.8	299.2	300.1	300.5	300.6	299.9	299.3	298.5	297.8
7.5°	293.9	296.2	297.9	299.3	300.1	300.5	300.4	299.7	299.0	298.2	297.4
6.25°	294.0	296.4	297.9	299.3	300.0	300.4	300.2	299.6	298.9	298.1	297.3
5°	293.4	296.0	297.7	299.3	299.9	300.4	300.1	299.5	298.8	298.0	297.3
3.75°	292.3	294.8	296.5	298.1	298.8	299.5	299.4	299.0	298.5	297.9	297.4
2.5°	291.1	293.6	295.3	296.9	297.6	298.3	298.0	297.7	297.2	296.7	296.3
1.25°	289.8	292.3	294.0	295.7	296.4	297.0	296.7	296.4	296.0	295.5	295.2
0°	288.5	291.0	292.7	294.4	295.1	295.8	295.4	295.1	294.8	294.4	294.1
-1.25°	287.6	290.1	291.9	293.6	294.4	295.2	294.9	294.6	294.3	294.0	293.8
-2.5°	286.6	289.2	291.0	292.8	293.6	294.5	294.3	294.0	293.9	293.7	293.5
-3.75°	285.6	288.2	290.0	291.9	292.9	293.8	293.8	293.5	293.4	293.3	293.2
-5°	284.5	287.1	289.1	291.0	292.1	293.0	293.1	292.8	292.6	292.5	292.4
-6.25°	283.4	285.9	287.9	289.8	291.0	292.0	292.2	291.9	291.8	291.7	291.6
-7.5°	282.0	284.6	286.8	288.7	290.0	290.9	291.2	291.0	290.9	290.9	290.7
-8.75°	280.7	283.2	285.5	287.4	288.9	289.8	290.3	290.1	290.0	289.9	289.8
-10°	279.2	281.8	284.2	286.2	287.7	288.5	289.1	289.0	288.9	288.9	288.9
-11.25°	277.7	280.2	282.6	284.4	286.1	286.9	287.7	287.8	287.7	287.8	287.9
-12.5°	275.8	278.2	280.7	282.5	284.3	285.2	286.1	286.7	286.5	286.3	286.0
-13.75°	273.6	276.1	278.6	280.5	282.3	283.5	284.4	285.0	284.7	284.4	284.1
-15°	271.2	273.9	276.4	278.5	280.2	281.4	282.1	282.9	282.7	282.5	282.2
-16.25°	268.7	271.6	274.1	276.1	277.5	279.0	279.7	280.6	280.7	280.5	280.4
-17.5°	266.2	269.0	271.1	273.3	274.8	276.2	277.2	278.1	278.6	278.6	278.6
-18.75°	263.1	265.9	268.1	270.2	271.9	273.4	274.6	275.5	276.3	276.5	276.6
-20°	259.8	262.6	265.0	267.0	268.9	270.4	271.9	272.8	273.6	274.2	274.4
-21.25°	256.4	259.1	261.8	263.8	265.7	267.2	268.8	270.0	270.8	271.4	271.0



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
-22.5°	252.9	255.5	258.3	260.3	262.2	264.0	265.5	267.2	267.5	267.7	267.6
-23.75°	249.1	251.8	254.3	256.7	258.5	260.6	262.1	263.3	263.8	263.8	264.0
-25°	245.1	247.9	250.3	252.8	254.7	256.7	258.1	259.0	259.9	259.9	260.0
-26.25°	240.9	243.8	246.2	248.6	250.8	252.3	253.7	254.6	255.4	255.8	256.4
-27.5°	236.7	239.4	242.0	244.3	246.3	247.7	249.0	250.2	250.8	252.0	252.8
-28.75°	232.3	234.9	237.6	239.6	241.4	243.0	244.2	245.5	246.6	247.8	249.0
-30°	227.7	230.3	232.7	234.8	236.4	238.0	239.3	240.8	242.4	243.4	244.5
-31.25°	222.7	225.5	227.6	229.7	231.4	232.9	234.6	236.1	237.6	238.9	239.7
-32.5°	217.5	220.2	222.4	224.4	226.4	227.8	229.6	231.5	232.8	234.1	234.5
-33.75°	212.1	214.6	217.1	219.0	220.9	222.7	224.4	226.3	228.0	228.4	228.9
-35°	206.6	209.0	211.3	213.4	215.2	217.2	218.9	220.7	222.2	222.6	222.9
-36.25°	200.7	203.2	205.4	207.5	209.4	211.1	213.1	214.7	215.5	216.3	216.7
-37.5°	194.6	197.3	199.2	200.9	203.3	204.9	206.7	207.9	208.6	209.3	210.0
-38.75°	188.4	190.9	192.5	193.9	196.0	198.6	199.4	199.9	201.5	202.1	202.1
-40°	182.1	183.4	184.5	186.6	188.4	190.7	191.1	191.3	192.4	194.6	192.9
-41.25°	174.9	174.9	175.6	177.8	180.3	180.4	180.7	181.9	182.6	182.6	182.2
-42.5°	165.4	165.7	166.0	167.6	170.2	169.4	169.1	170.0	171.8	169.9	168.8
-43.75°	156.1	156.2	155.6	156.6	157.9	157.6	156.5	156.8	157.6	156.4	154.7
-45°	147.1	147.1	146.3	145.1	146.4	146.2	144.4	142.9	144.4	143.7	140.8
-46.25°	138.7	138.1	137.3	136.7	135.7	135.5	133.9	132.7	132.3	132.1	129.9
-47.5°	131.0	130.0	128.8	128.6	127.6	125.8	124.3	124.3	123.6	122.0	120.4
-48.75°	123.6	122.6	121.6	120.9	120.0	118.3	116.8	116.3	115.7	114.3	112.3
-50°	116.6	115.7	115.1	114.0	112.7	111.0	110.3	109.3	108.2	107.0	105.1
-51.25°	110.4	109.4	108.7	107.6	106.1	104.6	103.9	102.9	101.7	100.0	98.2
-52.5°	104.3	103.5	102.5	101.3	99.8	98.4	97.5	96.6	95.4	93.2	91.0
-53.75°	98.5	97.6	96.5	95.2	93.7	91.9	90.6	89.6	88.9	86.1	83.5
-55°	92.9	91.8	90.6	89.3	87.5	85.2	83.4	82.0	80.6	78.5	75.8
-56.25°	87.5	86.3	84.8	83.4	81.4	79.1	76.5	74.1	72.6	70.7	68.2
-57.5°	82.3	81.1	79.5	77.7	75.5	73.2	70.6	67.9	65.5	63.2	61.0
-58.75°	77.2	76.0	74.5	72.5	70.1	67.4	64.9	62.5	60.2	57.6	54.6
-60°	72.4	71.1	69.5	67.6	65.3	62.6	59.7	57.2	55.2	52.7	50.0
-61.25°	67.7	66.4	64.9	62.8	60.5	58.0	55.2	53.1	50.7	48.1	45.5
-62.5°	63.2	61.9	60.4	58.4	56.1	53.6	51.1	49.1	46.9	44.5	41.8
-63.75°	58.8	57.6	56.0	54.1	52.0	49.6	47.4	45.4	43.3	41.0	38.6
-65°	54.6	53.4	51.9	50.0	48.0	45.7	43.9	42.0	39.9	37.7	35.5
-66.25°	50.5	49.4	47.9	46.2	44.3	42.1	40.5	38.7	36.8	34.7	32.6
-67.5°	46.5	45.5	44.1	42.5	40.7	38.8	37.3	35.6	33.8	31.8	29.9
-68.75°	42.6	41.6	40.4	38.9	37.2	35.6	34.2	32.7	31.0	29.2	27.4
-70°	38.8	37.9	36.8	35.4	33.9	32.5	31.2	29.8	28.3	26.7	25.0
-71.25°	35.1	34.2	33.3	32.1	30.8	29.6	28.5	27.2	25.7	24.3	22.7
-72.5°	31.9	31.1	30.1	29.0	27.7	26.8	25.8	24.6	23.3	22.0	20.6
-73.75°	28.7	28.0	27.1	26.1	25.0	24.1	23.2	22.1	21.0	19.8	18.5
-75°	25.7	25.0	24.2	23.2	22.3	21.5	20.7	19.7	18.7	17.7	16.5
-76.25°	22.8	22.1	21.4	20.5	19.7	19.0	18.2	17.4	16.5	15.6	14.6
-77.5°	19.9	19.4	18.7	18.0	17.3	16.7	16.0	15.2	14.4	13.6	12.7



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
-78.75°	17.2	16.7	16.1	15.4	14.9	14.5	13.9	13.3	12.6	11.9	11.1
-80°	14.8	14.3	13.8	13.2	12.7	12.3	11.9	11.4	10.9	10.2	9.6
-81.25°	12.4	12.1	11.6	11.2	10.8	10.5	10.1	9.7	9.3	8.7	8.1
-82.5°	10.1	9.8	9.5	9.2	8.9	8.7	8.4	8.1	7.7	7.3	6.8
-83.75°	8.4	8.1	7.8	7.5	7.3	7.1	6.8	6.6	6.3	5.9	5.6
-85°	6.7	6.5	6.3	6.0	5.9	5.7	5.5	5.3	5.1	4.8	4.6
-86.25°	5.1	4.9	4.8	4.6	4.5	4.3	4.2	4.1	3.9	3.8	3.6
-87.5°	4.3	4.2	4.0	3.8	3.7	3.5	3.4	3.3	3.2	3.0	2.9
-88.75°	3.6	3.4	3.3	3.1	3.1	3.0	2.9	2.8	2.7	2.6	2.5
-90°	7.3	7.4	7.4	7.5	7.6	7.7	7.8	7.9	7.9	8.0	8.0



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
90°	2.0	1.9	1.8	1.7	1.6	1.5	1.5	1.4	1.3	1.3	1.2
88.75°	9.4	9.5	9.6	9.7	9.9	9.9	9.9	9.9	9.9	10.0	10.0
87.5°	10.7	10.9	11.0	11.2	11.3	11.3	11.3	11.2	11.1	11.3	11.4
86.25°	13.2	13.4	13.7	14.0	14.2	14.2	14.2	14.2	14.2	14.3	14.5
85°	16.5	16.8	17.1	17.4	17.7	17.7	17.7	17.7	17.7	17.8	18.0
83.75°	20.0	20.5	20.9	21.3	21.7	21.8	21.9	22.0	22.0	22.2	22.5
82.5°	24.8	25.3	25.7	26.2	26.6	26.7	26.8	26.9	27.0	27.2	27.5
81.25°	29.6	30.0	30.5	31.0	31.5	31.8	32.0	32.2	32.3	32.6	33.0
80°	35.0	35.6	36.3	36.9	37.5	37.8	38.0	38.1	38.3	38.6	39.0
78.75°	40.8	41.4	42.1	42.8	43.4	43.8	44.0	44.2	44.3	44.7	45.2
77.5°	46.7	47.5	48.3	49.1	49.8	50.3	50.6	50.9	51.1	51.5	51.9
76.25°	53.2	54.0	54.8	55.7	56.4	57.0	57.3	57.6	57.8	58.2	58.8
75°	59.7	60.5	61.4	62.4	63.3	64.0	64.4	64.8	65.1	65.5	66.2
73.75°	66.5	67.5	68.5	69.5	70.5	71.3	71.7	72.1	72.4	72.8	73.7
72.5°	73.5	74.5	75.7	76.7	77.7	78.6	79.2	79.7	80.0	80.5	81.3
71.25°	80.6	81.8	83.0	84.2	85.3	86.3	86.9	87.4	87.8	88.1	88.9
70°	88.0	89.3	90.6	91.8	92.9	94.0	94.7	95.3	95.9	96.4	97.2
68.75°	95.4	96.8	98.2	99.5	100.8	101.9	102.8	103.6	104.3	104.9	105.7
67.5°	103.0	104.5	105.9	107.3	108.7	109.9	111.0	111.9	112.7	113.4	114.2
66.25°	110.7	112.2	113.7	115.2	116.7	118.1	119.3	120.3	121.2	122.0	122.8
65°	118.5	120.3	122.0	123.6	125.1	126.4	127.6	128.6	129.6	130.5	131.4
63.75°	126.5	128.5	130.4	132.1	133.5	134.8	136.0	137.2	138.3	139.3	140.2
62.5°	134.5	136.6	138.6	140.4	141.9	143.2	144.4	145.7	146.9	148.0	148.9
61.25°	142.4	144.6	146.7	148.6	150.2	151.6	152.9	154.2	155.5	156.7	157.8
60°	150.4	152.7	154.9	156.9	158.6	160.1	161.5	162.8	164.2	165.5	166.6
58.75°	158.3	160.6	162.9	165.1	167.0	168.6	170.1	171.4	172.8	174.1	175.3
57.5°	165.7	168.2	170.7	173.3	175.4	177.0	178.4	179.7	181.2	182.7	184.0
56.25°	173.1	175.7	178.5	181.1	183.5	185.1	186.7	188.1	189.5	191.0	192.4
55°	180.9	183.4	186.2	188.9	191.5	193.3	194.9	196.3	197.6	199.3	200.7
53.75°	188.9	191.1	194.0	196.7	199.3	201.4	203.0	204.5	205.8	207.4	209.0
52.5°	196.9	198.8	201.7	204.5	207.2	209.5	211.2	212.6	213.9	215.5	217.2
51.25°	204.8	206.8	209.3	212.2	214.9	217.4	219.2	220.7	222.1	223.6	225.2
50°	212.7	214.8	216.8	219.7	222.5	225.1	227.2	228.7	229.9	231.1	232.9
48.75°	220.4	222.4	224.3	227.1	230.0	232.5	234.7	236.2	237.5	238.8	240.5
47.5°	227.7	229.8	231.9	234.2	236.8	239.4	241.9	243.6	244.9	246.0	247.4
46.25°	234.9	237.1	238.8	240.6	243.4	246.2	248.5	250.4	251.7	252.9	254.2
45°	241.5	243.4	245.3	247.4	249.6	251.9	254.4	256.8	258.3	259.4	260.2
43.75°	247.1	249.4	251.6	253.2	254.8	257.4	260.0	262.4	263.8	264.8	265.8
42.5°	252.5	255.1	256.9	258.6	260.2	262.4	264.8	267.1	268.9	270.1	271.0
41.25°	257.6	260.2	262.2	264.0	265.4	267.0	269.4	271.7	273.7	274.8	275.6
40°	262.5	265.1	267.3	268.9	270.5	271.9	273.9	276.0	277.9	279.4	280.2
38.75°	267.3	269.8	271.9	273.8	275.4	276.7	278.0	280.1	282.1	283.6	284.0
37.5°	271.9	274.3	276.5	278.4	279.9	281.2	282.5	283.9	285.4	286.9	287.9
36.25°	276.3	278.7	280.8	282.6	284.3	285.7	286.2	286.9	288.5	290.1	291.1
35°	280.9	282.7	284.6	286.5	288.3	288.9	289.5	290.3	291.2	292.0	292.8



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
33.75°	285.1	286.4	288.2	289.9	291.0	292.0	292.7	292.8	292.9	293.7	294.4
32.5°	288.8	290.2	291.3	292.4	293.5	294.5	294.6	294.6	294.7	295.1	295.7
31.25°	292.3	293.4	293.9	294.8	295.8	296.0	296.2	296.3	296.2	296.3	297.0
30°	295.4	295.8	296.4	297.0	297.1	297.2	297.4	297.4	297.4	297.7	297.7
28.75°	297.7	298.1	298.6	298.4	298.2	298.3	298.2	298.3	298.4	298.3	298.2
27.5°	300.0	300.2	299.9	299.5	299.3	299.0	298.9	299.0	298.8	298.7	298.7
26.25°	302.0	301.7	300.9	300.5	299.9	299.6	299.5	299.3	299.2	298.9	298.5
25°	303.5	302.9	302.1	301.0	300.4	300.0	299.8	299.7	299.4	298.7	298.2
23.75°	304.1	303.5	303.0	301.9	300.7	300.1	299.9	299.8	299.3	298.6	297.8
22.5°	303.6	303.7	303.3	302.9	301.6	300.1	299.7	299.3	299.0	298.3	297.1
21.25°	303.1	303.1	303.0	302.8	302.4	300.9	299.3	298.7	298.3	297.5	296.3
20°	302.5	302.4	302.4	302.1	301.8	301.5	299.9	298.3	297.2	296.2	295.3
18.75°	302.0	301.8	301.5	301.2	300.9	300.4	300.1	298.4	296.3	295.0	293.7
17.5°	301.6	301.2	300.6	300.2	299.8	299.3	298.6	297.9	296.3	293.9	292.0
16.25°	301.2	300.6	299.9	299.2	298.7	298.2	297.2	296.2	295.2	293.8	291.2
15°	300.8	300.0	299.3	298.6	297.8	296.9	295.8	294.7	293.3	292.0	291.6
13.75°	299.9	299.3	298.7	297.9	297.1	295.9	294.5	293.2	291.8	290.4	289.3
12.5°	299.0	298.4	297.8	297.1	296.3	294.9	293.5	292.0	290.5	289.2	288.0
11.25°	298.0	297.5	296.8	296.1	295.1	293.9	292.5	291.0	289.5	288.2	286.9
10°	297.4	296.7	295.9	295.2	293.9	292.6	291.3	289.9	288.6	287.4	286.2
8.75°	297.0	296.2	295.4	294.4	292.9	291.4	289.9	288.5	287.4	286.4	285.5
7.5°	296.6	295.9	295.1	294.0	292.5	290.9	289.0	287.3	286.0	284.9	284.0
6.25°	296.5	295.7	294.9	293.7	292.3	290.6	288.6	286.9	285.4	284.0	282.7
5°	296.6	295.8	295.0	293.7	292.3	290.4	288.4	286.7	285.2	283.8	282.4
3.75°	296.7	295.9	295.1	293.8	292.4	290.5	288.4	286.7	285.2	283.7	282.2
2.5°	295.9	295.3	294.6	293.4	292.2	290.3	288.4	286.9	285.3	283.8	282.3
1.25°	294.8	294.2	293.6	292.4	291.2	289.3	287.4	285.9	284.4	283.0	281.7
0°	293.8	293.2	292.6	291.4	290.2	288.4	286.5	284.9	283.3	282.1	280.8
-1.25°	293.6	293.0	292.5	291.3	290.1	288.3	286.4	284.9	283.4	282.1	280.9
-2.5°	293.3	292.8	292.3	291.2	290.0	288.3	286.5	284.9	283.4	281.9	280.4
-3.75°	293.0	292.4	291.9	290.7	289.4	287.5	285.5	283.8	282.1	280.5	278.8
-5°	292.2	291.6	291.0	289.9	288.5	286.6	284.5	282.7	281.1	279.6	278.2
-6.25°	291.3	290.9	290.2	289.1	287.8	286.1	284.1	282.3	280.7	279.2	277.9
-7.5°	290.5	290.1	289.5	288.6	287.3	285.8	283.8	281.9	280.0	278.1	276.3
-8.75°	289.5	289.2	288.7	288.1	286.8	285.3	283.0	280.7	278.7	276.7	274.8
-10°	288.6	288.3	287.8	287.0	285.5	283.8	281.7	279.4	277.5	275.7	274.1
-11.25°	287.4	286.9	286.2	285.4	284.1	282.4	280.7	278.7	276.8	275.0	273.2
-12.5°	285.6	285.2	284.7	283.8	282.9	281.5	280.2	278.2	276.2	273.7	271.2
-13.75°	283.7	283.4	283.2	282.5	281.8	280.7	279.5	277.3	274.4	271.7	269.2
-15°	281.8	281.7	281.6	281.1	280.5	279.6	277.4	275.2	272.4	270.1	268.6
-16.25°	280.2	280.0	279.9	279.7	278.5	277.0	275.0	272.8	271.1	269.6	268.1
-17.5°	278.4	278.4	278.0	277.0	275.7	274.3	272.6	271.4	270.4	269.0	266.8
-18.75°	276.5	275.9	275.0	274.0	273.0	271.7	271.2	270.4	269.3	267.4	264.7
-20°	273.7	272.8	272.0	271.0	270.4	270.0	269.5	269.1	267.1	264.9	262.6
-21.25°	270.3	269.5	268.7	268.4	268.2	268.1	267.7	266.2	264.5	262.3	260.3



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
-22.5°	266.8	266.1	265.9	265.9	265.8	265.7	264.6	262.9	261.3	259.7	257.8
-23.75°	263.3	263.2	263.1	263.1	263.2	262.1	260.8	259.5	258.0	256.7	255.2
-25°	260.4	260.3	260.3	260.2	259.3	258.3	257.0	255.8	254.7	253.3	251.7
-26.25°	257.2	257.2	257.2	256.5	255.4	254.3	253.1	252.0	251.0	249.8	247.6
-27.5°	253.4	254.2	253.4	252.4	251.4	250.2	249.2	248.1	247.0	245.3	243.3
-28.75°	249.6	249.7	249.4	248.4	247.3	246.2	245.0	244.0	242.6	240.6	238.6
-30°	245.2	245.0	244.7	244.2	243.1	242.0	240.8	239.5	237.7	235.9	233.9
-31.25°	240.1	240.2	239.8	239.3	238.8	237.7	236.4	234.7	232.9	231.0	229.1
-32.5°	234.7	234.9	234.9	234.3	233.8	233.2	231.6	229.8	228.0	226.1	224.2
-33.75°	229.2	229.3	229.3	229.0	228.4	227.7	226.5	224.8	222.9	221.0	219.1
-35°	223.3	223.4	223.0	222.9	222.8	221.4	220.1	219.0	217.4	215.3	213.4
-36.25°	216.9	216.8	216.6	216.2	215.7	215.0	213.4	212.1	210.6	209.2	207.3
-37.5°	210.0	209.7	209.5	209.3	208.1	207.1	206.2	204.9	203.2	201.6	200.3
-38.75°	202.2	202.5	202.1	200.8	200.3	199.1	197.8	196.3	195.6	193.8	192.4
-40°	192.4	193.3	193.9	190.9	189.5	189.5	188.5	186.3	184.9	184.1	184.2
-41.25°	181.4	181.5	180.7	179.8	177.3	176.0	174.8	175.0	173.5	170.9	169.6
-42.5°	168.6	168.0	165.6	163.9	162.9	160.7	158.1	156.9	157.0	156.1	153.3
-43.75°	153.8	152.7	149.7	147.2	145.6	144.3	140.7	137.5	138.2	138.4	136.7
-45°	138.7	138.2	135.8	131.5	129.4	129.1	126.7	122.5	121.6	122.0	121.5
-46.25°	127.3	124.9	123.2	119.7	118.3	116.1	114.2	112.7	112.1	110.9	109.2
-47.5°	118.5	115.9	112.5	110.1	109.1	107.3	104.8	103.7	103.1	102.3	101.2
-48.75°	110.1	107.7	104.6	102.6	100.7	99.0	97.3	96.7	95.8	94.6	93.4
-50°	102.8	100.1	97.4	95.7	93.9	91.8	90.5	90.0	89.2	88.1	86.9
-51.25°	95.9	93.3	90.8	89.0	87.1	85.1	84.3	83.5	82.7	81.7	80.4
-52.5°	89.2	86.8	84.3	82.0	80.0	78.4	78.0	77.1	76.2	74.7	73.1
-53.75°	81.2	79.2	77.3	74.8	72.4	70.6	69.6	69.2	69.3	67.3	65.2
-55°	73.1	70.7	68.4	66.3	64.3	62.2	60.3	58.9	58.1	57.1	55.8
-56.25°	65.3	62.0	59.4	56.9	54.8	53.5	51.5	48.6	46.9	46.1	45.0
-57.5°	58.3	55.4	52.0	48.0	45.9	45.3	44.0	42.0	40.0	37.9	35.5
-58.75°	51.8	49.2	46.1	42.6	40.6	39.1	37.4	35.9	34.4	32.5	30.4
-60°	47.1	44.0	40.7	37.5	36.3	34.9	33.4	31.7	29.8	27.7	25.5
-61.25°	42.9	40.0	36.9	34.0	32.6	31.0	29.5	27.9	26.1	24.2	22.2
-62.5°	39.1	36.2	33.3	31.1	29.7	28.3	26.7	24.9	22.9	20.8	18.9
-63.75°	36.0	33.3	30.3	28.4	27.0	25.7	24.2	22.6	20.9	19.0	17.0
-65°	33.1	30.6	27.8	26.4	25.1	23.7	22.1	20.6	19.0	17.4	15.6
-66.25°	30.4	28.0	25.7	24.5	23.3	21.9	20.5	19.1	17.6	16.1	14.4
-67.5°	27.8	25.6	23.7	22.6	21.5	20.3	19.0	17.7	16.3	14.8	13.2
-68.75°	25.4	23.3	21.8	20.8	19.7	18.6	17.4	16.2	15.0	13.6	12.1
-70°	23.2	21.3	20.0	19.1	18.1	17.0	16.0	14.9	13.7	12.5	11.1
-71.25°	21.1	19.3	18.3	17.4	16.5	15.5	14.6	13.6	12.5	11.4	10.1
-72.5°	19.1	17.5	16.7	15.8	15.0	14.1	13.2	12.3	11.4	10.4	9.2
-73.75°	17.1	15.8	15.1	14.3	13.5	12.7	11.9	11.1	10.3	9.4	8.4
-75°	15.3	14.2	13.5	12.8	12.1	11.4	10.7	10.0	9.2	8.4	7.5
-76.25°	13.5	12.6	12.0	11.4	10.8	10.1	9.5	8.9	8.2	7.5	6.7
-77.5°	11.8	11.1	10.6	10.1	9.5	9.0	8.5	7.9	7.3	6.7	6.0



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
-78.75°	10.3	9.7	9.3	8.8	8.4	7.9	7.4	6.9	6.4	5.9	5.3
-80°	8.9	8.4	8.0	7.6	7.2	6.8	6.5	6.1	5.6	5.1	4.6
-81.25°	7.5	7.1	6.8	6.4	6.1	5.8	5.5	5.2	4.9	4.4	4.0
-82.5°	6.3	6.0	5.8	5.5	5.2	4.9	4.7	4.4	4.1	3.8	3.4
-83.75°	5.2	5.0	4.7	4.5	4.3	4.1	3.9	3.6	3.4	3.2	2.9
-85°	4.3	4.1	3.9	3.7	3.5	3.3	3.1	3.0	2.8	2.6	2.4
-86.25°	3.4	3.2	3.1	2.9	2.8	2.7	2.5	2.4	2.2	2.1	1.9
-87.5°	2.7	2.6	2.5	2.3	2.2	2.1	2.0	1.9	1.8	1.6	1.5
-88.75°	2.4	2.3	2.1	2.0	1.9	1.8	1.7	1.6	1.5	1.4	1.4
-90°	8.0	8.1	8.2	8.3	8.4	8.5	8.5	8.6	8.6	8.7	8.7



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
90°	1.2	1.1	1.0	0.9	0.8	0.7	0.6	0.6	0.5	0.4	0.4
88.75°	10.1	10.2	10.2	10.2	10.2	10.2	10.2	10.2	10.2	10.2	10.2
87.5°	11.5	11.6	11.6	11.6	11.5	11.5	11.6	11.6	11.7	11.8	11.8
86.25°	14.6	14.8	14.8	14.9	14.9	14.9	15.0	15.1	15.2	15.3	15.3
85°	18.1	18.2	18.3	18.4	18.4	18.5	18.6	18.7	18.8	18.9	18.9
83.75°	22.7	22.9	23.0	23.1	23.2	23.3	23.4	23.6	23.7	23.8	23.9
82.5°	27.8	28.0	28.1	28.2	28.2	28.3	28.4	28.6	28.7	28.8	28.9
81.25°	33.4	33.7	33.9	34.0	34.0	34.1	34.3	34.5	34.7	34.8	35.0
80°	39.4	39.8	39.9	40.0	40.1	40.1	40.3	40.6	40.8	40.9	41.1
78.75°	45.7	46.1	46.3	46.5	46.6	46.8	47.0	47.3	47.5	47.7	47.9
77.5°	52.4	52.7	53.0	53.3	53.5	53.6	53.9	54.1	54.4	54.5	54.7
76.25°	59.3	59.8	60.2	60.4	60.7	60.8	61.1	61.4	61.7	61.9	62.2
75°	66.9	67.5	67.9	68.1	68.2	68.2	68.5	68.8	69.1	69.4	69.7
73.75°	74.4	75.1	75.6	75.7	75.8	75.9	76.1	76.4	76.7	76.9	77.3
72.5°	82.0	82.7	83.1	83.4	83.5	83.6	83.8	84.1	84.3	84.4	84.8
71.25°	89.6	90.3	90.8	91.2	91.5	91.7	92.0	92.3	92.6	92.9	93.3
70°	97.9	98.5	99.1	99.5	99.8	100.1	100.4	100.8	101.2	101.6	102.0
68.75°	106.3	106.9	107.3	107.8	108.3	108.6	108.9	109.4	109.7	110.0	110.4
67.5°	114.9	115.5	116.1	116.6	117.0	117.3	117.6	118.0	118.2	118.4	118.7
66.25°	123.5	124.2	124.8	125.3	125.8	126.1	126.4	126.8	127.2	127.6	128.0
65°	132.3	133.0	133.7	134.3	134.7	135.1	135.3	136.0	136.5	137.1	137.6
63.75°	141.1	141.9	142.6	143.2	143.7	144.1	144.4	145.1	145.7	146.2	146.6
62.5°	149.9	150.8	151.6	152.3	152.8	153.3	153.7	154.2	154.7	155.1	155.4
61.25°	158.8	159.7	160.6	161.3	161.9	162.5	162.9	163.5	164.1	164.7	165.3
60°	167.7	168.7	169.6	170.4	171.1	171.7	172.2	172.8	173.8	174.7	175.5
58.75°	176.5	177.6	178.7	179.6	180.3	180.9	181.4	182.0	183.1	184.1	185.0
57.5°	185.3	186.5	187.5	188.4	189.2	189.8	190.4	191.0	192.2	193.3	194.2
56.25°	193.7	194.9	196.1	197.1	198.0	198.7	199.3	199.8	201.0	201.9	202.7
55°	202.1	203.4	204.6	205.6	206.5	207.3	207.9	208.4	209.4	210.2	210.8
53.75°	210.4	211.7	213.0	214.1	215.0	215.8	216.5	217.0	217.8	218.5	219.1
52.5°	218.6	220.0	221.3	222.4	223.4	224.2	224.9	225.4	226.1	226.9	227.5
51.25°	226.7	228.1	229.4	230.6	231.7	232.6	233.3	233.7	234.3	235.0	235.6
50°	234.5	236.1	237.5	238.6	239.6	240.4	241.1	241.6	242.2	243.0	243.6
48.75°	242.0	243.5	244.9	246.1	247.2	248.1	248.8	249.4	249.8	250.5	251.1
47.5°	249.1	250.7	252.2	253.4	254.4	255.3	255.9	256.5	256.8	257.6	258.2
46.25°	256.0	257.4	258.8	260.0	261.1	262.2	262.9	263.5	263.7	264.2	264.7
45°	261.7	263.4	265.1	266.6	267.4	268.1	268.6	269.0	269.3	269.9	270.6
43.75°	267.2	268.9	270.3	271.5	272.3	273.1	273.8	274.4	274.7	274.9	275.4
42.5°	271.7	273.3	274.7	276.1	277.1	277.6	277.9	278.1	278.2	278.4	278.9
41.25°	276.3	277.6	278.8	279.9	280.7	281.1	281.4	281.6	281.8	281.8	282.2
40°	280.5	281.0	282.2	283.4	284.4	284.6	284.7	284.7	284.6	284.5	284.8
38.75°	284.3	284.4	285.5	286.3	287.0	287.1	287.2	287.1	287.1	287.0	287.1
37.5°	288.0	287.6	287.7	288.5	289.3	289.6	289.4	289.2	289.1	289.0	289.0
36.25°	290.6	290.1	289.7	290.5	291.1	291.5	291.3	291.1	291.0	290.9	290.8
35°	293.0	292.4	291.8	292.0	292.7	293.3	293.1	292.8	292.5	292.4	292.2



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
33.75°	295.0	294.4	293.8	293.5	293.9	294.4	294.4	294.2	293.9	293.8	293.5
32.5°	296.4	296.4	295.5	294.5	294.7	295.3	295.7	295.2	294.7	294.4	294.1
31.25°	297.4	297.7	296.8	295.9	295.4	295.6	295.9	295.6	295.2	294.9	294.5
30°	298.0	298.3	298.1	296.8	295.5	295.6	295.9	295.7	294.9	294.3	293.7
28.75°	298.4	298.5	298.6	297.4	296.1	295.1	295.0	294.9	294.2	293.5	293.0
27.5°	298.3	298.3	298.4	297.9	296.0	294.1	293.9	293.9	293.2	292.3	291.6
26.25°	298.1	298.0	297.6	297.2	295.6	293.8	292.4	292.1	291.7	290.9	290.2
25°	297.8	297.1	296.5	296.1	295.1	292.8	290.6	290.3	290.3	289.5	288.8
23.75°	296.8	296.1	295.5	294.5	293.7	292.0	289.8	288.7	288.6	288.3	287.5
22.5°	295.9	295.0	293.8	292.9	292.0	291.4	289.3	287.1	287.0	287.2	286.6
21.25°	295.0	293.3	292.1	291.2	290.6	290.1	289.0	286.7	285.6	285.9	285.7
20°	293.7	292.0	290.4	289.8	289.2	288.7	288.3	286.5	284.4	284.5	284.6
18.75°	292.5	291.0	289.6	288.3	287.7	287.4	286.9	286.2	284.0	282.8	283.2
17.5°	290.9	290.3	289.1	287.5	286.3	286.0	285.6	285.0	283.6	281.4	281.3
16.25°	289.5	288.9	288.4	287.1	285.4	284.4	284.0	283.6	282.9	280.7	279.1
15°	289.3	287.3	286.9	286.5	285.1	283.2	282.3	281.8	281.1	280.0	277.5
13.75°	289.2	287.7	285.4	284.8	284.3	282.9	280.7	279.6	279.3	278.8	277.3
12.5°	287.0	286.7	286.2	283.6	282.4	281.8	280.3	277.8	277.3	277.3	276.9
11.25°	286.0	285.2	284.0	284.2	281.7	279.5	279.0	277.9	275.6	275.4	275.7
10°	285.1	284.1	282.7	281.3	280.5	279.4	276.7	276.7	276.0	273.7	274.0
8.75°	284.4	283.1	281.7	280.1	278.4	276.7	277.6	274.7	274.6	274.7	272.0
7.5°	283.2	282.3	281.0	279.2	277.4	276.0	274.6	273.9	273.9	272.6	273.2
6.25°	281.6	280.5	279.4	278.0	276.5	275.1	273.9	273.0	271.8	272.7	270.0
5°	280.9	279.3	277.5	275.7	274.4	273.5	272.8	272.2	271.4	270.1	268.3
3.75°	280.6	278.9	277.0	275.1	273.3	271.7	270.5	270.1	269.7	269.2	267.9
2.5°	280.6	278.9	276.8	274.8	273.1	271.6	270.4	269.3	268.0	266.5	265.2
1.25°	280.0	278.4	276.3	274.3	272.8	271.3	270.2	269.1	267.7	266.3	264.7
0°	279.1	277.4	275.3	273.1	271.7	270.2	269.2	268.1	266.9	265.6	263.9
-1.25°	279.3	277.8	275.8	273.7	272.2	270.6	269.7	268.4	266.9	265.3	263.2
-2.5°	278.7	276.9	274.6	272.2	270.2	268.2	266.7	265.7	264.7	263.8	262.2
-3.75°	277.0	275.1	273.1	271.1	269.4	267.8	266.7	264.9	263.1	261.1	259.9
-5°	276.6	275.0	273.1	270.9	268.4	266.1	263.9	262.7	261.6	260.1	258.3
-6.25°	276.2	274.0	271.6	268.9	266.3	264.6	263.0	261.5	259.6	258.7	258.6
-7.5°	274.5	272.2	270.2	268.1	266.0	263.7	261.3	259.4	259.2	258.1	255.8
-8.75°	273.2	271.5	269.8	267.5	264.5	261.7	260.5	259.8	257.8	255.9	255.4
-10°	272.6	270.8	268.2	265.6	263.2	261.8	260.5	258.0	255.9	255.2	252.8
-11.25°	270.9	268.7	266.2	264.9	263.6	261.5	258.7	256.7	255.4	252.7	250.5
-12.5°	268.8	267.1	266.1	264.9	262.7	259.9	257.7	256.0	253.4	250.6	248.6
-13.75°	267.7	266.7	265.8	263.3	260.7	258.8	257.2	254.3	251.1	248.9	247.2
-15°	267.4	266.0	263.6	261.1	259.3	257.8	255.5	252.2	249.6	247.3	245.8
-16.25°	266.3	263.8	261.4	259.5	258.0	255.8	252.9	250.4	248.0	246.2	245.0
-17.5°	264.3	261.7	259.7	258.0	255.9	253.2	250.5	248.2	246.4	245.0	244.3
-18.75°	262.2	260.0	258.0	256.0	253.2	250.5	248.2	246.1	244.6	243.5	243.0
-20°	260.3	258.2	256.1	253.2	250.4	248.0	245.5	243.9	242.6	241.9	241.0
-21.25°	258.4	256.3	253.3	250.3	247.7	245.2	243.1	241.6	240.5	239.8	238.6



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
-22.5°	256.0	253.6	250.5	247.5	244.9	242.4	240.7	239.1	238.3	237.5	235.9
-23.75°	252.9	250.3	247.7	244.9	242.2	240.0	238.1	236.8	235.9	234.7	233.1
-25°	249.5	246.8	244.3	242.0	239.5	237.5	235.6	234.4	233.3	231.8	230.1
-26.25°	245.3	243.2	240.7	238.3	236.6	235.1	233.3	232.0	230.6	228.9	227.7
-27.5°	241.0	238.9	236.8	234.8	233.2	231.6	230.6	229.5	227.8	226.0	225.3
-28.75°	236.7	234.6	232.4	231.0	229.6	228.3	227.3	226.2	224.6	222.9	222.8
-30°	232.0	230.0	228.4	226.9	225.5	224.7	223.9	222.7	221.1	219.8	219.7
-31.25°	227.3	225.2	224.0	222.7	221.6	220.8	219.9	218.6	217.2	216.6	216.4
-32.5°	222.3	220.8	219.5	218.2	217.4	216.6	215.8	214.4	212.9	212.6	212.5
-33.75°	217.1	215.8	214.7	213.7	213.0	212.2	211.0	209.7	208.5	208.6	208.4
-35°	212.0	210.7	209.3	208.4	207.9	207.4	206.1	204.6	203.6	203.3	203.1
-36.25°	205.9	204.7	203.6	202.9	202.1	201.2	199.9	198.6	198.1	197.8	197.1
-37.5°	199.5	198.2	197.1	196.5	195.8	194.8	193.4	191.9	191.5	191.1	190.3
-38.75°	191.3	190.5	190.2	189.6	188.7	187.2	185.8	184.8	184.6	184.2	183.1
-40°	182.6	181.2	180.2	179.9	179.8	179.0	177.6	176.4	175.7	175.0	173.8
-41.25°	169.8	170.9	169.2	167.8	165.5	163.7	162.8	163.7	164.8	164.2	163.2
-42.5°	151.8	152.2	152.7	153.0	149.9	145.8	142.8	142.8	142.8	142.9	143.0
-43.75°	134.2	133.3	133.1	132.8	131.1	128.1	124.6	122.4	120.3	120.1	120.9
-45°	121.0	119.6	117.0	114.2	113.2	111.6	110.3	109.3	107.4	106.1	105.3
-46.25°	108.6	108.3	106.8	104.7	102.2	99.3	97.9	96.8	96.0	95.7	95.3
-47.5°	100.3	99.1	97.5	95.3	93.1	90.6	89.7	88.6	87.4	87.0	86.4
-48.75°	92.5	91.4	89.8	87.6	85.1	82.9	81.7	80.5	79.5	79.2	78.7
-50°	85.5	84.1	82.2	80.2	77.9	76.1	75.1	73.8	72.7	72.2	71.6
-51.25°	79.0	77.5	75.4	73.2	70.9	69.4	68.4	67.3	66.4	65.9	65.2
-52.5°	71.8	70.5	68.6	66.4	64.1	62.6	61.3	59.9	59.1	58.6	58.0
-53.75°	63.2	61.0	58.6	56.6	55.1	54.8	54.0	52.4	51.3	50.5	49.6
-55°	54.2	50.9	47.4	44.2	42.0	41.6	41.1	40.3	40.3	40.1	39.6
-56.25°	43.5	40.9	37.5	33.5	30.4	28.7	27.8	27.0	27.4	27.6	27.4
-57.5°	33.1	31.3	28.9	25.9	24.1	22.8	21.3	19.8	19.2	18.6	17.8
-58.75°	28.1	25.4	22.7	19.7	18.2	17.0	15.9	14.9	14.4	13.8	13.1
-60°	23.4	21.1	18.5	15.8	14.7	13.5	12.2	11.2	10.5	9.8	9.0
-61.25°	19.9	17.6	15.0	12.6	11.3	10.2	9.0	8.1	7.5	6.7	6.0
-62.5°	16.9	14.8	12.5	10.6	9.5	8.3	7.0	6.1	5.3	4.5	3.6
-63.75°	14.9	12.7	10.5	8.7	7.7	6.6	5.5	4.8	4.2	3.5	2.8
-65°	13.7	11.7	9.6	8.1	7.0	5.9	4.7	4.1	3.4	2.8	2.2
-66.25°	12.6	10.7	8.7	7.5	6.5	5.4	4.4	3.8	3.2	2.6	2.0
-67.5°	11.5	9.8	8.0	7.0	6.0	5.0	4.1	3.6	3.0	2.4	1.9
-68.75°	10.6	9.0	7.3	6.5	5.6	4.7	3.9	3.3	2.8	2.2	1.7
-70°	9.7	8.2	6.8	6.0	5.2	4.4	3.6	3.1	2.6	2.0	1.6
-71.25°	8.8	7.5	6.2	5.5	4.8	4.0	3.3	2.9	2.4	1.9	1.5
-72.5°	8.1	6.8	5.8	5.1	4.4	3.7	3.1	2.6	2.2	1.7	1.4
-73.75°	7.3	6.3	5.3	4.7	4.0	3.4	2.8	2.4	2.0	1.6	1.3
-75°	6.6	5.6	4.9	4.3	3.7	3.1	2.6	2.2	1.9	1.5	1.2
-76.25°	5.9	5.0	4.4	3.9	3.3	2.8	2.4	2.1	1.8	1.4	1.2
-77.5°	5.3	4.5	3.9	3.5	3.0	2.5	2.2	1.9	1.6	1.3	1.1



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
-78.75°	4.6	4.0	3.5	3.1	2.7	2.3	2.0	1.7	1.5	1.2	1.0
-80°	4.1	3.5	3.1	2.8	2.4	2.0	1.8	1.6	1.3	1.1	0.9
-81.25°	3.5	3.0	2.7	2.4	2.1	1.8	1.6	1.4	1.2	1.0	0.9
-82.5°	3.0	2.6	2.4	2.1	1.9	1.6	1.4	1.2	1.1	0.9	0.8
-83.75°	2.6	2.3	2.1	1.9	1.7	1.4	1.3	1.1	1.0	0.8	0.7
-85°	2.2	1.9	1.8	1.6	1.4	1.3	1.1	1.0	0.8	0.7	0.6
-86.25°	1.8	1.6	1.5	1.3	1.2	1.1	1.0	0.8	0.7	0.6	0.5
-87.5°	1.4	1.3	1.2	1.1	1.0	0.9	0.8	0.7	0.6	0.5	0.4
-88.75°	1.3	1.2	1.1	1.0	0.9	0.8	0.7	0.6	0.5	0.4	0.4
-90°	8.8	8.8	8.8	8.8	8.8	8.8	8.8	8.7	8.7	8.6	8.7



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
90°	0.3	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
88.75°	10.2	10.3	10.3	10.2	10.2	10.1	10.1	10.1	10.2	10.2	10.3
87.5°	11.8	11.8	11.8	11.7	11.7	11.6	11.6	11.6	11.7	11.7	11.8
86.25°	15.3	15.3	15.4	15.4	15.3	15.3	15.3	15.3	15.3	15.4	15.4
85°	18.9	18.9	18.9	19.0	19.0	19.0	19.0	19.0	19.0	19.0	18.9
83.75°	24.0	24.0	24.1	24.1	24.1	24.1	24.1	24.1	24.1	24.1	24.1
82.5°	29.0	29.1	29.2	29.2	29.2	29.1	29.1	29.1	29.2	29.2	29.2
81.25°	35.1	35.2	35.3	35.4	35.4	35.3	35.3	35.3	35.4	35.4	35.3
80°	41.3	41.4	41.5	41.5	41.6	41.5	41.5	41.5	41.6	41.5	41.5
78.75°	48.1	48.2	48.3	48.4	48.4	48.5	48.5	48.5	48.4	48.4	48.3
77.5°	54.9	55.0	55.1	55.3	55.3	55.4	55.4	55.4	55.3	55.3	55.1
76.25°	62.4	62.6	62.7	62.8	62.9	62.9	63.0	62.9	62.9	62.8	62.7
75°	69.9	70.1	70.3	70.4	70.5	70.5	70.5	70.5	70.5	70.4	70.3
73.75°	77.6	77.9	78.2	78.4	78.5	78.5	78.5	78.5	78.5	78.4	78.2
72.5°	85.3	85.8	86.2	86.4	86.4	86.5	86.4	86.5	86.4	86.4	86.2
71.25°	93.8	94.2	94.6	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.6
70°	102.4	102.7	103.0	103.1	103.2	103.2	103.2	103.2	103.2	103.1	103.0
68.75°	110.9	111.3	111.7	112.0	112.1	112.1	112.1	112.1	112.1	112.0	111.7
67.5°	119.4	120.0	120.5	120.8	120.9	120.9	120.9	120.9	120.9	120.8	120.5
66.25°	128.7	129.2	129.7	130.0	130.1	130.1	130.0	130.1	130.1	130.0	129.7
65°	138.1	138.6	139.0	139.2	139.2	139.2	139.1	139.2	139.2	139.2	139.0
63.75°	147.2	147.8	148.2	148.5	148.5	148.5	148.4	148.5	148.5	148.5	148.2
62.5°	156.2	156.8	157.4	157.7	157.8	157.8	157.7	157.8	157.8	157.7	157.4
61.25°	165.9	166.4	166.8	167.0	167.1	167.1	167.0	167.1	167.1	167.0	166.8
60°	175.9	176.2	176.2	176.3	176.4	176.4	176.3	176.4	176.4	176.3	176.2
58.75°	185.3	185.3	185.1	185.1	185.3	185.4	185.5	185.4	185.3	185.1	185.1
57.5°	194.4	194.3	194.0	193.9	194.2	194.5	194.6	194.5	194.2	193.9	194.0
56.25°	203.0	202.9	202.8	202.8	203.1	203.2	203.2	203.2	203.1	202.8	202.8
55°	211.2	211.5	211.7	211.8	211.9	211.9	211.7	211.9	211.9	211.8	211.7
53.75°	219.6	219.9	220.0	220.1	220.2	220.1	220.0	220.1	220.2	220.1	220.0
52.5°	228.0	228.2	228.3	228.2	228.4	228.4	228.2	228.4	228.4	228.2	228.3
51.25°	236.1	236.2	236.2	236.1	236.2	236.2	236.1	236.2	236.2	236.1	236.2
50°	244.0	244.1	244.0	243.8	244.0	244.0	243.9	244.0	244.0	243.8	244.0
48.75°	251.5	251.5	251.4	251.1	251.3	251.3	251.3	251.3	251.3	251.1	251.4
47.5°	258.7	258.8	258.6	258.3	258.5	258.6	258.6	258.6	258.5	258.3	258.6
46.25°	265.2	265.1	264.8	264.4	264.5	264.6	264.6	264.6	264.5	264.4	264.8
45°	271.3	271.3	270.9	270.4	270.5	270.6	270.6	270.6	270.5	270.4	270.9
43.75°	275.8	275.7	275.1	274.4	274.3	274.3	274.2	274.3	274.3	274.4	275.1
42.5°	279.4	279.4	278.9	278.3	278.0	277.9	277.7	277.9	278.0	278.3	278.9
41.25°	282.5	282.4	281.7	280.8	280.4	280.2	279.9	280.2	280.4	280.8	281.7
40°	285.0	285.1	284.2	283.3	282.8	282.6	282.4	282.6	282.8	283.3	284.2
38.75°	287.3	287.4	286.5	285.5	284.9	284.7	284.5	284.7	284.9	285.5	286.5
37.5°	289.3	289.5	288.6	287.6	287.0	286.8	286.5	286.8	287.0	287.6	288.6
36.25°	291.0	291.2	290.4	289.3	288.5	288.3	288.0	288.3	288.5	289.3	290.4
35°	292.5	292.7	292.1	290.9	289.9	289.7	289.5	289.7	289.9	290.9	292.1



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°
33.75°	293.5	293.7	293.1	291.7	290.5	290.3	290.1	290.3	290.5
32.5°	294.1	294.2	293.8	292.3	291.0	290.8	290.6	290.8	291.0
31.25°	294.1	294.0	293.7	292.1	290.5	290.3	290.1	290.3	290.5
30°	293.3	293.3	293.3	291.6	289.9	289.7	289.5	289.7	289.9
28.75°	292.3	292.1	292.1	290.5	288.7	288.3	288.2	288.3	288.7
27.5°	291.0	290.7	290.6	289.2	287.4	286.9	286.8	286.9	287.4
26.25°	289.7	289.4	289.3	288.2	286.4	285.9	285.8	285.9	286.4
25°	288.5	288.3	288.1	287.3	285.5	284.8	284.7	284.8	285.5
23.75°	287.2	287.2	287.1	286.6	284.7	283.9	283.8	283.9	284.7
22.5°	286.3	286.2	286.2	286.0	283.9	282.9	282.9	282.9	283.9
21.25°	285.4	285.1	285.0	285.0	282.9	281.7	281.6	281.7	282.9
20°	284.2	283.9	283.7	283.7	281.9	280.4	280.2	280.4	281.9
18.75°	283.0	282.5	282.2	282.0	280.5	278.7	278.6	278.7	280.5
17.5°	281.2	280.8	280.4	280.3	279.1	277.1	277.0	277.1	279.1
16.25°	279.3	279.0	278.8	278.8	278.1	275.8	275.8	275.8	278.1
15°	277.4	277.5	277.5	277.6	277.2	274.6	274.5	274.6	277.2
13.75°	275.5	276.0	276.2	276.6	276.5	274.0	273.9	274.0	276.5
12.5°	274.7	274.6	275.2	275.6	275.7	273.5	273.3	273.5	275.7
11.25°	275.1	273.0	274.0	274.3	274.4	272.5	272.1	272.5	274.4
10°	274.4	272.6	272.0	272.7	273.1	271.6	270.8	271.6	273.1
8.75°	272.5	272.4	269.8	270.6	271.0	269.9	268.7	269.9	271.0
7.5°	269.9	270.7	269.4	267.8	268.5	268.3	266.6	268.3	268.5
6.25°	270.9	267.2	267.9	265.3	265.9	266.6	264.7	266.6	265.9
5°	268.4	267.6	264.3	265.1	262.9	264.7	262.7	264.7	262.9
3.75°	266.1	265.0	264.1	261.4	262.3	263.1	261.8	263.1	262.3
2.5°	264.4	263.7	262.1	262.1	260.1	260.6	260.9	260.6	260.1
1.25°	263.0	261.4	259.9	260.7	260.4	259.4	260.0	259.4	260.4
0°	262.2	260.9	259.5	259.7	259.8	259.4	259.1	259.4	259.8
-1.25°	261.0	259.8	259.2	258.3	257.8	257.8	258.1	257.8	257.8
-2.5°	259.7	257.9	256.6	256.7	256.2	255.3	257.2	255.3	256.2
-3.75°	258.3	256.5	256.0	254.7	252.6	252.8	255.2	252.8	252.6
-5°	257.9	255.5	254.8	252.0	251.9	251.8	253.2	251.8	251.9
-6.25°	255.7	255.2	252.2	251.2	250.6	250.9	252.5	250.9	250.6
-7.5°	255.6	252.7	251.2	251.0	249.8	250.0	251.8	250.0	249.8
-8.75°	252.8	251.2	250.4	250.1	249.8	249.4	251.0	249.4	249.8
-10°	250.9	249.8	249.7	248.5	249.1	248.7	250.2	248.7	249.1
-11.25°	249.1	248.6	248.6	247.5	247.6	247.3	248.9	247.3	247.6
-12.5°	247.5	247.4	246.6	246.5	246.0	245.8	247.7	245.8	246.0
-13.75°	246.2	246.1	244.4	245.2	244.1	244.2	246.0	244.2	244.1
-15°	245.4	244.4	243.4	243.6	242.5	242.7	244.3	242.7	242.5
-16.25°	244.5	242.8	242.5	242.1	241.1	241.5	242.9	241.5	241.1
-17.5°	243.2	241.3	241.6	240.6	239.8	240.2	241.6	240.2	239.8
-18.75°	241.6	240.4	240.7	239.3	238.7	239.1	240.3	239.1	238.7
-20°	239.3	239.0	239.1	237.7	237.5	238.0	239.1	238.0	237.5
-21.25°	237.1	237.4	237.0	235.5	235.4	235.9	236.9	235.9	235.4

REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

3.75°	5°		-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°
291.7	293.1	-22.5°	234.9	235.3	234.5	233.3	233.3	233.8	234.8	233.8	233.3
292.3	293.8	-23.75°	232.7	232.8	231.7	230.6	230.6	231.2	232.2	231.2	230.6
292.1	293.7	-25°	230.2	230.1	228.8	228.0	227.9	228.6	229.6	228.6	227.9
291.6	293.3	-26.25°	227.7	227.2	225.8	225.2	225.1	225.8	226.7	225.8	225.1
290.5	292.1	-27.5°	225.2	224.3	222.8	222.4	222.3	223.1	223.9	223.1	222.3
289.2	290.6	-28.75°	222.6	221.4	219.9	219.7	219.6	220.4	221.1	220.4	219.6
288.2	289.3	-30°	219.4	218.1	216.7	216.9	216.8	217.7	218.4	217.7	216.8
287.3	288.1	-31.25°	215.8	214.4	213.2	213.3	213.4	214.2	214.8	214.2	213.4
286.6	287.1	-32.5°	211.7	210.4	209.6	209.7	209.9	210.6	211.2	210.6	209.9
286.0	286.2	-33.75°	207.4	206.1	205.4	205.5	205.6	206.3	206.9	206.3	205.6
285.0	285.0	-35°	202.1	201.0	200.8	201.0	201.2	202.0	202.6	202.0	201.2
283.7	283.7	-36.25°	196.1	194.8	194.6	194.7	194.9	195.6	196.1	195.6	194.9
282.0	282.2	-37.5°	189.3	188.1	188.1	188.2	188.5	189.2	189.7	189.2	188.5
280.3	280.4	-38.75°	181.8	180.4	180.5	180.4	180.7	181.4	181.8	181.4	180.7
278.8	278.8	-40°	172.5	171.5	171.8	172.0	172.6	173.5	174.0	173.5	172.6
277.6	277.5	-41.25°	161.3	159.9	159.7	159.2	159.7	160.5	160.9	160.5	159.7
276.6	276.2	-42.5°	142.2	141.8	141.9	141.6	142.2	143.1	143.4	143.1	142.2
275.6	275.2	-43.75°	120.9	121.1	121.6	121.5	122.3	123.1	123.4	123.1	122.3
274.3	274.0	-45°	104.2	103.6	103.2	102.5	102.9	103.3	103.5	103.3	102.9
272.7	272.0	-46.25°	94.6	94.3	94.0	93.4	93.9	94.4	94.6	94.4	93.9
270.6	269.8	-47.5°	85.7	85.4	85.0	84.5	85.0	85.4	85.7	85.4	85.0
267.8	269.4	-48.75°	78.1	77.9	77.6	77.2	77.7	78.0	78.2	78.0	77.7
265.3	267.9	-50°	70.9	70.7	70.4	70.0	70.4	70.6	70.8	70.6	70.4
265.1	264.3	-51.25°	64.7	64.4	64.0	63.6	63.8	63.8	63.8	63.8	63.8
261.4	264.1	-52.5°	57.6	57.5	57.2	57.0	57.0	57.0	56.7	57.0	57.0
262.1	262.1	-53.75°	48.8	48.2	47.5	46.8	46.5	46.1	45.5	46.1	46.5
260.7	259.9	-55°	39.1	38.4	37.5	36.6	36.0	35.2	34.2	35.2	36.0
259.7	259.5	-56.25°	27.3	27.1	26.7	26.2	25.9	25.4	24.8	25.4	25.9
258.3	259.2	-57.5°	17.4	17.0	16.6	16.2	16.0	15.7	15.4	15.7	16.0
256.7	256.6	-58.75°	12.8	12.4	12.0	11.6	11.5	11.2	10.9	11.2	11.5
254.7	256.0	-60°	8.5	8.0	7.5	7.2	7.0	6.7	6.4	6.7	7.0
252.0	254.8	-61.25°	5.5	5.0	4.5	4.1	3.9	3.7	3.4	3.7	3.9
251.2	252.2	-62.5°	3.0	2.3	1.7	1.2	1.0	0.7	0.4	0.7	1.0
251.0	251.2	-63.75°	2.3	1.8	1.2	0.9	0.7	0.4	0.2	0.4	0.7
250.1	250.4	-65°	1.7	1.3	0.9	0.6	0.4	0.2	0.0	0.2	0.4
248.5	249.7	-66.25°	1.6	1.2	0.7	0.5	0.3	0.2	0.0	0.2	0.3
247.5	248.6	-67.5°	1.5	1.1	0.6	0.4	0.3	0.1	0.0	0.1	0.3
246.5	246.6	-68.75°	1.4	1.0	0.6	0.4	0.3	0.1	0.0	0.1	0.3
245.2	244.4	-70°	1.3	0.9	0.6	0.4	0.3	0.1	0.0	0.1	0.3
243.6	243.4	-71.25°	1.2	0.9	0.6	0.4	0.3	0.1	0.0	0.1	0.3
242.1	242.5	-72.5°	1.1	0.8	0.6	0.4	0.3	0.1	0.0	0.1	0.3
240.6	241.6	-73.75°	1.1	0.8	0.5	0.4	0.3	0.2	0.1	0.2	0.3
239.3	240.7	-75°	1.0	0.8	0.5	0.4	0.4	0.3	0.2	0.3	0.4
237.7	239.1	-76.25°	0.9	0.7	0.5	0.4	0.3	0.3	0.2	0.3	0.3
235.5	237.0	-77.5°	0.9	0.7	0.4	0.4	0.3	0.3	0.2	0.3	0.3

REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

3.75°	5°		-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°
233.3	234.5	-78.75°	0.8	0.6	0.4	0.4	0.3	0.3	0.2	0.3	0.3
230.6	231.7	-80°	0.8	0.6	0.4	0.4	0.3	0.3	0.2	0.3	0.3
228.0	228.8	-81.25°	0.7	0.6	0.4	0.4	0.3	0.3	0.2	0.3	0.3
225.2	225.8	-82.5°	0.7	0.5	0.4	0.4	0.3	0.3	0.2	0.3	0.3
222.4	222.8	-83.75°	0.6	0.5	0.4	0.4	0.3	0.3	0.2	0.3	0.3
219.7	219.9	-85°	0.5	0.5	0.4	0.3	0.3	0.3	0.2	0.3	0.3
216.9	216.7	-86.25°	0.4	0.4	0.3	0.3	0.2	0.2	0.2	0.2	0.2
213.3	213.2	-87.5°	0.3	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2
209.7	209.6	-88.75°	0.3	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2
205.5	205.4	-90°	8.7	8.8	8.8	8.8	8.7	8.7	8.6	8.7	8.7
201.0	200.8										
194.7	194.6										
188.2	188.1										
180.4	180.5										
172.0	171.8										
159.2	159.7										
141.6	141.9										
121.5	121.6										
102.5	103.2										
93.4	94.0										
84.5	85.0										
77.2	77.6										
70.0	70.4										
63.6	64.0										
57.0	57.2										
46.8	47.5										
36.6	37.5										
26.2	26.7										
16.2	16.6										
11.6	12.0										
7.2	7.5										
4.1	4.5										
1.2	1.7										
0.9	1.2										
0.6	0.9										
0.5	0.7										
0.4	0.6										
0.4	0.6										
0.4	0.6										
0.4	0.6										
0.4	0.6										
0.4	0.5										
0.4	0.5										
0.4	0.5										
0.4	0.4										

REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

3.75°	5°		6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°
0.4	0.4	90°	0.3	0.3	0.4	0.4	0.5	0.6	0.6	0.7	0.8
0.4	0.4	88.75°	10.3	10.2	10.2	10.2	10.2	10.2	10.2	10.2	10.2
0.4	0.4	87.5°	11.8	11.8	11.8	11.8	11.7	11.6	11.6	11.5	11.5
0.4	0.4	86.25°	15.3	15.3	15.3	15.3	15.2	15.1	15.0	14.9	14.9
0.4	0.4	85°	18.9	18.9	18.9	18.9	18.8	18.7	18.6	18.5	18.4
0.3	0.4	83.75°	24.0	24.0	23.9	23.8	23.7	23.6	23.4	23.3	23.2
0.3	0.3	82.5°	29.1	29.0	28.9	28.8	28.7	28.6	28.4	28.3	28.2
0.2	0.2	81.25°	35.2	35.1	35.0	34.8	34.7	34.5	34.3	34.1	34.0
0.2	0.2	80°	41.4	41.3	41.1	40.9	40.8	40.6	40.3	40.1	40.1
8.8	8.8	78.75°	48.2	48.1	47.9	47.7	47.5	47.3	47.0	46.8	46.6
		77.5°	55.0	54.9	54.7	54.5	54.4	54.1	53.9	53.6	53.5
		76.25°	62.6	62.4	62.2	61.9	61.7	61.4	61.1	60.8	60.7
		75°	70.1	69.9	69.7	69.4	69.1	68.8	68.5	68.2	68.2
		73.75°	77.9	77.6	77.3	76.9	76.7	76.4	76.1	75.9	75.8
		72.5°	85.8	85.3	84.8	84.4	84.3	84.1	83.8	83.6	83.5
		71.25°	94.2	93.8	93.3	92.9	92.6	92.3	92.0	91.7	91.5
		70°	102.7	102.4	102.0	101.6	101.2	100.8	100.4	100.1	99.8
		68.75°	111.3	110.9	110.4	110.0	109.7	109.4	108.9	108.6	108.3
		67.5°	120.0	119.4	118.7	118.4	118.2	118.0	117.6	117.3	117.0
		66.25°	129.2	128.7	128.0	127.6	127.2	126.8	126.4	126.1	125.8
		65°	138.6	138.1	137.6	137.1	136.5	136.0	135.3	135.1	134.7
		63.75°	147.8	147.2	146.6	146.2	145.7	145.1	144.4	144.1	143.7
		62.5°	156.8	156.2	155.4	155.1	154.7	154.2	153.7	153.3	152.8
		61.25°	166.4	165.9	165.3	164.7	164.1	163.5	162.9	162.5	161.9
		60°	176.2	175.9	175.5	174.7	173.8	172.8	172.2	171.7	171.1
		58.75°	185.3	185.3	185.0	184.1	183.1	182.0	181.4	180.9	180.3
		57.5°	194.3	194.4	194.2	193.3	192.2	191.0	190.4	189.8	189.2
		56.25°	202.9	203.0	202.7	201.9	201.0	199.8	199.3	198.7	198.0
		55°	211.5	211.2	210.8	210.2	209.4	208.4	207.9	207.3	206.5
		53.75°	219.9	219.6	219.1	218.5	217.8	217.0	216.5	215.8	215.0
		52.5°	228.2	228.0	227.5	226.9	226.1	225.4	224.9	224.2	223.4
		51.25°	236.2	236.1	235.6	235.0	234.3	233.7	233.3	232.6	231.7
		50°	244.1	244.0	243.6	243.0	242.2	241.6	241.1	240.4	239.6
		48.75°	251.5	251.5	251.1	250.5	249.8	249.4	248.8	248.1	247.2
		47.5°	258.8	258.7	258.2	257.6	256.8	256.5	255.9	255.3	254.4
		46.25°	265.1	265.2	264.7	264.2	263.7	263.5	262.9	262.2	261.1
		45°	271.3	271.3	270.6	269.9	269.3	269.0	268.6	268.1	267.4
		43.75°	275.7	275.8	275.4	274.9	274.7	274.4	273.8	273.1	272.3
		42.5°	279.4	279.4	278.9	278.4	278.2	278.1	277.9	277.6	277.1
		41.25°	282.4	282.5	282.2	281.8	281.8	281.6	281.4	281.1	280.7
		40°	285.1	285.0	284.8	284.5	284.6	284.7	284.7	284.6	284.4
		38.75°	287.4	287.3	287.1	287.0	287.1	287.1	287.2	287.1	287.0
		37.5°	289.5	289.3	289.0	289.0	289.1	289.2	289.4	289.6	289.3
		36.25°	291.2	291.0	290.8	290.9	291.0	291.1	291.3	291.5	291.1
		35°	292.7	292.5	292.2	292.4	292.5	292.8	293.1	293.3	292.7

REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

17.5°	18.75°		6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°
0.9	1.0	33.75°	293.7	293.5	293.5	293.8	293.9	294.2	294.4	294.4	293.9
10.2	10.2	32.5°	294.2	294.1	294.1	294.4	294.7	295.2	295.7	295.3	294.7
11.6	11.6	31.25°	294.0	294.1	294.5	294.9	295.2	295.6	295.9	295.6	295.4
14.9	14.8	30°	293.3	293.3	293.7	294.3	294.9	295.7	295.9	295.6	295.5
18.4	18.3	28.75°	292.1	292.3	293.0	293.5	294.2	294.9	295.0	295.1	296.1
23.1	23.0	27.5°	290.7	291.0	291.6	292.3	293.2	293.9	293.9	294.1	296.0
28.2	28.1	26.25°	289.4	289.7	290.2	290.9	291.7	292.1	292.4	293.8	295.6
34.0	33.9	25°	288.3	288.5	288.8	289.5	290.3	290.3	290.6	292.8	295.1
40.0	39.9	23.75°	287.2	287.2	287.5	288.3	288.6	288.7	289.8	292.0	293.7
46.5	46.3	22.5°	286.2	286.3	286.6	287.2	287.0	287.1	289.3	291.4	292.0
53.3	53.0	21.25°	285.1	285.4	285.7	285.9	285.6	286.7	289.0	290.1	290.6
60.4	60.2	20°	283.9	284.2	284.6	284.5	284.4	286.5	288.3	288.7	289.2
68.1	67.9	18.75°	282.5	283.0	283.2	282.8	284.0	286.2	286.9	287.4	287.7
75.7	75.6	17.5°	280.8	281.2	281.3	281.4	283.6	285.0	285.6	286.0	286.3
83.4	83.1	16.25°	279.0	279.3	279.1	280.7	282.9	283.6	284.0	284.4	285.4
91.2	90.8	15°	277.5	277.4	277.5	280.0	281.1	281.8	282.3	283.2	285.1
99.5	99.1	13.75°	276.0	275.5	277.3	278.8	279.3	279.6	280.7	282.9	284.3
107.8	107.3	12.5°	274.6	274.7	276.9	277.3	277.3	277.8	280.3	281.8	282.4
116.6	116.1	11.25°	273.0	275.1	275.7	275.4	275.6	277.9	279.0	279.5	281.7
125.3	124.8	10°	272.6	274.4	274.0	273.7	276.0	276.7	276.7	279.4	280.5
134.3	133.7	8.75°	272.4	272.5	272.0	274.7	274.6	274.7	277.6	276.7	278.4
143.2	142.6	7.5°	270.7	269.9	273.2	272.6	273.9	273.9	274.6	276.0	277.4
152.3	151.6	6.25°	267.2	270.9	270.0	272.7	271.8	273.0	273.9	275.1	276.5
161.3	160.6	5°	267.6	268.4	268.3	270.1	271.4	272.2	272.8	273.5	274.4
170.4	169.6	3.75°	265.0	266.1	267.9	269.2	269.7	270.1	270.5	271.7	273.3
179.6	178.7	2.5°	263.7	264.4	265.2	266.5	268.0	269.3	270.4	271.6	273.1
188.4	187.5	1.25°	261.4	263.0	264.7	266.3	267.7	269.1	270.2	271.3	272.8
197.1	196.1	0°	260.9	262.2	263.9	265.6	266.9	268.1	269.2	270.2	271.7
205.6	204.6	-1.25°	259.8	261.0	263.2	265.3	266.9	268.4	269.7	270.6	272.2
214.1	213.0	-2.5°	257.9	259.7	262.2	263.8	264.7	265.7	266.7	268.2	270.2
222.4	221.3	-3.75°	256.5	258.3	259.9	261.1	263.1	264.9	266.7	267.8	269.4
230.6	229.4	-5°	255.5	257.9	258.3	260.1	261.6	262.7	263.9	266.1	268.4
238.6	237.5	-6.25°	255.2	255.7	258.6	258.7	259.6	261.5	263.0	264.6	266.3
246.1	244.9	-7.5°	252.7	255.6	255.8	258.1	259.2	259.4	261.3	263.7	266.0
253.4	252.2	-8.75°	251.2	252.8	255.4	255.9	257.8	259.8	260.5	261.7	264.5
260.0	258.8	-10°	249.8	250.9	252.8	255.2	255.9	258.0	260.5	261.8	263.2
266.6	265.1	-11.25°	248.6	249.1	250.5	252.7	255.4	256.7	258.7	261.5	263.6
271.5	270.3	-12.5°	247.4	247.5	248.6	250.6	253.4	256.0	257.7	259.9	262.7
276.1	274.7	-13.75°	246.1	246.2	247.2	248.9	251.1	254.3	257.2	258.8	260.7
279.9	278.8	-15°	244.4	245.4	245.8	247.3	249.6	252.2	255.5	257.8	259.3
283.4	282.2	-16.25°	242.8	244.5	245.0	246.2	248.0	250.4	252.9	255.8	258.0
286.3	285.5	-17.5°	241.3	243.2	244.3	245.0	246.4	248.2	250.5	253.2	255.9
288.5	287.7	-18.75°	240.4	241.6	243.0	243.5	244.6	246.1	248.2	250.5	253.2
290.5	289.7	-20°	239.0	239.3	241.0	241.9	242.6	243.9	245.5	248.0	250.4
292.0	291.8	-21.25°	237.4	237.1	238.6	239.8	240.5	241.6	243.1	245.2	247.7

REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

17.5°	18.75°		6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°
293.5	293.8	-22.5°	235.3	234.9	235.9	237.5	238.3	239.1	240.7	242.4	244.9
294.5	295.5	-23.75°	232.8	232.7	233.1	234.7	235.9	236.8	238.1	240.0	242.2
295.9	296.8	-25°	230.1	230.2	230.1	231.8	233.3	234.4	235.6	237.5	239.5
296.8	298.1	-26.25°	227.2	227.7	227.7	228.9	230.6	232.0	233.3	235.1	236.6
297.4	298.6	-27.5°	224.3	225.2	225.3	226.0	227.8	229.5	230.6	231.6	233.2
297.9	298.4	-28.75°	221.4	222.6	222.8	222.9	224.6	226.2	227.3	228.3	229.6
297.2	297.6	-30°	218.1	219.4	219.7	219.8	221.1	222.7	223.9	224.7	225.5
296.1	296.5	-31.25°	214.4	215.8	216.4	216.6	217.2	218.6	219.9	220.8	221.6
294.5	295.5	-32.5°	210.4	211.7	212.5	212.6	212.9	214.4	215.8	216.6	217.4
292.9	293.8	-33.75°	206.1	207.4	208.4	208.6	208.5	209.7	211.0	212.2	213.0
291.2	292.1	-35°	201.0	202.1	203.1	203.3	203.6	204.6	206.1	207.4	207.9
289.8	290.4	-36.25°	194.8	196.1	197.1	197.8	198.1	198.6	199.9	201.2	202.1
288.3	289.6	-37.5°	188.1	189.3	190.3	191.1	191.5	191.9	193.4	194.8	195.8
287.5	289.1	-38.75°	180.4	181.8	183.1	184.2	184.6	184.8	185.8	187.2	188.7
287.1	288.4	-40°	171.5	172.5	173.8	175.0	175.7	176.4	177.6	179.0	179.8
286.5	286.9	-41.25°	159.9	161.3	163.2	164.2	164.8	163.7	162.8	163.7	165.5
284.8	285.4	-42.5°	141.8	142.2	143.0	142.9	142.8	142.8	142.8	145.8	149.9
283.6	286.2	-43.75°	121.1	120.9	120.9	120.1	120.3	122.4	124.6	128.1	131.1
284.2	284.0	-45°	103.6	104.2	105.3	106.1	107.4	109.3	110.3	111.6	113.2
281.3	282.7	-46.25°	94.3	94.6	95.3	95.7	96.0	96.8	97.9	99.3	102.2
280.1	281.7	-47.5°	85.4	85.7	86.4	87.0	87.4	88.6	89.7	90.6	93.1
279.2	281.0	-48.75°	77.9	78.1	78.7	79.2	79.5	80.5	81.7	82.9	85.1
278.0	279.4	-50°	70.7	70.9	71.6	72.2	72.7	73.8	75.1	76.1	77.9
275.7	277.5	-51.25°	64.4	64.7	65.2	65.9	66.4	67.3	68.4	69.4	70.9
275.1	277.0	-52.5°	57.5	57.6	58.0	58.6	59.1	59.9	61.3	62.6	64.1
274.8	276.8	-53.75°	48.2	48.8	49.6	50.5	51.3	52.4	54.0	54.8	55.1
274.3	276.3	-55°	38.4	39.1	39.6	40.1	40.3	40.3	41.1	41.6	42.0
273.1	275.3	-56.25°	27.1	27.3	27.4	27.6	27.4	27.0	27.8	28.7	30.4
273.7	275.8	-57.5°	17.0	17.4	17.8	18.6	19.2	19.8	21.3	22.8	24.1
272.2	274.6	-58.75°	12.4	12.8	13.1	13.8	14.4	14.9	15.9	17.0	18.2
271.1	273.1	-60°	8.0	8.5	9.0	9.8	10.5	11.2	12.2	13.5	14.7
270.9	273.1	-61.25°	5.0	5.5	6.0	6.7	7.5	8.1	9.0	10.2	11.3
268.9	271.6	-62.5°	2.3	3.0	3.6	4.5	5.3	6.1	7.0	8.3	9.5
268.1	270.2	-63.75°	1.8	2.3	2.8	3.5	4.2	4.8	5.5	6.6	7.7
267.5	269.8	-65°	1.3	1.7	2.2	2.8	3.4	4.1	4.7	5.9	7.0
265.6	268.2	-66.25°	1.2	1.6	2.0	2.6	3.2	3.8	4.4	5.4	6.5
264.9	266.2	-67.5°	1.1	1.5	1.9	2.4	3.0	3.6	4.1	5.0	6.0
264.9	266.1	-68.75°	1.0	1.4	1.7	2.2	2.8	3.3	3.9	4.7	5.6
263.3	265.8	-70°	0.9	1.3	1.6	2.0	2.6	3.1	3.6	4.4	5.2
261.1	263.6	-71.25°	0.9	1.2	1.5	1.9	2.4	2.9	3.3	4.0	4.8
259.5	261.4	-72.5°	0.8	1.1	1.4	1.7	2.2	2.6	3.1	3.7	4.4
258.0	259.7	-73.75°	0.8	1.1	1.3	1.6	2.0	2.4	2.8	3.4	4.0
256.0	258.0	-75°	0.8	1.0	1.2	1.5	1.9	2.2	2.6	3.1	3.7
253.2	256.1	-76.25°	0.7	0.9	1.2	1.4	1.8	2.1	2.4	2.8	3.3
250.3	253.3	-77.5°	0.7	0.9	1.1	1.3	1.6	1.9	2.2	2.5	3.0

REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

17.5°	18.75°		6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°
247.5	250.5	-78.75°	0.6	0.8	1.0	1.2	1.5	1.7	2.0	2.3	2.7
244.9	247.7	-80°	0.6	0.8	0.9	1.1	1.3	1.6	1.8	2.0	2.4
242.0	244.3	-81.25°	0.6	0.7	0.9	1.0	1.2	1.4	1.6	1.8	2.1
238.3	240.7	-82.5°	0.5	0.7	0.8	0.9	1.1	1.2	1.4	1.6	1.9
234.8	236.8	-83.75°	0.5	0.6	0.7	0.8	1.0	1.1	1.3	1.4	1.7
231.0	232.4	-85°	0.5	0.5	0.6	0.7	0.8	1.0	1.1	1.3	1.4
226.9	228.4	-86.25°	0.4	0.4	0.5	0.6	0.7	0.8	1.0	1.1	1.2
222.7	224.0	-87.5°	0.3	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
218.2	219.5	-88.75°	0.3	0.3	0.4	0.4	0.5	0.6	0.7	0.8	0.9
213.7	214.7	-90°	8.8	8.7	8.7	8.6	8.7	8.7	8.8	8.8	8.8
208.4	209.3										
202.9	203.6										
196.5	197.1										
189.6	190.2										
179.9	180.2										
167.8	169.2										
153.0	152.7										
132.8	133.1										
114.2	117.0										
104.7	106.8										
95.3	97.5										
87.6	89.8										
80.2	82.2										
73.2	75.4										
66.4	68.6										
56.6	58.6										
44.2	47.4										
33.5	37.5										
25.9	28.9										
19.7	22.7										
15.8	18.5										
12.6	15.0										
10.6	12.5										
8.7	10.5										
8.1	9.6										
7.5	8.7										
7.0	8.0										
6.5	7.3										
6.0	6.8										
5.5	6.2										
5.1	5.8										
4.7	5.3										
4.3	4.9										
3.9	4.4										
3.5	3.9										



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

17.5°	18.75°		20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°
3.1	3.5	90°	1.1	1.2	1.2	1.3	1.3	1.4	1.5	1.5	1.6
2.8	3.1	88.75°	10.2	10.1	10.0	10.0	9.9	9.9	9.9	9.9	9.9
2.4	2.7	87.5°	11.6	11.5	11.4	11.3	11.1	11.2	11.3	11.3	11.3
2.1	2.4	86.25°	14.8	14.6	14.5	14.3	14.2	14.2	14.2	14.2	14.2
1.9	2.1	85°	18.2	18.1	18.0	17.8	17.7	17.7	17.7	17.7	17.7
1.6	1.8	83.75°	22.9	22.7	22.5	22.2	22.0	22.0	21.9	21.8	21.7
1.3	1.5	82.5°	28.0	27.8	27.5	27.2	27.0	26.9	26.8	26.7	26.6
1.1	1.2	81.25°	33.7	33.4	33.0	32.6	32.3	32.2	32.0	31.8	31.5
1.0	1.1	80°	39.8	39.4	39.0	38.6	38.3	38.1	38.0	37.8	37.5
8.8	8.8	78.75°	46.1	45.7	45.2	44.7	44.3	44.2	44.0	43.8	43.4
		77.5°	52.7	52.4	51.9	51.5	51.1	50.9	50.6	50.3	49.8
		76.25°	59.8	59.3	58.8	58.2	57.8	57.6	57.3	57.0	56.4
		75°	67.5	66.9	66.2	65.5	65.1	64.8	64.4	64.0	63.3
		73.75°	75.1	74.4	73.7	72.8	72.4	72.1	71.7	71.3	70.5
		72.5°	82.7	82.0	81.3	80.5	80.0	79.7	79.2	78.6	77.7
		71.25°	90.3	89.6	88.9	88.1	87.8	87.4	86.9	86.3	85.3
		70°	98.5	97.9	97.2	96.4	95.9	95.3	94.7	94.0	92.9
		68.75°	106.9	106.3	105.7	104.9	104.3	103.6	102.8	101.9	100.8
		67.5°	115.5	114.9	114.2	113.4	112.7	111.9	111.0	109.9	108.7
		66.25°	124.2	123.5	122.8	122.0	121.2	120.3	119.3	118.1	116.7
		65°	133.0	132.3	131.4	130.5	129.6	128.6	127.6	126.4	125.1
		63.75°	141.9	141.1	140.2	139.3	138.3	137.2	136.0	134.8	133.5
		62.5°	150.8	149.9	148.9	148.0	146.9	145.7	144.4	143.2	141.9
		61.25°	159.7	158.8	157.8	156.7	155.5	154.2	152.9	151.6	150.2
		60°	168.7	167.7	166.6	165.5	164.2	162.8	161.5	160.1	158.6
		58.75°	177.6	176.5	175.3	174.1	172.8	171.4	170.1	168.6	167.0
		57.5°	186.5	185.3	184.0	182.7	181.2	179.7	178.4	177.0	175.4
		56.25°	194.9	193.7	192.4	191.0	189.5	188.1	186.7	185.1	183.5
		55°	203.4	202.1	200.7	199.3	197.6	196.3	194.9	193.3	191.5
		53.75°	211.7	210.4	209.0	207.4	205.8	204.5	203.0	201.4	199.3
		52.5°	220.0	218.6	217.2	215.5	213.9	212.6	211.2	209.5	207.2
		51.25°	228.1	226.7	225.2	223.6	222.1	220.7	219.2	217.4	214.9
		50°	236.1	234.5	232.9	231.1	229.9	228.7	227.2	225.1	222.5
		48.75°	243.5	242.0	240.5	238.8	237.5	236.2	234.7	232.5	230.0
		47.5°	250.7	249.1	247.4	246.0	244.9	243.6	241.9	239.4	236.8
		46.25°	257.4	256.0	254.2	252.9	251.7	250.4	248.5	246.2	243.4
		45°	263.4	261.7	260.2	259.4	258.3	256.8	254.4	251.9	249.6
		43.75°	268.9	267.2	265.8	264.8	263.8	262.4	260.0	257.4	254.8
		42.5°	273.3	271.7	271.0	270.1	268.9	267.1	264.8	262.4	260.2
		41.25°	277.6	276.3	275.6	274.8	273.7	271.7	269.4	267.0	265.4
		40°	281.0	280.5	280.2	279.4	277.9	276.0	273.9	271.9	270.5
		38.75°	284.4	284.3	284.0	283.6	282.1	280.1	278.0	276.7	275.4
		37.5°	287.6	288.0	287.9	286.9	285.4	283.9	282.5	281.2	279.9
		36.25°	290.1	290.6	291.1	290.1	288.5	286.9	286.2	285.7	284.3
		35°	292.4	293.0	292.8	292.0	291.2	290.3	289.5	288.9	288.3

REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

31.25°	32.5°		20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°
1.7	1.8	33.75°	294.4	295.0	294.4	293.7	292.9	292.8	292.7	292.0	291.0
9.7	9.6	32.5°	296.4	296.4	295.7	295.1	294.7	294.6	294.6	294.5	293.5
11.2	11.0	31.25°	297.7	297.4	297.0	296.3	296.2	296.3	296.2	296.0	295.8
14.0	13.7	30°	298.3	298.0	297.7	297.7	297.4	297.4	297.4	297.2	297.1
17.4	17.1	28.75°	298.5	298.4	298.2	298.3	298.4	298.3	298.2	298.3	298.2
21.3	20.9	27.5°	298.3	298.3	298.7	298.7	298.8	299.0	298.9	299.0	299.3
26.2	25.7	26.25°	298.0	298.1	298.5	298.9	299.2	299.3	299.5	299.6	299.9
31.0	30.5	25°	297.1	297.8	298.2	298.7	299.4	299.7	299.8	300.0	300.4
36.9	36.3	23.75°	296.1	296.8	297.8	298.6	299.3	299.8	299.9	300.1	300.7
42.8	42.1	22.5°	295.0	295.9	297.1	298.3	299.0	299.3	299.7	300.1	301.6
49.1	48.3	21.25°	293.3	295.0	296.3	297.5	298.3	298.7	299.3	300.9	302.4
55.7	54.8	20°	292.0	293.7	295.3	296.2	297.2	298.3	299.9	301.5	301.8
62.4	61.4	18.75°	291.0	292.5	293.7	295.0	296.3	298.4	300.1	300.4	300.9
69.5	68.5	17.5°	290.3	290.9	292.0	293.9	296.3	297.9	298.6	299.3	299.8
76.7	75.7	16.25°	288.9	289.5	291.2	293.8	295.2	296.2	297.2	298.2	298.7
84.2	83.0	15°	287.3	289.3	291.6	292.0	293.3	294.7	295.8	296.9	297.8
91.8	90.6	13.75°	287.7	289.2	289.3	290.4	291.8	293.2	294.5	295.9	297.1
99.5	98.2	12.5°	286.7	287.0	288.0	289.2	290.5	292.0	293.5	294.9	296.3
107.3	105.9	11.25°	285.2	286.0	286.9	288.2	289.5	291.0	292.5	293.9	295.1
115.2	113.7	10°	284.1	285.1	286.2	287.4	288.6	289.9	291.3	292.6	293.9
123.6	122.0	8.75°	283.1	284.4	285.5	286.4	287.4	288.5	289.9	291.4	292.9
132.1	130.4	7.5°	282.3	283.2	284.0	284.9	286.0	287.3	289.0	290.9	292.5
140.4	138.6	6.25°	280.5	281.6	282.7	284.0	285.4	286.9	288.6	290.6	292.3
148.6	146.7	5°	279.3	280.9	282.4	283.8	285.2	286.7	288.4	290.4	292.3
156.9	154.9	3.75°	278.9	280.6	282.2	283.7	285.2	286.7	288.4	290.5	292.4
165.1	162.9	2.5°	278.9	280.6	282.3	283.8	285.3	286.9	288.4	290.3	292.2
173.3	170.7	1.25°	278.4	280.0	281.7	283.0	284.4	285.9	287.4	289.3	291.2
181.1	178.5	0°	277.4	279.1	280.8	282.1	283.3	284.9	286.5	288.4	290.2
188.9	186.2	-1.25°	277.8	279.3	280.9	282.1	283.4	284.9	286.4	288.3	290.1
196.7	194.0	-2.5°	276.9	278.7	280.4	281.9	283.4	284.9	286.5	288.3	290.0
204.5	201.7	-3.75°	275.1	277.0	278.8	280.5	282.1	283.8	285.5	287.5	289.4
212.2	209.3	-5°	275.0	276.6	278.2	279.6	281.1	282.7	284.5	286.6	288.5
219.7	216.8	-6.25°	274.0	276.2	277.9	279.2	280.7	282.3	284.1	286.1	287.8
227.1	224.3	-7.5°	272.2	274.5	276.3	278.1	280.0	281.9	283.8	285.8	287.3
234.2	231.9	-8.75°	271.5	273.2	274.8	276.7	278.7	280.7	283.0	285.3	286.8
240.6	238.8	-10°	270.8	272.6	274.1	275.7	277.5	279.4	281.7	283.8	285.5
247.4	245.3	-11.25°	268.7	270.9	273.2	275.0	276.8	278.7	280.7	282.4	284.1
253.2	251.6	-12.5°	267.1	268.8	271.2	273.7	276.2	278.2	280.2	281.5	282.9
258.6	256.9	-13.75°	266.7	267.7	269.2	271.7	274.4	277.3	279.5	280.7	281.8
264.0	262.2	-15°	266.0	267.4	268.6	270.1	272.4	275.2	277.4	279.6	280.5
268.9	267.3	-16.25°	263.8	266.3	268.1	269.6	271.1	272.8	275.0	277.0	278.5
273.8	271.9	-17.5°	261.7	264.3	266.8	269.0	270.4	271.4	272.6	274.3	275.7
278.4	276.5	-18.75°	260.0	262.2	264.7	267.4	269.3	270.4	271.2	271.7	273.0
282.6	280.8	-20°	258.2	260.3	262.6	264.9	267.1	269.1	269.5	270.0	270.4
286.5	284.6	-21.25°	256.3	258.4	260.3	262.3	264.5	266.2	267.7	268.1	268.2

REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

31.25°	32.5°		20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°
289.9	288.2	-22.5°	253.6	256.0	257.8	259.7	261.3	262.9	264.6	265.7	265.8
292.4	291.3	-23.75°	250.3	252.9	255.2	256.7	258.0	259.5	260.8	262.1	263.2
294.8	293.9	-25°	246.8	249.5	251.7	253.3	254.7	255.8	257.0	258.3	259.3
297.0	296.4	-26.25°	243.2	245.3	247.6	249.8	251.0	252.0	253.1	254.3	255.4
298.4	298.6	-27.5°	238.9	241.0	243.3	245.3	247.0	248.1	249.2	250.2	251.4
299.5	299.9	-28.75°	234.6	236.7	238.6	240.6	242.6	244.0	245.0	246.2	247.3
300.5	300.9	-30°	230.0	232.0	233.9	235.9	237.7	239.5	240.8	242.0	243.1
301.0	302.1	-31.25°	225.2	227.3	229.1	231.0	232.9	234.7	236.4	237.7	238.8
301.9	303.0	-32.5°	220.8	222.3	224.2	226.1	228.0	229.8	231.6	233.2	233.8
302.9	303.3	-33.75°	215.8	217.1	219.1	221.0	222.9	224.8	226.5	227.7	228.4
302.8	303.0	-35°	210.7	212.0	213.4	215.3	217.4	219.0	220.1	221.4	222.8
302.1	302.4	-36.25°	204.7	205.9	207.3	209.2	210.6	212.1	213.4	215.0	215.7
301.2	301.5	-37.5°	198.2	199.5	200.3	201.6	203.2	204.9	206.2	207.1	208.1
300.2	300.6	-38.75°	190.5	191.3	192.4	193.8	195.6	196.3	197.8	199.1	200.3
299.2	299.9	-40°	181.2	182.6	184.2	184.1	184.9	186.3	188.5	189.5	189.5
298.6	299.3	-41.25°	170.9	169.8	169.6	170.9	173.5	175.0	174.8	176.0	177.3
297.9	298.7	-42.5°	152.2	151.8	153.3	156.1	157.0	156.9	158.1	160.7	162.9
297.1	297.8	-43.75°	133.3	134.2	136.7	138.4	138.2	137.5	140.7	144.3	145.6
296.1	296.8	-45°	119.6	121.0	121.5	122.0	121.6	122.5	126.7	129.1	129.4
295.2	295.9	-46.25°	108.3	108.6	109.2	110.9	112.1	112.7	114.2	116.1	118.3
294.4	295.4	-47.5°	99.1	100.3	101.2	102.3	103.1	103.7	104.8	107.3	109.1
294.0	295.1	-48.75°	91.4	92.5	93.4	94.6	95.8	96.7	97.3	99.0	100.7
293.7	294.9	-50°	84.1	85.5	86.9	88.1	89.2	90.0	90.5	91.8	93.9
293.7	295.0	-51.25°	77.5	79.0	80.4	81.7	82.7	83.5	84.3	85.1	87.1
293.8	295.1	-52.5°	70.5	71.8	73.1	74.7	76.2	77.1	78.0	78.4	80.0
293.4	294.6	-53.75°	61.0	63.2	65.2	67.3	69.3	69.2	69.6	70.6	72.4
292.4	293.6	-55°	50.9	54.2	55.8	57.1	58.1	58.9	60.3	62.2	64.3
291.4	292.6	-56.25°	40.9	43.5	45.0	46.1	46.9	48.6	51.5	53.5	54.8
291.3	292.5	-57.5°	31.3	33.1	35.5	37.9	40.0	42.0	44.0	45.3	45.9
291.2	292.3	-58.75°	25.4	28.1	30.4	32.5	34.4	35.9	37.4	39.1	40.6
290.7	291.9	-60°	21.1	23.4	25.5	27.7	29.8	31.7	33.4	34.9	36.3
289.9	291.0	-61.25°	17.6	19.9	22.2	24.2	26.1	27.9	29.5	31.0	32.6
289.1	290.2	-62.5°	14.8	16.9	18.9	20.8	22.9	24.9	26.7	28.3	29.7
288.6	289.5	-63.75°	12.7	14.9	17.0	19.0	20.9	22.6	24.2	25.7	27.0
288.1	288.7	-65°	11.7	13.7	15.6	17.4	19.0	20.6	22.1	23.7	25.1
287.0	287.8	-66.25°	10.7	12.6	14.4	16.1	17.6	19.1	20.5	21.9	23.3
285.4	286.2	-67.5°	9.8	11.5	13.2	14.8	16.3	17.7	19.0	20.3	21.5
283.8	284.7	-68.75°	9.0	10.6	12.1	13.6	15.0	16.2	17.4	18.6	19.7
282.5	283.2	-70°	8.2	9.7	11.1	12.5	13.7	14.9	16.0	17.0	18.1
281.1	281.6	-71.25°	7.5	8.8	10.1	11.4	12.5	13.6	14.6	15.5	16.5
279.7	279.9	-72.5°	6.8	8.1	9.2	10.4	11.4	12.3	13.2	14.1	15.0
277.0	278.0	-73.75°	6.3	7.3	8.4	9.4	10.3	11.1	11.9	12.7	13.5
274.0	275.0	-75°	5.6	6.6	7.5	8.4	9.2	10.0	10.7	11.4	12.1
271.0	272.0	-76.25°	5.0	5.9	6.7	7.5	8.2	8.9	9.5	10.1	10.8
268.4	268.7	-77.5°	4.5	5.3	6.0	6.7	7.3	7.9	8.5	9.0	9.5

REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

31.25°	32.5°		20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°
265.9	265.9	-78.75°	4.0	4.6	5.3	5.9	6.4	6.9	7.4	7.9	8.4
263.1	263.1	-80°	3.5	4.1	4.6	5.1	5.6	6.1	6.5	6.8	7.2
260.2	260.3	-81.25°	3.0	3.5	4.0	4.4	4.9	5.2	5.5	5.8	6.1
256.5	257.2	-82.5°	2.6	3.0	3.4	3.8	4.1	4.4	4.7	4.9	5.2
252.4	253.4	-83.75°	2.3	2.6	2.9	3.2	3.4	3.6	3.9	4.1	4.3
248.4	249.4	-85°	1.9	2.2	2.4	2.6	2.8	3.0	3.1	3.3	3.5
244.2	244.7	-86.25°	1.6	1.8	1.9	2.1	2.2	2.4	2.5	2.7	2.8
239.3	239.8	-87.5°	1.3	1.4	1.5	1.6	1.8	1.9	2.0	2.1	2.2
234.3	234.9	-88.75°	1.2	1.3	1.4	1.4	1.5	1.6	1.7	1.8	1.9
229.0	229.3	-90°	8.8	8.8	8.7	8.7	8.6	8.6	8.5	8.5	8.4
222.9	223.0										
216.2	216.6										
209.3	209.5										
200.8	202.1										
190.9	193.9										
179.8	180.7										
163.9	165.6										
147.2	149.7										
131.5	135.8										
119.7	123.2										
110.1	112.5										
102.6	104.6										
95.7	97.4										
89.0	90.8										
82.0	84.3										
74.8	77.3										
66.3	68.4										
56.9	59.4										
48.0	52.0										
42.6	46.1										
37.5	40.7										
34.0	36.9										
31.1	33.3										
28.4	30.3										
26.4	27.8										
24.5	25.7										
22.6	23.7										
20.8	21.8										
19.1	20.0										
17.4	18.3										
15.8	16.7										
14.3	15.1										
12.8	13.5										
11.4	12.0										
10.1	10.6										

REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

31.25°	32.5°		33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°
8.8	9.3	90°	1.9	2.0	2.1	2.2	2.2	2.3	2.4	2.4	2.5
7.6	8.0	88.75°	9.5	9.4	9.3	9.3	9.2	9.2	9.1	9.0	8.9
6.4	6.8	87.5°	10.9	10.7	10.7	10.6	10.6	10.5	10.4	10.4	10.3
5.5	5.8	86.25°	13.4	13.2	13.0	12.9	12.7	12.6	12.4	12.2	12.0
4.5	4.7	85°	16.8	16.5	16.4	16.2	16.0	15.8	15.6	15.4	15.2
3.7	3.9	83.75°	20.5	20.0	19.7	19.5	19.2	19.0	18.8	18.6	18.4
2.9	3.1	82.5°	25.3	24.8	24.5	24.1	23.7	23.3	22.9	22.5	22.1
2.3	2.5	81.25°	30.0	29.6	29.2	28.8	28.4	27.9	27.5	27.0	26.5
2.0	2.1	80°	35.6	35.0	34.5	33.9	33.3	32.7	32.0	31.5	30.9
8.3	8.2	78.75°	41.4	40.8	40.2	39.6	39.0	38.3	37.6	36.9	36.1
		77.5°	47.5	46.7	46.0	45.4	44.7	44.0	43.2	42.4	41.6
		76.25°	54.0	53.2	52.5	51.7	50.8	50.0	49.1	48.1	47.1
		75°	60.5	59.7	58.9	58.0	57.1	56.3	55.4	54.4	53.4
		73.75°	67.5	66.5	65.6	64.6	63.5	62.7	61.8	60.8	59.8
		72.5°	74.5	73.5	72.5	71.4	70.2	69.4	68.4	67.4	66.1
		71.25°	81.8	80.6	79.4	78.2	77.0	76.1	75.1	74.0	72.7
		70°	89.3	88.0	86.7	85.3	84.0	83.0	81.9	80.7	79.2
		68.75°	96.8	95.4	94.0	92.5	91.2	90.2	89.0	87.7	85.9
		67.5°	104.5	103.0	101.4	99.7	98.5	97.4	96.2	94.8	92.8
		66.25°	112.2	110.7	109.1	107.3	106.1	104.8	103.4	101.9	99.7
		65°	120.3	118.5	116.8	115.1	113.8	112.4	110.9	109.1	106.6
		63.75°	128.5	126.5	124.6	122.9	121.5	120.0	118.4	116.3	113.7
		62.5°	136.6	134.5	132.3	130.6	129.1	127.5	125.8	123.5	120.8
		61.25°	144.6	142.4	140.1	138.3	136.6	134.9	133.1	130.5	127.8
		60°	152.7	150.4	148.1	146.2	144.3	142.3	140.1	137.6	134.7
		58.75°	160.6	158.3	156.1	154.2	152.1	149.9	147.4	144.6	141.8
		57.5°	168.2	165.7	163.8	162.0	159.9	157.5	154.8	151.9	148.8
		56.25°	175.7	173.1	171.4	169.5	167.4	165.0	162.2	159.1	156.0
		55°	183.4	180.9	179.1	177.1	175.0	172.4	169.5	166.4	163.1
		53.75°	191.1	188.9	187.0	184.8	182.6	179.8	176.7	173.5	170.1
		52.5°	198.8	196.9	194.8	192.6	190.1	187.1	184.0	180.6	177.4
		51.25°	206.8	204.8	202.7	200.3	197.5	194.4	191.1	187.7	184.8
		50°	214.8	212.7	210.4	208.0	204.9	201.6	198.2	194.8	192.1
		48.75°	222.4	220.4	218.1	215.3	212.0	208.7	205.3	202.1	199.2
		47.5°	229.8	227.7	225.5	222.5	219.1	215.6	212.1	209.3	206.2
		46.25°	237.1	234.9	232.2	229.0	225.9	222.4	219.0	216.0	213.1
		45°	243.4	241.5	238.6	235.2	231.9	228.7	225.8	222.6	219.5
		43.75°	249.4	247.1	244.2	241.2	237.7	234.6	232.1	229.1	225.8
		42.5°	255.1	252.5	249.5	246.4	243.2	240.7	238.0	235.2	232.0
		41.25°	260.2	257.6	254.8	251.5	248.8	246.6	243.9	240.9	237.8
		40°	265.1	262.5	259.6	256.7	254.5	252.2	249.7	246.7	243.4
		38.75°	269.8	267.3	264.4	262.1	260.2	257.8	255.1	252.4	249.1
		37.5°	274.3	271.9	269.5	267.4	265.4	263.4	260.6	257.7	254.7
		36.25°	278.7	276.3	274.4	272.6	270.5	268.3	266.0	262.9	260.1
		35°	282.7	280.9	279.1	277.3	275.4	273.1	270.8	268.1	265.6

REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

45°	46.25°		33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°
2.5	2.6	33.75°	286.4	285.1	283.5	281.7	279.9	277.8	275.4	273.2	270.7
8.8	8.7	32.5°	290.2	288.8	287.5	285.9	284.0	282.2	280.1	277.9	275.0
10.2	9.9	31.25°	293.4	292.3	290.9	289.8	288.0	286.2	284.9	282.0	278.6
11.8	11.4	30°	295.8	295.4	294.3	293.1	292.0	290.3	288.5	285.5	282.0
15.0	14.5	28.75°	298.1	297.7	297.7	296.4	295.2	293.9	291.1	288.4	285.2
18.1	17.6	27.5°	300.2	300.0	299.9	299.5	298.2	296.1	293.6	290.8	288.1
21.6	20.9	26.25°	301.7	302.0	301.8	301.7	299.9	297.9	295.9	293.1	290.5
26.0	25.2	25°	302.9	303.5	303.4	302.4	301.5	299.4	297.6	295.2	292.5
30.3	29.5	23.75°	303.5	304.1	303.9	302.9	302.1	300.8	299.0	297.1	294.5
35.2	34.2	22.5°	303.7	303.6	303.7	303.2	302.5	302.0	300.2	298.4	296.2
40.7	39.6	21.25°	303.1	303.1	303.3	303.3	302.9	302.4	301.3	299.6	297.8
46.1	45.1	20°	302.4	302.5	302.7	303.3	303.3	302.8	302.3	300.6	298.9
52.1	50.8	18.75°	301.8	302.0	302.5	303.1	303.6	303.2	302.8	301.3	299.5
58.2	56.7	17.5°	301.2	301.6	302.1	302.8	303.6	303.5	302.8	301.8	300.1
64.4	62.6	16.25°	300.6	301.2	301.8	302.5	303.1	303.3	302.7	302.1	300.5
70.8	68.7	15°	300.0	300.8	301.2	301.7	302.3	302.9	302.5	302.0	300.8
77.3	75.2	13.75°	299.3	299.9	300.4	300.9	301.5	302.2	302.3	301.8	300.8
83.9	81.7	12.5°	298.4	299.0	299.5	300.1	300.8	301.5	302.0	301.4	300.8
90.6	88.3	11.25°	297.5	298.0	298.7	299.4	300.2	301.0	301.6	301.1	300.6
97.4	94.9	10°	296.7	297.4	298.2	299.0	299.7	300.4	301.1	300.8	300.3
104.1	101.6	8.75°	296.2	297.0	297.8	298.5	299.3	299.9	300.6	300.5	300.1
111.0	108.2	7.5°	295.9	296.6	297.4	298.2	299.0	299.7	300.4	300.5	300.1
117.9	115.0	6.25°	295.7	296.5	297.3	298.1	298.9	299.6	300.2	300.4	300.0
124.8	121.7	5°	295.8	296.6	297.3	298.0	298.8	299.5	300.1	300.4	299.9
131.7	128.8	3.75°	295.9	296.7	297.4	297.9	298.5	299.0	299.4	299.5	298.8
138.7	136.0	2.5°	295.3	295.9	296.3	296.7	297.2	297.7	298.0	298.3	297.6
145.7	143.2	1.25°	294.2	294.8	295.2	295.5	296.0	296.4	296.7	297.0	296.4
152.9	150.4	0°	293.2	293.8	294.1	294.4	294.8	295.1	295.4	295.8	295.1
160.2	157.6	-1.25°	293.0	293.6	293.8	294.0	294.3	294.6	294.9	295.2	294.4
167.5	164.8	-2.5°	292.8	293.3	293.5	293.7	293.9	294.0	294.3	294.5	293.6
174.8	172.0	-3.75°	292.4	293.0	293.2	293.3	293.4	293.5	293.8	293.8	292.9
182.0	179.1	-5°	291.6	292.2	292.4	292.5	292.6	292.8	293.1	293.0	292.1
189.2	186.1	-6.25°	290.9	291.3	291.6	291.7	291.8	291.9	292.2	292.0	291.0
196.3	193.1	-7.5°	290.1	290.5	290.7	290.9	290.9	291.0	291.2	290.9	290.0
203.1	199.9	-8.75°	289.2	289.5	289.8	289.9	290.0	290.1	290.3	289.8	288.9
209.8	206.3	-10°	288.3	288.6	288.9	288.9	288.9	289.0	289.1	288.5	287.7
216.4	212.5	-11.25°	286.9	287.4	287.9	287.8	287.7	287.8	287.7	286.9	286.1
222.4	218.7	-12.5°	285.2	285.6	286.0	286.3	286.5	286.7	286.1	285.2	284.3
228.3	224.4	-13.75°	283.4	283.7	284.1	284.4	284.7	285.0	284.4	283.5	282.3
234.2	230.2	-15°	281.7	281.8	282.2	282.5	282.7	282.9	282.1	281.4	280.2
240.0	236.5	-16.25°	280.0	280.2	280.4	280.5	280.7	280.6	279.7	279.0	277.5
245.5	243.0	-17.5°	278.4	278.4	278.6	278.6	278.6	278.1	277.2	276.2	274.8
251.7	249.1	-18.75°	275.9	276.5	276.6	276.5	276.3	275.5	274.6	273.4	271.9
257.8	254.4	-20°	272.8	273.7	274.4	274.2	273.6	272.8	271.9	270.4	268.9
263.2	259.2	-21.25°	269.5	270.3	271.0	271.4	270.8	270.0	268.8	267.2	265.7

REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

45°	46.25°		33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°
267.3	263.8	-22.5°	266.1	266.8	267.6	267.7	267.5	267.2	265.5	264.0	262.2
271.3	267.7	-23.75°	263.2	263.3	264.0	263.8	263.8	263.3	262.1	260.6	258.5
275.2	271.4	-25°	260.3	260.4	260.0	259.9	259.9	259.0	258.1	256.7	254.7
278.8	275.1	-26.25°	257.2	257.2	256.4	255.8	255.4	254.6	253.7	252.3	250.8
281.9	278.7	-27.5°	254.2	253.4	252.8	252.0	250.8	250.2	249.0	247.7	246.3
284.8	281.7	-28.75°	249.7	249.6	249.0	247.8	246.6	245.5	244.2	243.0	241.4
287.4	284.3	-30°	245.0	245.2	244.5	243.4	242.4	240.8	239.3	238.0	236.4
289.9	286.7	-31.25°	240.2	240.1	239.7	238.9	237.6	236.1	234.6	232.9	231.4
291.9	289.0	-32.5°	234.9	234.7	234.5	234.1	232.8	231.5	229.6	227.8	226.4
293.7	291.2	-33.75°	229.3	229.2	228.9	228.4	228.0	226.3	224.4	222.7	220.9
295.3	292.8	-35°	223.4	223.3	222.9	222.6	222.2	220.7	218.9	217.2	215.2
296.5	294.0	-36.25°	216.8	216.9	216.7	216.3	215.5	214.7	213.1	211.1	209.4
297.5	295.1	-37.5°	209.7	210.0	210.0	209.3	208.6	207.9	206.7	204.9	203.3
298.4	296.0	-38.75°	202.5	202.2	202.1	202.1	201.5	199.9	199.4	198.6	196.0
298.9	296.9	-40°	193.3	192.4	192.9	194.6	192.4	191.3	191.1	190.7	188.4
299.2	297.2	-41.25°	181.5	181.4	182.2	182.6	182.6	181.9	180.7	180.4	180.3
299.2	297.4	-42.5°	168.0	168.6	168.8	169.9	171.8	170.0	169.1	169.4	170.2
299.2	297.6	-43.75°	152.7	153.8	154.7	156.4	157.6	156.8	156.5	157.6	157.9
299.1	297.6	-45°	138.2	138.7	140.8	143.7	144.4	142.9	144.4	146.2	146.4
299.1	297.7	-46.25°	124.9	127.3	129.9	132.1	132.3	132.7	133.9	135.5	135.7
299.2	297.8	-47.5°	115.9	118.5	120.4	122.0	123.6	124.3	124.3	125.8	127.6
299.3	297.9	-48.75°	107.7	110.1	112.3	114.3	115.7	116.3	116.8	118.3	120.0
299.3	297.9	-50°	100.1	102.8	105.1	107.0	108.2	109.3	110.3	111.0	112.7
299.3	297.7	-51.25°	93.3	95.9	98.2	100.0	101.7	102.9	103.9	104.6	106.1
298.1	296.5	-52.5°	86.8	89.2	91.0	93.2	95.4	96.6	97.5	98.4	99.8
296.9	295.3	-53.75°	79.2	81.2	83.5	86.1	88.9	89.6	90.6	91.9	93.7
295.7	294.0	-55°	70.7	73.1	75.8	78.5	80.6	82.0	83.4	85.2	87.5
294.4	292.7	-56.25°	62.0	65.3	68.2	70.7	72.6	74.1	76.5	79.1	81.4
293.6	291.9	-57.5°	55.4	58.3	61.0	63.2	65.5	67.9	70.6	73.2	75.5
292.8	291.0	-58.75°	49.2	51.8	54.6	57.6	60.2	62.5	64.9	67.4	70.1
291.9	290.0	-60°	44.0	47.1	50.0	52.7	55.2	57.2	59.7	62.6	65.3
291.0	289.1	-61.25°	40.0	42.9	45.5	48.1	50.7	53.1	55.2	58.0	60.5
289.8	287.9	-62.5°	36.2	39.1	41.8	44.5	46.9	49.1	51.1	53.6	56.1
288.7	286.8	-63.75°	33.3	36.0	38.6	41.0	43.3	45.4	47.4	49.6	52.0
287.4	285.5	-65°	30.6	33.1	35.5	37.7	39.9	42.0	43.9	45.7	48.0
286.2	284.2	-66.25°	28.0	30.4	32.6	34.7	36.8	38.7	40.5	42.1	44.3
284.4	282.6	-67.5°	25.6	27.8	29.9	31.8	33.8	35.6	37.3	38.8	40.7
282.5	280.7	-68.75°	23.3	25.4	27.4	29.2	31.0	32.7	34.2	35.6	37.2
280.5	278.6	-70°	21.3	23.2	25.0	26.7	28.3	29.8	31.2	32.5	33.9
278.5	276.4	-71.25°	19.3	21.1	22.7	24.3	25.7	27.2	28.5	29.6	30.8
276.1	274.1	-72.5°	17.5	19.1	20.6	22.0	23.3	24.6	25.8	26.8	27.7
273.3	271.1	-73.75°	15.8	17.1	18.5	19.8	21.0	22.1	23.2	24.1	25.0
270.2	268.1	-75°	14.2	15.3	16.5	17.7	18.7	19.7	20.7	21.5	22.3
267.0	265.0	-76.25°	12.6	13.5	14.6	15.6	16.5	17.4	18.2	19.0	19.7
263.8	261.8	-77.5°	11.1	11.8	12.7	13.6	14.4	15.2	16.0	16.7	17.3



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

45°	46.25°		33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°
260.3	258.3	-78.75°	9.7	10.3	11.1	11.9	12.6	13.3	13.9	14.5	14.9
256.7	254.3	-80°	8.4	8.9	9.6	10.2	10.9	11.4	11.9	12.3	12.7
252.8	250.3	-81.25°	7.1	7.5	8.1	8.7	9.3	9.7	10.1	10.5	10.8
248.6	246.2	-82.5°	6.0	6.3	6.8	7.3	7.7	8.1	8.4	8.7	8.9
244.3	242.0	-83.75°	5.0	5.2	5.6	5.9	6.3	6.6	6.8	7.1	7.3
239.6	237.6	-85°	4.1	4.3	4.6	4.8	5.1	5.3	5.5	5.7	5.9
234.8	232.7	-86.25°	3.2	3.4	3.6	3.8	3.9	4.1	4.2	4.3	4.5
229.7	227.6	-87.5°	2.6	2.7	2.9	3.0	3.2	3.3	3.4	3.5	3.7
224.4	222.4	-88.75°	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1
219.0	217.1	-90°	8.1	8.0	8.0	8.0	7.9	7.9	7.8	7.7	7.6
213.4	211.3										
207.5	205.4										
200.9	199.2										
193.9	192.5										
186.6	184.5										
177.8	175.6										
167.6	166.0										
156.6	155.6										
145.1	146.3										
136.7	137.3										
128.6	128.8										
120.9	121.6										
114.0	115.1										
107.6	108.7										
101.3	102.5										
95.2	96.5										
89.3	90.6										
83.4	84.8										
77.7	79.5										
72.5	74.5										
67.6	69.5										
62.8	64.9										
58.4	60.4										
54.1	56.0										
50.0	51.9										
46.2	47.9										
42.5	44.1										
38.9	40.4										
35.4	36.8										
32.1	33.3										
29.0	30.1										
26.1	27.1										
23.2	24.2										
20.5	21.4										
18.0	18.7										



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

45°	46.25°		47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°
15.4	16.1	90°	2.7	2.8	2.9	2.9	3.0	3.0	3.0	3.1	3.1
13.2	13.8	88.75°	8.5	8.4	8.2	8.1	8.0	7.9	7.7	7.6	7.4
11.2	11.6	87.5°	9.7	9.5	9.3	9.2	9.1	9.0	8.9	8.6	8.4
9.2	9.5	86.25°	11.0	10.6	10.3	10.2	10.2	10.1	10.0	9.7	9.4
7.5	7.8	85°	14.0	13.5	13.1	12.8	12.6	12.3	12.0	11.4	10.8
6.0	6.3	83.75°	17.1	16.6	16.0	15.8	15.5	15.2	14.9	14.2	13.5
4.6	4.8	82.5°	20.2	19.6	19.0	18.8	18.5	18.2	17.7	17.0	16.3
3.8	4.0	81.25°	24.5	23.7	23.0	22.5	21.9	21.3	20.6	19.8	19.0
3.1	3.3	80°	28.7	27.9	27.2	26.6	26.1	25.4	24.6	23.5	22.3
7.5	7.4	78.75°	33.1	32.1	31.4	30.8	30.2	29.5	28.6	27.4	26.2
		77.5°	38.5	37.4	36.3	35.4	34.4	33.6	32.6	31.4	30.2
		76.25°	44.0	42.8	41.7	40.7	39.6	38.5	37.1	35.4	34.2
		75°	49.5	48.2	47.1	45.9	44.7	43.4	41.9	40.2	38.7
		73.75°	55.2	53.7	52.5	51.2	49.8	48.4	46.7	44.9	43.5
		72.5°	60.9	59.2	58.0	56.7	55.2	53.5	51.5	49.6	48.4
		71.25°	66.5	64.8	63.6	62.3	60.8	59.0	56.9	54.6	53.2
		70°	73.0	71.0	69.4	67.9	66.3	64.5	62.2	59.9	58.6
		68.75°	79.5	77.5	75.8	74.0	72.1	70.0	67.6	65.3	64.1
		67.5°	86.0	84.0	82.1	80.2	78.2	75.8	73.1	70.8	69.5
		66.25°	92.5	90.6	88.5	86.4	84.2	81.7	78.9	76.7	75.1
		65°	99.1	97.2	95.0	92.7	90.2	87.6	84.7	82.7	80.9
		63.75°	105.8	103.8	101.6	99.1	96.5	93.5	90.5	88.7	86.5
		62.5°	112.7	110.5	108.1	105.6	102.7	99.6	96.6	94.7	92.0
		61.25°	119.6	117.3	114.8	112.1	108.9	105.6	102.9	100.8	97.6
		60°	126.5	124.1	121.5	118.6	115.2	111.7	109.2	107.1	103.3
		58.75°	133.5	130.9	128.2	125.1	121.5	117.8	115.6	113.0	109.0
		57.5°	140.6	137.9	134.9	131.5	127.8	124.4	122.2	118.9	114.7
		56.25°	147.7	144.8	141.7	138.0	134.2	131.1	128.7	124.8	120.4
		55°	154.7	151.7	148.3	144.6	140.5	137.9	135.0	130.6	126.1
		53.75°	161.8	158.6	155.0	151.1	147.3	144.7	141.1	136.5	131.7
		52.5°	168.9	165.5	161.7	157.6	154.3	151.5	147.1	142.3	137.4
		51.25°	176.0	172.3	168.3	164.1	161.3	157.9	153.1	148.1	143.0
		50°	182.9	179.0	174.8	171.0	168.2	164.1	159.1	153.9	148.6
		48.75°	189.5	185.5	181.3	178.1	175.0	170.1	165.0	159.6	154.1
		47.5°	196.1	191.8	187.8	185.1	181.0	175.9	170.7	165.3	159.6
		46.25°	202.4	198.1	194.7	191.7	187.1	181.8	176.4	170.9	165.1
		45°	208.4	204.5	201.4	197.6	192.7	187.5	181.9	176.2	170.7
		43.75°	214.4	211.1	208.1	203.4	198.3	193.1	187.4	181.6	176.1
		42.5°	220.6	217.7	213.9	209.1	203.8	198.4	192.8	187.1	181.4
		41.25°	227.2	224.3	219.5	214.5	209.4	203.7	198.1	192.5	186.6
		40°	233.7	229.9	225.0	219.9	214.7	209.0	203.4	197.8	191.8
		38.75°	239.9	235.2	230.5	225.2	219.8	214.4	208.7	202.9	196.9
		37.5°	245.3	240.4	235.5	230.5	224.9	219.5	213.9	207.9	201.9
		36.25°	250.1	245.5	240.5	235.4	230.0	224.5	219.0	212.8	206.6
		35°	254.8	250.3	245.3	240.2	235.2	229.5	223.7	217.7	211.3

REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

58.75°	60°		47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°
3.2	3.2	33.75°	259.3	254.7	250.0	244.9	239.8	234.3	228.4	222.4	215.7
7.3	7.3	32.5°	263.7	259.0	254.5	249.6	244.3	239.1	233.0	226.8	220.0
8.3	8.3	31.25°	267.7	263.2	258.7	254.2	248.8	243.4	237.4	230.9	224.2
9.3	9.4	30°	271.3	267.3	262.6	258.2	253.1	247.5	241.6	234.8	228.1
10.6	10.4	28.75°	274.7	270.8	266.4	261.9	257.2	251.3	245.4	238.7	231.9
13.3	13.1	27.5°	278.0	274.0	270.0	265.4	260.8	254.9	248.9	242.4	235.5
16.1	15.9	26.25°	281.1	277.1	273.2	268.6	263.8	258.4	252.2	246.0	239.0
18.9	18.7	25°	283.8	280.0	275.9	271.5	266.6	261.7	255.4	249.3	242.3
21.9	21.4	23.75°	286.1	282.6	278.4	274.3	269.3	264.5	258.5	252.3	245.0
25.9	25.2	22.5°	288.0	284.9	280.7	276.6	271.9	267.0	261.5	254.6	247.5
29.8	28.9	21.25°	289.7	286.6	282.8	278.7	274.4	269.4	263.6	256.7	249.8
33.7	32.7	20°	291.2	288.1	284.8	280.7	276.5	271.0	265.5	258.6	251.7
37.9	36.5	18.75°	292.7	289.6	286.6	282.2	277.8	272.5	266.9	260.4	253.5
42.7	40.9	17.5°	293.9	290.8	287.5	283.4	278.9	273.9	268.3	262.1	255.1
47.5	45.5	16.25°	294.5	291.5	288.2	284.4	280.0	275.2	269.6	263.7	256.7
52.2	50.0	15°	294.8	292.1	288.8	285.3	280.9	276.4	270.8	265.1	258.0
57.0	54.6	13.75°	295.0	292.6	289.4	286.2	281.8	277.4	271.8	266.1	259.2
62.2	59.5	12.5°	295.2	292.9	289.8	286.7	282.5	278.1	272.7	267.0	260.2
67.4	64.5	11.25°	295.4	293.1	290.2	287.1	283.1	278.7	273.5	267.7	261.2
72.5	69.6	10°	295.7	293.4	290.6	287.5	283.7	279.3	274.2	268.4	262.0
77.7	74.6	8.75°	295.9	293.6	291.0	287.8	284.2	279.8	274.8	269.0	262.8
83.2	79.7	7.5°	296.2	293.9	291.3	288.1	284.5	280.2	275.4	269.5	263.1
88.6	85.0	6.25°	296.4	294.0	291.5	288.3	284.6	279.9	275.0	268.9	262.6
94.0	90.2	5°	296.0	293.4	290.7	287.3	283.7	279.0	274.2	268.2	262.0
99.4	95.4	3.75°	294.8	292.3	289.6	286.2	282.7	278.1	273.4	267.4	261.3
104.9	100.6	2.5°	293.6	291.1	288.5	285.1	281.6	277.0	272.4	266.5	260.5
110.4	105.9	1.25°	292.3	289.8	287.3	283.9	280.5	275.9	271.3	265.5	259.6
115.9	111.2	0°	291.0	288.5	286.0	282.7	279.3	274.8	270.2	264.4	258.6
121.3	116.5	-1.25°	290.1	287.6	285.1	281.7	278.3	273.8	269.2	263.4	257.6
126.8	121.7	-2.5°	289.2	286.6	284.1	280.7	277.2	272.7	268.1	262.3	256.5
132.3	127.1	-3.75°	288.2	285.6	283.0	279.6	276.1	271.5	266.9	261.1	255.2
137.7	132.5	-5°	287.1	284.5	281.9	278.4	274.8	270.3	265.6	259.8	253.9
143.1	137.9	-6.25°	285.9	283.4	280.6	277.2	273.5	269.0	264.3	258.5	252.5
148.7	143.2	-7.5°	284.6	282.0	279.2	275.8	272.1	267.6	262.8	257.0	251.0
154.1	148.6	-8.75°	283.2	280.7	277.7	274.3	270.5	266.1	261.1	255.4	249.3
159.5	153.8	-10°	281.8	279.2	276.2	272.8	268.9	264.5	259.4	253.6	247.4
164.9	159.0	-11.25°	280.2	277.7	274.5	271.2	267.1	262.8	257.5	251.7	245.5
170.2	164.1	-12.5°	278.2	275.8	272.7	269.5	265.3	261.1	255.6	249.8	243.6
175.5	169.1	-13.75°	276.1	273.6	270.4	267.3	263.3	259.3	253.5	247.7	241.5
180.5	174.1	-15°	273.9	271.2	268.0	264.7	260.8	256.7	251.1	245.5	239.4
185.5	179.1	-16.25°	271.6	268.7	265.6	262.1	258.2	253.9	248.5	242.9	237.1
190.4	183.8	-17.5°	269.0	266.2	263.1	259.4	255.6	251.0	245.7	240.2	234.4
195.3	188.3	-18.75°	265.9	263.1	260.4	256.6	252.9	248.0	242.9	237.3	231.6
200.1	192.8	-20°	262.6	259.8	256.9	253.6	250.0	245.0	239.9	234.3	228.6
204.6	197.2	-21.25°	259.1	256.4	253.4	250.1	246.4	241.9	236.8	231.2	225.6

REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

58.75°	60°		47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°
208.8	201.6	-22.5°	255.5	252.9	249.7	246.5	242.6	238.3	233.5	227.9	222.2
212.9	205.8	-23.75°	251.8	249.1	246.0	242.9	238.7	234.5	229.6	224.5	218.7
217.0	209.7	-25°	247.9	245.1	242.2	238.8	234.7	230.6	225.7	220.7	215.1
220.9	213.5	-26.25°	243.8	240.9	238.2	234.6	230.7	226.4	221.7	216.8	211.1
224.8	217.2	-27.5°	239.4	236.7	233.8	230.3	226.6	222.2	217.6	212.6	207.1
228.5	220.7	-28.75°	234.9	232.3	229.2	225.7	222.2	217.9	213.5	208.4	203.0
232.0	223.6	-30°	230.3	227.7	224.4	221.1	217.4	213.5	209.1	204.0	198.9
234.6	226.3	-31.25°	225.5	222.7	219.5	216.3	212.5	208.8	204.6	199.6	194.6
237.1	229.0	-32.5°	220.2	217.5	214.6	211.2	207.5	203.9	199.6	195.2	190.1
239.5	231.5	-33.75°	214.6	212.1	209.4	205.9	202.5	198.7	194.6	190.5	185.6
241.7	233.7	-35°	209.0	206.6	203.7	200.6	197.2	193.5	189.6	185.4	181.0
243.9	235.8	-36.25°	203.2	200.7	197.9	195.0	191.8	188.2	184.5	180.3	176.0
245.9	237.7	-37.5°	197.3	194.6	191.9	189.1	186.2	182.8	179.1	175.1	171.0
247.8	239.5	-38.75°	190.9	188.4	185.9	182.6	180.0	177.4	173.6	169.8	165.8
249.5	241.1	-40°	183.4	182.1	179.0	175.8	173.4	171.3	168.1	164.5	160.6
250.9	242.5	-41.25°	174.9	174.9	171.5	168.7	166.4	164.5	162.5	159.0	155.3
252.0	243.9	-42.5°	165.7	165.4	163.7	161.2	159.2	157.6	156.2	153.4	149.9
253.1	245.1	-43.75°	156.2	156.1	155.4	153.5	151.9	150.5	149.5	147.9	144.5
254.0	246.2	-45°	147.1	147.1	146.8	145.7	144.3	143.5	142.9	141.8	139.2
254.9	247.2	-46.25°	138.1	138.7	138.7	137.7	136.8	136.8	136.3	135.4	133.8
255.6	248.0	-47.5°	130.0	131.0	131.0	130.0	130.1	130.2	129.9	129.3	128.3
255.6	247.8	-48.75°	122.6	123.6	123.6	123.7	123.5	123.8	123.7	123.4	122.5
255.1	247.4	-50°	115.7	116.6	117.2	117.5	117.4	117.5	117.8	117.5	116.8
254.5	246.9	-51.25°	109.4	110.4	111.1	111.5	111.5	111.6	111.9	111.8	111.3
253.9	246.4	-52.5°	103.5	104.3	105.2	105.6	105.9	105.9	106.2	106.2	105.8
253.1	245.6	-53.75°	97.6	98.5	99.4	100.1	100.5	100.5	100.6	100.7	100.5
252.2	244.8	-55°	91.8	92.9	93.9	94.6	95.1	95.2	95.2	95.4	95.2
251.3	243.9	-56.25°	86.3	87.5	88.5	89.3	89.8	90.1	90.0	90.1	90.0
250.3	243.0	-57.5°	81.1	82.3	83.2	84.1	84.7	85.0	84.9	84.9	84.9
249.2	241.9	-58.75°	76.0	77.2	78.3	79.1	79.7	80.0	80.0	79.9	80.0
248.0	240.8	-60°	71.1	72.4	73.4	74.2	74.8	75.2	75.3	75.0	75.1
246.8	239.5	-61.25°	66.4	67.7	68.7	69.5	70.1	70.5	70.6	70.4	70.3
245.4	238.2	-62.5°	61.9	63.2	64.2	64.9	65.5	65.9	66.0	65.8	65.7
244.0	236.7	-63.75°	57.6	58.8	59.8	60.5	61.0	61.4	61.6	61.5	61.2
242.4	235.1	-65°	53.4	54.6	55.5	56.2	56.7	57.1	57.3	57.2	56.8
240.7	233.4	-66.25°	49.4	50.5	51.4	52.0	52.5	52.9	53.1	53.0	52.6
238.9	231.5	-67.5°	45.5	46.5	47.3	48.0	48.4	48.8	48.9	48.9	48.7
237.1	229.6	-68.75°	41.6	42.6	43.4	44.0	44.4	44.8	45.0	45.0	44.9
235.2	227.5	-70°	37.9	38.8	39.5	40.1	40.6	41.0	41.2	41.2	41.0
233.2	225.4	-71.25°	34.2	35.1	36.0	36.6	37.0	37.3	37.4	37.4	37.3
230.9	223.1	-72.5°	31.1	31.9	32.6	33.1	33.5	33.6	33.8	33.9	33.8
228.2	220.7	-73.75°	28.0	28.7	29.3	29.7	30.0	30.2	30.4	30.4	30.3
225.2	217.9	-75°	25.0	25.7	26.2	26.6	26.8	26.9	27.0	27.0	26.9
222.0	215.0	-76.25°	22.1	22.8	23.2	23.5	23.7	23.7	23.8	23.7	23.7
218.8	212.0	-77.5°	19.4	19.9	20.3	20.5	20.6	20.7	20.8	20.8	20.8

REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

58.75°	60°		47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°
215.6	208.9	-78.75°	16.7	17.2	17.6	17.8	17.9	18.0	18.0	18.1	18.0
212.3	205.6	-80°	14.3	14.8	15.1	15.3	15.3	15.4	15.3	15.3	15.2
208.9	202.3	-81.25°	12.1	12.4	12.7	12.7	12.8	12.7	12.7	12.8	12.8
205.4	198.8	-82.5°	9.8	10.1	10.4	10.5	10.6	10.7	10.7	10.8	10.8
201.5	195.3	-83.75°	8.1	8.4	8.7	8.7	8.8	8.8	8.8	8.8	8.9
197.4	191.4	-85°	6.5	6.7	6.9	7.0	7.0	6.9	6.9	6.9	6.9
193.3	187.5	-86.25°	4.9	5.1	5.3	5.4	5.4	5.5	5.5	5.6	5.7
189.0	183.4	-87.5°	4.2	4.3	4.5	4.6	4.6	4.6	4.7	4.8	4.8
184.8	179.3	-88.75°	3.4	3.6	3.7	3.7	3.8	3.8	3.8	3.9	4.0
180.4	174.9	-90°	7.4	7.3	7.2	7.1	6.9	6.8	6.6	6.5	6.4
176.0	170.5										
171.4	166.1										
166.6	161.6										
161.6	157.1										
156.5	152.4										
151.4	147.4										
146.3	142.5										
141.1	137.5										
136.0	132.5										
130.8	127.6										
125.7	122.7										
120.6	117.8										
115.7	113.0										
110.4	108.3										
105.1	103.5										
99.9	98.8										
94.7	93.7										
89.6	88.7										
84.6	83.8										
79.6	78.9										
74.8	74.3										
70.2	69.7										
65.6	65.2										
61.2	60.8										
56.8	56.5										
52.6	52.4										
48.6	48.4										
44.6	44.4										
40.7	40.5										
37.1	36.9										
33.5	33.3										
30.0	29.8										
26.6	26.4										
23.5	23.4										
20.7	20.5										

REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

58.75°	60°		61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°
17.9	17.7	90°	3.3	3.3	3.4	3.4	3.5	3.5	3.6	3.6	3.6
15.0	14.8	88.75°	7.1	7.0	6.8	6.6	6.4	6.2	6.0	5.8	5.7
12.8	12.8	87.5°	8.1	7.9	7.7	7.5	7.3	7.1	6.8	6.6	6.4
10.8	10.8	86.25°	9.1	8.9	8.7	8.4	8.2	7.9	7.7	7.4	7.2
8.8	8.8	85°	10.1	9.9	9.6	9.3	9.1	8.8	8.5	8.2	8.0
6.9	6.8	83.75°	12.5	11.9	11.3	10.6	10.0	9.6	9.3	9.0	8.7
5.8	5.9	82.5°	15.2	14.5	13.8	13.0	12.3	11.6	10.8	10.0	9.5
4.9	5.0	81.25°	17.9	17.1	16.3	15.5	14.6	13.8	12.9	12.0	11.2
4.0	4.1	80°	20.6	19.7	18.8	17.9	17.0	16.0	15.1	14.1	13.2
6.3	6.3	78.75°	23.9	22.6	21.3	20.3	19.3	18.3	17.2	16.2	15.2
		77.5°	27.6	26.2	24.7	23.2	21.6	20.5	19.3	18.2	17.2
		76.25°	31.3	29.7	28.2	26.6	24.9	23.2	21.5	20.3	19.2
		75°	34.9	33.3	31.6	30.0	28.2	26.4	24.4	22.5	21.1
		73.75°	38.9	36.9	35.1	33.4	31.5	29.6	27.5	25.5	23.5
		72.5°	43.4	41.1	38.8	36.8	34.8	32.8	30.6	28.5	26.3
		71.25°	47.8	45.4	42.9	40.6	38.1	36.0	33.7	31.4	29.1
		70°	52.2	49.7	47.1	44.6	42.0	39.2	36.8	34.4	31.9
		68.75°	56.7	54.0	51.3	48.7	46.0	43.0	39.9	37.3	34.7
		67.5°	61.6	58.4	55.5	52.8	49.9	46.8	43.6	40.3	37.5
		66.25°	66.5	63.2	60.0	56.9	53.8	50.6	47.2	43.7	40.3
		65°	71.3	67.9	64.6	61.2	57.8	54.4	50.8	47.1	43.4
		63.75°	76.2	72.7	69.2	65.6	61.9	58.2	54.4	50.4	46.5
		62.5°	81.2	77.4	73.8	70.1	66.1	62.1	57.9	53.8	49.6
		61.25°	86.3	82.3	78.4	74.5	70.4	66.1	61.4	57.1	52.7
		60°	91.3	87.2	83.1	78.9	74.6	70.1	65.2	60.3	55.7
		58.75°	96.3	92.2	87.8	83.3	78.8	74.0	69.0	63.7	58.8
		57.5°	101.4	97.1	92.6	87.9	83.0	78.0	72.7	67.3	61.8
		56.25°	106.6	102.0	97.3	92.4	87.3	81.9	76.5	70.8	65.0
		55°	111.8	106.9	102.0	96.9	91.6	85.9	80.2	74.3	68.3
		53.75°	116.9	111.9	106.7	101.4	95.9	90.0	83.8	77.8	71.6
		52.5°	122.1	116.9	111.5	105.9	100.2	94.1	87.7	81.3	74.9
		51.25°	127.2	121.8	116.2	110.4	104.4	98.2	91.6	84.7	78.1
		50°	132.4	126.8	121.0	114.9	108.7	102.2	95.4	88.3	81.3
		48.75°	137.6	131.7	125.6	119.3	112.9	106.3	99.3	92.0	84.4
		47.5°	142.7	136.6	130.3	123.7	117.0	110.4	103.2	95.6	87.5
		46.25°	147.8	141.5	134.9	128.0	121.1	114.2	107.0	99.1	90.8
		45°	152.8	146.3	139.4	132.2	125.1	118.0	110.8	102.5	94.0
		43.75°	157.8	151.1	143.8	136.4	129.1	121.8	114.4	105.9	97.1
		42.5°	162.6	155.7	148.2	140.6	132.9	125.4	117.7	109.1	100.2
		41.25°	167.4	160.2	152.5	144.7	136.8	129.0	120.9	112.3	103.2
		40°	172.0	164.6	156.8	148.8	140.6	132.5	124.0	115.3	106.1
		38.75°	176.6	168.9	161.0	152.8	144.4	135.8	127.1	118.2	108.9
		37.5°	181.2	173.3	165.1	156.7	148.1	139.1	130.2	121.1	111.7
		36.25°	185.5	177.6	169.2	160.6	151.6	142.4	133.2	123.9	114.4
		35°	189.7	181.9	173.3	164.4	155.0	145.6	136.2	126.7	116.9

REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

72.5°	73.75°		61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°
3.5	3.5	33.75°	193.9	186.1	177.3	167.9	158.3	148.8	139.1	129.4	119.4
5.5	5.3	32.5°	197.9	190.0	181.1	171.3	161.6	151.8	142.0	132.1	121.9
6.2	6.0	31.25°	201.9	193.7	184.6	174.6	164.7	154.8	144.8	134.7	124.3
7.0	6.8	30°	205.8	197.0	187.9	177.8	167.8	157.7	147.5	137.2	126.6
7.7	7.5	28.75°	209.4	200.1	190.8	180.8	170.7	160.5	150.1	139.7	128.8
8.5	8.2	27.5°	212.2	203.0	193.6	183.7	173.5	163.2	152.7	141.9	130.9
9.2	8.9	26.25°	215.0	205.9	196.3	186.6	176.1	165.8	155.1	144.1	133.0
10.3	9.6	25°	217.6	208.6	198.9	189.2	178.7	168.3	157.3	146.1	134.9
12.2	11.2	23.75°	220.1	211.3	201.4	191.6	181.2	170.4	159.4	148.1	136.8
14.1	13.0	22.5°	222.6	213.6	203.8	193.9	183.4	172.5	161.4	150.0	138.6
16.0	14.8	21.25°	224.9	215.8	206.1	196.0	185.4	174.4	163.3	151.8	140.3
17.9	16.6	20°	227.1	217.9	208.2	197.9	187.4	176.3	165.1	153.5	141.9
19.8	18.4	18.75°	229.2	219.8	210.1	199.7	189.3	178.1	166.8	155.1	143.4
21.7	20.2	17.5°	231.0	221.5	211.9	201.4	191.0	179.7	168.4	156.7	144.8
24.0	22.0	16.25°	232.7	223.1	213.5	203.1	192.5	181.3	169.9	158.1	146.2
26.7	24.2	15°	234.1	224.7	215.0	204.6	194.0	182.8	171.3	159.5	147.4
29.3	26.7	13.75°	235.4	226.1	216.3	206.0	195.3	184.1	172.5	160.6	148.1
32.0	29.1	12.5°	236.6	227.4	217.6	207.2	196.5	185.4	173.5	161.2	148.7
34.6	31.6	11.25°	237.7	228.6	218.7	208.4	197.5	186.0	173.9	161.7	149.2
37.2	34.0	10°	238.7	229.7	219.6	208.9	197.8	186.3	174.3	162.1	149.6
39.8	36.4	8.75°	239.2	229.9	219.6	209.1	197.9	186.6	174.5	162.4	149.9
42.5	38.8	7.5°	239.0	229.8	219.5	209.1	197.9	186.7	174.7	162.6	150.1
45.5	41.2	6.25°	238.6	229.6	219.3	209.0	197.9	186.7	174.7	162.7	150.2
48.3	43.7	5°	238.1	229.2	219.0	208.7	197.7	186.6	174.7	162.7	150.2
51.2	46.4	3.75°	237.6	228.7	218.6	208.4	197.4	186.4	174.5	162.6	150.1
54.0	49.0	2.5°	236.9	228.1	218.0	207.9	197.0	186.1	174.2	162.4	150.0
56.8	51.5	1.25°	236.1	227.4	217.4	207.4	196.5	185.6	173.9	162.1	149.7
59.5	54.1	0°	235.3	226.6	216.7	206.7	195.9	185.1	173.4	161.7	149.4
62.2	56.7	-1.25°	234.4	225.7	215.9	206.0	195.2	184.5	172.8	161.2	148.9
65.2	59.2	-2.5°	233.4	224.8	215.0	205.2	194.5	183.8	172.2	160.6	148.4
68.3	61.7	-3.75°	232.3	223.7	214.0	204.3	193.6	183.0	171.5	159.9	147.8
71.3	64.3	-5°	231.1	222.5	213.0	203.3	192.7	182.0	170.6	159.1	147.1
74.2	67.1	-6.25°	229.8	221.3	211.8	202.1	191.6	181.0	169.7	158.3	146.4
77.1	69.8	-7.5°	228.4	219.9	210.5	200.9	190.5	179.9	168.6	157.3	145.5
80.0	72.5	-8.75°	226.9	218.4	209.1	199.6	189.2	178.7	167.5	156.3	144.6
82.9	75.1	-10°	225.3	216.8	207.7	198.1	187.8	177.3	166.3	155.1	143.5
85.6	77.7	-11.25°	223.5	215.0	206.0	196.6	186.4	175.9	165.0	153.9	142.4
88.4	80.2	-12.5°	221.6	213.1	204.3	194.9	184.8	174.4	163.6	152.6	141.3
91.3	82.7	-13.75°	219.6	211.2	202.5	193.1	183.2	172.8	162.1	151.2	140.0
94.1	85.2	-15°	217.5	209.1	200.6	191.2	181.4	171.1	160.6	149.7	138.7
96.8	87.6	-16.25°	215.3	207.0	198.7	189.2	179.6	169.4	158.9	148.2	137.3
99.4	90.0	-17.5°	212.9	204.8	196.6	187.2	177.7	167.5	157.2	146.6	135.8
102.0	92.4	-18.75°	210.5	202.6	194.3	185.0	175.6	165.6	155.4	144.9	134.2
104.5	94.7	-20°	207.7	200.2	191.9	182.8	173.4	163.5	153.5	143.1	132.6
107.0	96.9	-21.25°	204.7	197.4	189.4	180.5	171.2	161.4	151.5	141.3	130.9

REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

72.5°	73.75°		61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°
109.3	99.0	-22.5°	201.7	194.5	186.4	178.0	168.8	159.3	149.5	139.4	129.1
111.6	101.1	-23.75°	198.6	191.5	183.4	175.2	166.4	157.0	147.3	137.4	127.3
113.7	103.1	-25°	195.4	188.2	180.3	172.2	163.6	154.7	145.1	135.4	125.3
115.8	105.1	-26.25°	192.1	184.9	177.1	169.1	160.6	152.0	142.9	133.3	123.4
117.9	107.0	-27.5°	188.7	181.5	173.9	166.0	157.7	149.2	140.4	131.1	121.3
119.9	108.8	-28.75°	185.3	178.0	170.6	162.7	154.6	146.3	137.7	128.9	119.2
121.8	110.5	-30°	181.3	174.4	167.2	159.5	151.6	143.3	134.9	126.3	117.0
123.6	112.2	-31.25°	177.3	170.8	163.7	156.1	148.4	140.3	132.1	123.6	114.8
125.3	113.8	-32.5°	173.2	166.9	160.1	152.7	145.2	137.3	129.2	120.9	112.3
127.0	115.4	-33.75°	169.0	162.9	156.3	149.3	141.9	134.1	126.3	118.1	109.7
128.6	116.8	-35°	164.8	158.8	152.4	145.8	138.5	131.0	123.2	115.2	107.0
130.1	118.2	-36.25°	160.6	154.7	148.5	142.1	135.1	127.7	120.2	112.3	104.3
131.5	119.6	-37.5°	156.3	150.5	144.5	138.3	131.6	124.4	117.0	109.4	101.6
132.8	120.8	-38.75°	151.9	146.3	140.6	134.4	127.9	121.1	113.9	106.4	98.9
134.1	121.6	-40°	147.5	142.1	136.5	130.5	124.3	117.7	110.7	103.4	96.1
134.9	122.3	-41.25°	143.0	137.9	132.4	126.6	120.5	114.2	107.4	100.4	93.2
135.6	122.9	-42.5°	138.4	133.6	128.3	122.7	116.8	110.6	104.1	97.3	90.4
136.2	123.5	-43.75°	133.6	129.3	124.1	118.7	113.0	107.0	100.8	94.3	87.5
136.6	124.0	-45°	128.8	124.8	119.9	114.7	109.2	103.4	97.4	91.2	84.6
137.0	124.3	-46.25°	124.1	120.2	115.8	110.7	105.4	99.8	94.0	88.1	81.7
137.3	124.6	-47.5°	119.4	115.7	111.6	106.7	101.5	96.1	90.6	84.9	78.7
137.6	124.9	-48.75°	114.7	111.1	107.2	102.6	97.7	92.5	87.2	81.7	75.9
137.7	125.0	-50°	110.0	106.6	102.8	98.6	93.8	88.9	83.8	78.4	73.0
137.7	125.0	-51.25°	105.4	102.1	98.5	94.5	90.0	85.3	80.4	75.2	70.1
137.7	125.0	-52.5°	100.7	97.6	94.1	90.4	86.2	81.7	76.9	72.1	67.2
137.5	124.9	-53.75°	96.1	93.1	89.8	86.3	82.4	78.0	73.5	69.0	64.2
137.3	124.7	-55°	91.5	88.7	85.6	82.3	78.6	74.4	70.2	65.8	61.2
137.0	124.5	-56.25°	87.0	84.3	81.4	78.2	74.7	70.8	66.8	62.6	58.2
136.6	124.2	-57.5°	82.5	80.0	77.2	74.2	70.9	67.3	63.5	59.4	55.2
136.2	123.8	-58.75°	78.0	75.7	73.1	70.2	67.1	63.8	60.1	56.2	52.4
135.7	123.3	-60°	73.4	71.5	69.0	66.3	63.4	60.3	56.7	53.1	49.5
135.1	122.8	-61.25°	68.9	67.3	65.0	62.5	59.7	56.7	53.4	50.1	46.7
134.4	122.2	-62.5°	64.4	63.2	61.1	58.7	56.1	53.2	50.2	47.1	43.8
133.6	121.5	-63.75°	60.1	59.2	57.2	54.9	52.4	49.8	47.1	44.1	41.0
132.8	120.7	-65°	56.0	55.1	53.3	51.1	48.8	46.5	44.0	41.1	38.1
131.9	119.9	-66.25°	51.9	51.0	49.5	47.5	45.5	43.3	40.8	38.1	35.3
130.8	119.0	-67.5°	47.8	47.0	45.8	44.0	42.1	40.0	37.7	35.1	32.9
129.8	118.0	-68.75°	43.9	43.2	42.2	40.5	38.7	36.7	34.6	32.6	30.5
128.6	116.9	-70°	40.2	39.6	38.6	37.1	35.4	33.5	31.9	30.0	28.0
127.4	115.8	-71.25°	36.5	35.9	35.1	33.6	32.1	30.7	29.2	27.5	25.6
126.0	114.6	-72.5°	32.9	32.3	31.5	30.4	29.2	27.9	26.5	24.9	23.1
124.7	113.4	-73.75°	29.4	28.9	28.4	27.5	26.4	25.2	23.8	22.3	20.7
123.2	112.1	-75°	26.2	25.9	25.4	24.6	23.6	22.4	21.2	19.8	18.6
121.7	110.7	-76.25°	23.2	22.9	22.5	21.7	20.7	19.7	18.6	17.7	16.8
120.1	109.3	-77.5°	20.3	20.0	19.5	18.8	17.9	17.3	16.6	15.9	15.0

REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

72.5°	73.75°		61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°
118.5	107.8	-78.75°	17.4	17.1	16.7	16.4	15.9	15.3	14.7	14.0	13.2
116.8	106.2	-80°	14.8	14.7	14.6	14.3	13.8	13.3	12.7	12.1	11.4
115.0	104.6	-81.25°	12.8	12.7	12.5	12.2	11.8	11.3	10.8	10.2	9.6
113.2	103.0	-82.5°	10.7	10.6	10.4	10.1	9.7	9.3	8.8	8.3	8.0
111.3	101.2	-83.75°	8.7	8.5	8.3	8.1	7.7	7.6	7.5	7.4	7.2
109.4	99.4	-85°	6.8	6.9	6.9	6.9	6.8	6.8	6.7	6.6	6.5
107.4	97.6	-86.25°	5.9	6.0	6.0	6.0	6.0	5.9	5.9	5.9	5.8
105.3	95.7	-87.5°	5.0	5.1	5.1	5.1	5.1	5.1	5.1	5.1	5.0
103.2	93.8	-88.75°	4.1	4.2	4.2	4.3	4.3	4.3	4.3	4.4	4.3
101.0	91.8	-90°	6.2	6.0	5.9	5.7	5.5	5.4	5.2	5.0	4.9
98.6	89.7										
96.2	87.6										
93.6	85.4										
91.1	83.0										
88.5	80.7										
85.9	78.4										
83.2	76.0										
80.5	73.7										
77.9	71.3										
75.3	68.8										
72.6	66.4										
70.0	63.9										
67.3	61.4										
64.6	58.8										
61.8	56.4										
59.1	54.0										
56.3	51.5										
53.7	49.1										
51.1	46.6										
48.4	44.2										
45.8	41.7										
43.1	39.2										
40.4	36.7										
37.7	34.6										
35.2	32.4										
32.9	30.3										
30.6	28.1										
28.3	25.9										
25.9	23.7										
23.6	21.5										
21.3	19.6										
19.2	18.0										
17.5	16.4										
15.8	14.7										
14.1	13.1										



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

72.5°	73.75°		75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°
12.3	11.5	90°	3.4	3.4	3.3	3.3	3.2	3.2	3.1	3.1	3.0
10.6	9.8	88.75°	5.2	5.0	4.8	4.6	4.4	4.2	4.0	3.8	3.6
8.9	8.4	87.5°	5.8	5.6	5.3	5.1	4.8	4.6	4.3	4.1	3.9
7.8	7.6	86.25°	6.5	6.2	5.9	5.6	5.3	5.0	4.7	4.4	4.1
7.1	6.9	85°	7.2	6.8	6.4	6.1	5.7	5.4	5.0	4.7	4.4
6.4	6.2	83.75°	7.8	7.4	7.0	6.6	6.1	5.8	5.4	5.0	4.6
5.7	5.5	82.5°	8.5	8.0	7.6	7.1	6.6	6.2	5.7	5.3	4.8
4.9	4.8	81.25°	9.2	8.6	8.1	7.6	7.0	6.6	6.1	5.6	5.1
4.2	4.1	80°	10.1	9.2	8.7	8.1	7.5	7.0	6.4	5.9	5.3
4.8	4.6	78.75°	11.8	10.4	9.2	8.6	7.9	7.4	6.8	6.2	5.5
		77.5°	13.5	11.9	10.4	9.1	8.4	7.7	7.1	6.4	5.8
		76.25°	15.2	13.5	11.8	10.1	8.8	8.1	7.4	6.7	6.0
		75°	16.8	15.1	13.2	11.4	9.5	8.5	7.8	7.0	6.2
		73.75°	18.5	16.6	14.6	12.7	10.7	8.9	8.1	7.3	6.5
		72.5°	20.2	18.1	16.1	13.9	11.8	9.7	8.4	7.6	6.7
		71.25°	21.8	19.7	17.5	15.2	12.9	10.7	8.8	7.9	6.9
		70°	23.7	21.2	18.8	16.5	14.1	11.7	9.3	8.1	7.1
		68.75°	25.9	22.7	20.2	17.7	15.2	12.7	10.2	8.4	7.4
		67.5°	28.2	24.7	21.6	19.0	16.3	13.7	11.0	8.7	7.6
		66.25°	30.4	26.7	23.0	20.2	17.4	14.6	11.8	9.0	7.8
		65°	32.6	28.8	24.8	21.4	18.5	15.6	12.7	9.7	8.0
		63.75°	34.8	30.8	26.7	22.6	19.6	16.6	13.5	10.4	8.2
		62.5°	37.0	32.8	28.5	24.2	20.7	17.5	14.3	11.1	8.4
		61.25°	39.2	34.8	30.4	25.8	21.7	18.4	15.1	11.7	8.6
		60°	41.3	36.8	32.2	27.5	22.8	19.4	15.9	12.4	8.9
		58.75°	43.7	38.7	33.9	29.1	24.2	20.3	16.7	13.0	9.4
		57.5°	46.1	40.7	35.7	30.7	25.6	21.2	17.4	13.7	9.9
		56.25°	48.5	42.7	37.4	32.3	27.0	22.1	18.2	14.3	10.4
		55°	50.9	44.9	39.2	33.8	28.4	22.9	19.0	15.0	10.9
		53.75°	53.3	47.1	40.9	35.4	29.8	24.1	19.7	15.6	11.4
		52.5°	55.6	49.2	42.6	36.9	31.1	25.3	20.4	16.2	11.9
		51.25°	57.9	51.4	44.6	38.4	32.5	26.5	21.1	16.8	12.3
		50°	60.2	53.5	46.5	39.8	33.8	27.6	21.9	17.3	12.8
		48.75°	62.5	55.6	48.4	41.3	35.1	28.8	22.5	17.9	13.2
		47.5°	64.8	57.7	50.3	42.8	36.3	29.9	23.4	18.5	13.7
		46.25°	67.2	59.7	52.1	44.4	37.6	31.0	24.3	19.0	14.1
		45°	69.6	61.7	53.9	46.1	38.8	32.0	25.2	19.6	14.6
		43.75°	72.0	63.6	55.7	47.6	40.0	33.1	26.1	20.1	15.0
		42.5°	74.3	65.6	57.4	49.2	41.1	34.1	27.0	20.6	15.4
		41.25°	76.6	67.6	59.1	50.7	42.3	35.1	27.8	21.1	15.8
		40°	78.7	69.6	60.7	52.2	43.6	36.1	28.6	21.6	16.2
		38.75°	80.8	71.5	62.3	53.6	44.9	37.0	29.4	22.0	16.5
		37.5°	82.9	73.4	63.9	55.0	46.1	37.9	30.2	22.5	16.9
		36.25°	84.9	75.2	65.5	56.4	47.3	38.9	30.9	23.0	17.2
		35°	86.8	77.0	67.1	57.8	48.5	39.7	31.7	23.6	17.6

REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

86.25°	87.5°		75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°
3.0	3.0	33.75°	88.8	78.7	68.7	59.0	49.7	40.6	32.4	24.2	17.9
3.5	3.3	32.5°	90.6	80.4	70.2	60.3	50.8	41.3	33.0	24.7	18.2
3.7	3.4	31.25°	92.5	82.1	71.7	61.5	51.9	42.1	33.7	25.3	18.5
3.8	3.6	30°	94.3	83.7	73.1	62.7	52.9	42.9	34.3	25.8	18.8
4.0	3.7	28.75°	96.0	85.2	74.5	63.8	53.9	43.7	34.9	26.3	19.1
4.2	3.8	27.5°	97.7	86.7	75.8	64.9	54.8	44.5	35.5	26.8	19.4
4.4	3.9	26.25°	99.3	88.1	77.1	66.1	55.6	45.3	36.0	27.3	19.7
4.6	4.0	25°	100.9	89.5	78.4	67.1	56.5	46.0	36.5	27.7	19.9
4.7	4.2	23.75°	102.3	90.8	79.5	68.0	57.2	46.7	37.0	28.1	20.1
4.9	4.3	22.5°	103.8	92.1	80.6	68.9	58.0	47.3	37.5	28.5	20.4
5.1	4.4	21.25°	105.1	93.3	81.5	69.8	58.7	47.9	37.9	28.9	20.6
5.3	4.5	20°	106.4	94.3	82.3	70.6	59.3	48.5	38.4	29.2	20.8
5.4	4.6	18.75°	107.5	95.2	83.1	71.3	60.0	49.1	38.7	29.5	21.0
5.6	4.7	17.5°	108.3	95.9	83.8	71.9	60.5	49.6	39.1	29.9	21.1
5.8	4.9	16.25°	109.1	96.6	84.4	72.6	61.1	50.0	39.4	30.1	21.3
5.9	5.0	15°	109.8	97.3	85.0	73.1	61.5	50.5	39.8	30.4	21.4
6.1	5.1	13.75°	110.4	97.8	85.5	73.6	62.0	50.9	40.0	30.6	21.6
6.3	5.2	12.5°	110.9	98.3	86.0	74.1	62.4	51.2	40.3	30.9	21.7
6.5	5.3	11.25°	111.3	98.7	86.3	74.5	62.7	51.5	40.5	31.0	21.8
6.6	5.4	10°	111.7	99.1	86.7	74.8	63.1	51.8	40.7	31.2	21.9
6.8	5.5	8.75°	112.0	99.4	86.9	75.1	63.3	52.0	40.9	31.4	22.0
6.9	5.6	7.5°	112.2	99.6	87.1	75.3	63.6	52.2	41.0	31.5	22.1
7.1	5.7	6.25°	112.3	99.8	87.3	75.5	63.7	52.4	41.1	31.6	22.1
7.3	5.8	5°	112.4	99.8	87.4	75.6	63.9	52.5	41.2	31.7	22.2
7.4	6.0	3.75°	112.4	99.9	87.4	75.7	64.0	52.6	41.3	31.7	22.2
7.6	6.1	2.5°	112.3	99.8	87.3	75.7	64.0	52.7	41.3	31.8	22.2
7.7	6.2	1.25°	112.1	99.7	87.2	75.6	64.0	52.7	41.3	31.8	22.2
7.9	6.3	0°	111.9	99.5	87.1	75.6	64.0	52.7	41.3	31.8	22.2
8.0	6.4	-1.25°	111.6	99.3	86.9	75.4	63.9	52.5	41.2	31.7	22.2
8.2	6.4	-2.5°	111.3	99.0	86.7	75.2	63.7	52.4	41.1	31.6	22.2
8.3	6.5	-3.75°	110.9	98.7	86.4	74.9	63.4	52.2	41.0	31.6	22.1
8.4	6.6	-5°	110.5	98.3	86.1	74.6	63.2	52.0	40.9	31.5	22.1
8.6	6.7	-6.25°	109.9	97.8	85.7	74.3	62.9	51.8	40.7	31.3	22.0
8.7	6.8	-7.5°	109.3	97.3	85.3	73.9	62.5	51.5	40.5	31.2	21.9
8.9	6.9	-8.75°	108.7	96.7	84.8	73.4	62.1	51.2	40.3	31.0	21.8
9.3	7.0	-10°	107.9	96.0	84.2	72.9	61.7	50.8	40.0	30.8	21.7
9.6	7.1	-11.25°	107.1	95.3	83.6	72.4	61.2	50.4	39.7	30.6	21.6
9.9	7.2	-12.5°	106.2	94.5	82.9	71.8	60.7	50.0	39.4	30.4	21.5
10.2	7.2	-13.75°	105.3	93.7	82.2	71.1	60.1	49.5	39.1	30.1	21.3
10.5	7.3	-15°	104.3	92.8	81.4	70.4	59.5	49.0	38.8	29.8	21.2
10.8	7.4	-16.25°	103.2	91.8	80.6	69.7	58.9	48.5	38.4	29.5	21.0
11.1	7.5	-17.5°	102.1	90.8	79.7	68.9	58.2	47.9	38.0	29.2	20.8
11.4	7.5	-18.75°	100.9	89.8	78.8	68.0	57.5	47.3	37.6	28.9	20.6
11.6	7.6	-20°	99.7	88.6	77.8	67.1	56.8	46.7	37.1	28.5	20.4
11.9	7.7	-21.25°	98.4	87.4	76.8	66.2	56.0	46.0	36.6	28.1	20.2

REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

86.25°	87.5°		75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°
12.1	7.7	-22.5°	97.0	86.2	75.7	65.2	55.2	45.3	36.2	27.7	20.0
12.4	7.8	-23.75°	95.6	85.0	74.6	64.2	54.4	44.6	35.6	27.3	19.8
12.6	7.9	-25°	94.2	83.6	73.4	63.1	53.5	43.8	35.1	26.9	19.5
12.8	7.9	-26.25°	92.6	82.3	72.2	62.0	52.6	43.0	34.5	26.4	19.2
13.0	8.0	-27.5°	91.1	80.9	71.0	60.9	51.6	42.2	34.0	26.0	19.0
13.2	8.0	-28.75°	89.4	79.5	69.7	59.9	50.6	41.4	33.4	25.5	18.7
13.4	8.1	-30°	87.7	78.0	68.4	58.8	49.6	40.5	32.7	25.0	18.4
13.6	8.1	-31.25°	86.0	76.5	67.0	57.7	48.6	39.6	32.1	24.4	18.1
13.8	8.2	-32.5°	84.2	75.0	65.6	56.5	47.6	38.9	31.4	23.9	17.8
14.0	8.2	-33.75°	82.4	73.4	64.2	55.3	46.5	38.1	30.8	23.3	17.5
14.1	8.3	-35°	80.6	71.7	62.7	54.1	45.5	37.3	30.1	22.8	17.1
14.3	8.3	-36.25°	78.8	70.0	61.2	52.8	44.3	36.4	29.4	22.2	16.8
14.4	8.4	-37.5°	76.9	68.3	59.7	51.5	43.2	35.6	28.6	21.7	16.4
14.6	8.4	-38.75°	75.0	66.6	58.2	50.2	42.0	34.8	27.9	21.2	16.1
14.7	8.4	-40°	73.0	64.8	56.7	48.8	40.8	33.9	27.1	20.7	15.7
14.8	8.4	-41.25°	71.0	62.9	55.2	47.4	39.6	33.0	26.3	20.3	15.3
14.9	8.5	-42.5°	68.8	61.1	53.6	46.0	38.5	32.0	25.5	19.8	14.9
15.0	8.5	-43.75°	66.6	59.2	52.0	44.6	37.4	31.1	24.7	19.3	14.5
15.1	8.5	-45°	64.4	57.4	50.3	43.1	36.3	30.1	23.9	18.7	14.1
15.2	8.5	-46.25°	62.1	55.6	48.7	41.6	35.2	29.2	23.1	18.2	13.7
15.2	8.6	-47.5°	59.9	53.6	47.0	40.1	34.1	28.2	22.2	17.7	13.3
15.3	8.6	-48.75°	57.7	51.7	45.2	38.6	32.9	27.1	21.4	17.1	12.8
15.3	8.6	-50°	55.5	49.7	43.5	37.3	31.7	26.1	20.8	16.6	12.4
15.4	8.6	-51.25°	53.3	47.6	41.7	35.9	30.5	25.0	20.1	16.0	11.9
15.4	8.6	-52.5°	51.1	45.6	39.9	34.6	29.3	24.0	19.4	15.5	11.5
15.4	8.6	-53.75°	48.8	43.5	38.2	33.2	28.0	22.9	18.7	14.9	11.0
15.4	8.6	-55°	46.6	41.4	36.6	31.7	26.8	21.8	18.0	14.3	10.5
15.4	8.6	-56.25°	44.3	39.3	34.9	30.3	25.5	20.9	17.3	13.7	10.1
15.4	8.6	-57.5°	42.0	37.4	33.3	28.8	24.2	20.1	16.6	13.1	9.6
15.4	8.6	-58.75°	39.7	35.6	31.6	27.3	22.9	19.2	15.9	12.5	9.1
15.3	8.6	-60°	37.5	33.8	29.9	25.8	21.6	18.4	15.2	11.9	8.6
15.3	8.6	-61.25°	35.5	31.9	28.2	24.3	20.6	17.5	14.4	11.3	8.4
15.3	8.6	-62.5°	33.5	30.1	26.5	22.8	19.6	16.6	13.7	10.6	8.2
15.2	8.6	-63.75°	31.5	28.2	24.8	21.3	18.6	15.8	12.9	10.0	7.9
15.1	8.5	-65°	29.4	26.3	23.1	20.2	17.6	14.9	12.1	9.3	7.7
15.1	8.5	-66.25°	27.4	24.4	21.3	19.0	16.5	14.0	11.4	8.7	7.5
15.0	8.5	-67.5°	25.4	22.5	20.0	17.9	15.5	13.1	10.6	8.4	7.3
14.9	8.5	-68.75°	23.3	20.7	18.8	16.7	14.5	12.1	9.8	8.1	7.1
14.8	8.4	-70°	21.3	19.3	17.5	15.5	13.4	11.2	9.0	7.8	6.8
14.7	8.4	-71.25°	19.6	17.9	16.2	14.3	12.4	10.3	8.5	7.5	6.6
14.5	8.4	-72.5°	18.1	16.5	14.9	13.1	11.3	9.4	8.1	7.2	6.4
14.4	8.3	-73.75°	16.6	15.1	13.6	12.0	10.2	8.6	7.8	7.0	6.1
14.3	8.3	-75°	15.1	13.7	12.3	10.8	9.2	8.2	7.4	6.7	5.9
14.1	8.3	-76.25°	13.6	12.3	11.0	9.6	8.5	7.8	7.1	6.4	5.7
14.0	8.2	-77.5°	12.0	10.9	9.6	8.6	8.0	7.4	6.7	6.1	5.4



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

86.25°	87.5°		75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°
13.8	8.2	-78.75°	10.5	9.4	8.5	8.1	7.5	7.0	6.4	5.8	5.2
13.6	8.1	-80°	9.0	8.4	8.0	7.5	7.1	6.5	6.0	5.5	4.9
13.4	8.1	-81.25°	8.1	7.7	7.4	7.0	6.6	6.1	5.6	5.2	4.7
13.2	8.0	-82.5°	7.4	7.1	6.8	6.5	6.1	5.7	5.3	4.9	4.5
13.0	8.0	-83.75°	6.8	6.5	6.2	5.9	5.6	5.3	4.9	4.6	4.2
12.8	7.9	-85°	6.1	5.9	5.6	5.4	5.1	4.9	4.6	4.3	4.0
12.6	7.8	-86.25°	5.4	5.2	5.1	4.9	4.7	4.4	4.2	4.0	3.7
12.4	7.8	-87.5°	4.7	4.6	4.5	4.3	4.2	4.0	3.8	3.7	3.5
12.2	7.7	-88.75°	4.1	4.0	3.9	3.8	3.7	3.6	3.5	3.4	3.2
11.9	7.7	-90°	4.5	4.4	4.2	4.1	3.9	3.8	3.7	3.5	3.4
11.7	7.6										
11.4	7.5										
11.1	7.4										
10.9	7.4										
10.6	7.3										
10.3	7.2										
10.0	7.1										
9.7	7.0										
9.4	7.0										
9.1	6.9										
8.8	6.8										
8.5	6.7										
8.4	6.6										
8.3	6.5										
8.1	6.4										
8.0	6.3										
7.8	6.2										
7.7	6.1										
7.5	6.0										
7.4	5.9										
7.2	5.8										
7.0	5.7										
6.9	5.6										
6.7	5.5										
6.5	5.4										
6.4	5.3										
6.2	5.1										
6.0	5.0										
5.9	4.9										
5.7	4.8										
5.5	4.7										
5.3	4.6										
5.2	4.4										
5.0	4.3										
4.8	4.2										

REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

86.25°	87.5°		88.75°	90°
4.6	4.1	90°	3.0	3.0
4.5	4.0	88.75°	3.2	3.0
4.3	3.9	87.5°	3.2	3.0
4.1	3.7	86.25°	3.3	3.0
3.9	3.6	85°	3.3	3.0
3.7	3.5	83.75°	3.4	3.0
3.5	3.4	82.5°	3.5	3.0
3.4	3.2	81.25°	3.5	3.0
3.2	3.1	80°	3.6	3.0
3.3	3.2	78.75°	3.6	3.0
		77.5°	3.7	3.0
		76.25°	3.8	3.0
		75°	3.8	3.0
		73.75°	3.9	3.0
		72.5°	3.9	3.0
		71.25°	4.0	3.0
		70°	4.0	3.0
		68.75°	4.1	3.0
		67.5°	4.2	3.0
		66.25°	4.2	3.0
		65°	4.3	3.0
		63.75°	4.3	3.0
		62.5°	4.4	3.0
		61.25°	4.4	3.0
		60°	4.5	3.0
		58.75°	4.5	3.0
		57.5°	4.6	3.0
		56.25°	4.6	3.0
		55°	4.7	3.0
		53.75°	4.7	3.0
		52.5°	4.8	3.0
		51.25°	4.8	3.0
		50°	4.9	3.0
		48.75°	4.9	3.0
		47.5°	5.0	3.0
		46.25°	5.0	3.0
		45°	5.0	3.0
		43.75°	5.1	3.0
		42.5°	5.1	3.0
		41.25°	5.2	3.0
		40°	5.2	3.0
		38.75°	5.2	3.0
		37.5°	5.3	3.0
		36.25°	5.3	3.0
		35°	5.3	3.0



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	88.75°	90°
33.75°	5.4	3.0
32.5°	5.4	3.0
31.25°	5.4	3.0
30°	5.5	3.0
28.75°	5.5	3.0
27.5°	5.5	3.0
26.25°	5.6	3.0
25°	5.6	3.0
23.75°	5.6	3.0
22.5°	5.6	3.0
21.25°	5.6	3.0
20°	5.7	3.0
18.75°	5.7	3.0
17.5°	5.7	3.0
16.25°	5.7	3.0
15°	5.7	3.0
13.75°	5.7	3.0
12.5°	5.8	3.0
11.25°	5.8	3.0
10°	5.8	3.0
8.75°	5.8	3.0
7.5°	5.8	3.0
6.25°	5.8	3.0
5°	5.8	3.0
3.75°	5.8	3.0
2.5°	5.8	3.0
1.25°	5.8	3.0
0°	5.8	3.0
-1.25°	5.8	3.0
-2.5°	5.8	3.0
-3.75°	5.8	3.0
-5°	5.8	3.0
-6.25°	5.8	3.0
-7.5°	5.8	3.0
-8.75°	5.8	3.0
-10°	5.8	3.0
-11.25°	5.7	3.0
-12.5°	5.7	3.0
-13.75°	5.7	3.0
-15°	5.7	3.0
-16.25°	5.7	3.0
-17.5°	5.7	3.0
-18.75°	5.7	3.0
-20°	5.6	3.0
-21.25°	5.6	3.0

REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	88.75°	90°
-22.5°	5.6	3.0
-23.75°	5.6	3.0
-25°	5.5	3.0
-26.25°	5.5	3.0
-27.5°	5.5	3.0
-28.75°	5.5	3.0
-30°	5.4	3.0
-31.25°	5.4	3.0
-32.5°	5.4	3.0
-33.75°	5.3	3.0
-35°	5.3	3.0
-36.25°	5.3	3.0
-37.5°	5.2	3.0
-38.75°	5.2	3.0
-40°	5.1	3.0
-41.25°	5.1	3.0
-42.5°	5.1	3.0
-43.75°	5.0	3.0
-45°	5.0	3.0
-46.25°	4.9	3.0
-47.5°	4.9	3.0
-48.75°	4.8	3.0
-50°	4.8	3.0
-51.25°	4.8	3.0
-52.5°	4.7	3.0
-53.75°	4.7	3.0
-55°	4.6	3.0
-56.25°	4.6	3.0
-57.5°	4.5	3.0
-58.75°	4.5	3.0
-60°	4.4	3.0
-61.25°	4.3	3.0
-62.5°	4.3	3.0
-63.75°	4.2	3.0
-65°	4.2	3.0
-66.25°	4.1	3.0
-67.5°	4.1	3.0
-68.75°	4.0	3.0
-70°	4.0	3.0
-71.25°	3.9	3.0
-72.5°	3.8	3.0
-73.75°	3.8	3.0
-75°	3.7	3.0
-76.25°	3.7	3.0
-77.5°	3.6	3.0



REPORT NUMBER: P394846 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 303-S1-LEDB2-2700-UNV-T2-DIM10-EDGE

CANDELA DISTRIBUTION (continued):

	88.75°	90°
-78.75°	3.5	3.0
-80°	3.5	3.0
-81.25°	3.4	3.0
-82.5°	3.4	3.0
-83.75°	3.3	3.0
-85°	3.2	3.0
-86.25°	3.2	3.0
-87.5°	3.1	3.0
-88.75°	3.1	3.0
-90°	3.1	3.0

(END OF REPORT)