

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: LUMIERE

Report Number: P395005

Luminaire Tested: **303-W2-LEDB2-TSAM-UNV-T4-DIM10-CS-EDGE**

Issue Date: 4/9/2020

Test Information

Test Method: LM-79-08
Report Number: P395005
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2001-623-2)
Test Lab: INNOVATION CENTER
Issue Date: 4/9/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 303-W2-LEDB2-TSAM-UNV-T4-DIM10-CS-EDGE
Description: LUMIERE EON LED LUMINAIRE
WALL MOUNT, DIRECT-INDIRECT, TWO LIGHTBARS, TYPE 4 WITH EDGE GLOW
Light Source: AMBER LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 314.1 lumens
Efficiency: N/A
Efficacy: 26.0 lumens/watt
Spacing Criteria (0/90/45): 1.39 / 1.44 / 1.55
Luminous Opening: Rectangular w/ Sides (W: 0.38' x L: 0.21' x H: 1.52')
CIE Type: General Diffuse


Input Watts (W): 12.1
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P395005

CATALOG NUMBER: 303-W2-LEDB2-TSAM-UNV-T4-DIM10-CS-EDGE

Luminous Intensity Polar Plot

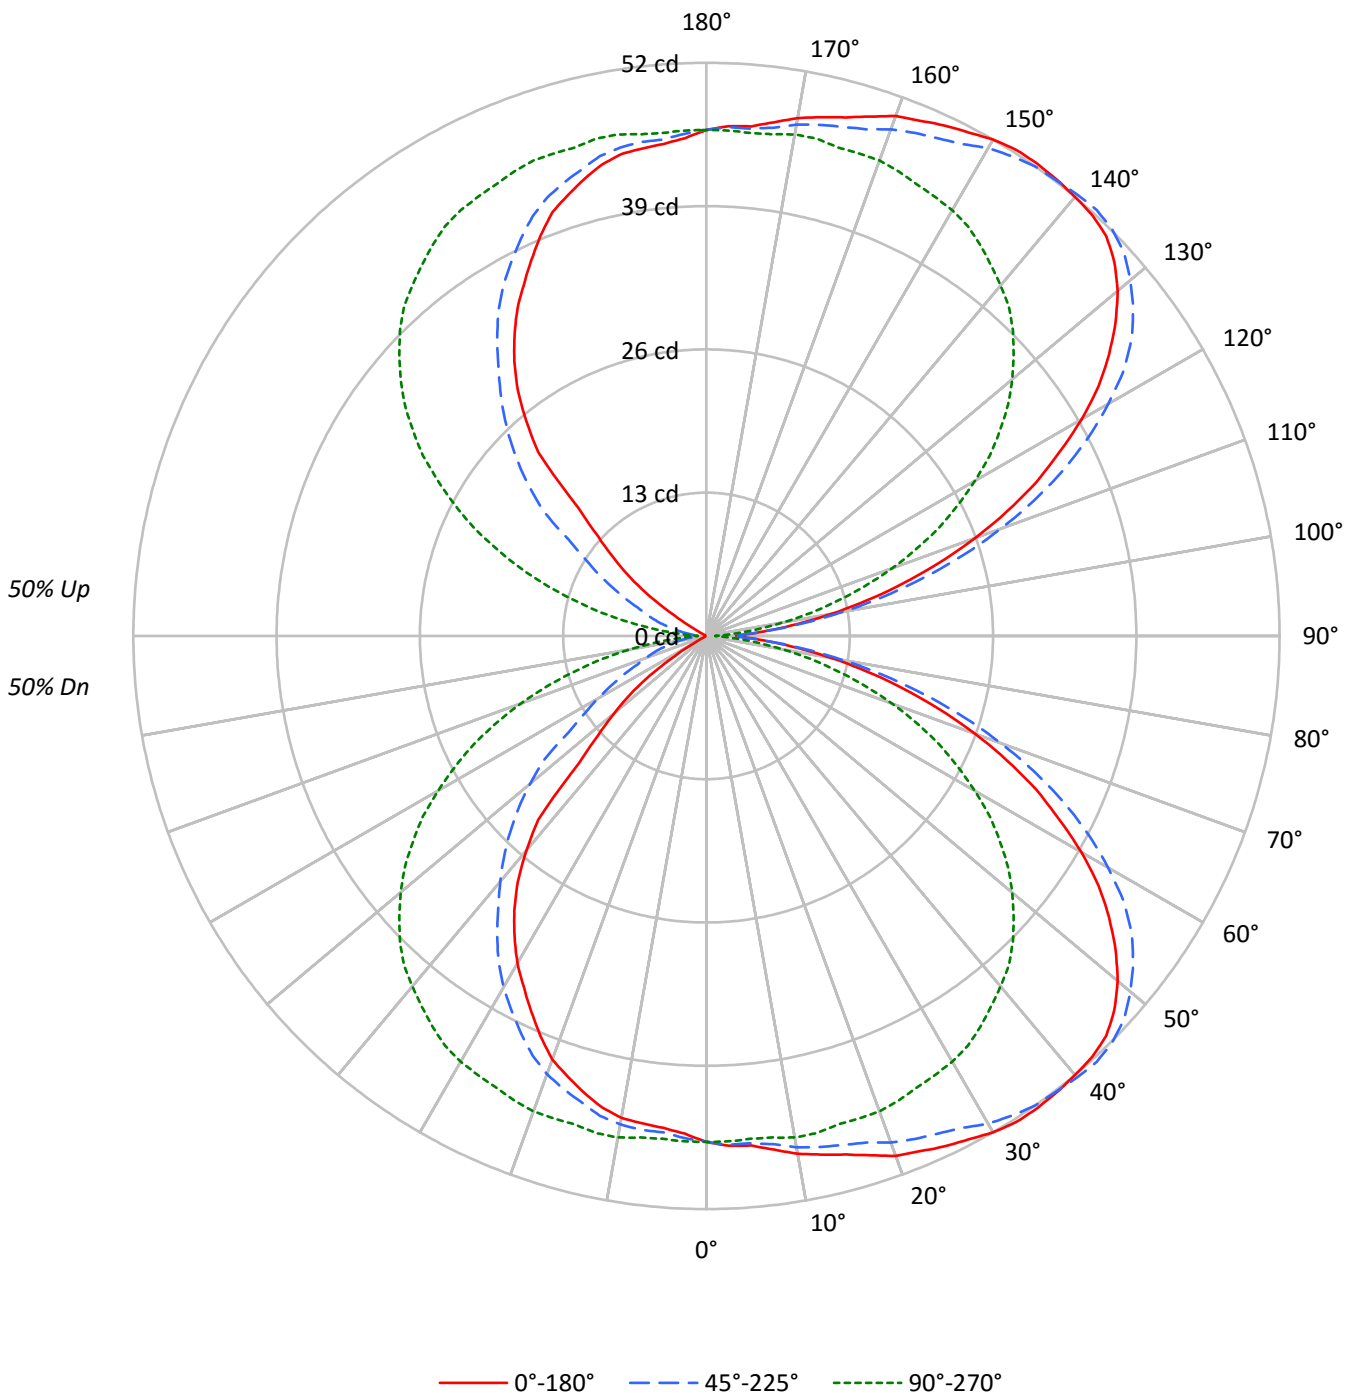



TEST NUMBER: P395005

CATALOG NUMBER: 303-W2-LEDB2-TSAM-UNV-T4-DIM10-CS-EDGE

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50
1	97	93	89	85	90	86	82	79	72	70	68	60	58	57	49	48	47	41
2	88	81	74	69	81	75	69	64	63	59	55	52	49	47	43	40	39	34
3	80	71	63	57	74	65	59	53	55	50	46	46	42	39	37	35	32	28
4	73	62	54	48	67	58	50	45	49	43	39	41	37	33	33	30	28	24
5	67	55	47	41	62	51	44	38	43	38	33	36	32	28	30	26	24	20
6	62	49	41	35	57	46	38	33	39	33	29	33	28	25	27	23	21	18
7	57	44	36	30	52	41	34	29	35	29	25	30	25	22	24	21	18	16
8	53	40	32	27	48	37	30	25	32	26	22	27	22	19	22	19	16	14
9	49	37	29	24	45	34	27	22	29	24	20	25	20	17	20	17	14	12
10	46	33	26	21	42	31	24	20	27	21	18	23	18	15	19	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°
0°	6324	6324	6324
5°	3917	4676	3782
10°	2919	3769	2717
15°	2351	3138	2071
20°	2013	2719	1640
25°	1765	2378	1298
30°	1587	2124	1047
35°	1440	1897	837
40°	1313	1696	641
45°	1205	1515	385
50°	1077	1331	241
55°	938	1150	133
60°	794	965	30
65°	646	784	2
70°	496	594	2
75°	349	406	2
80°	215	232	2
85°	105	90	2



TEST NUMBER: P395005

CATALOG NUMBER: 303-W2-LEDB2-TSAM-UNV-T4-DIM10-CS-EDGE

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	4.4	1.4
10°-20°	13.0	4.1
20°-30°	20.7	6.6
30°-40°	26.6	8.5
40°-50°	29.0	9.2
50°-60°	26.8	8.5
60°-70°	20.6	6.6
70°-80°	12.2	3.9
80°-90°	3.9	1.2
90°-100°	3.9	1.2
100°-110°	12.2	3.9
110°-120°	20.6	6.6
120°-130°	26.8	8.5
130°-140°	29.0	9.2
140°-150°	26.6	8.5
150°-160°	20.7	6.6
160°-170°	13.0	4.1
170°-180°	4.4	1.4
0°-30°	38.0	12.1
0°-40°	64.6	20.6
0°-60°	120.4	38.3
0°-90°	157.0	50.0
90°-120°	36.6	11.7
90°-150°	119.0	37.9
90°-180°	157.0	50.0
0°-180°	314.1	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	46	46	46	46	46	
5°	46	46	46	45	45	4
15°	49	48	46	44	43	14
25°	51	50	45	40	38	24
35°	52	52	43	33	30	33
45°	51	52	39	25	16	39
55°	45	47	32	15	6	40
65°	33	36	23	8	0	32
75°	18	20	12	4	0	20
85°	6	6	3	1	0	6
90°	3	2	1	1	0	2
95°	6	6	3	1	0	6
105°	18	20	12	4	0	20
115°	33	36	23	8	0	32
125°	45	47	32	15	6	40
135°	51	52	39	25	16	39
145°	52	52	43	33	30	33
155°	51	50	45	40	38	24
165°	49	48	46	44	43	14
175°	46	46	46	45	45	4
180°	46	46	46	46	46	



TEST NUMBER: P395005

CATALOG NUMBER: 303-W2-LEDB2-TSAM-UNV-T4-DIM10-CS-EDGE

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	37°	40°	45°
0°	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9
2.5°	46.3	45.8	45.6	45.9	45.6	46.2	46.0	45.9	45.9	46.2	46.2
5°	46.4	45.9	45.6	45.9	45.7	46.2	46.0	45.9	45.8	46.2	46.2
7.5°	47.0	46.4	46.1	46.4	46.2	46.6	46.4	46.3	46.3	46.6	46.5
10°	47.7	47.0	46.8	47.1	46.9	47.3	47.1	46.9	46.9	47.2	47.1
12.5°	48.2	47.6	47.3	47.7	47.4	47.8	47.6	47.4	47.3	47.6	47.5
15°	48.7	48.1	47.8	48.1	47.9	48.2	48.0	47.8	47.7	47.9	47.8
17.5°	49.4	48.7	48.5	48.8	48.5	48.7	48.5	48.3	48.3	48.5	48.2
20°	50.2	49.5	49.3	49.6	49.3	49.5	49.3	49.1	49.0	49.1	48.9
22.5°	50.6	50.0	49.9	50.2	49.9	50.1	49.9	49.7	49.6	49.7	49.4
25°	51.1	50.4	50.3	50.7	50.4	50.5	50.4	50.2	50.1	50.1	49.8
27.5°	51.5	50.8	50.8	51.2	50.9	51.1	51.0	50.8	50.7	50.6	50.3
30°	52.0	51.4	51.4	51.9	51.7	51.8	51.7	51.6	51.5	51.4	51.1
32.5°	52.3	51.8	51.8	52.3	52.2	52.4	52.3	52.2	52.1	52.0	51.6
35°	52.3	51.8	51.9	52.4	52.3	52.6	52.6	52.5	52.5	52.3	52.0
37.5°	52.2	51.8	51.9	52.5	52.4	52.6	52.8	52.7	52.8	52.6	52.1
40°	52.0	51.7	51.8	52.4	52.4	52.7	52.9	52.9	53.0	52.7	52.3
42.5°	51.8	51.5	51.7	52.3	52.3	52.6	53.0	53.0	53.1	52.9	52.4
45°	51.3	51.0	51.4	51.9	51.9	52.1	52.6	52.7	52.8	52.6	52.1
47.5°	50.2	50.0	50.3	50.9	51.1	51.3	51.9	52.0	52.1	51.9	51.4
50°	48.7	48.4	48.8	49.4	49.7	50.1	50.8	50.9	51.1	50.8	50.2
52.5°	46.8	46.6	47.0	47.6	48.0	48.5	49.2	49.5	49.7	49.5	48.8
55°	44.6	44.5	44.9	45.5	45.9	46.4	47.3	47.6	47.8	47.6	47.1
57.5°	42.2	42.1	42.5	43.0	43.5	43.9	44.9	45.2	45.4	45.3	44.9
60°	39.3	39.2	39.6	40.3	40.7	41.1	42.1	42.4	42.7	42.6	42.1
62.5°	36.1	36.1	36.5	37.0	37.5	37.9	38.9	39.2	39.5	39.3	39.1
65°	33.0	33.0	33.4	33.9	34.3	34.6	35.6	36.1	36.2	36.1	35.8
67.5°	29.5	29.5	29.9	30.4	30.7	31.0	31.9	32.3	32.5	32.5	32.2
70°	25.9	25.8	26.2	26.7	26.9	27.2	28.0	28.4	28.5	28.4	28.4
72.5°	22.2	22.1	22.5	22.9	23.2	23.4	24.0	24.4	24.5	24.5	24.5
75°	18.5	18.6	18.7	19.2	19.4	19.4	20.1	20.4	20.4	20.4	20.4
77.5°	14.9	14.8	15.1	15.6	15.6	15.7	16.2	16.4	16.4	16.4	16.4
80°	11.5	11.6	11.6	11.9	11.9	12.0	12.4	12.5	12.5	12.6	12.5
82.5°	8.3	8.5	8.4	8.6	8.6	8.6	8.9	8.9	8.9	8.9	8.9
85°	5.6	5.7	5.7	5.8	5.8	5.8	5.9	5.9	5.8	5.8	5.7
87.5°	3.7	3.7	3.7	3.8	3.8	3.7	3.7	3.6	3.5	3.5	3.4
90°	2.7	2.8	2.8	2.8	2.8	2.7	2.7	2.6	2.5	2.5	2.4
92.5°	3.7	3.7	3.7	3.8	3.8	3.7	3.7	3.6	3.5	3.5	3.4
95°	5.6	5.7	5.7	5.8	5.8	5.8	5.9	5.9	5.8	5.8	5.7
97.5°	8.3	8.5	8.4	8.6	8.6	8.6	8.9	8.9	8.9	8.9	8.9
100°	11.5	11.6	11.6	11.9	11.9	12.0	12.4	12.5	12.5	12.6	12.5
102.5°	14.9	14.8	15.1	15.6	15.6	15.7	16.2	16.4	16.4	16.4	16.4
105°	18.5	18.6	18.7	19.2	19.4	19.4	20.1	20.4	20.4	20.4	20.4
107.5°	22.2	22.1	22.5	22.9	23.2	23.4	24.0	24.4	24.5	24.5	24.5
110°	25.9	25.8	26.2	26.7	26.9	27.2	28.0	28.4	28.5	28.4	28.4



TEST NUMBER: P395005

CATALOG NUMBER: 303-W2-LEDB2-TSAM-UNV-T4-DIM10-CS-EDGE

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	37°	40°	45°
112.5°	29.5	29.5	29.9	30.4	30.7	31.0	31.9	32.3	32.5	32.5	32.2
115°	33.0	33.0	33.4	33.9	34.3	34.6	35.6	36.1	36.2	36.1	35.8
117.5°	36.1	36.1	36.5	37.0	37.5	37.9	38.9	39.2	39.5	39.3	39.1
120°	39.3	39.2	39.6	40.3	40.7	41.1	42.1	42.4	42.7	42.6	42.1
122.5°	42.2	42.1	42.5	43.0	43.5	43.9	44.9	45.2	45.4	45.3	44.9
125°	44.6	44.5	44.9	45.5	45.9	46.4	47.3	47.6	47.8	47.6	47.1
127.5°	46.8	46.6	47.0	47.6	48.0	48.5	49.2	49.5	49.7	49.5	48.8
130°	48.7	48.4	48.8	49.4	49.7	50.1	50.8	50.9	51.1	50.8	50.2
132.5°	50.2	50.0	50.3	50.9	51.1	51.3	51.9	52.0	52.1	51.9	51.4
135°	51.3	51.0	51.4	51.9	51.9	52.1	52.6	52.7	52.8	52.6	52.1
137.5°	51.8	51.5	51.7	52.3	52.3	52.6	53.0	53.0	53.1	52.9	52.4
140°	52.0	51.7	51.8	52.4	52.4	52.7	52.9	52.9	53.0	52.7	52.3
142.5°	52.2	51.8	51.9	52.5	52.4	52.6	52.8	52.7	52.8	52.6	52.1
145°	52.3	51.8	51.9	52.4	52.3	52.6	52.6	52.5	52.5	52.3	52.0
147.5°	52.3	51.8	51.8	52.3	52.2	52.4	52.3	52.2	52.1	52.0	51.6
150°	52.0	51.4	51.4	51.9	51.7	51.8	51.7	51.6	51.5	51.4	51.1
152.5°	51.5	50.8	50.8	51.2	50.9	51.1	51.0	50.8	50.7	50.6	50.3
155°	51.1	50.4	50.3	50.7	50.4	50.5	50.4	50.2	50.1	50.1	49.8
157.5°	50.6	50.0	49.9	50.2	49.9	50.1	49.9	49.7	49.6	49.7	49.4
160°	50.2	49.5	49.3	49.6	49.3	49.5	49.3	49.1	49.0	49.1	48.9
162.5°	49.4	48.7	48.5	48.8	48.5	48.7	48.5	48.3	48.3	48.5	48.2
165°	48.7	48.1	47.8	48.1	47.9	48.2	48.0	47.8	47.7	47.9	47.8
167.5°	48.2	47.6	47.3	47.7	47.4	47.8	47.6	47.4	47.3	47.6	47.5
170°	47.7	47.0	46.8	47.1	46.9	47.3	47.1	46.9	46.9	47.2	47.1
172.5°	47.0	46.4	46.1	46.4	46.2	46.6	46.4	46.3	46.3	46.6	46.5
175°	46.4	45.9	45.6	45.9	45.7	46.2	46.0	45.9	45.8	46.2	46.2
177.5°	46.3	45.8	45.6	45.9	45.6	46.2	46.0	45.9	45.9	46.2	46.2
180°	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9



TEST NUMBER: P395005

CATALOG NUMBER: 303-W2-LEDB2-TSAM-UNV-T4-DIM10-CS-EDGE

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°
0°	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9
2.5°	45.9	46.1	46.1	46.0	45.9	46.0	45.9	46.1	45.9	45.7	45.9
5°	45.9	46.0	46.0	45.9	45.8	45.9	45.8	45.9	45.8	45.5	45.6
7.5°	46.2	46.5	46.3	46.3	46.1	46.2	46.1	46.1	45.9	45.7	45.8
10°	46.8	47.0	46.8	46.7	46.4	46.5	46.4	46.4	46.2	45.9	45.9
12.5°	47.1	47.4	47.0	47.0	46.6	46.7	46.4	46.4	46.2	45.8	45.8
15°	47.4	47.6	47.3	47.1	46.7	46.7	46.4	46.2	45.9	45.6	45.5
17.5°	47.9	48.1	47.6	47.4	46.8	46.8	46.4	46.2	45.9	45.4	45.2
20°	48.5	48.7	48.1	47.9	47.2	47.1	46.6	46.2	45.9	45.3	45.0
22.5°	48.9	49.1	48.5	48.2	47.3	47.2	46.7	46.1	45.6	45.0	44.5
25°	49.3	49.5	48.7	48.4	47.4	47.2	46.5	45.9	45.2	44.5	43.9
27.5°	49.8	50.0	49.1	48.7	47.6	47.3	46.5	45.6	44.9	44.0	43.3
30°	50.5	50.7	49.7	49.2	47.9	47.5	46.5	45.5	44.6	43.5	42.6
32.5°	51.1	51.1	50.0	49.5	48.0	47.5	46.4	45.1	44.1	42.9	41.8
35°	51.4	51.3	50.1	49.5	47.9	47.3	46.0	44.5	43.3	42.0	40.6
37.5°	51.5	51.4	50.2	49.4	47.6	46.9	45.4	43.8	42.4	40.9	39.3
40°	51.7	51.5	50.1	49.3	47.3	46.5	44.8	43.0	41.5	39.9	38.1
42.5°	51.8	51.5	50.0	49.1	46.9	46.0	44.2	42.2	40.6	38.8	36.8
45°	51.5	51.1	49.5	48.4	46.2	45.1	43.2	41.1	39.3	37.4	35.4
47.5°	50.7	50.1	48.5	47.4	45.1	43.9	41.9	39.6	37.8	35.9	33.7
50°	49.6	48.9	47.3	46.1	43.7	42.4	40.4	38.1	36.2	34.2	32.0
52.5°	48.2	47.5	45.8	44.5	42.1	40.7	38.7	36.3	34.5	32.5	30.2
55°	46.4	45.6	43.9	42.6	40.2	38.8	36.8	34.4	32.5	30.5	28.3
57.5°	44.4	43.4	41.7	40.3	37.9	36.5	34.5	32.2	30.5	28.5	26.3
60°	41.7	40.7	39.0	37.6	35.3	33.9	32.0	29.9	28.1	26.2	24.1
62.5°	38.7	37.7	36.1	34.5	32.5	31.1	29.3	27.3	25.7	23.9	21.9
65°	35.5	34.5	33.1	31.6	29.6	28.3	26.7	24.8	23.3	21.6	19.7
67.5°	31.8	31.0	29.7	28.2	26.4	25.4	23.7	22.0	20.6	19.1	17.5
70°	28.1	27.2	26.1	24.7	23.2	22.0	20.6	19.1	17.9	16.6	15.1
72.5°	24.1	23.3	22.3	21.1	19.6	18.8	17.5	16.2	15.1	14.0	12.8
75°	20.1	19.4	18.5	17.4	16.1	15.5	14.4	13.3	12.3	11.4	10.4
77.5°	16.1	15.5	14.8	14.0	12.7	12.2	11.3	10.4	9.7	8.9	8.2
80°	12.2	11.7	11.1	10.4	9.6	9.0	8.3	7.6	7.0	6.6	6.1
82.5°	8.6	8.2	7.8	7.3	6.6	6.2	5.7	5.1	4.7	4.4	4.1
85°	5.5	5.2	4.9	4.5	4.1	3.8	3.4	3.0	2.7	2.6	2.5
87.5°	3.3	3.1	2.8	2.7	2.3	2.0	1.8	1.5	1.4	1.3	1.3
90°	2.3	2.1	1.9	1.7	1.6	1.4	1.1	1.0	0.8	0.8	0.9
92.5°	3.3	3.1	2.8	2.7	2.3	2.0	1.8	1.5	1.4	1.3	1.3
95°	5.5	5.2	4.9	4.5	4.1	3.8	3.4	3.0	2.7	2.6	2.5
97.5°	8.6	8.2	7.8	7.3	6.6	6.2	5.7	5.1	4.7	4.4	4.1
100°	12.2	11.7	11.1	10.4	9.6	9.0	8.3	7.6	7.0	6.6	6.1
102.5°	16.1	15.5	14.8	14.0	12.7	12.2	11.3	10.4	9.7	8.9	8.2
105°	20.1	19.4	18.5	17.4	16.1	15.5	14.4	13.3	12.3	11.4	10.4
107.5°	24.1	23.3	22.3	21.1	19.6	18.8	17.5	16.2	15.1	14.0	12.8
110°	28.1	27.2	26.1	24.7	23.2	22.0	20.6	19.1	17.9	16.6	15.1



TEST NUMBER: P395005

CATALOG NUMBER: 303-W2-LEDB2-TSAM-UNV-T4-DIM10-CS-EDGE

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°
112.5°	31.8	31.0	29.7	28.2	26.4	25.4	23.7	22.0	20.6	19.1	17.5
115°	35.5	34.5	33.1	31.6	29.6	28.3	26.7	24.8	23.3	21.6	19.7
117.5°	38.7	37.7	36.1	34.5	32.5	31.1	29.3	27.3	25.7	23.9	21.9
120°	41.7	40.7	39.0	37.6	35.3	33.9	32.0	29.9	28.1	26.2	24.1
122.5°	44.4	43.4	41.7	40.3	37.9	36.5	34.5	32.2	30.5	28.5	26.3
125°	46.4	45.6	43.9	42.6	40.2	38.8	36.8	34.4	32.5	30.5	28.3
127.5°	48.2	47.5	45.8	44.5	42.1	40.7	38.7	36.3	34.5	32.5	30.2
130°	49.6	48.9	47.3	46.1	43.7	42.4	40.4	38.1	36.2	34.2	32.0
132.5°	50.7	50.1	48.5	47.4	45.1	43.9	41.9	39.6	37.8	35.9	33.7
135°	51.5	51.1	49.5	48.4	46.2	45.1	43.2	41.1	39.3	37.4	35.4
137.5°	51.8	51.5	50.0	49.1	46.9	46.0	44.2	42.2	40.6	38.8	36.8
140°	51.7	51.5	50.1	49.3	47.3	46.5	44.8	43.0	41.5	39.9	38.1
142.5°	51.5	51.4	50.2	49.4	47.6	46.9	45.4	43.8	42.4	40.9	39.3
145°	51.4	51.3	50.1	49.5	47.9	47.3	46.0	44.5	43.3	42.0	40.6
147.5°	51.1	51.1	50.0	49.5	48.0	47.5	46.4	45.1	44.1	42.9	41.8
150°	50.5	50.7	49.7	49.2	47.9	47.5	46.5	45.5	44.6	43.5	42.6
152.5°	49.8	50.0	49.1	48.7	47.6	47.3	46.5	45.6	44.9	44.0	43.3
155°	49.3	49.5	48.7	48.4	47.4	47.2	46.5	45.9	45.2	44.5	43.9
157.5°	48.9	49.1	48.5	48.2	47.3	47.2	46.7	46.1	45.6	45.0	44.5
160°	48.5	48.7	48.1	47.9	47.2	47.1	46.6	46.2	45.9	45.3	45.0
162.5°	47.9	48.1	47.6	47.4	46.8	46.8	46.4	46.2	45.9	45.4	45.2
165°	47.4	47.6	47.3	47.1	46.7	46.7	46.4	46.2	45.9	45.6	45.5
167.5°	47.1	47.4	47.0	47.0	46.6	46.7	46.4	46.4	46.2	45.8	45.8
170°	46.8	47.0	46.8	46.7	46.4	46.5	46.4	46.4	46.2	45.9	45.9
172.5°	46.2	46.5	46.3	46.3	46.1	46.2	46.1	46.1	45.9	45.7	45.8
175°	45.9	46.0	46.0	45.9	45.8	45.9	45.8	45.9	45.8	45.5	45.6
177.5°	45.9	46.1	46.1	46.0	45.9	46.0	45.9	46.1	45.9	45.7	45.9
180°	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9



TEST NUMBER: P395005

CATALOG NUMBER: 303-W2-LEDB2-TSAM-UNV-T4-DIM10-CS-EDGE

CANDELA DISTRIBUTION (continued):

	105°	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°
0°	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9
2.5°	45.7	46.2	45.8	45.6	45.8	45.7	45.6	46.0	45.5	45.3	45.2
5°	45.4	45.9	45.6	45.3	45.5	45.3	45.2	45.6	45.1	44.9	44.8
7.5°	45.6	46.0	45.6	45.3	45.6	45.2	45.2	45.5	45.0	44.8	44.7
10°	45.7	46.1	45.6	45.3	45.6	45.1	45.0	45.3	44.9	44.6	44.4
12.5°	45.5	45.8	45.3	45.0	45.2	44.7	44.6	44.7	44.3	44.0	43.8
15°	45.1	45.3	44.8	44.4	44.6	44.0	43.8	43.9	43.5	43.1	43.0
17.5°	44.8	44.9	44.3	43.8	44.0	43.3	43.1	43.2	42.7	42.2	42.1
20°	44.5	44.5	43.9	43.3	43.4	42.6	42.3	42.3	41.8	41.3	41.1
22.5°	43.9	43.8	43.1	42.4	42.5	41.6	41.2	41.1	40.6	40.0	39.8
25°	43.2	42.9	42.1	41.3	41.2	40.3	39.8	39.6	39.1	38.5	38.2
27.5°	42.3	41.8	40.9	40.1	39.9	38.8	38.3	38.0	37.5	36.8	36.6
30°	41.5	40.9	39.8	38.9	38.5	37.4	36.8	36.5	36.0	35.2	34.9
32.5°	40.5	39.6	38.4	37.3	36.9	35.7	35.1	34.6	34.1	33.4	33.2
35°	39.2	38.1	36.8	35.6	35.0	33.7	33.1	32.6	32.2	31.4	31.2
37.5°	37.8	36.5	35.0	33.7	33.0	31.7	31.0	30.5	30.1	29.5	29.2
40°	36.4	34.9	33.3	31.9	31.0	29.8	29.1	28.6	28.2	27.4	27.0
42.5°	35.0	33.4	31.5	30.0	29.2	27.9	27.2	26.7	26.1	25.2	24.7
45°	33.4	31.6	29.7	28.1	27.2	25.9	25.2	24.5	23.8	22.8	22.0
47.5°	31.6	29.7	27.8	26.2	25.2	24.0	23.1	22.1	21.3	20.0	17.3
50°	29.9	27.8	25.8	24.4	23.3	21.9	20.9	19.7	17.4	15.5	14.3
52.5°	28.0	26.0	24.0	22.6	21.4	19.9	18.7	15.8	14.3	13.1	12.1
55°	26.1	24.1	22.2	20.8	19.4	17.8	15.3	13.3	12.1	11.1	10.0
57.5°	24.2	22.2	20.3	18.9	17.4	14.8	13.1	11.4	10.3	9.1	7.9
60°	22.2	20.3	18.5	17.0	15.0	12.6	11.4	9.7	8.6	6.8	5.4
62.5°	20.1	18.3	16.6	15.1	12.8	10.9	9.7	8.0	6.3	5.0	3.7
65°	18.1	16.5	14.8	12.8	11.2	9.5	8.2	6.5	5.0	3.7	2.7
67.5°	16.0	14.5	13.1	11.2	9.7	8.2	6.8	5.3	4.0	3.2	2.4
70°	14.0	12.6	11.3	9.7	8.3	7.1	5.8	4.6	3.6	2.8	2.1
72.5°	11.7	10.6	9.5	8.2	7.1	6.0	5.0	3.9	3.1	2.4	1.8
75°	9.7	8.7	7.8	6.7	5.9	5.0	4.1	3.3	2.6	2.0	1.5
77.5°	7.6	6.8	6.2	5.4	4.6	4.0	3.3	2.6	2.1	1.6	1.2
80°	5.7	5.1	4.6	4.0	3.5	3.0	2.5	2.0	1.6	1.3	1.0
82.5°	3.9	3.5	3.2	2.8	2.5	2.2	1.9	1.5	1.2	1.0	0.7
85°	2.4	2.2	2.0	1.8	1.6	1.4	1.3	1.1	0.9	0.7	0.6
87.5°	1.3	1.3	1.2	1.2	1.0	1.0	0.9	0.8	0.7	0.6	0.5
90°	1.0	1.0	1.0	1.0	0.9	0.8	0.8	0.7	0.7	0.5	0.4
92.5°	1.3	1.3	1.2	1.2	1.0	1.0	0.9	0.8	0.7	0.6	0.5
95°	2.4	2.2	2.0	1.8	1.6	1.4	1.3	1.1	0.9	0.7	0.6
97.5°	3.9	3.5	3.2	2.8	2.5	2.2	1.9	1.5	1.2	1.0	0.7
100°	5.7	5.1	4.6	4.0	3.5	3.0	2.5	2.0	1.6	1.3	1.0
102.5°	7.6	6.8	6.2	5.4	4.6	4.0	3.3	2.6	2.1	1.6	1.2
105°	9.7	8.7	7.8	6.7	5.9	5.0	4.1	3.3	2.6	2.0	1.5
107.5°	11.7	10.6	9.5	8.2	7.1	6.0	5.0	3.9	3.1	2.4	1.8
110°	14.0	12.6	11.3	9.7	8.3	7.1	5.8	4.6	3.6	2.8	2.1



TEST NUMBER: P395005

CATALOG NUMBER: 303-W2-LEDB2-TSAM-UNV-T4-DIM10-CS-EDGE

CANDELA DISTRIBUTION (continued):

	105°	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°
112.5°	16.0	14.5	13.1	11.2	9.7	8.2	6.8	5.3	4.0	3.2	2.4
115°	18.1	16.5	14.8	12.8	11.2	9.5	8.2	6.5	5.0	3.7	2.7
117.5°	20.1	18.3	16.6	15.1	12.8	10.9	9.7	8.0	6.3	5.0	3.7
120°	22.2	20.3	18.5	17.0	15.0	12.6	11.4	9.7	8.6	6.8	5.4
122.5°	24.2	22.2	20.3	18.9	17.4	14.8	13.1	11.4	10.3	9.1	7.9
125°	26.1	24.1	22.2	20.8	19.4	17.8	15.3	13.3	12.1	11.1	10.0
127.5°	28.0	26.0	24.0	22.6	21.4	19.9	18.7	15.8	14.3	13.1	12.1
130°	29.9	27.8	25.8	24.4	23.3	21.9	20.9	19.7	17.4	15.5	14.3
132.5°	31.6	29.7	27.8	26.2	25.2	24.0	23.1	22.1	21.3	20.0	17.3
135°	33.4	31.6	29.7	28.1	27.2	25.9	25.2	24.5	23.8	22.8	22.0
137.5°	35.0	33.4	31.5	30.0	29.2	27.9	27.2	26.7	26.1	25.2	24.7
140°	36.4	34.9	33.3	31.9	31.0	29.8	29.1	28.6	28.2	27.4	27.0
142.5°	37.8	36.5	35.0	33.7	33.0	31.7	31.0	30.5	30.1	29.5	29.2
145°	39.2	38.1	36.8	35.6	35.0	33.7	33.1	32.6	32.2	31.4	31.2
147.5°	40.5	39.6	38.4	37.3	36.9	35.7	35.1	34.6	34.1	33.4	33.2
150°	41.5	40.9	39.8	38.9	38.5	37.4	36.8	36.5	36.0	35.2	34.9
152.5°	42.3	41.8	40.9	40.1	39.9	38.8	38.3	38.0	37.5	36.8	36.6
155°	43.2	42.9	42.1	41.3	41.2	40.3	39.8	39.6	39.1	38.5	38.2
157.5°	43.9	43.8	43.1	42.4	42.5	41.6	41.2	41.1	40.6	40.0	39.8
160°	44.5	44.5	43.9	43.3	43.4	42.6	42.3	42.3	41.8	41.3	41.1
162.5°	44.8	44.9	44.3	43.8	44.0	43.3	43.1	43.2	42.7	42.2	42.1
165°	45.1	45.3	44.8	44.4	44.6	44.0	43.8	43.9	43.5	43.1	43.0
167.5°	45.5	45.8	45.3	45.0	45.2	44.7	44.6	44.7	44.3	44.0	43.8
170°	45.7	46.1	45.6	45.3	45.6	45.1	45.0	45.3	44.9	44.6	44.4
172.5°	45.6	46.0	45.6	45.3	45.6	45.2	45.2	45.5	45.0	44.8	44.7
175°	45.4	45.9	45.6	45.3	45.5	45.3	45.2	45.6	45.1	44.9	44.8
177.5°	45.7	46.2	45.8	45.6	45.8	45.7	45.6	46.0	45.5	45.3	45.2
180°	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9



TEST NUMBER: P395005

CATALOG NUMBER: 303-W2-LEDB2-TSAM-UNV-T4-DIM10-CS-EDGE

CANDELA DISTRIBUTION (continued):

	160°	165°	170°	175°	180°
0°	45.9	45.9	45.9	45.9	45.9
2.5°	45.4	45.6	45.2	45.4	45.2
5°	45.0	45.2	44.7	45.0	44.8
7.5°	44.8	45.0	44.6	44.8	44.6
10°	44.6	44.8	44.4	44.6	44.4
12.5°	44.0	44.2	43.7	43.9	43.8
15°	43.1	43.3	42.8	43.0	42.9
17.5°	42.1	42.3	41.8	41.9	41.9
20°	41.1	41.3	40.7	40.8	40.9
22.5°	39.6	39.8	39.3	39.3	39.3
25°	38.0	38.1	37.6	37.6	37.6
27.5°	36.3	36.5	35.9	35.9	35.9
30°	34.7	34.8	34.4	34.3	34.3
32.5°	32.9	33.0	32.6	32.5	32.4
35°	31.0	31.0	30.6	30.4	30.4
37.5°	28.9	28.7	28.3	28.1	28.1
40°	26.5	26.3	25.8	25.5	25.4
42.5°	24.0	23.6	23.1	22.7	22.6
45°	21.0	18.6	17.2	16.6	16.4
47.5°	15.4	14.5	13.8	13.5	13.3
50°	12.7	12.0	11.4	11.1	10.9
52.5°	10.5	9.8	9.3	8.9	8.7
55°	8.5	7.6	7.1	6.6	6.3
57.5°	5.7	4.5	3.9	3.4	3.4
60°	3.6	2.6	1.9	1.5	1.5
62.5°	2.1	1.1	0.4	0.1	0.1
65°	1.5	0.8	0.4	0.2	0.1
67.5°	1.3	0.7	0.4	0.2	0.1
70°	1.2	0.7	0.4	0.1	0.1
72.5°	1.0	0.6	0.3	0.1	0.1
75°	0.9	0.5	0.3	0.1	0.1
77.5°	0.7	0.4	0.3	0.1	0.1
80°	0.6	0.4	0.2	0.1	0.1
82.5°	0.5	0.3	0.2	0.1	0.1
85°	0.4	0.3	0.2	0.1	0.1
87.5°	0.4	0.3	0.2	0.1	0.1
90°	0.4	0.2	0.2	0.1	0.1
92.5°	0.4	0.3	0.2	0.1	0.1
95°	0.4	0.3	0.2	0.1	0.1
97.5°	0.5	0.3	0.2	0.1	0.1
100°	0.6	0.4	0.2	0.1	0.1
102.5°	0.7	0.4	0.3	0.1	0.1
105°	0.9	0.5	0.3	0.1	0.1
107.5°	1.0	0.6	0.3	0.1	0.1
110°	1.2	0.7	0.4	0.1	0.1



TEST NUMBER: P395005

CATALOG NUMBER: 303-W2-LEDB2-TSAM-UNV-T4-DIM10-CS-EDGE

CANDELA DISTRIBUTION (continued):

	160°	165°	170°	175°	180°
112.5°	1.3	0.7	0.4	0.2	0.1
115°	1.5	0.8	0.4	0.2	0.1
117.5°	2.1	1.1	0.4	0.1	0.1
120°	3.6	2.6	1.9	1.5	1.5
122.5°	5.7	4.5	3.9	3.4	3.4
125°	8.5	7.6	7.1	6.6	6.3
127.5°	10.5	9.8	9.3	8.9	8.7
130°	12.7	12.0	11.4	11.1	10.9
132.5°	15.4	14.5	13.8	13.5	13.3
135°	21.0	18.6	17.2	16.6	16.4
137.5°	24.0	23.6	23.1	22.7	22.6
140°	26.5	26.3	25.8	25.5	25.4
142.5°	28.9	28.7	28.3	28.1	28.1
145°	31.0	31.0	30.6	30.4	30.4
147.5°	32.9	33.0	32.6	32.5	32.4
150°	34.7	34.8	34.4	34.3	34.3
152.5°	36.3	36.5	35.9	35.9	35.9
155°	38.0	38.1	37.6	37.6	37.6
157.5°	39.6	39.8	39.3	39.3	39.3
160°	41.1	41.3	40.7	40.8	40.9
162.5°	42.1	42.3	41.8	41.9	41.9
165°	43.1	43.3	42.8	43.0	42.9
167.5°	44.0	44.2	43.7	43.9	43.8
170°	44.6	44.8	44.4	44.6	44.4
172.5°	44.8	45.0	44.6	44.8	44.6
175°	45.0	45.2	44.7	45.0	44.8
177.5°	45.4	45.6	45.2	45.4	45.2
180°	45.9	45.9	45.9	45.9	45.9

(END OF REPORT)