

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: LUMIERE

Report Number: P220341

Luminaire Tested: **9002-W1-[RW, RI]-LED2797-S-BK-L1-UNV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P220341
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29413)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 9002-W1-[RW, RI]-LED2797-S-BK-L1-UNV
Description: LUMIERE LANTERRA 9002 LED WALL LUMINAIRE, RECESSED LENS, SPOT OPTIC, BLACK HOUSING.
Light Source: (1) 2700K CCT, 97 CRI LED
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 341.2 lumens
Efficiency: N/A
Efficacy: 34.1 lumens/watt
Spacing Criteria (0/90/45): 0.25 / 0.25 / 0.25
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 10
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P220341
CATALOG NUMBER: 9002-W1-[RW, RI]-LED2797-S-BK-L1-UNV

Luminous Intensity Polar Plot

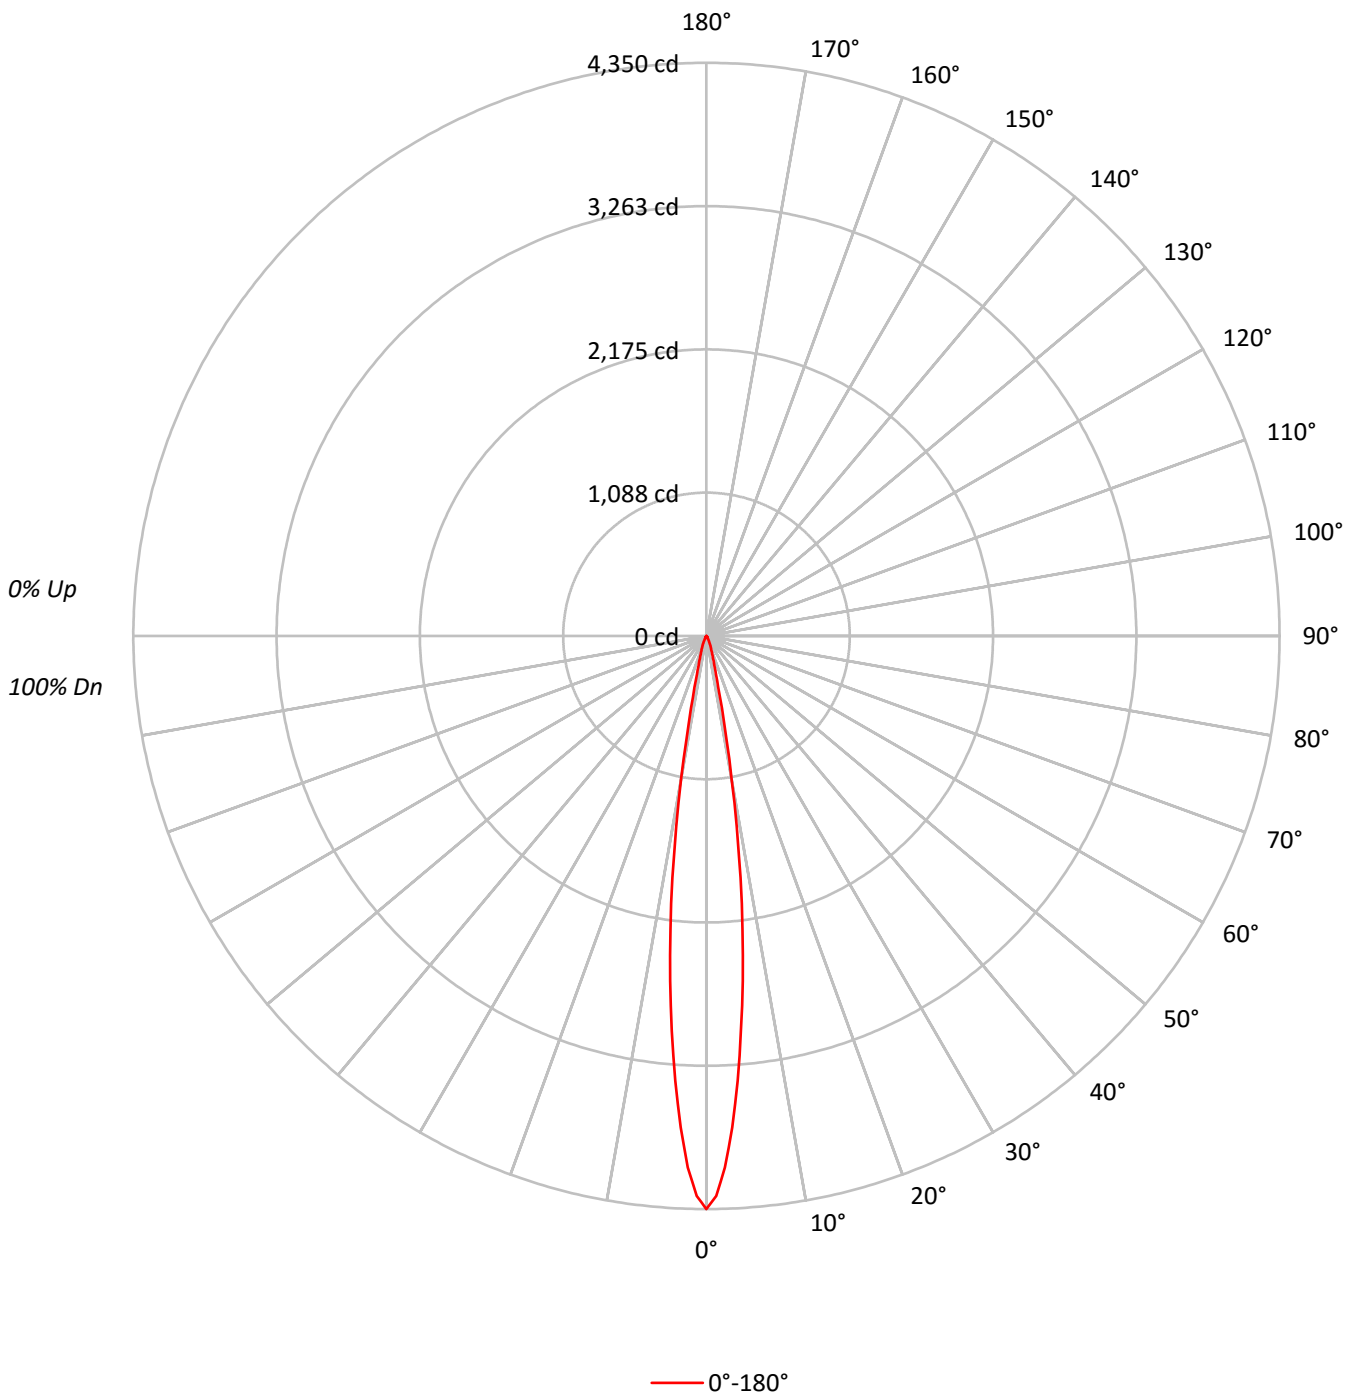



TEST NUMBER: P220341

CATALOG NUMBER: 9002-W1-[RW, RI]-LED2797-S-BK-L1-UNV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	116	114	113	111	114	112	111	109	108	107	106	104	104	103	101	100	100	98
2	113	110	108	106	111	108	106	104	105	104	102	103	101	100	100	99	98	97
3	110	107	104	102	109	105	103	101	103	101	99	101	99	98	99	97	96	95
4	108	104	101	98	107	103	100	98	101	99	97	99	97	96	98	96	95	94
5	106	101	98	96	105	101	98	96	99	97	95	98	96	94	96	95	93	92
6	104	99	96	94	103	99	96	94	97	95	93	96	94	92	95	93	92	91
7	102	97	94	92	101	97	94	92	96	93	91	95	93	91	94	92	91	90
8	101	96	93	91	100	95	92	90	95	92	90	94	91	90	93	91	89	89
9	99	94	91	89	98	94	91	89	93	91	89	93	90	89	92	90	88	88
10	98	93	90	88	97	93	90	88	92	89	88	91	89	88	91	89	87	87

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2146250
5°	1490398
10°	553495
15°	118706
20°	53029
25°	25913
30°	8660
35°	3915
40°	2319
45°	1535
50°	1075
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P220341

CATALOG NUMBER: 9002-W1-[RW, RI]-LED2797-S-BK-L1-UNV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	225.3	66.0
10°-20°	86.6	25.4
20°-30°	22.7	6.7
30°-40°	4.6	1.4
40°-50°	1.6	0.5
50°-60°	0.3	0.1
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	334.7	98.1
0°-40°	339.3	99.4
0°-60°	341.2	100.0
0°-90°	341.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	341.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4350	
5°	3009	225
15°	232	87
25°	48	23
35°	6	5
45°	2	2
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P220341

CATALOG NUMBER: 9002-W1-[RW, RI]-LED2797-S-BK-L1-UNV

CANDELA DISTRIBUTION (FULL):

0°	
0°	4350.1
1°	4250.5
2°	4036.9
3°	3736.0
4°	3385.2
5°	3009.3
6°	2633.3
7°	2246.5
8°	1851.0
9°	1463.5
10°	1104.8
11°	798.1
12°	562.2
13°	399.8
14°	297.3
15°	232.4
17.5°	142.9
20°	101.0
22.5°	73.6
25°	47.6
27.5°	27.4
30°	15.2
32.5°	9.4
35°	6.5
37.5°	5.1
40°	3.6
42.5°	2.2
45°	2.2
47.5°	1.4
50°	1.4
52.5°	0.7
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P220341

CATALOG NUMBER: 9002-W1-[RW, RI]-LED2797-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

90° | $\frac{0^\circ}{0.0}$

(END OF REPORT)