

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: LUMIERE

Report Number: P220354

Luminaire Tested: **9002-W1-[RW, RI]-LED3090-F-BK-L1-UNV**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P220354  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29415)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: LUMIERE  
Catalog Number: 9002-W1-[RW, RI]-LED3090-F-BK-L1-UNV  
Description: LUMIERE LANTERRA 9002 LED WALL LUMINAIRE, RECESSED LENS, FLOOD OPTIC, BLACK HOUSING.  
Light Source: (1) 3000K CCT, 90 CRI LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 790.7 lumens  
Efficiency: N/A  
Efficacy: 79.1 lumens/watt  
Spacing Criteria (0/90/45): 0.66 / 0.66 / 0.63  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 10  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P220354

CATALOG NUMBER: 9002-W1-[RW, RI]-LED3090-F-BK-L1-UNV

### Luminous Intensity Polar Plot

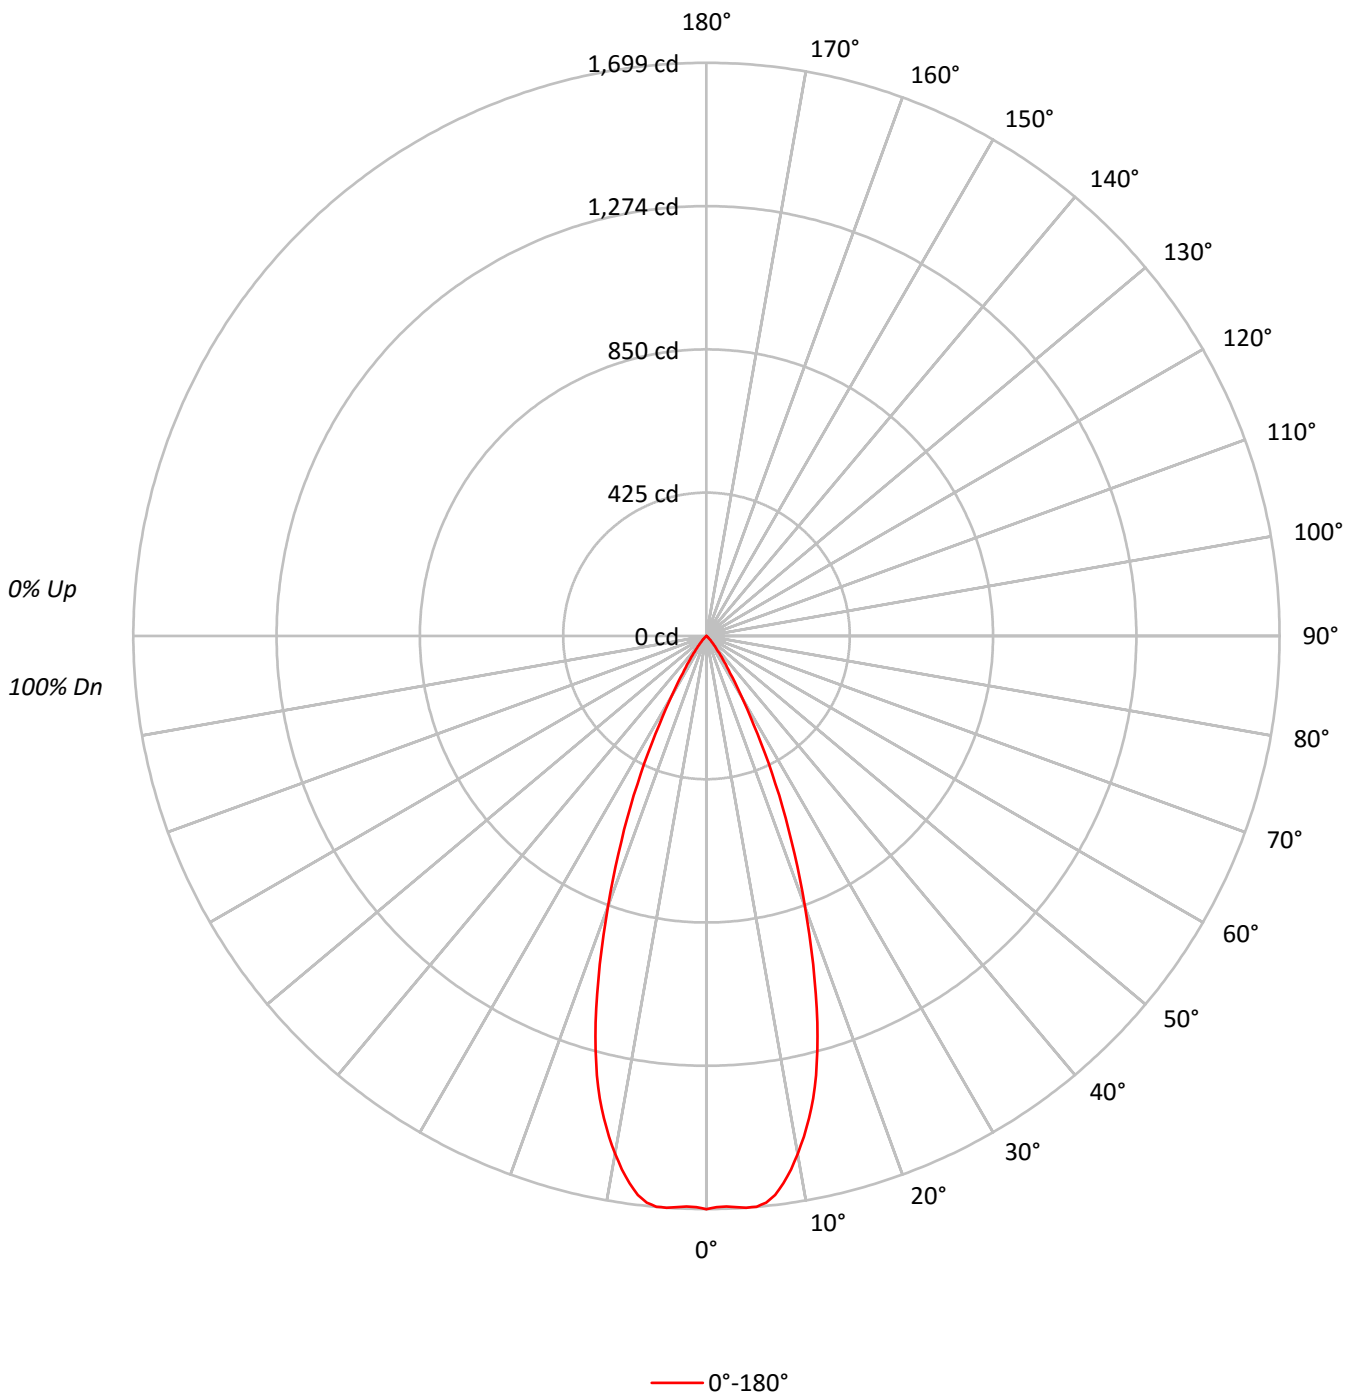



TEST NUMBER: P220354

CATALOG NUMBER: 9002-W1-[RW, RI]-LED3090-F-BK-L1-UNV

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95
2	110	106	103	100	108	104	101	99	101	99	97	98	96	95	96	94	93	91
3	106	101	96	93	104	99	95	92	97	94	91	94	92	90	92	90	88	87
4	102	96	91	88	100	95	90	87	92	89	86	91	88	85	89	86	84	83
5	98	91	86	83	96	90	86	83	89	85	82	87	84	81	86	83	80	79
6	94	87	82	79	93	86	82	78	85	81	78	84	80	77	82	79	77	76
7	91	83	78	75	90	83	78	75	82	77	74	80	77	74	79	76	74	73
8	88	80	75	72	86	79	75	71	78	74	71	77	74	71	77	73	71	70
9	84	77	72	69	84	76	72	68	75	71	68	75	71	68	74	70	68	67
10	82	74	69	66	81	73	69	66	73	68	66	72	68	65	71	68	65	64

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	838449
5°	841256
10°	781045
15°	649207
20°	447390
25°	263809
30°	117929
35°	50232
40°	20159
45°	7257
50°	2456
55°	688
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P220354

CATALOG NUMBER: 9002-W1-[RW, RI]-LED3090-F-BK-L1-UNV

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	157.8	20.0
10°-20°	342.2	43.3
20°-30°	221.7	28.0
30°-40°	58.2	7.4
40°-50°	9.7	1.2
50°-60°	1.1	0.1
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	721.7	91.3
0°-40°	779.9	98.6
0°-60°	790.7	100.0
0°-90°	790.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	790.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1699	
5°	1699	158
15°	1271	342
25°	485	222
35°	83	58
45°	10	10
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P220354

CATALOG NUMBER: 9002-W1-[RW, RI]-LED3090-F-BK-L1-UNV

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1699.4
1°	1693.8
2°	1692.2
3°	1695.4
4°	1699.4
5°	1698.6
6°	1689.0
7°	1669.7
8°	1638.4
9°	1601.5
10°	1559.0
11°	1512.5
12°	1461.9
13°	1406.6
14°	1342.4
15°	1271.0
16°	1192.3
17°	1108.9
18°	1023.0
19°	935.6
20°	852.1
22.5°	658.7
25°	484.6
26°	420.4
27°	356.3
28°	298.5
29°	248.7
30°	207.0
32.5°	130.0
35°	83.4
37.5°	51.4
40°	31.3
42.5°	18.5
45°	10.4
47.5°	5.6
50°	3.2
52.5°	1.6
55°	0.8
57.5°	0.8
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0



TEST NUMBER: P220354

CATALOG NUMBER: 9002-W1-[RW, RI]-LED3090-F-BK-L1-UNV

**CANDELA DISTRIBUTION (continued):**

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)