

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: LUMIERE

Report Number: P220319

Luminaire Tested: **9002-W1-[RW, RI]-LED3597-M-WT-L1-UNV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P220319
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29410)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 9002-W1-[RW, RI]-LED3597-M-WT-L1-UNV
Description: LUMIERE LANTERRA 9002 LED WALL LUMINAIRE, RECESSED LENS, MEDIUM FLOOD OPTIC, WHITE HOUSING.
Light Source: (1) 3500K CCT, 97 CRI LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 800.1 lumens
Efficiency: N/A
Efficacy: 80.0 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.37
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P220319

CATALOG NUMBER: 9002-W1-[RW, RI]-LED3597-M-WT-L1-UNV

Luminous Intensity Polar Plot

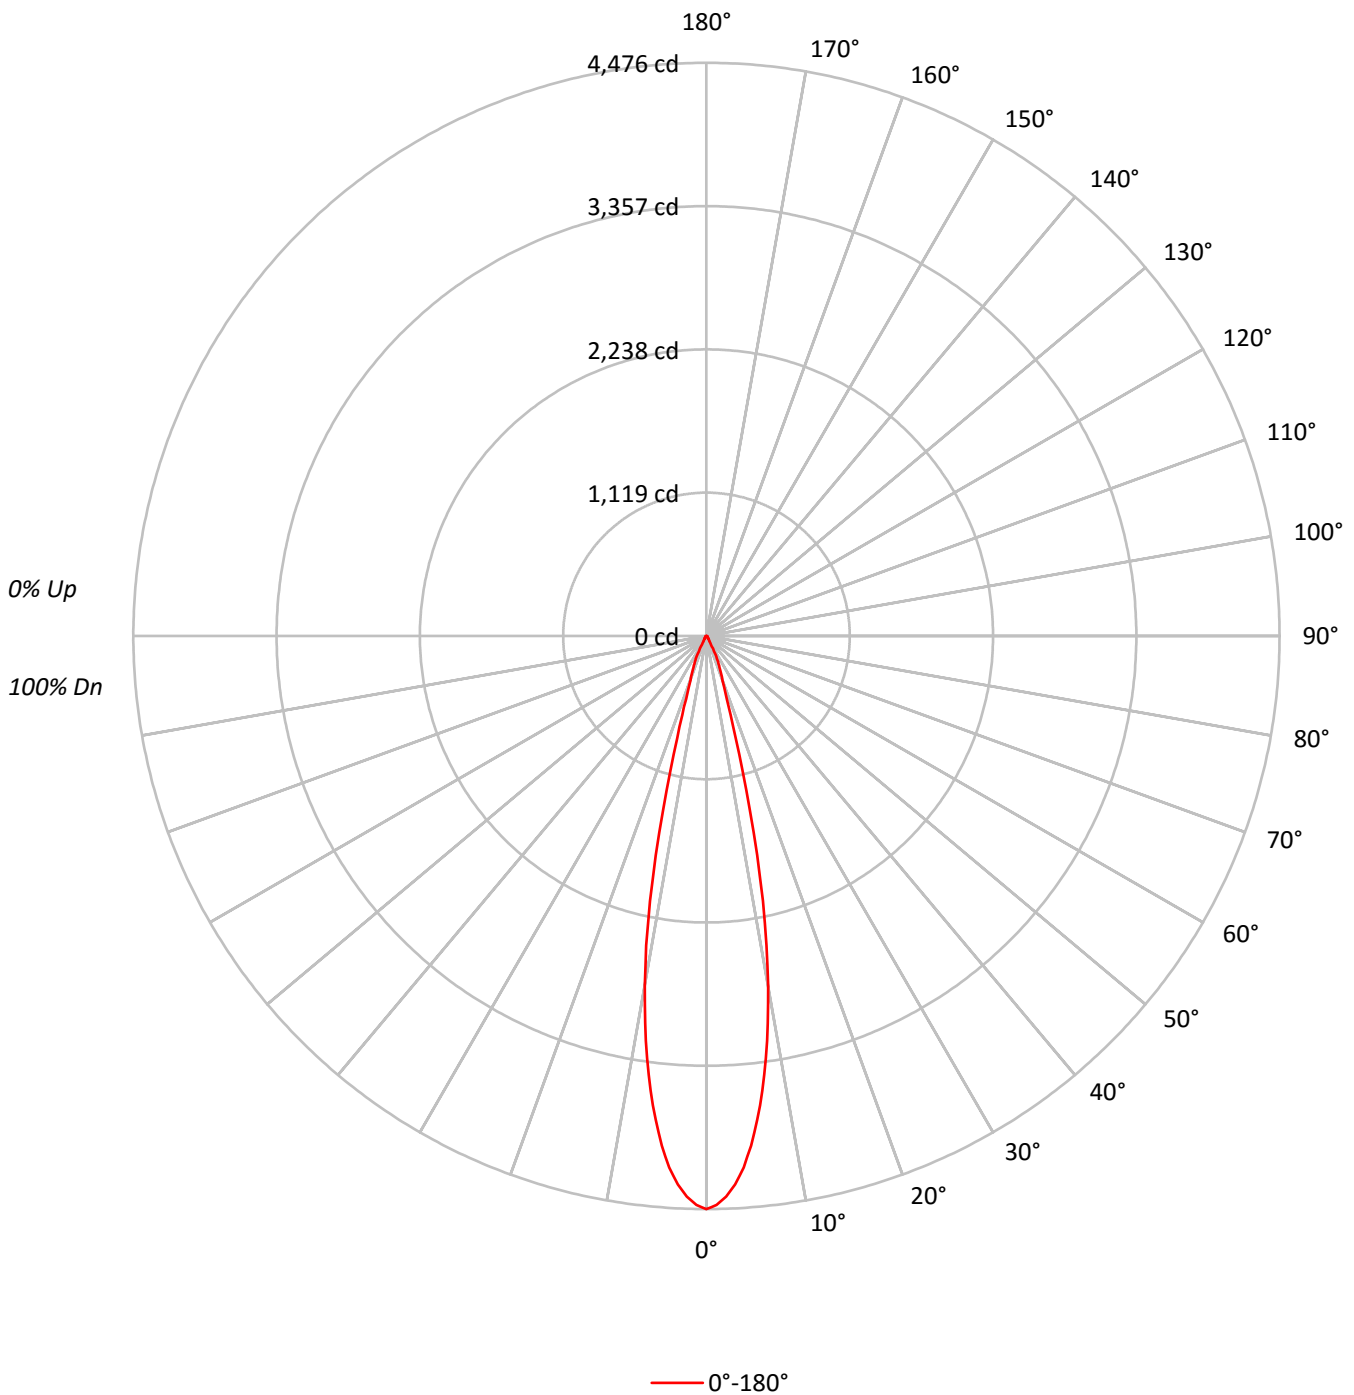



TEST NUMBER: P220319

CATALOG NUMBER: 9002-W1-[RW, RI]-LED3597-M-WT-L1-UNV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	109	112	111	109	107	107	105	104	103	102	101	100	99	98	96
2	111	107	104	102	109	106	103	101	103	100	98	100	98	96	97	96	94	93
3	108	103	99	96	106	102	98	96	99	96	94	97	95	93	95	93	91	90
4	104	99	95	92	103	98	94	92	96	93	91	94	92	90	93	90	89	87
5	102	96	92	89	100	95	91	88	93	90	88	92	89	87	90	88	86	85
6	99	93	89	86	98	92	88	85	91	87	85	90	87	84	88	86	84	83
7	96	90	86	83	95	89	86	83	88	85	83	87	84	82	86	84	82	81
8	94	88	84	81	93	87	83	81	86	83	80	85	82	80	85	82	80	79
9	92	85	82	79	91	85	81	79	84	81	79	84	80	78	83	80	78	77
10	90	83	80	77	89	83	79	77	82	79	77	82	79	77	81	78	76	76

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2208466
5°	1978679
10°	1389748
15°	554456
20°	190696
25°	106155
30°	25922
35°	14214
40°	10498
45°	9629
50°	9364
55°	9806
60°	9670
65°	9456
70°	9377
75°	9341
80°	9376
85°	9057



TEST NUMBER: P220319

CATALOG NUMBER: 9002-W1-[RW, RI]-LED3597-M-WT-L1-UNV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	341.9	42.7
10°-20°	324.1	40.5
20°-30°	82.1	10.3
30°-40°	16.0	2.0
40°-50°	10.7	1.3
50°-60°	10.1	1.3
60°-70°	8.0	1.0
70°-80°	5.4	0.7
80°-90°	1.8	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	748.1	93.5
0°-40°	764.1	95.5
0°-60°	785.0	98.1
0°-90°	800.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	800.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4476	
5°	3995	342
15°	1086	324
25°	195	82
35°	24	16
45°	14	11
55°	11	10
65°	8	8
75°	5	5
85°	2	2
90°	0	



TEST NUMBER: P220319

CATALOG NUMBER: 9002-W1-[RW, RI]-LED3597-M-WT-L1-UNV

CANDELA DISTRIBUTION (FULL):

0°	
0°	4476.2
1°	4445.3
2°	4381.2
3°	4288.5
4°	4161.0
5°	3995.2
6°	3800.2
7°	3579.2
8°	3332.2
9°	3061.6
10°	2774.0
11°	2462.0
12°	2116.6
13°	1757.5
14°	1400.8
15°	1085.5
16°	832.0
17°	646.8
18°	516.8
19°	426.6
20°	363.2
22.5°	264.1
25°	195.0
26°	156.8
27°	110.5
28°	73.9
29°	55.3
30°	45.5
32.5°	30.9
35°	23.6
37.5°	18.7
40°	16.3
42.5°	14.6
45°	13.8
47.5°	13.0
50°	12.2
52.5°	12.2
55°	11.4
57.5°	10.6
60°	9.8
62.5°	8.9
65°	8.1
67.5°	7.3
70°	6.5
72.5°	5.7



TEST NUMBER: P220319

CATALOG NUMBER: 9002-W1-[RW, RI]-LED3597-M-WT-L1-UNV

CANDELA DISTRIBUTION (continued):

	0°
75°	4.9
77.5°	4.9
80°	3.3
82.5°	2.4
85°	1.6
87.5°	0.8
90°	0.0

(END OF REPORT)