

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: LUMIERE

Report Number: P220554

Luminaire Tested: **9003-W1-[RW, RI]-LED3590-W-BK-L1-UNV**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P220554  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29475)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: LUMIERE  
Catalog Number: 9003-W1-[RW, RI]-LED3590-W-BK-L1-UNV  
Description: LUMIERE LANTERRA 9003 LED WALL LUMINAIRE, RECESSED LENS, WIDE FLOOD OPTIC, BLACK HOUSING.  
Light Source: (1) 3500K CCT, 90 CRI LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 599.7 lumens  
Efficiency: N/A  
Efficacy: 61.2 lumens/watt  
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.67  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct


Input Watts (W): 9.8  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P220554

CATALOG NUMBER: 9003-W1-[RW, RI]-LED3590-W-BK-L1-UNV

### Luminous Intensity Polar Plot

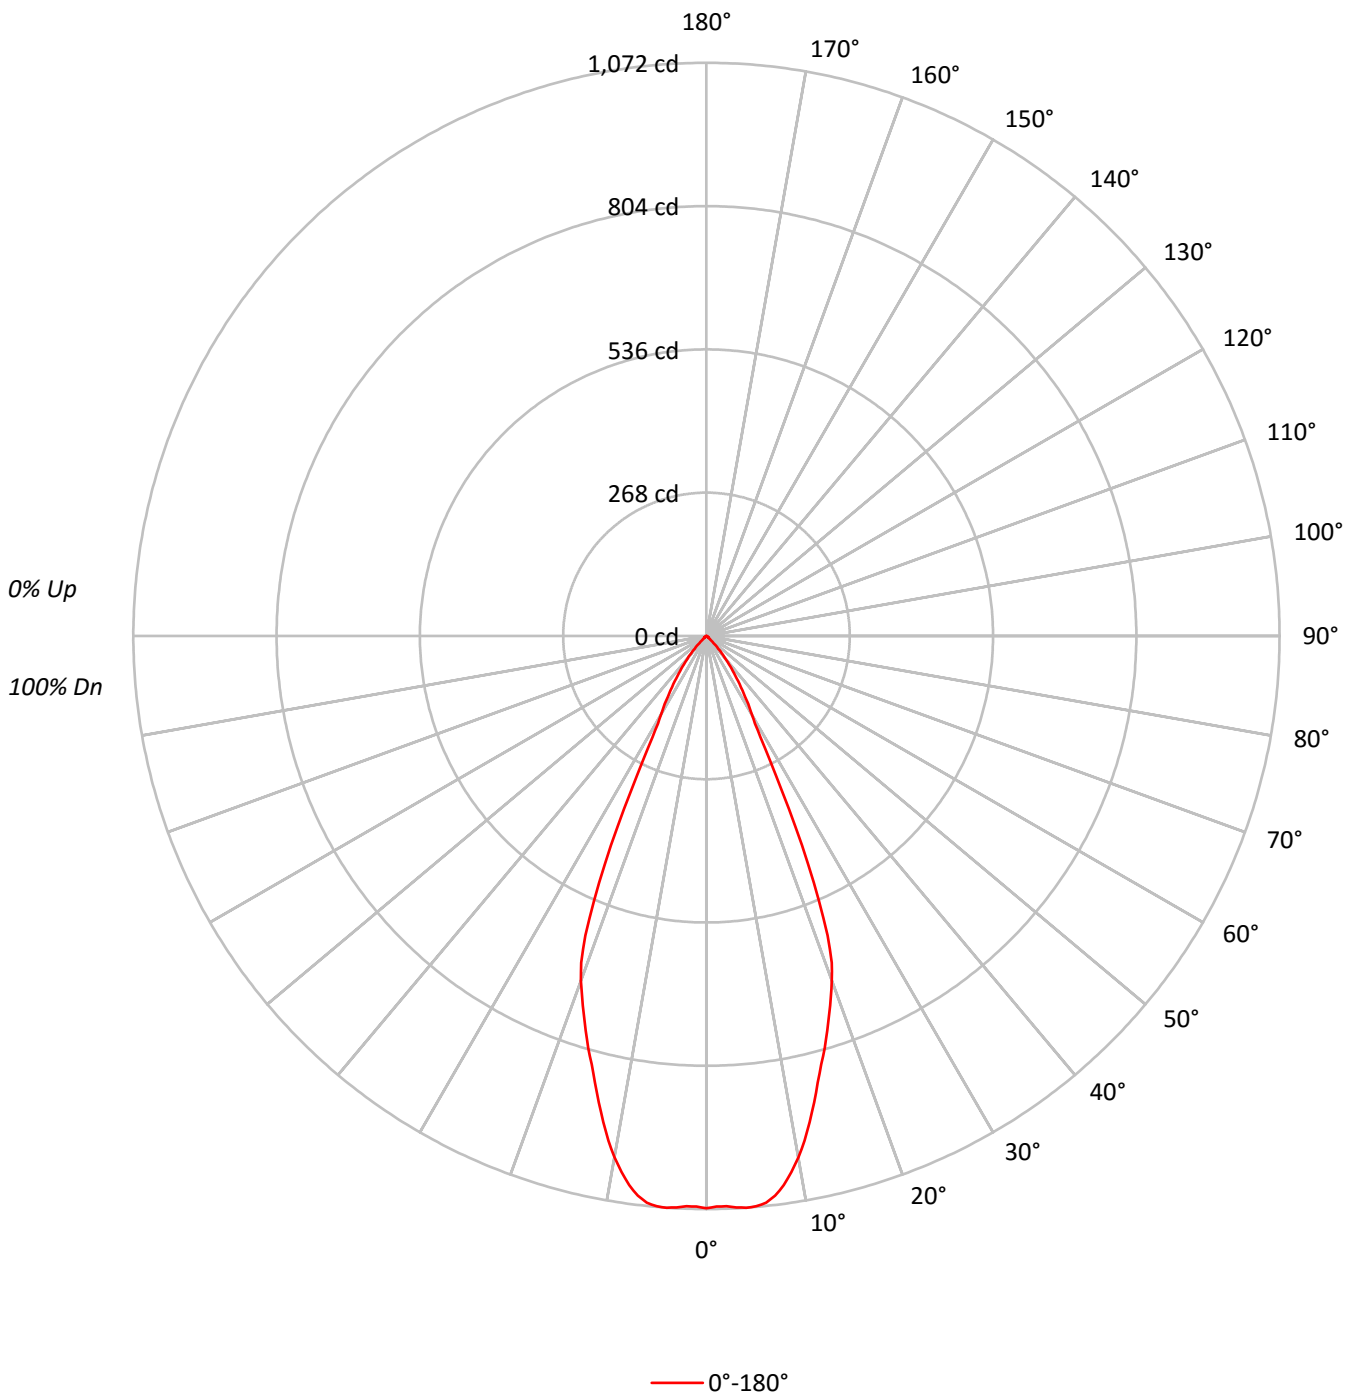



TEST NUMBER: P220554

CATALOG NUMBER: 9003-W1-[RW, RI]-LED3590-W-BK-L1-UNV

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	109	107	112	110	108	106	105	104	102	102	101	99	98	97	97	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	90
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85
4	100	94	89	85	99	93	88	85	90	87	84	89	85	83	87	84	82	80
5	96	89	84	80	95	88	83	80	86	82	79	85	81	78	83	80	78	76
6	92	84	79	75	91	84	79	75	82	78	75	81	77	74	80	76	74	72
7	88	80	75	71	87	80	75	71	78	74	71	77	73	70	76	73	70	69
8	85	77	71	68	84	76	71	68	75	71	67	74	70	67	73	69	67	66
9	82	73	68	64	81	73	68	64	72	67	64	71	67	64	70	66	64	63
10	78	70	65	62	78	70	65	61	69	64	61	68	64	61	67	64	61	60

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	234718
5°	235725
10°	220481
15°	188378
20°	160081
25°	95135
30°	43298
35°	27465
40°	15572
45°	5706
50°	1808
55°	1338
60°	1140
65°	675
70°	256
75°	339
80°	0
85°	0



TEST NUMBER: P220554

CATALOG NUMBER: 9003-W1-[RW, RI]-LED3590-W-BK-L1-UNV

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	99.7	16.6
10°-20°	231.9	38.7
20°-30°	180.0	30.0
30°-40°	65.6	10.9
40°-50°	17.4	2.9
50°-60°	3.2	0.5
60°-70°	1.5	0.2
70°-80°	0.4	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	511.7	85.3
0°-40°	577.3	96.3
0°-60°	597.9	99.7
0°-90°	599.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	599.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1070	
5°	1071	100
15°	830	232
25°	393	180
35°	103	66
45°	18	17
55°	4	3
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P220554

CATALOG NUMBER: 9003-W1-[RW, RI]-LED3590-W-BK-L1-UNV

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1070.4
1°	1067.3
2°	1067.3
3°	1070.4
4°	1072.2
5°	1070.9
6°	1065.6
7°	1054.6
8°	1037.5
9°	1015.2
10°	990.2
11°	961.3
12°	929.3
13°	895.5
14°	860.9
15°	829.8
16°	801.7
17°	771.9
18°	743.4
19°	714.5
20°	686.0
21°	654.4
22°	604.5
23°	538.7
24°	467.3
25°	393.2
26°	323.5
27°	261.2
28°	214.3
29°	187.6
30°	171.0
32.5°	134.6
35°	102.6
37.5°	77.1
40°	54.4
42.5°	35.9
45°	18.4
47.5°	8.3
50°	5.3
52.5°	3.9
55°	3.5
57.5°	3.1
60°	2.6
62.5°	1.8
65°	1.3



TEST NUMBER: P220554

CATALOG NUMBER: 9003-W1-[RW, RI]-LED3590-W-BK-L1-UNV

**CANDELA DISTRIBUTION (continued):**

	0°
67.5°	1.3
70°	0.4
72.5°	0.4
75°	0.4
77.5°	0.4
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)