

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: LUMIERE

Report Number: P220708

Luminaire Tested: **9003-W1-FL-LED4097-W-BK-L2-UNV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P220708
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29479)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 9003-W1-FL-LED4097-W-BK-L2-UNV
Description: LUMIERE LANTERRA 9003 LED WALL LUMINAIRE, FLUSH LENS, WIDE FLOOD OPTIC, BLACK HOUSING.
Light Source: (1) 4000K CCT, 97 CRI LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1292.2 lumens
Efficiency: N/A
Efficacy: 64.3 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.76
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct


Input Watts (W): 20.1
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P220708

CATALOG NUMBER: 9003-W1-FL-LED4097-W-BK-L2-UNV

Luminous Intensity Polar Plot

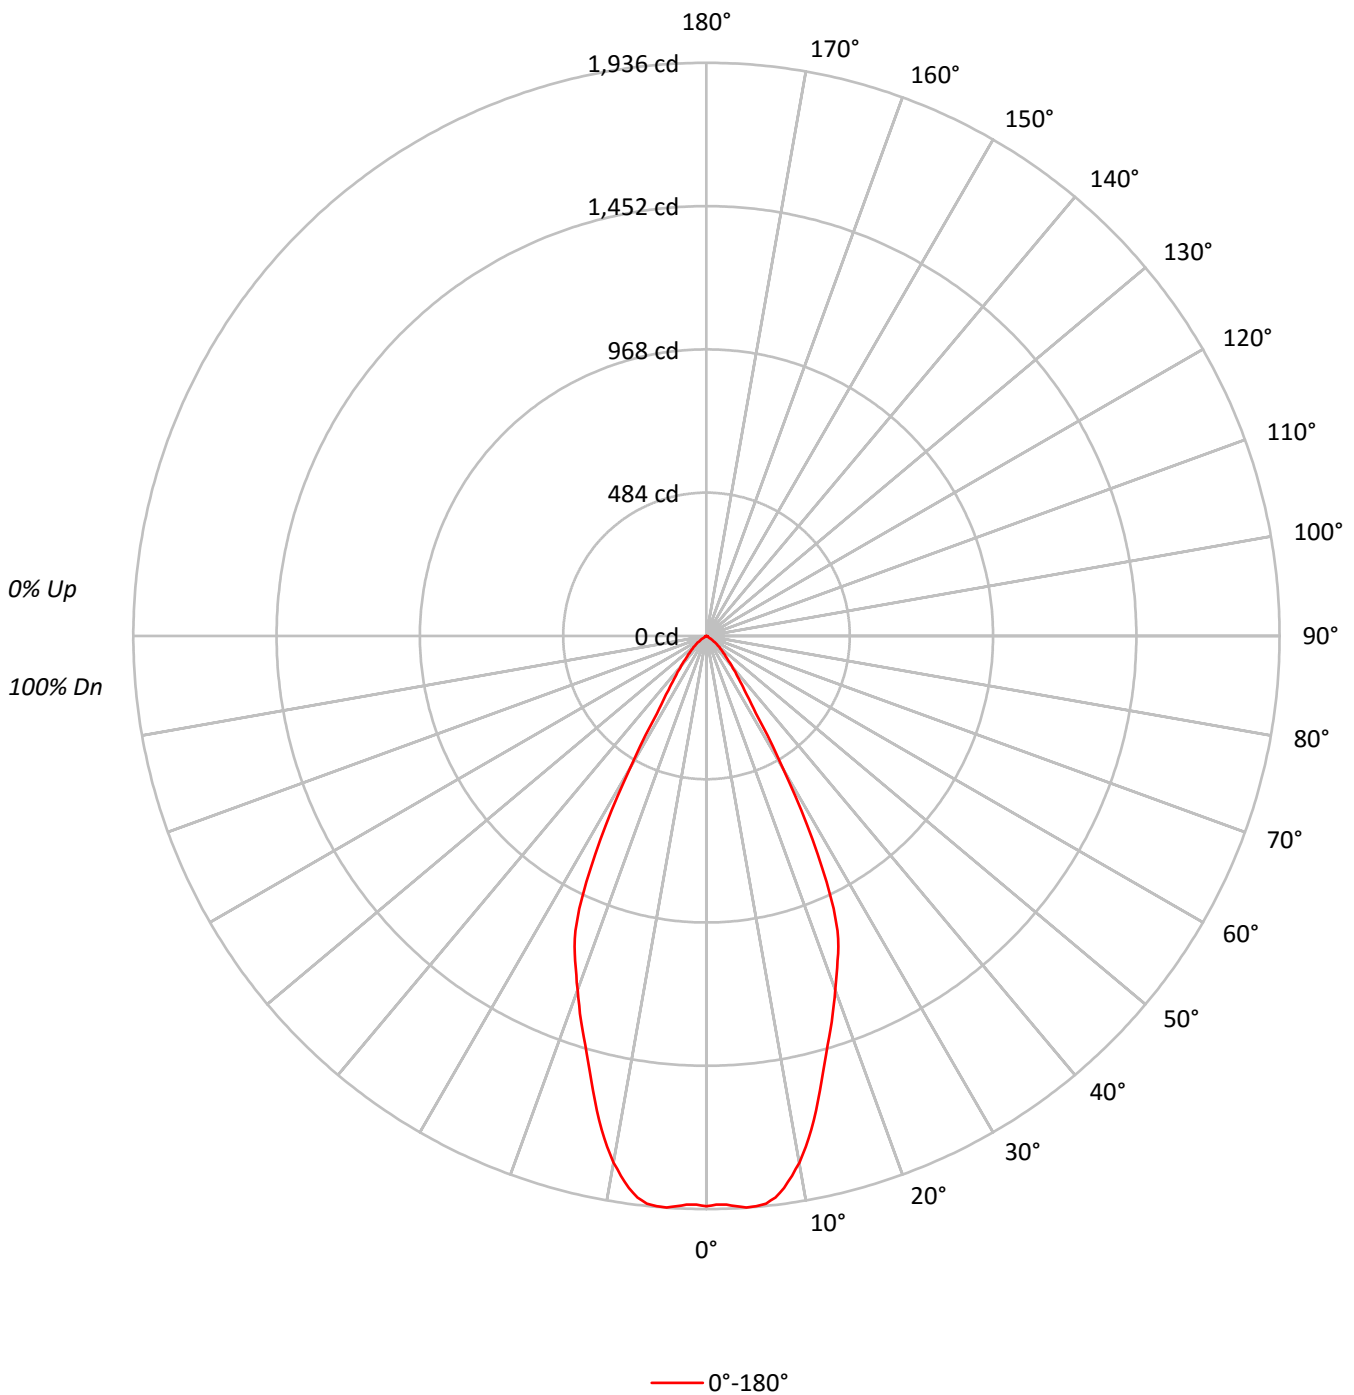



TEST NUMBER: P220708

CATALOG NUMBER: 9003-W1-FL-LED4097-W-BK-L2-UNV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94		96	94	92		93	92	90	88
3	104	98	93	89	102	96	92	88	94	90	87		91	88	86		89	86	84	83
4	99	92	87	83	97	91	86	82	88	84	81		87	83	80		85	82	79	78
5	94	86	81	77	93	86	80	77	84	79	76		82	78	75		81	77	75	73
6	90	82	76	72	89	81	76	72	79	75	71		78	74	71		77	73	70	69
7	86	77	72	68	85	77	71	68	75	71	67		74	70	67		73	69	67	65
8	82	73	68	64	81	73	68	64	72	67	64		71	66	63		70	66	63	62
9	79	70	64	61	78	69	64	60	68	64	60		68	63	60		67	63	60	59
10	75	66	61	57	75	66	61	57	65	60	57		64	60	57		64	60	57	56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	422510
5°	425687
10°	402175
15°	345972
20°	296966
25°	245748
30°	131109
35°	59642
40°	38129
45°	25088
50°	17569
55°	8793
60°	2105
65°	2075
70°	2052
75°	1356
80°	1010
85°	2013



TEST NUMBER: P220708

CATALOG NUMBER: 9003-W1-FL-LED4097-W-BK-L2-UNV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	180.7	14.0
10°-20°	426.2	33.0
20°-30°	435.5	33.7
30°-40°	157.8	12.2
40°-50°	65.0	5.0
50°-60°	21.0	1.6
60°-70°	3.8	0.3
70°-80°	1.8	0.1
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1042.4	80.7
0°-40°	1200.2	92.9
0°-60°	1286.1	99.5
0°-90°	1292.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1292.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1927	
5°	1934	181
15°	1524	426
25°	1016	436
35°	223	158
45°	81	65
55°	23	21
65°	4	4
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P220708

CATALOG NUMBER: 9003-W1-FL-LED4097-W-BK-L2-UNV

CANDELA DISTRIBUTION (FULL):

0°	
0°	1926.8
1°	1921.2
2°	1922.0
3°	1929.1
4°	1935.5
5°	1933.9
6°	1928.3
7°	1910.9
8°	1883.1
9°	1846.7
10°	1806.2
11°	1757.9
12°	1704.7
13°	1645.3
14°	1583.4
15°	1524.0
16°	1466.9
17°	1416.9
18°	1370.9
19°	1320.2
20°	1272.6
21°	1227.4
22°	1183.0
23°	1140.2
24°	1089.4
25°	1015.7
26°	925.3
27°	827.0
28°	723.1
29°	618.5
30°	517.8
32.5°	310.8
35°	222.8
37.5°	172.1
40°	133.2
42.5°	101.5
45°	80.9
47.5°	65.0
50°	51.5
52.5°	38.1
55°	23.0
57.5°	6.3
60°	4.8
62.5°	4.0
65°	4.0



TEST NUMBER: P220708

CATALOG NUMBER: 9003-W1-FL-LED4097-W-BK-L2-UNV

CANDELA DISTRIBUTION (continued):

	0°
67.5°	3.2
70°	3.2
72.5°	2.4
75°	1.6
77.5°	0.8
80°	0.8
82.5°	0.8
85°	0.8
87.5°	0.0
90°	0.0

(END OF REPORT)