

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: LUMIERE

Report Number: P220792

Luminaire Tested: **9004-W1-[RW, RI]-LED2797-W-WT-L1-UNV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P220792
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29490)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 9004-W1-[RW, RI]-LED2797-W-WT-L1-UNV
Description: LUMIERE LANTERRA 9004 LED WALL LUMINAIRE, RECESSED LENS, WIDE FLOOD OPTIC, WHITE HOUSING.
Light Source: (1) 2700K CCT, 97 CRI LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 759.4 lumens
Efficiency: N/A
Efficacy: 77.5 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.83
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 9.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P220792

CATALOG NUMBER: 9004-W1-[RW, RI]-LED2797-W-WT-L1-UNV

Luminous Intensity Polar Plot

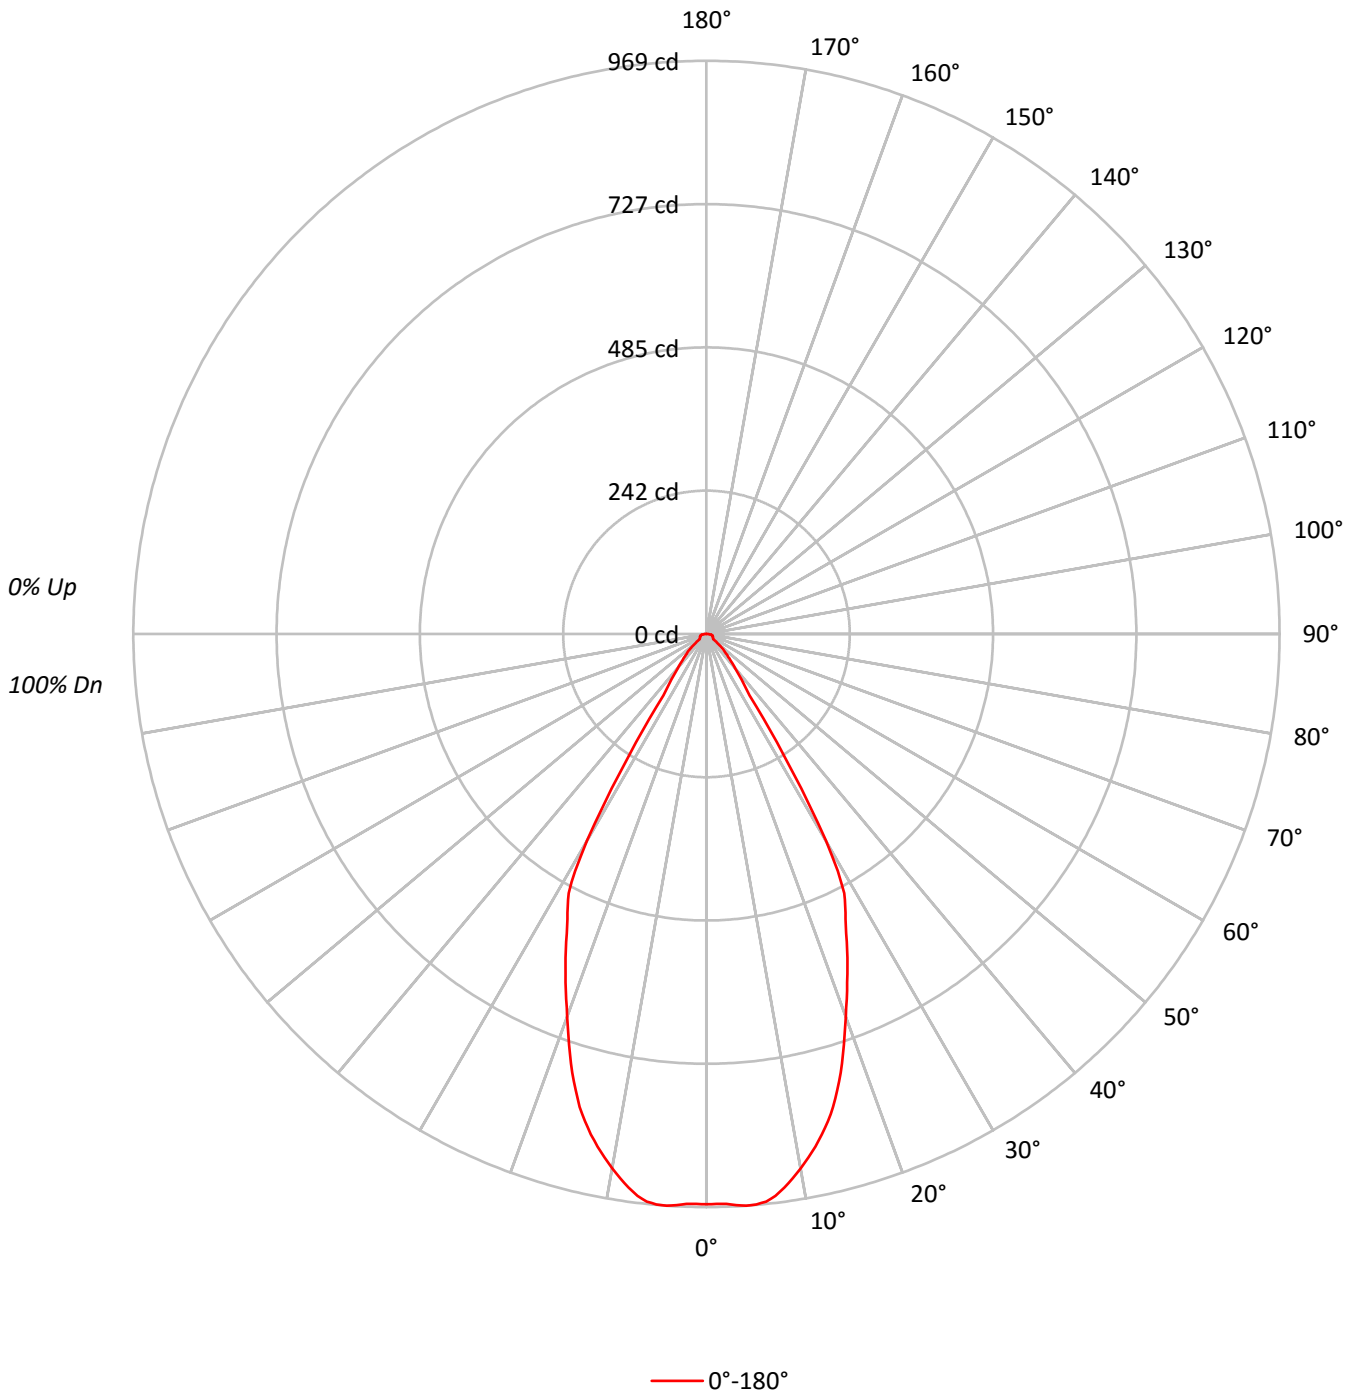



TEST NUMBER: P220792

CATALOG NUMBER: 9004-W1-[RW, RI]-LED2797-W-WT-L1-UNV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	108	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93
2	107	102	98	95	105	101	97	94	97	94	91	94	92	90	92	89	88	86
3	102	95	90	86	100	94	89	86	91	87	84	89	86	83	87	84	82	80
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70
6	88	79	73	69	86	78	73	68	77	72	68	75	71	68	74	70	67	66
7	84	75	69	64	82	74	68	64	73	68	64	71	67	64	70	66	63	62
8	80	70	65	61	79	70	64	60	69	64	60	68	63	60	67	63	60	58
9	76	67	61	57	75	66	61	57	65	60	57	64	60	57	64	59	56	55
10	73	63	58	54	72	63	58	54	62	57	54	61	57	54	61	56	53	52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	118942
5°	119904
10°	114890
15°	105707
20°	90361
25°	76065
30°	57498
35°	19108
40°	12141
45°	8268
50°	4816
55°	2882
60°	3182
65°	3502
70°	4003
75°	4861
80°	5825
85°	5802



TEST NUMBER: P220792

CATALOG NUMBER: 9004-W1-[RW, RI]-LED2797-W-WT-L1-UNV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	90.8	12.0
10°-20°	228.3	30.1
20°-30°	255.7	33.7
30°-40°	106.9	14.1
40°-50°	37.2	4.9
50°-60°	13.5	1.8
60°-70°	11.9	1.6
70°-80°	10.6	1.4
80°-90°	4.5	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	574.8	75.7
0°-40°	681.8	89.8
0°-60°	732.4	96.5
0°-90°	759.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	759.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	964	
5°	968	91
15°	828	228
25°	559	256
35°	127	107
45°	47	37
55°	13	13
65°	12	12
75°	10	11
85°	4	4
90°	0	



TEST NUMBER: P220792

CATALOG NUMBER: 9004-W1-[RW, RI]-LED2797-W-WT-L1-UNV

CANDELA DISTRIBUTION (FULL):

0°	
0°	964.3
1°	963.5
2°	964.3
3°	967.3
4°	969.0
5°	968.4
6°	964.9
7°	957.3
8°	945.3
9°	931.9
10°	917.3
11°	901.8
12°	886.0
13°	868.2
14°	849.2
15°	827.8
16°	802.4
17°	775.8
18°	747.2
19°	717.3
20°	688.4
21°	661.5
22°	635.5
23°	609.8
24°	584.6
25°	558.9
26°	536.4
27°	516.5
28°	496.1
29°	458.6
30°	403.7
32.5°	242.0
35°	126.9
37.5°	97.0
40°	75.4
42.5°	58.8
45°	47.4
47.5°	38.0
50°	25.1
52.5°	14.9
55°	13.4
57.5°	13.2
60°	12.9
62.5°	12.6
65°	12.0



TEST NUMBER: P220792

CATALOG NUMBER: 9004-W1-[RW, RI]-LED2797-W-WT-L1-UNV

CANDELA DISTRIBUTION (continued):

	0°
67.5°	11.4
70°	11.1
72.5°	10.8
75°	10.2
77.5°	9.4
80°	8.2
82.5°	6.4
85°	4.1
87.5°	1.8
90°	0.0

(END OF REPORT)