

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: LUMIERE

Report Number: P220972

Luminaire Tested: **9004-W1-FL-LED3090-F-WT-L1-UNV**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P220972  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29495)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: LUMIERE  
Catalog Number: 9004-W1-FL-LED3090-F-WT-L1-UNV  
Description: LUMIERE LANTERRA 9004 LED WALL LUMINAIRE, FLUSH LENS, FLOOD OPTIC, WHITE HOUSING.  
Light Source: (1) 3000K CCT, 90 CRI LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 925.8 lumens  
Efficiency: N/A  
Efficacy: 94.5 lumens/watt  
Spacing Criteria (0/90/45): 0.59 / 0.59 / 0.56  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct


Input Watts (W): 9.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P220972

CATALOG NUMBER: 9004-W1-FL-LED3090-F-WT-L1-UNV

### Luminous Intensity Polar Plot

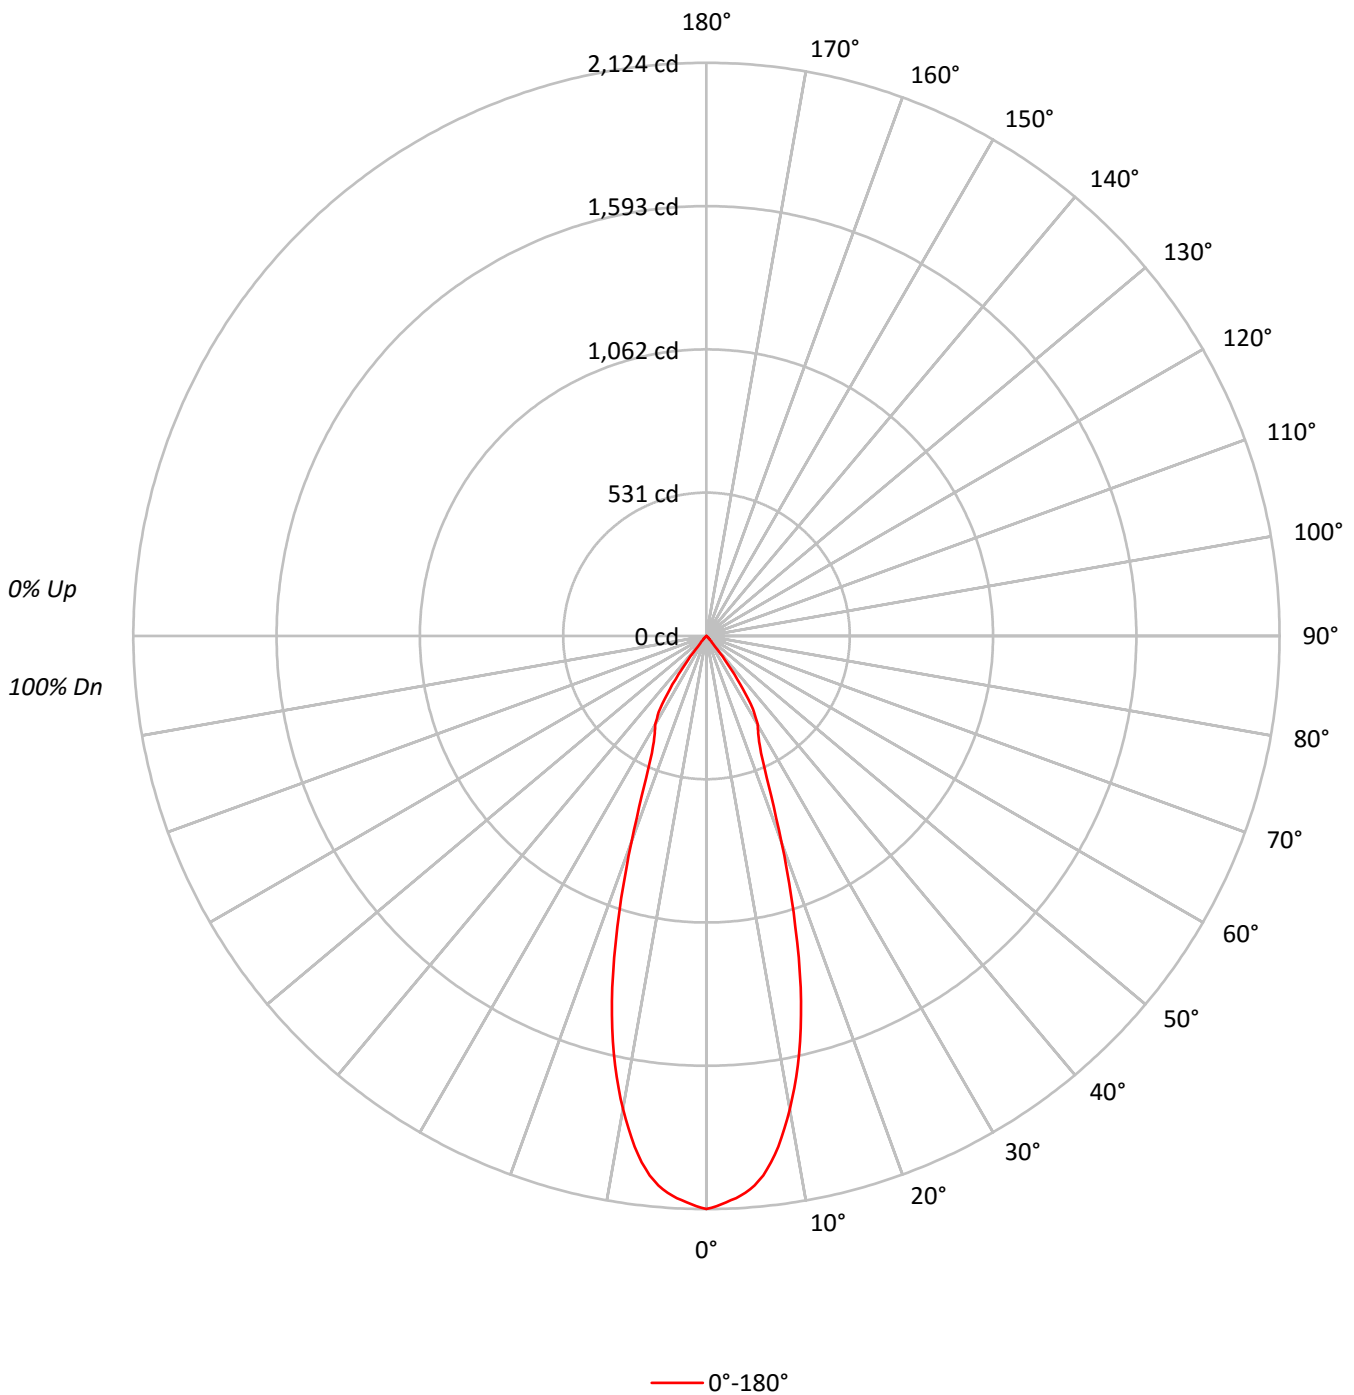



TEST NUMBER: P220972

CATALOG NUMBER: 9004-W1-FL-LED3090-F-WT-L1-UNV

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99	98	97	95
2	110	106	102	99	108	104	101	98	101	98	96		98	96	94		95	93	92	90
3	105	100	96	92	103	98	95	91	96	93	90		94	91	89		91	89	87	86
4	101	95	90	86	99	94	89	86	91	88	85		90	86	84		88	85	83	82
5	97	90	85	81	96	89	84	81	87	83	80		86	82	80		84	81	79	78
6	93	86	81	77	92	85	80	77	84	79	76		82	79	76		81	78	75	74
7	90	82	77	73	88	81	76	73	80	76	73		79	75	72		78	74	72	71
8	86	78	73	70	85	78	73	70	77	72	69		76	72	69		75	71	69	68
9	83	75	70	67	82	74	70	66	74	69	66		73	69	66		72	68	66	65
10	80	72	67	64	79	71	67	64	71	66	63		70	66	63		69	66	63	62

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	261924
5°	253094
10°	223005
15°	172199
20°	106900
25°	65204
30°	54080
35°	33007
40°	5587
45°	2041
50°	441
55°	215
60°	173
65°	204
70°	108
75°	143
80°	0
85°	0



TEST NUMBER: P220972

CATALOG NUMBER: 9004-W1-FL-LED3090-F-WT-L1-UNV

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	186.7	20.2
10°-20°	361.1	39.0
20°-30°	235.2	25.4
30°-40°	130.6	14.1
40°-50°	10.2	1.1
50°-60°	1.1	0.1
60°-70°	0.6	0.1
70°-80°	0.3	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	783.0	84.6
0°-40°	913.6	98.7
0°-60°	924.8	99.9
0°-90°	925.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	925.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2124	
5°	2044	187
15°	1348	361
25°	479	235
35°	219	131
45°	12	10
55°	1	1
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P220972

CATALOG NUMBER: 9004-W1-FL-LED3090-F-WT-L1-UNV

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2123.5
1°	2114.2
2°	2100.5
3°	2086.1
4°	2069.1
5°	2044.1
6°	2010.4
7°	1966.0
8°	1911.0
9°	1847.9
10°	1780.5
11°	1707.2
12°	1627.4
13°	1542.0
14°	1447.9
15°	1348.5
16°	1240.4
17°	1127.6
18°	1020.9
19°	913.5
20°	814.4
21°	721.0
22°	639.9
23°	572.2
24°	519.5
25°	479.1
26°	449.7
27°	426.4
28°	408.0
29°	393.3
30°	379.7
32.5°	321.9
35°	219.2
37.5°	112.4
40°	34.7
42.5°	16.7
45°	11.7
47.5°	7.3
50°	2.3
52.5°	1.3
55°	1.0
57.5°	1.0
60°	0.7
62.5°	0.7
65°	0.7



TEST NUMBER: P220972

CATALOG NUMBER: 9004-W1-FL-LED3090-F-WT-L1-UNV

**CANDELA DISTRIBUTION (continued):**

	0°
67.5°	0.7
70°	0.3
72.5°	0.3
75°	0.3
77.5°	0.3
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)