

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: LUMIERE

Report Number: P220923

Luminaire Tested: **9004-W1-FL-LED3097-S-WT-L1-UNV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P220923
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29496)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 9004-W1-FL-LED3097-S-WT-L1-UNV
Description: LUMIERE LANTERRA 9004 LED WALL LUMINAIRE, FLUSH LENS, SPOT OPTIC, WHITE HOUSING.
Light Source: (1) 3000K CCT, 97 CRI LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 826.6 lumens
Efficiency: N/A
Efficacy: 84.3 lumens/watt
Spacing Criteria (0/90/45): 0.27 / 0.27 / 0.27
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 9.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P220923

CATALOG NUMBER: 9004-W1-FL-LED3097-S-WT-L1-UNV

Luminous Intensity Polar Plot

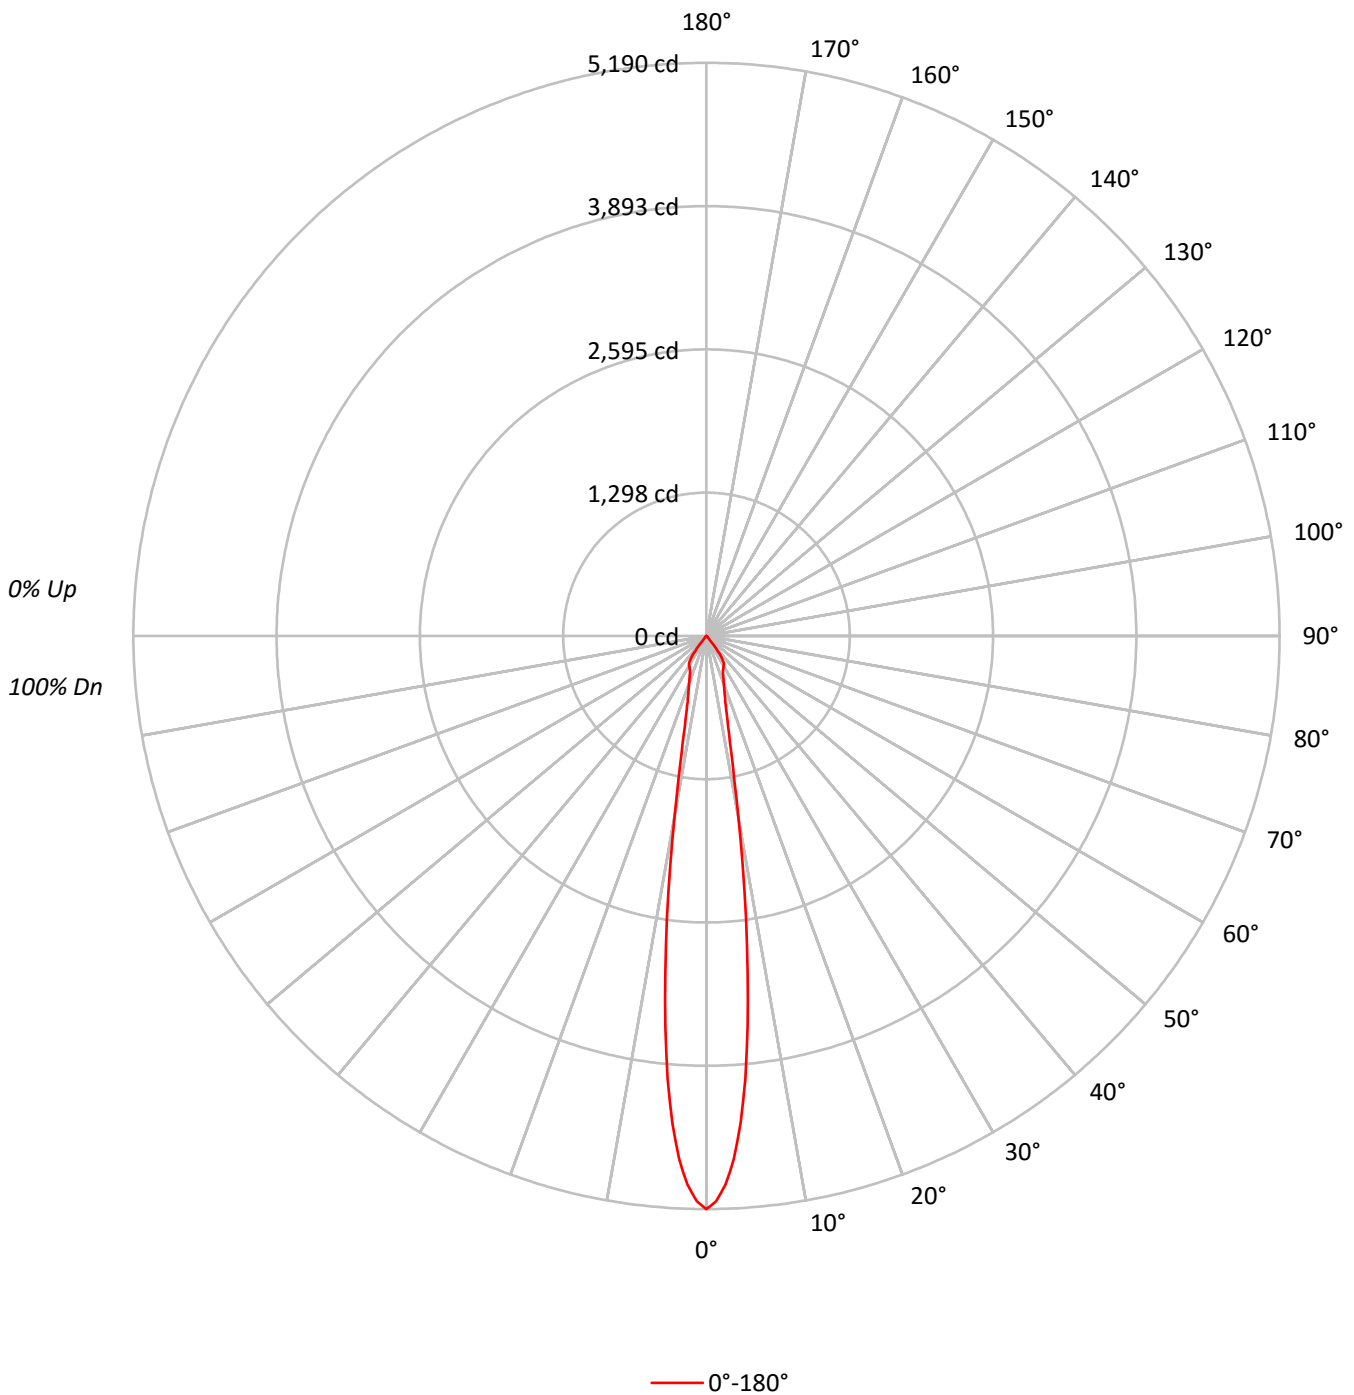



TEST NUMBER: P220923

CATALOG NUMBER: 9004-W1-FL-LED3097-S-WT-L1-UNV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	115	112	110	108	112	110	108	107	106	105	103		103	101	100		99	98	98	96
2	110	106	103	100	108	105	102	99	102	99	97		99	97	95		96	95	93	92
3	106	101	97	94	104	100	96	93	97	94	92		95	93	90		93	91	89	88
4	102	97	92	89	101	95	91	88	93	90	87		92	89	86		90	87	85	84
5	99	92	88	84	97	91	87	84	90	86	83		88	85	83		87	84	82	81
6	95	89	84	81	94	88	83	80	86	83	80		85	82	79		84	81	79	78
7	92	85	80	77	91	85	80	77	83	79	77		82	79	76		81	78	76	75
8	89	82	77	74	88	82	77	74	81	77	74		80	76	74		79	76	73	72
9	87	79	75	72	86	79	74	71	78	74	71		77	74	71		76	73	71	70
10	84	77	72	69	83	76	72	69	76	72	69		75	71	69		74	71	69	68

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	640201
5°	498325
10°	207549
15°	87753
20°	60223
25°	48069
30°	44423
35°	36349
40°	7648
45°	1744
50°	614
55°	516
60°	296
65°	175
70°	108
75°	143
80°	0
85°	0



TEST NUMBER: P220923

CATALOG NUMBER: 9004-W1-FL-LED3097-S-WT-L1-UNV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	302.5	36.6
10°-20°	212.0	25.6
20°-30°	167.1	20.2
30°-40°	131.5	15.9
40°-50°	10.6	1.3
50°-60°	2.1	0.3
60°-70°	0.6	0.1
70°-80°	0.3	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	681.5	82.4
0°-40°	813.1	98.4
0°-60°	825.8	99.9
0°-90°	826.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	826.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5190	
5°	4025	302
15°	687	212
25°	353	167
35°	241	132
45°	10	11
55°	2	2
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P220923

CATALOG NUMBER: 9004-W1-FL-LED3097-S-WT-L1-UNV

CANDELA DISTRIBUTION (FULL):

0°	
0°	5190.3
1°	5118.8
2°	4970.4
3°	4740.3
4°	4425.4
5°	4024.7
6°	3562.1
7°	3062.2
8°	2571.8
9°	2078.2
10°	1657.1
11°	1321.0
12°	1077.3
13°	904.7
14°	779.6
15°	687.2
16°	617.9
17°	567.1
18°	528.5
19°	491.6
20°	458.8
21°	431.7
22°	407.5
23°	386.2
24°	367.7
25°	353.2
26°	342.3
27°	334.0
28°	326.1
29°	319.0
30°	311.9
32.5°	294.2
35°	241.4
37.5°	144.0
40°	47.5
42.5°	14.2
45°	10.0
47.5°	7.1
50°	3.2
52.5°	3.0
55°	2.4
57.5°	1.8
60°	1.2
62.5°	0.6
65°	0.6



TEST NUMBER: P220923

CATALOG NUMBER: 9004-W1-FL-LED3097-S-WT-L1-UNV

CANDELA DISTRIBUTION (continued):

	0°
67.5°	0.3
70°	0.3
72.5°	0.3
75°	0.3
77.5°	0.3
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)