

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: LUMIERE

Report Number: P220751

Luminaire Tested: **9004-W1-[RW, RI]-LED3597-M-WT-L2-UNV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P220751
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29488)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 9004-W1-[RW, RI]-LED3597-M-WT-L2-UNV
Description: LUMIERE LANTERRA 9004 LED WALL LUMINAIRE, RECESSED LENS, MEDIUM FLOOD OPTIC, WHITE HOUSING.
Light Source: (1) 3500K CCT, 97 CRI LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1636.3 lumens
Efficiency: N/A
Efficacy: 81.4 lumens/watt
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.44
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 20.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P220751

CATALOG NUMBER: 9004-W1-[RW, RI]-LED3597-M-WT-L2-UNV

Luminous Intensity Polar Plot

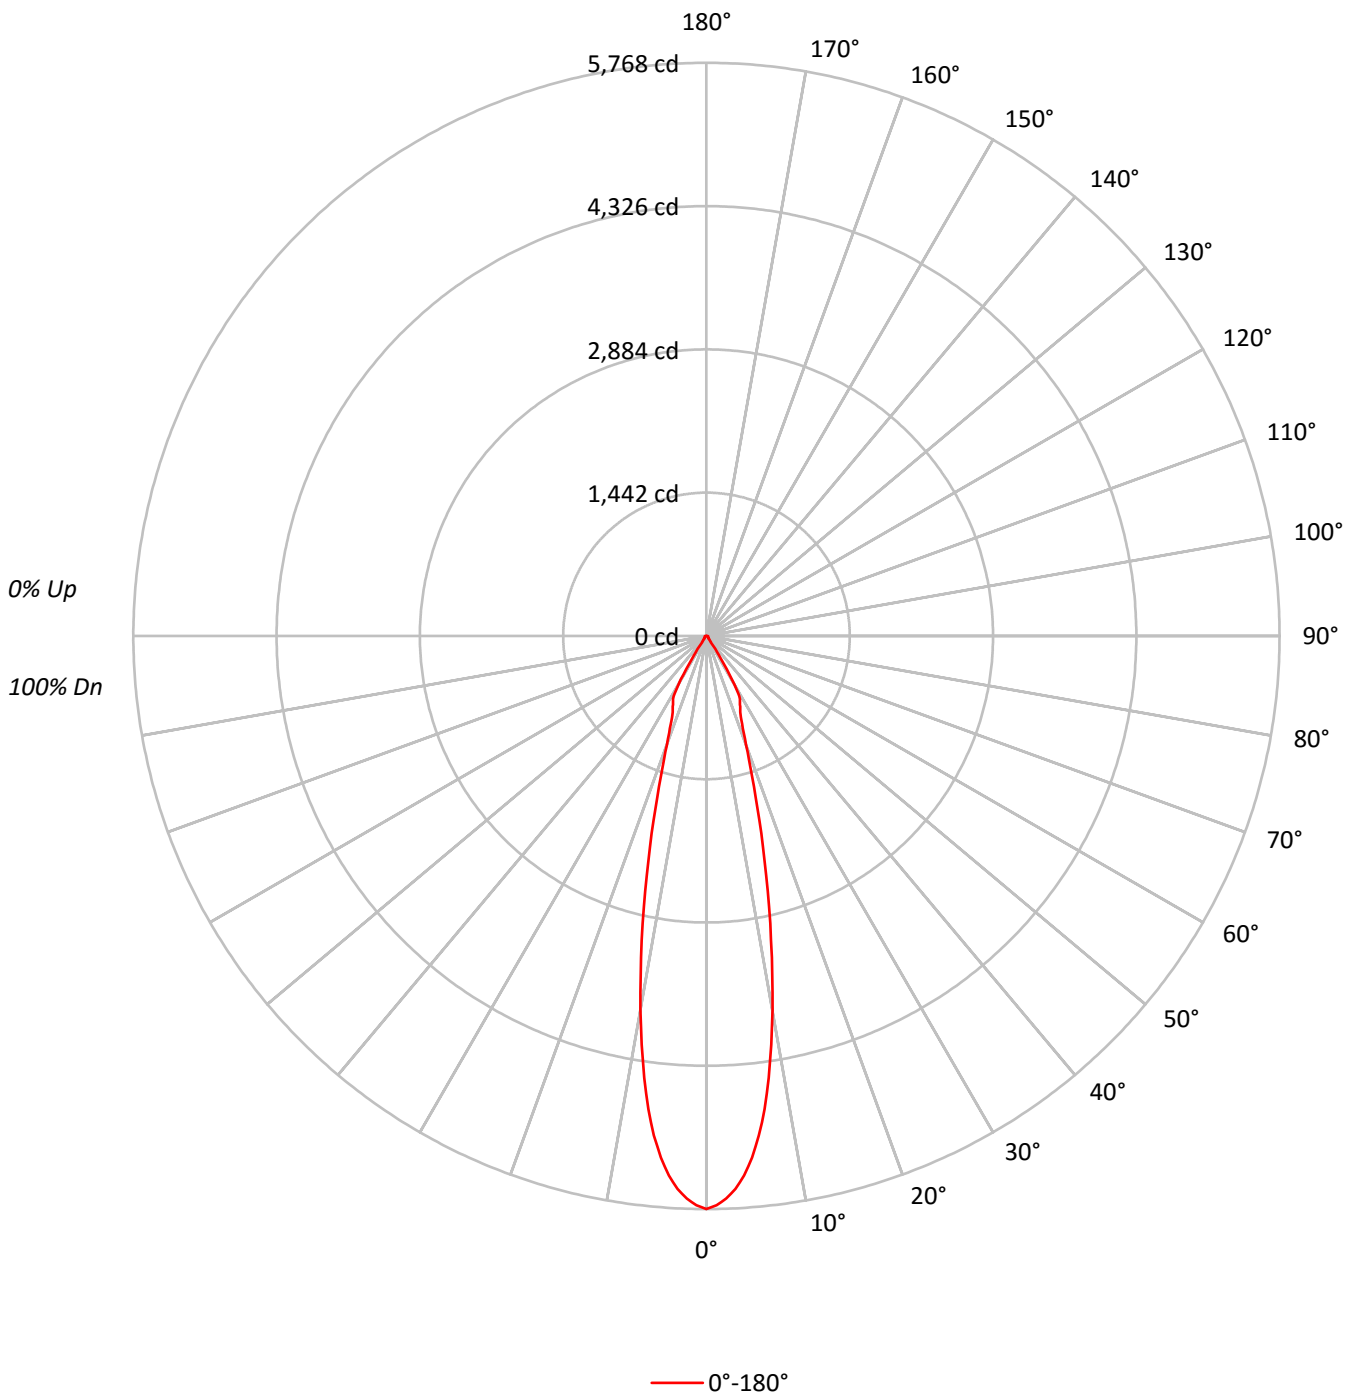



TEST NUMBER: P220751

CATALOG NUMBER: 9004-W1-[RW, RI]-LED3597-M-WT-L2-UNV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	109	107	112	109	107	106	105	104	102	102	100	99	98	97	96	95
2	109	105	102	99	107	104	100	98	100	98	95	97	95	93	95	93	92	90
3	105	100	95	92	103	98	95	91	96	93	90	94	91	89	91	89	87	86
4	101	95	90	87	100	94	90	86	92	88	85	90	87	84	88	86	83	82
5	98	91	86	82	96	90	85	82	88	84	81	87	83	81	85	82	80	79
6	94	87	82	79	93	86	82	78	85	81	78	84	80	77	82	79	77	76
7	91	83	79	75	90	83	78	75	82	78	75	81	77	74	80	76	74	73
8	88	80	76	72	87	80	75	72	79	75	72	78	74	72	77	74	71	70
9	85	77	73	70	84	77	73	69	76	72	69	75	72	69	75	71	69	68
10	83	75	70	67	82	74	70	67	74	70	67	73	69	67	72	69	67	66

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	711396
5°	652366
10°	478725
15°	280384
20°	152985
25°	109000
30°	80628
35°	11625
40°	6376
45°	4535
50°	4625
55°	4774
60°	5329
65°	5954
70°	6924
75°	8531
80°	10087
85°	9624



TEST NUMBER: P220751

CATALOG NUMBER: 9004-W1-[RW, RI]-LED3597-M-WT-L2-UNV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	456.0	27.9
10°-20°	610.6	37.3
20°-30°	376.9	23.0
30°-40°	105.1	6.4
40°-50°	21.2	1.3
50°-60°	20.2	1.2
60°-70°	20.4	1.2
70°-80°	18.3	1.1
80°-90°	7.6	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1443.5	88.2
0°-40°	1548.5	94.6
0°-60°	1590.0	97.2
0°-90°	1636.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1636.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5768	
5°	5269	456
15°	2196	611
25°	801	377
35°	77	105
45°	26	21
55°	22	20
65°	20	20
75°	18	18
85°	7	8
90°	0	



TEST NUMBER: P220751

CATALOG NUMBER: 9004-W1-[RW, RI]-LED3597-M-WT-L2-UNV

CANDELA DISTRIBUTION (FULL):

0°	
0°	5767.5
1°	5731.7
2°	5665.6
3°	5571.6
4°	5442.5
5°	5268.8
6°	5053.8
7°	4797.9
8°	4492.7
9°	4164.5
10°	3822.2
11°	3473.6
12°	3129.4
13°	2793.9
14°	2482.4
15°	2195.7
16°	1931.8
17°	1695.1
18°	1487.5
19°	1310.1
20°	1165.5
21°	1046.2
22°	956.6
23°	888.6
24°	838.0
25°	800.9
26°	770.6
27°	744.0
28°	718.7
29°	661.8
30°	566.1
32.5°	274.4
35°	77.2
37.5°	53.1
40°	39.6
42.5°	27.8
45°	26.0
47.5°	24.7
50°	24.1
52.5°	22.9
55°	22.2
57.5°	22.2
60°	21.6
62.5°	21.6
65°	20.4



TEST NUMBER: P220751

CATALOG NUMBER: 9004-W1-[RW, RI]-LED3597-M-WT-L2-UNV

CANDELA DISTRIBUTION (continued):

	0°
67.5°	19.8
70°	19.2
72.5°	18.5
75°	17.9
77.5°	16.1
80°	14.2
82.5°	11.1
85°	6.8
87.5°	3.1
90°	0.0

(END OF REPORT)