

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: LUMIERE

Report Number: P220829

Luminaire Tested: **9004-W1-[RW, RI]-LED3597-S-BK-L2-UNV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P220829
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29491)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 9004-W1-[RW, RI]-LED3597-S-BK-L2-UNV
Description: LUMIERE LANTERRA 9004 LED WALL LUMINAIRE, RECESSED LENS, SPOT OPTIC, BLACK HOUSING.
Light Source: (1) 3500K CCT, 97 CRI LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1533.8 lumens
Efficiency: N/A
Efficacy: 76.3 lumens/watt
Spacing Criteria (0/90/45): 0.27 / 0.27 / 0.27
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 20.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P220829

CATALOG NUMBER: 9004-W1-[RW, RI]-LED3597-S-BK-L2-UNV

Luminous Intensity Polar Plot

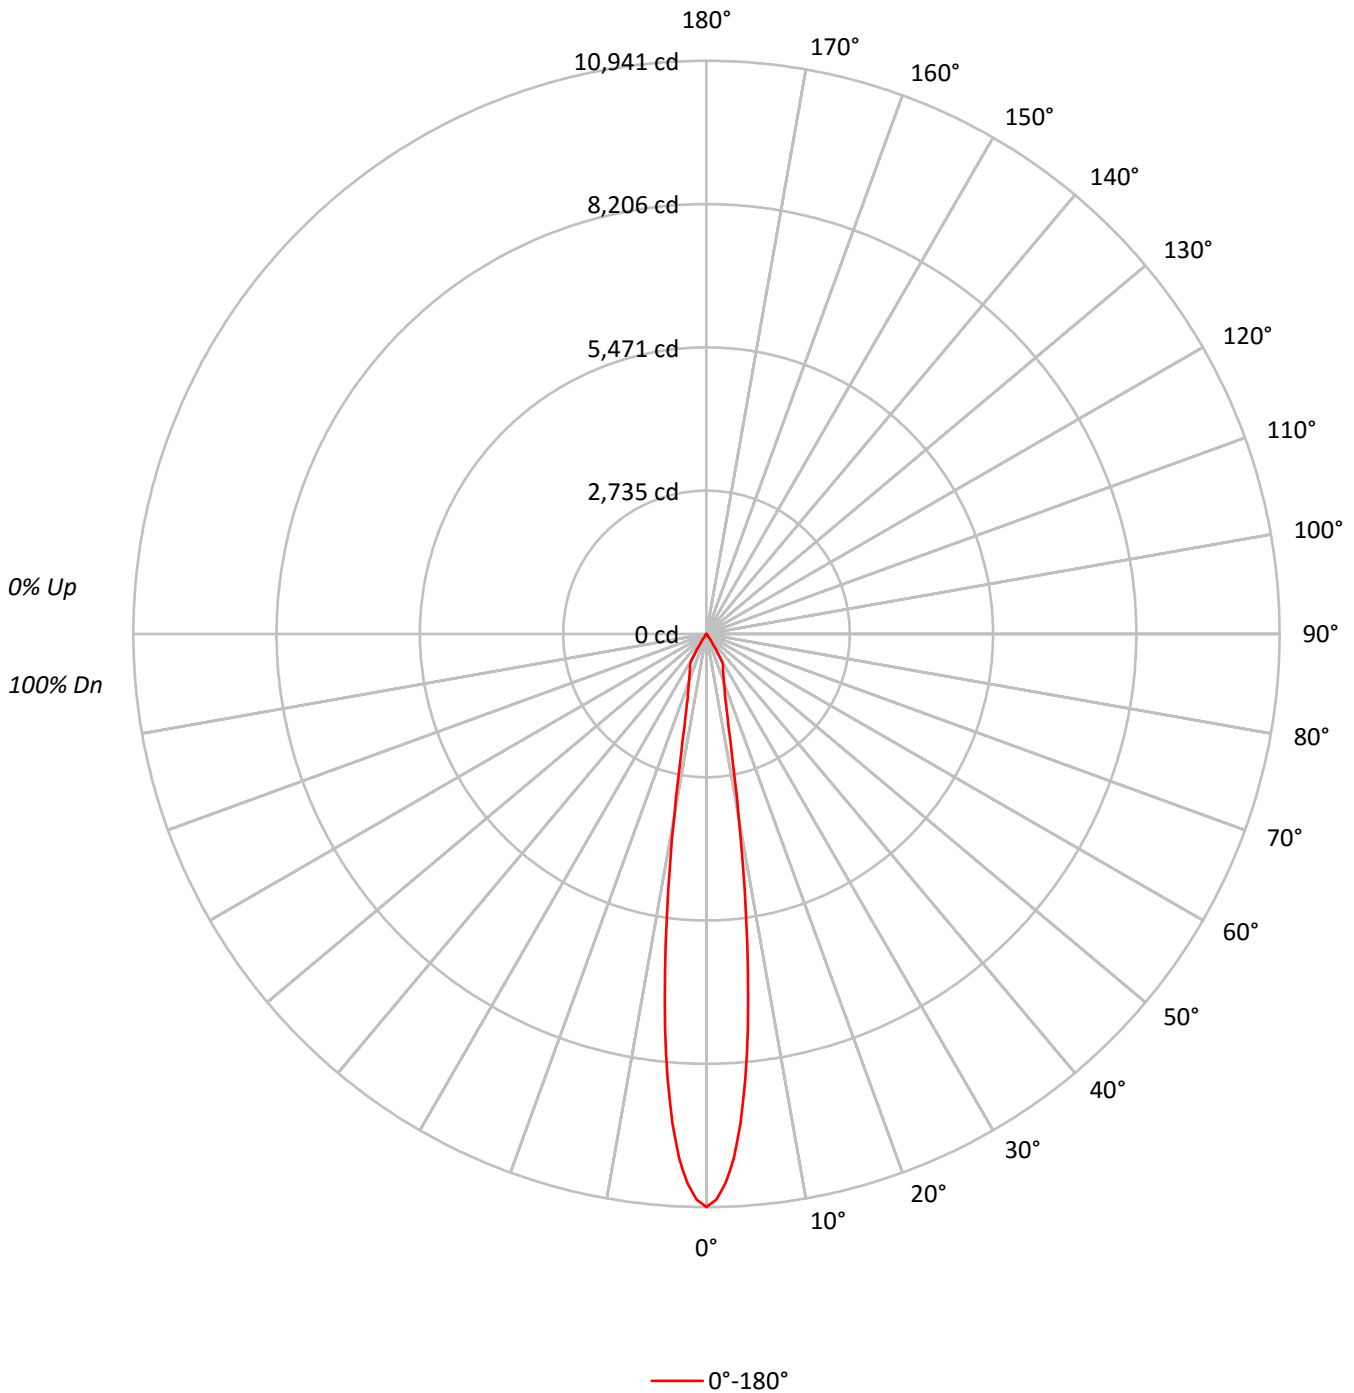



TEST NUMBER: P220829

CATALOG NUMBER: 9004-W1-[RW, RI]-LED3597-S-BK-L2-UNV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97
2	111	108	105	102	109	106	103	101	103	101	99	100	98	97	97	96	95	93
3	108	103	99	97	106	102	98	96	99	97	94	97	95	93	95	93	92	90
4	104	99	95	92	103	98	94	92	96	93	91	94	92	90	92	90	89	87
5	101	95	91	88	100	95	91	88	93	90	87	91	89	86	90	88	86	85
6	98	92	88	85	97	91	88	85	90	87	84	89	86	84	88	85	83	82
7	96	89	85	82	95	89	85	82	87	84	82	86	83	81	86	83	81	80
8	93	86	82	80	92	86	82	79	85	82	79	84	81	79	83	81	78	78
9	91	84	80	77	90	84	80	77	83	79	77	82	79	77	81	78	76	75
10	88	82	78	75	88	81	78	75	81	77	75	80	77	75	79	77	74	74

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1349549
5°	1054387
10°	444118
15°	188212
20°	127429
25°	101174
30°	74902
35°	6791
40°	2480
45°	750
50°	595
55°	667
60°	469
65°	350
70°	216
75°	286
80°	426
85°	0



TEST NUMBER: P220829

CATALOG NUMBER: 9004-W1-[RW, RI]-LED3597-S-BK-L2-UNV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	641.0	41.8
10°-20°	452.9	29.5
20°-30°	345.9	22.5
30°-40°	84.8	5.5
40°-50°	4.6	0.3
50°-60°	2.5	0.2
60°-70°	1.2	0.1
70°-80°	0.6	0.0
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1439.8	93.9
0°-40°	1524.6	99.4
0°-60°	1531.7	99.9
0°-90°	1533.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1533.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	10941	
5°	8516	641
15°	1474	453
25°	743	346
35°	45	85
45°	4	5
55°	3	3
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P220829

CATALOG NUMBER: 9004-W1-[RW, RI]-LED3597-S-BK-L2-UNV

CANDELA DISTRIBUTION (FULL):

0°	
0°	10941.2
1°	10800.9
2°	10491.9
3°	10017.9
4°	9354.2
5°	8515.7
6°	7551.6
7°	6492.4
8°	5425.8
9°	4449.4
10°	3545.9
11°	2830.3
12°	2306.3
13°	1935.5
14°	1671.6
15°	1473.9
16°	1321.8
17°	1211.2
18°	1123.5
19°	1041.3
20°	970.8
22.5°	837.4
25°	743.4
26°	718.1
27°	697.1
28°	676.1
29°	620.4
30°	525.9
32.5°	236.7
35°	45.1
37.5°	24.7
40°	15.4
42.5°	6.8
45°	4.3
47.5°	3.7
50°	3.1
52.5°	3.1
55°	3.1
57.5°	2.5
60°	1.9
62.5°	1.9
65°	1.2
67.5°	0.6
70°	0.6
72.5°	0.6



TEST NUMBER: P220829

CATALOG NUMBER: 9004-W1-[RW, RI]-LED3597-S-BK-L2-UNV

CANDELA DISTRIBUTION (continued):

	0°
75°	0.6
77.5°	0.6
80°	0.6
82.5°	0.6
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)