

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: LUMIERE

Report Number: P221006

Luminaire Tested: **9004-W1-FL-LED2790-W-WT-L2-UNV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P221006
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29499)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 9004-W1-FL-LED2790-W-WT-L2-UNV
Description: LUMIERE LANTERRA 9004 LED WALL LUMINAIRE, FLUSH LENS, WIDE FLOOD OPTIC, WHITE HOUSING.
Light Source: (1) 2700K CCT, 90 CRI LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1624.8 lumens
Efficiency: N/A
Efficacy: 80.8 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.91
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 20.1
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P221006

CATALOG NUMBER: 9004-W1-FL-LED2790-W-WT-L2-UNV

Luminous Intensity Polar Plot

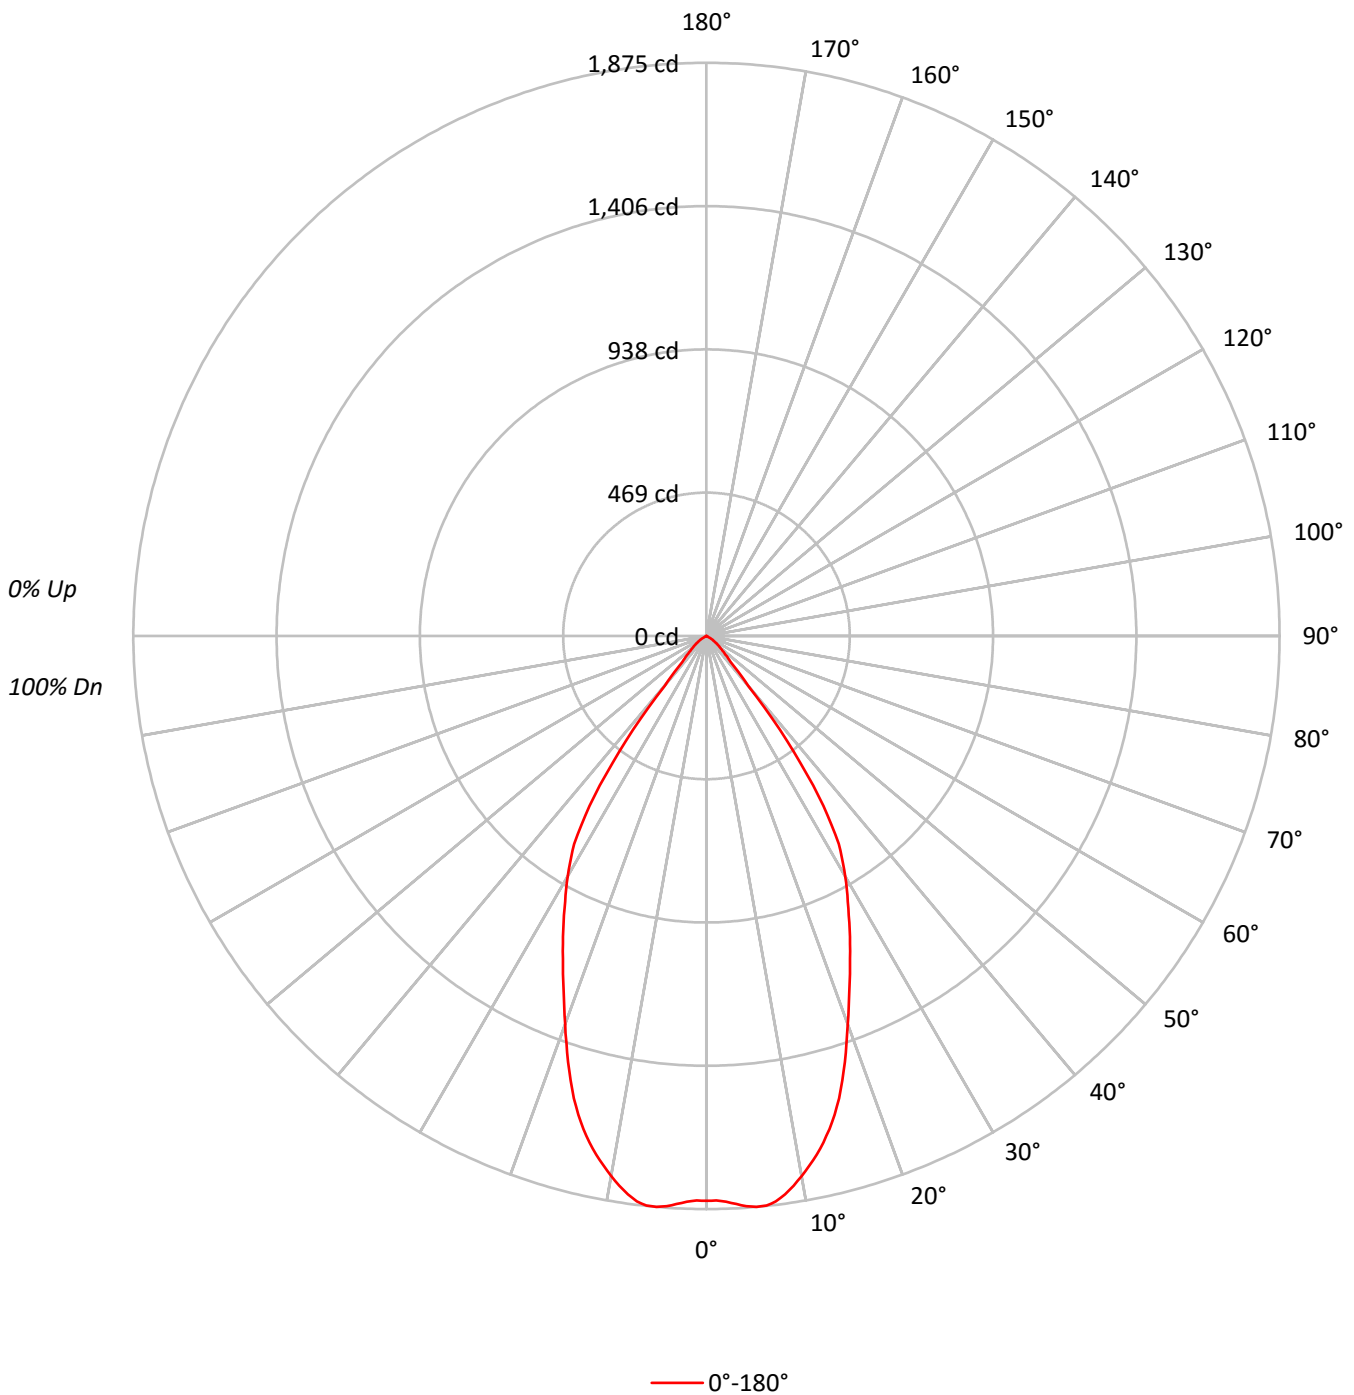



TEST NUMBER: P221006

CATALOG NUMBER: 9004-W1-FL-LED2790-W-WT-L2-UNV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |
| 1 | 114 | 111 | 108 | 106 | 111 | 109 | 106 | 104 | 105 | 103 | 101 | 101 | 99 | 98 | 97 | 96 | 95 | 94 |
| 2 | 108 | 103 | 99 | 96 | 106 | 101 | 98 | 95 | 98 | 95 | 92 | 95 | 93 | 90 | 92 | 90 | 89 | 87 |
| 3 | 102 | 96 | 91 | 87 | 100 | 95 | 90 | 86 | 92 | 88 | 85 | 90 | 86 | 84 | 87 | 85 | 82 | 81 |
| 4 | 97 | 90 | 84 | 80 | 95 | 89 | 83 | 79 | 86 | 82 | 79 | 84 | 81 | 78 | 83 | 79 | 77 | 75 |
| 5 | 92 | 84 | 78 | 74 | 91 | 83 | 78 | 73 | 81 | 76 | 73 | 80 | 75 | 72 | 78 | 74 | 72 | 70 |
| 6 | 88 | 79 | 73 | 68 | 86 | 78 | 72 | 68 | 76 | 71 | 68 | 75 | 71 | 67 | 74 | 70 | 67 | 65 |
| 7 | 83 | 74 | 68 | 64 | 82 | 73 | 68 | 64 | 72 | 67 | 63 | 71 | 66 | 63 | 70 | 66 | 63 | 61 |
| 8 | 79 | 70 | 64 | 60 | 78 | 69 | 63 | 59 | 68 | 63 | 59 | 67 | 62 | 59 | 66 | 62 | 59 | 57 |
| 9 | 75 | 66 | 60 | 56 | 74 | 65 | 60 | 56 | 64 | 59 | 56 | 63 | 59 | 55 | 63 | 58 | 55 | 54 |
| 10 | 72 | 62 | 56 | 53 | 71 | 62 | 56 | 52 | 61 | 56 | 52 | 60 | 55 | 52 | 59 | 55 | 52 | 51 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 227906 |
| 5° | 232169 |
| 10° | 224783 |
| 15° | 207022 |
| 20° | 177413 |
| 25° | 151299 |
| 30° | 129381 |
| 35° | 96716 |
| 40° | 34313 |
| 45° | 16048 |
| 50° | 10612 |
| 55° | 7140 |
| 60° | 3602 |
| 65° | 846 |
| 70° | 613 |
| 75° | 572 |
| 80° | 0 |
| 85° | 0 |



TEST NUMBER: P221006

CATALOG NUMBER: 9004-W1-FL-LED2790-W-WT-L2-UNV

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 176.4 | 10.9 |
| 10°-20° | 447.5 | 27.5 |
| 20°-30° | 510.8 | 31.4 |
| 30°-40° | 375.0 | 23.1 |
| 40°-50° | 79.6 | 4.9 |
| 50°-60° | 30.1 | 1.9 |
| 60°-70° | 4.3 | 0.3 |
| 70°-80° | 1.1 | 0.1 |
| 80°-90° | 0.0 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 1134.7 | 69.8 |
| 0°-40° | 1509.7 | 92.9 |
| 0°-60° | 1619.4 | 99.7 |
| 0°-90° | 1624.8 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 1624.8 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 1848 | |
| 5° | 1875 | 176 |
| 15° | 1621 | 447 |
| 25° | 1112 | 511 |
| 35° | 642 | 375 |
| 45° | 92 | 80 |
| 55° | 33 | 30 |
| 65° | 3 | 4 |
| 75° | 1 | 1 |
| 85° | 0 | 0 |
| 90° | 0 | |



TEST NUMBER: P221006

CATALOG NUMBER: 9004-W1-FL-LED2790-W-WT-L2-UNV

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|--------|
| 0° | 1847.7 |
| 1° | 1847.1 |
| 2° | 1851.8 |
| 3° | 1861.1 |
| 4° | 1869.9 |
| 5° | 1875.1 |
| 6° | 1873.9 |
| 7° | 1864.0 |
| 8° | 1844.8 |
| 9° | 1820.9 |
| 10° | 1794.7 |
| 11° | 1765.0 |
| 12° | 1734.8 |
| 13° | 1700.4 |
| 14° | 1663.1 |
| 15° | 1621.2 |
| 16° | 1573.5 |
| 17° | 1520.5 |
| 18° | 1465.7 |
| 19° | 1408.1 |
| 20° | 1351.6 |
| 21° | 1299.2 |
| 22° | 1248.5 |
| 23° | 1200.8 |
| 24° | 1155.3 |
| 25° | 1111.7 |
| 26° | 1069.2 |
| 27° | 1026.1 |
| 28° | 984.7 |
| 29° | 946.3 |
| 30° | 908.4 |
| 32.5° | 806.5 |
| 35° | 642.3 |
| 37.5° | 433.8 |
| 40° | 213.1 |
| 42.5° | 120.0 |
| 45° | 92.0 |
| 47.5° | 72.2 |
| 50° | 55.3 |
| 52.5° | 43.7 |
| 55° | 33.2 |
| 57.5° | 23.9 |
| 60° | 14.6 |
| 62.5° | 4.1 |
| 65° | 2.9 |



TEST NUMBER: P221006

CATALOG NUMBER: 9004-W1-FL-LED2790-W-WT-L2-UNV

CANDELA DISTRIBUTION (continued):

| | 0° |
|-------|-----|
| 67.5° | 2.3 |
| 70° | 1.7 |
| 72.5° | 1.7 |
| 75° | 1.2 |
| 77.5° | 0.6 |
| 80° | 0.0 |
| 82.5° | 0.0 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |

(END OF REPORT)