

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: LUMIERE

Report Number: P220955

Luminaire Tested: **9004-W1-FL-LED3590-M-WT-L2-UNV**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P220955  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29497)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: LUMIERE  
Catalog Number: 9004-W1-FL-LED3590-M-WT-L2-UNV  
Description: LUMIERE LANTERRA 9004 LED WALL LUMINAIRE, FLUSH LENS, MEDIUM FLOOD OPTIC, WHITE HOUSING.  
Light Source: (1) 3500K CCT, 90 CRI LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1763.3 lumens  
Efficiency: N/A  
Efficacy: 87.7 lumens/watt  
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.44  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct


Input Watts (W): 20.1  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P220955

CATALOG NUMBER: 9004-W1-FL-LED3590-M-WT-L2-UNV

### Luminous Intensity Polar Plot

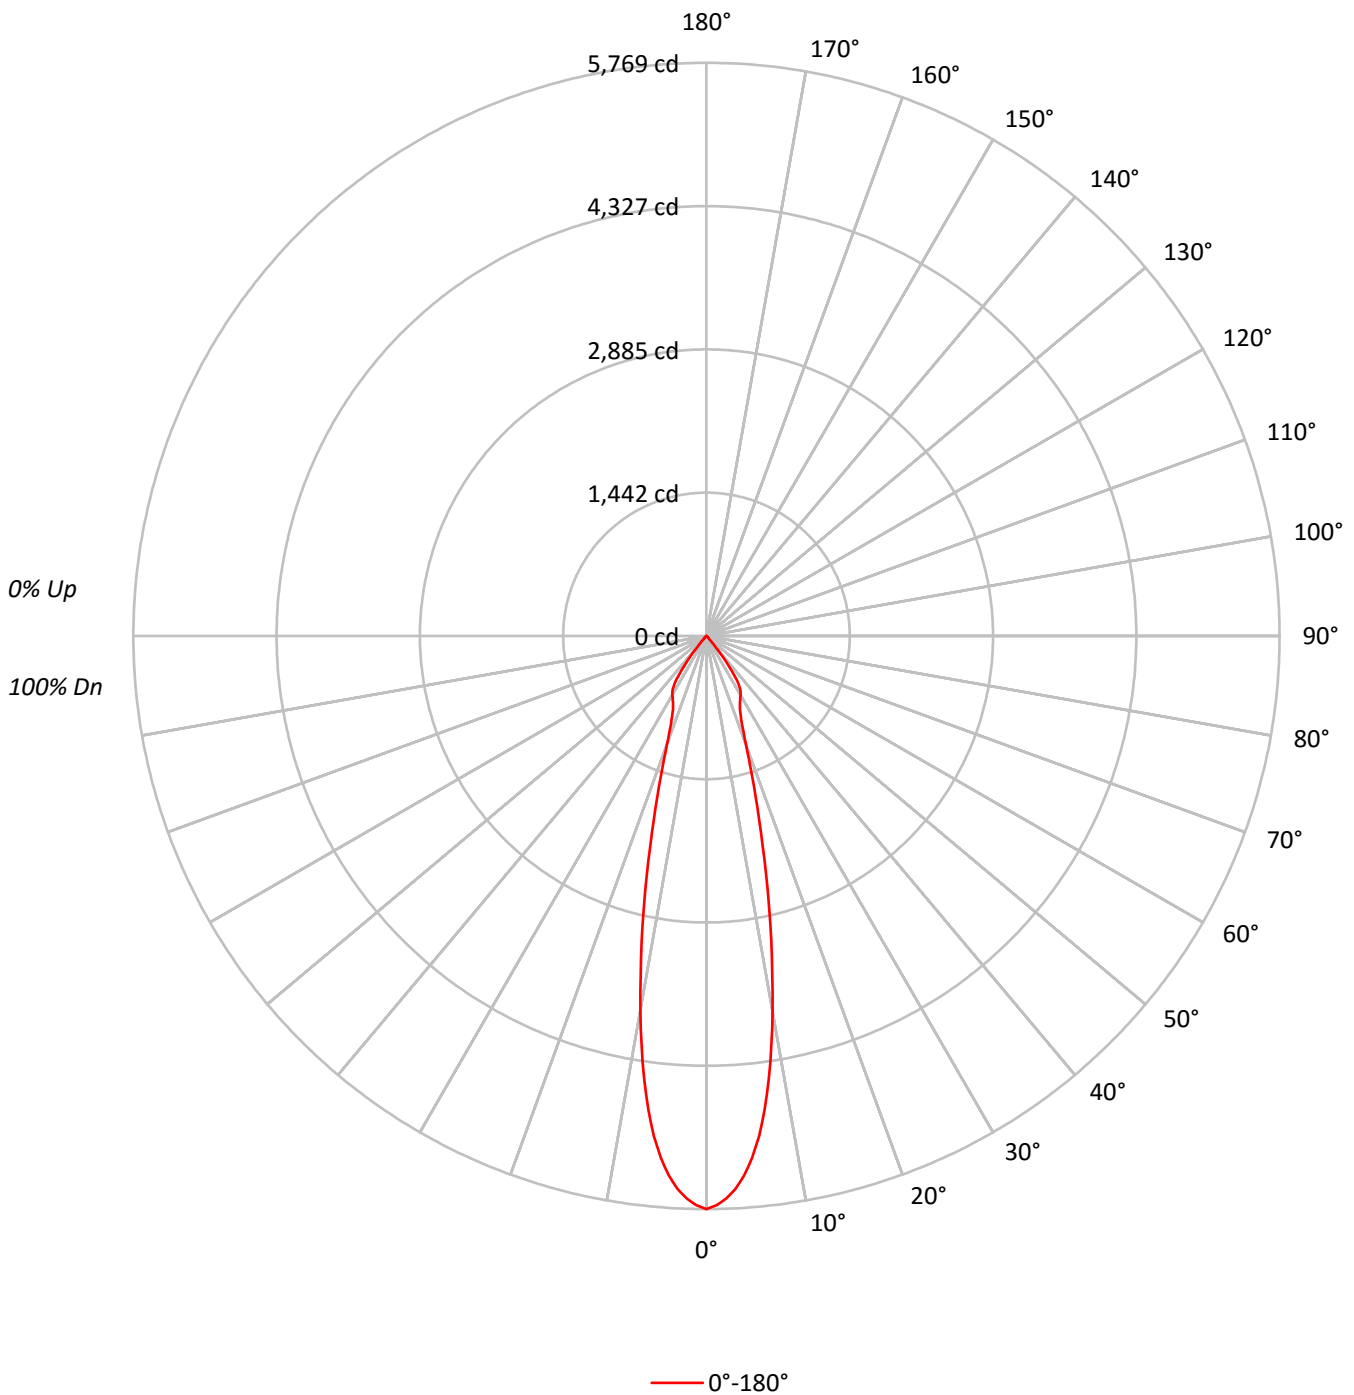



TEST NUMBER: P220955

CATALOG NUMBER: 9004-W1-FL-LED3590-M-WT-L2-UNV

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99	98	97	95
2	110	106	102	99	108	104	101	98	101	98	96		98	96	94		95	94	92	91
3	106	100	96	93	104	99	95	92	96	93	90		94	91	89		92	90	88	86
4	101	95	91	87	100	94	90	86	92	88	85		90	87	85		88	86	84	82
5	97	91	86	82	96	90	85	82	88	84	81		86	83	80		85	82	80	78
6	94	86	82	78	92	86	81	78	84	80	77		83	79	77		82	79	76	75
7	90	83	78	74	89	82	77	74	81	77	74		80	76	73		79	75	73	72
8	87	79	74	71	86	79	74	71	78	74	71		77	73	70		76	73	70	69
9	84	76	71	68	83	76	71	68	75	71	68		74	70	67		73	70	67	66
10	81	73	68	65	80	73	68	65	72	68	65		71	68	65		71	67	65	64

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	711630
5°	653010
10°	479814
15°	279337
20°	152329
25°	108265
30°	97577
35°	76855
40°	17084
45°	4675
50°	1554
55°	946
60°	617
65°	350
70°	216
75°	286
80°	0
85°	0



TEST NUMBER: P220955

CATALOG NUMBER: 9004-W1-FL-LED3590-M-WT-L2-UNV

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	456.9	25.9
10°-20°	609.7	34.6
20°-30°	381.3	21.6
30°-40°	282.8	16.0
40°-50°	26.3	1.5
50°-60°	4.2	0.2
60°-70°	1.4	0.1
70°-80°	0.6	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1447.9	82.1
0°-40°	1730.8	98.2
0°-60°	1761.3	99.9
0°-90°	1763.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1763.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5769	
5°	5274	457
15°	2188	610
25°	796	381
35°	510	283
45°	27	26
55°	4	4
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P220955

CATALOG NUMBER: 9004-W1-FL-LED3590-M-WT-L2-UNV

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	5769.4
1°	5731.4
2°	5666.5
3°	5572.9
4°	5444.4
5°	5274.0
6°	5062.5
7°	4807.3
8°	4509.7
9°	4177.8
10°	3830.9
11°	3475.9
12°	3132.1
13°	2797.1
14°	2478.9
15°	2187.5
16°	1922.3
17°	1690.8
18°	1483.1
19°	1307.1
20°	1160.5
21°	1044.5
22°	951.5
23°	882.9
24°	832.3
25°	795.5
26°	768.1
27°	744.3
28°	722.5
29°	703.8
30°	685.1
32.5°	633.3
35°	510.4
37.5°	308.8
40°	106.1
42.5°	36.8
45°	26.8
47.5°	19.3
50°	8.1
52.5°	6.2
55°	4.4
57.5°	3.1
60°	2.5
62.5°	1.9
65°	1.2



TEST NUMBER: P220955

CATALOG NUMBER: 9004-W1-FL-LED3590-M-WT-L2-UNV

**CANDELA DISTRIBUTION (continued):**

	0°
67.5°	1.2
70°	0.6
72.5°	0.6
75°	0.6
77.5°	0.6
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)