

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: LUMIERE

Report Number: P220913

Luminaire Tested: **9004-W1-[RW, RI]-LED2797-W-BK-L3-UNV**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P220913  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29494)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: LUMIERE  
Catalog Number: 9004-W1-[RW, RI]-LED2797-W-BK-L3-UNV  
Description: LUMIERE LANTERRA 9004 LED WALL LUMINAIRE, RECESSED LENS, WIDE FLOOD OPTIC, BLACK HOUSING.  
Light Source: (1) 2700K CCT, 97 CRI LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1669.1 lumens  
Efficiency: N/A  
Efficacy: 58.4 lumens/watt  
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.83  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct


Input Watts (W): 28.6  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P220913

CATALOG NUMBER: 9004-W1-[RW, RI]-LED2797-W-BK-L3-UNV

### Luminous Intensity Polar Plot

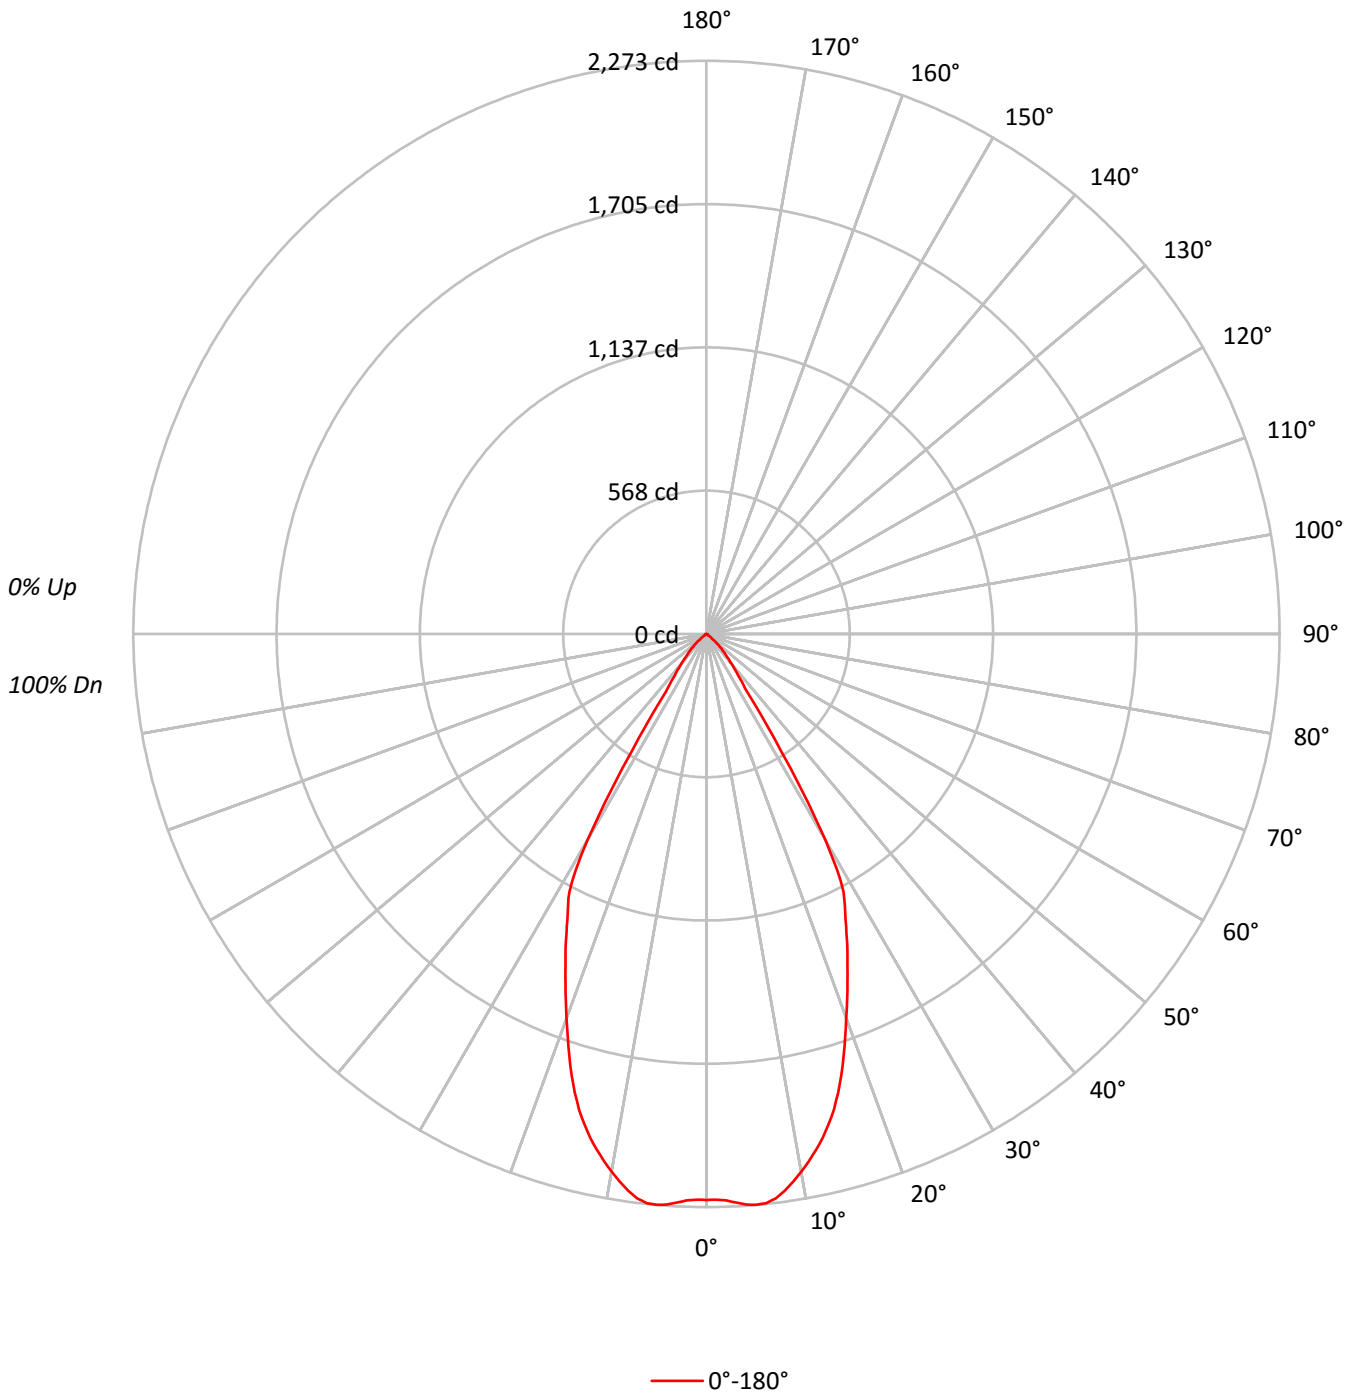



TEST NUMBER: P220913

CATALOG NUMBER: 9004-W1-[RW, RI]-LED2797-W-BK-L3-UNV

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94	96	94	92	94	92	90	89
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	85	83
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	80	78
5	94	87	81	77	93	86	81	77	84	80	76	82	79	76	81	78	75	73
6	90	82	76	72	89	81	76	72	80	75	72	78	74	71	77	73	71	69
7	86	77	72	68	85	77	71	68	75	71	67	74	70	67	73	69	67	65
8	82	73	68	64	81	73	67	64	72	67	64	71	66	63	70	66	63	62
9	79	70	64	60	78	69	64	60	68	63	60	67	63	60	67	63	60	58
10	75	66	61	57	74	66	61	57	65	60	57	64	60	57	64	60	57	55

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	276862
5°	281386
10°	271238
15°	249302
20°	212854
25°	178818
30°	133853
35°	42011
40°	24877
45°	15124
50°	6313
55°	1054
60°	691
65°	409
70°	252
75°	334
80°	0
85°	0



TEST NUMBER: P220913

CATALOG NUMBER: 9004-W1-[RW, RI]-LED2797-W-BK-L3-UNV

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	213.5	12.8
10°-20°	538.5	32.3
20°-30°	599.7	35.9
30°-40°	239.3	14.3
40°-50°	68.4	4.1
50°-60°	7.6	0.5
60°-70°	1.5	0.1
70°-80°	0.6	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1351.7	81.0
0°-40°	1591.0	95.3
0°-60°	1667.0	99.9
0°-90°	1669.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1669.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2245	
5°	2273	214
15°	1952	538
25°	1314	600
35°	279	239
45°	87	68
55°	5	8
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P220913

CATALOG NUMBER: 9004-W1-[RW, RI]-LED2797-W-BK-L3-UNV

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2244.6
1°	2243.9
2°	2248.1
3°	2258.6
4°	2268.4
5°	2272.6
6°	2269.8
7°	2255.1
8°	2229.9
9°	2199.1
10°	2165.6
11°	2129.2
12°	2091.5
13°	2049.5
14°	2003.3
15°	1952.3
16°	1892.9
17°	1829.2
18°	1760.0
19°	1689.4
20°	1621.6
21°	1555.8
22°	1492.9
23°	1431.4
24°	1373.3
25°	1313.9
26°	1257.9
27°	1209.7
28°	1159.4
29°	1070.5
30°	939.8
32.5°	549.6
35°	279.0
37.5°	206.3
40°	154.5
42.5°	114.7
45°	86.7
47.5°	64.3
50°	32.9
52.5°	8.4
55°	4.9
57.5°	3.5
60°	2.8
62.5°	2.1
65°	1.4



TEST NUMBER: P220913

CATALOG NUMBER: 9004-W1-[RW, RI]-LED2797-W-BK-L3-UNV

**CANDELA DISTRIBUTION (continued):**

	0°
67.5°	0.7
70°	0.7
72.5°	0.7
75°	0.7
77.5°	0.7
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)