

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: LUMIERE

Report Number: P220940

Luminaire Tested: **9004-W1-FL-LED2797-S-WT-L3-UNV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P220940
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29496)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 9004-W1-FL-LED2797-S-WT-L3-UNV
Description: LUMIERE LANTERRA 9004 LED WALL LUMINAIRE, FLUSH LENS, SPOT OPTIC, WHITE HOUSING.
Light Source: (1) 2700K CCT, 97 CRI LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1958.8 lumens
Efficiency: N/A
Efficacy: 68.5 lumens/watt
Spacing Criteria (0/90/45): 0.27 / 0.27 / 0.27
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 28.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P220940

CATALOG NUMBER: 9004-W1-FL-LED2797-S-WT-L3-UNV

Luminous Intensity Polar Plot

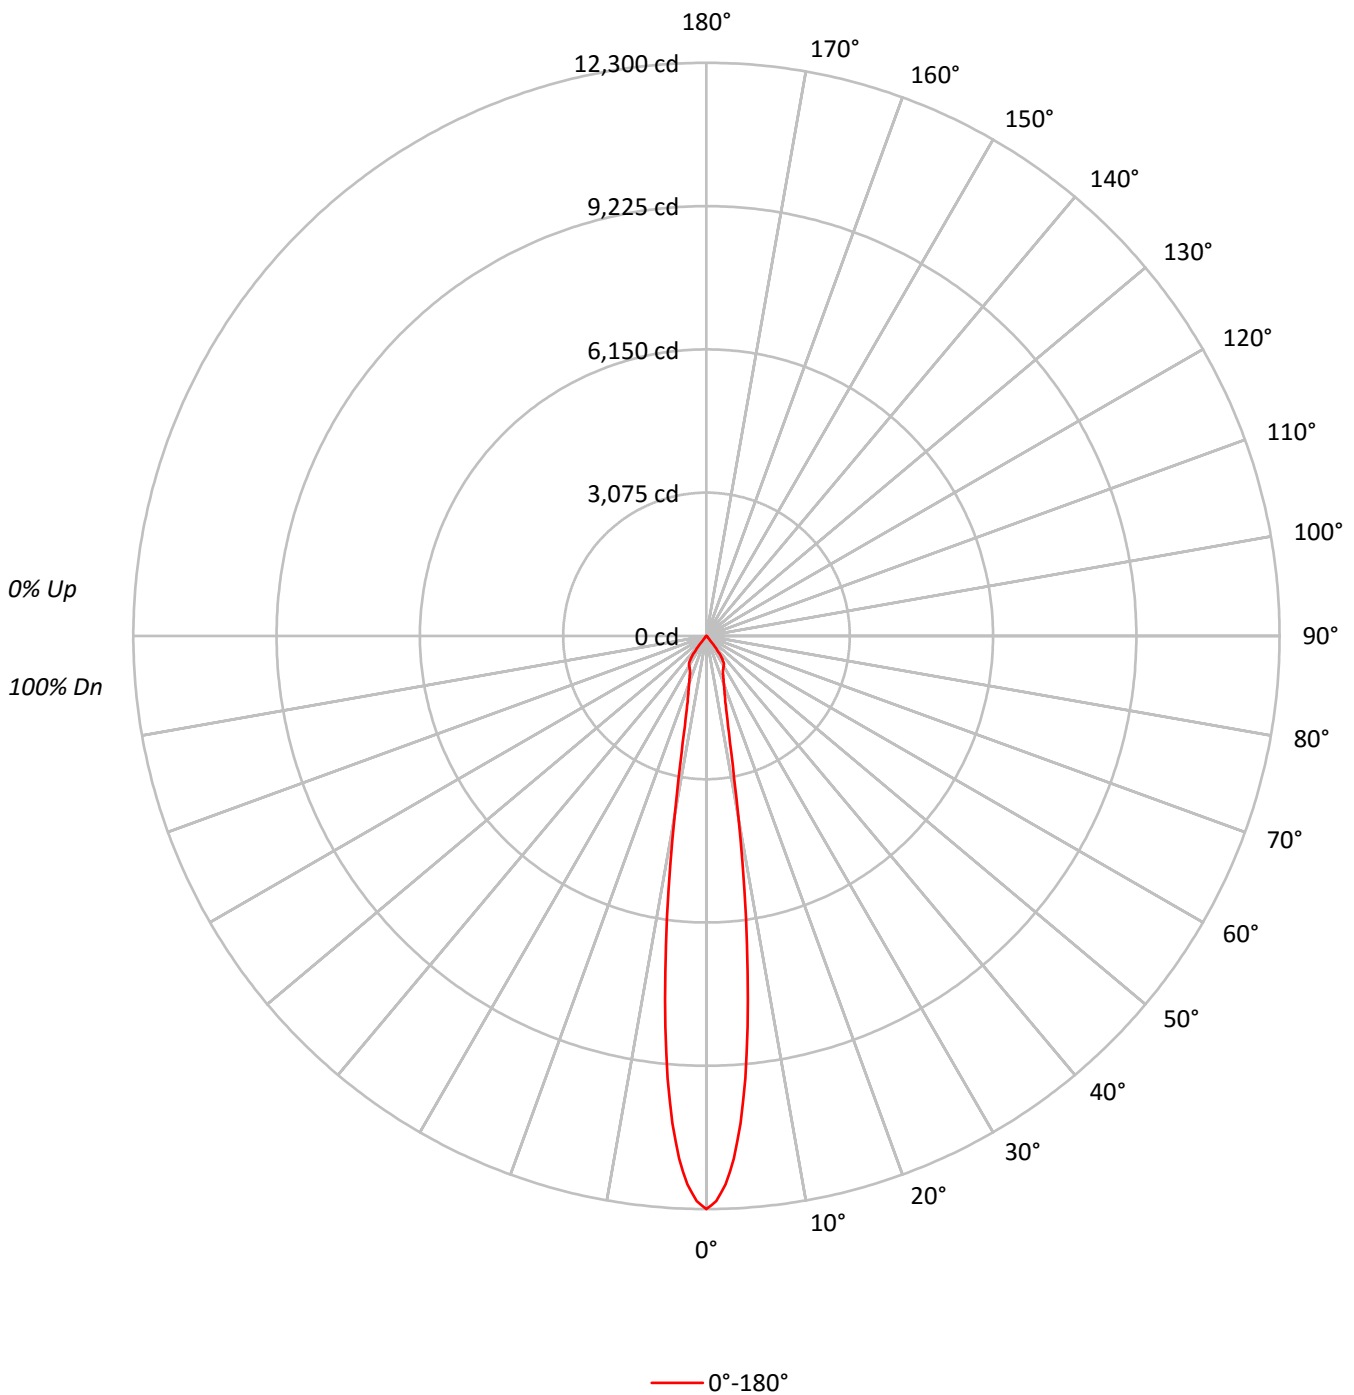



TEST NUMBER: P220940

CATALOG NUMBER: 9004-W1-FL-LED2797-S-WT-L3-UNV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	115	112	110	108	112	110	108	107	106	105	104		103	101	100		99	98	98	96
2	110	106	103	100	108	105	102	99	102	99	97		99	97	95		96	95	93	92
3	106	101	97	94	104	100	96	93	97	94	92		95	93	90		93	91	89	88
4	102	97	92	89	101	95	91	88	93	90	87		92	89	86		90	87	85	84
5	99	92	88	84	97	91	87	84	90	86	83		88	85	83		87	84	82	81
6	95	89	84	81	94	88	83	80	86	83	80		85	82	79		84	81	79	78
7	92	85	80	77	91	85	80	77	83	79	77		82	79	76		81	78	76	75
8	89	82	77	74	88	82	77	74	81	77	74		80	76	74		79	76	73	72
9	87	79	75	72	86	79	74	71	78	74	71		77	74	71		76	73	71	70
10	84	77	72	69	83	76	72	69	76	72	69		75	71	69		74	71	69	68

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1517114
5°	1180927
10°	491851
15°	207954
20°	142721
25°	113913
30°	105268
35°	86130
40°	18130
45°	4152
50°	1478
55°	1204
60°	691
65°	409
70°	252
75°	334
80°	0
85°	0



TEST NUMBER: P220940

CATALOG NUMBER: 9004-W1-FL-LED2797-S-WT-L3-UNV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	716.8	36.6
10°-20°	502.3	25.6
20°-30°	395.9	20.2
30°-40°	311.7	15.9
40°-50°	25.2	1.3
50°-60°	4.9	0.3
60°-70°	1.3	0.1
70°-80°	0.6	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1615.0	82.5
0°-40°	1926.8	98.4
0°-60°	1956.9	99.9
0°-90°	1958.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1958.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	12300	
5°	9538	717
15°	1628	502
25°	837	396
35°	572	312
45°	24	25
55°	6	5
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P220940

CATALOG NUMBER: 9004-W1-FL-LED2797-S-WT-L3-UNV

CANDELA DISTRIBUTION (FULL):

0°	
0°	12299.7
1°	12130.5
2°	11778.8
3°	11233.4
4°	10487.3
5°	9537.7
6°	8441.3
7°	7256.8
8°	6094.6
9°	4924.8
10°	3927.0
11°	3130.5
12°	2552.9
13°	2143.9
14°	1847.4
15°	1628.5
16°	1464.2
17°	1344.0
18°	1252.4
19°	1164.9
20°	1087.3
21°	1023.0
22°	965.7
23°	915.3
24°	871.3
25°	837.0
26°	811.1
27°	791.5
28°	772.7
29°	755.9
30°	739.1
32.5°	697.1
35°	572.0
37.5°	341.2
40°	112.6
42.5°	33.6
45°	23.8
47.5°	16.8
50°	7.7
52.5°	7.0
55°	5.6
57.5°	4.2
60°	2.8
62.5°	1.4
65°	1.4



TEST NUMBER: P220940

CATALOG NUMBER: 9004-W1-FL-LED2797-S-WT-L3-UNV

CANDELA DISTRIBUTION (continued):

	0°
67.5°	0.7
70°	0.7
72.5°	0.7
75°	0.7
77.5°	0.7
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)