

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: LUMIERE

Report Number: P220936

Luminaire Tested: **9004-W1-FL-LED3090-S-WT-L3-UNV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P220936
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29496)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 9004-W1-FL-LED3090-S-WT-L3-UNV
Description: LUMIERE LANTERRA 9004 LED WALL LUMINAIRE, FLUSH LENS, SPOT OPTIC, WHITE HOUSING.
Light Source: (1) 3000K CCT, 90 CRI LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2235.6 lumens
Efficiency: N/A
Efficacy: 78.2 lumens/watt
Spacing Criteria (0/90/45): 0.27 / 0.27 / 0.27
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 28.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P220936

CATALOG NUMBER: 9004-W1-FL-LED3090-S-WT-L3-UNV

Luminous Intensity Polar Plot

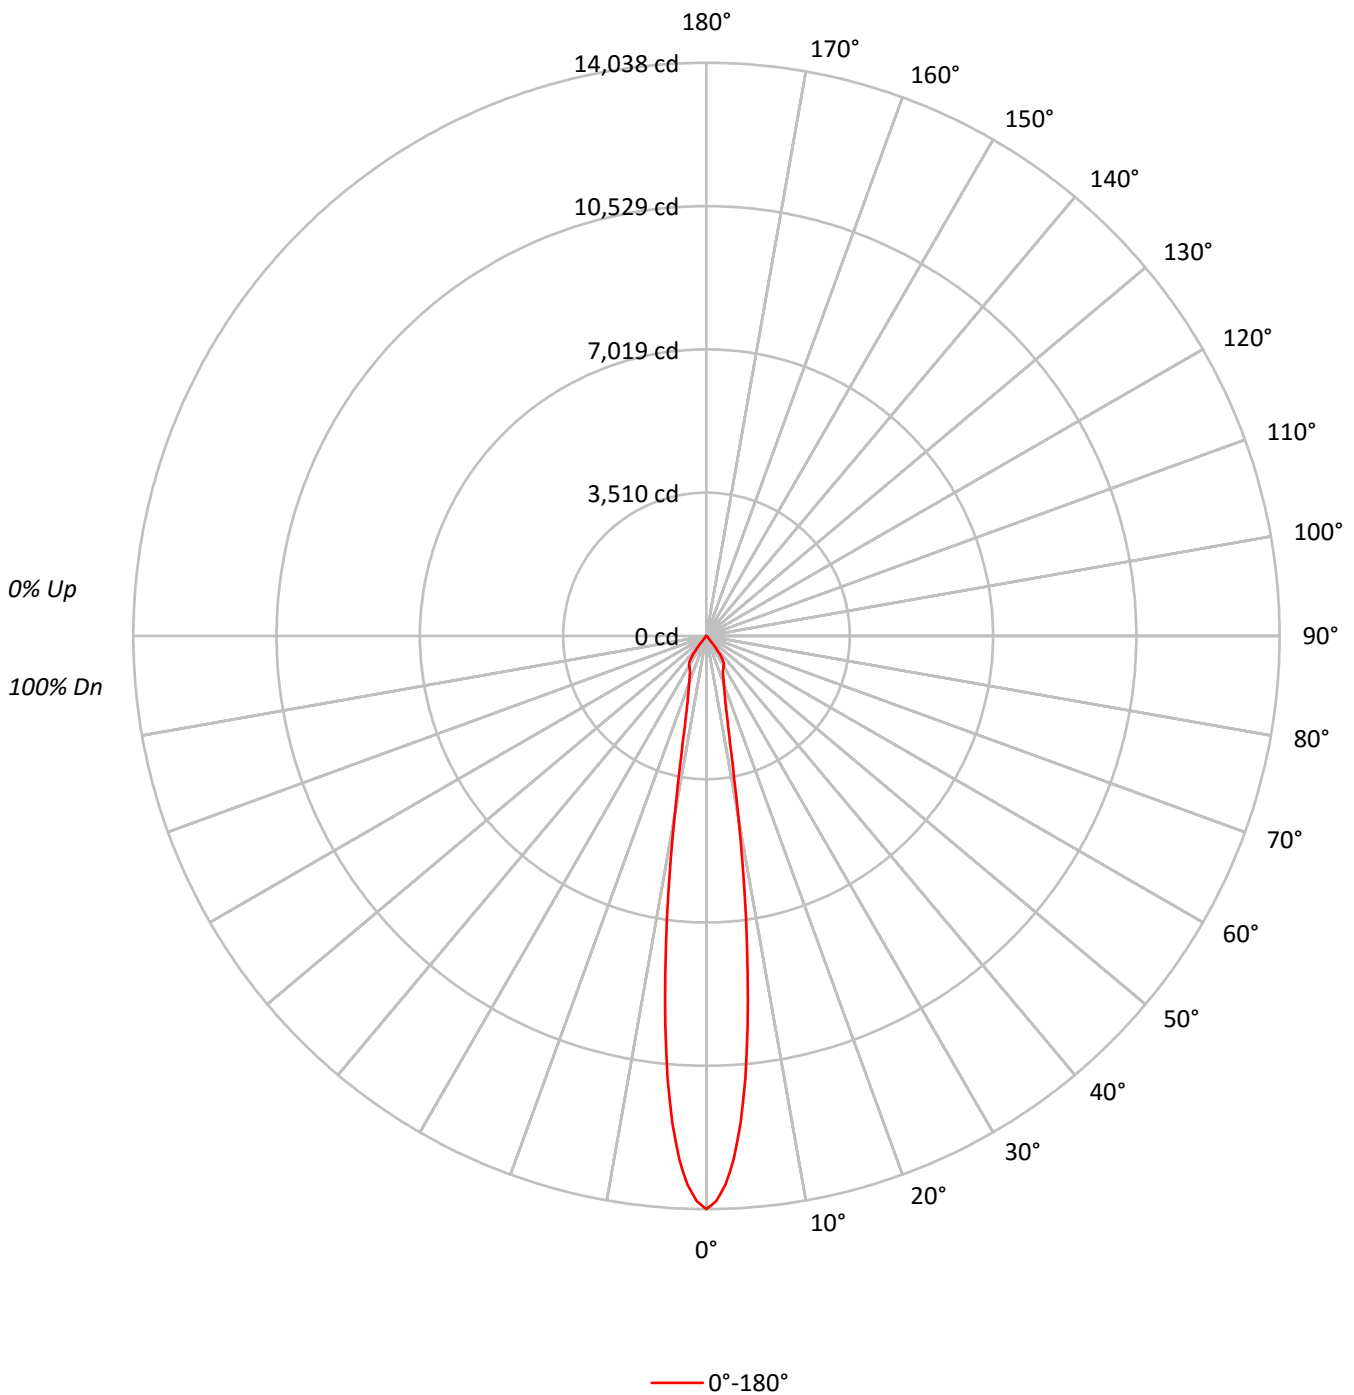



TEST NUMBER: P220936

CATALOG NUMBER: 9004-W1-FL-LED3090-S-WT-L3-UNV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	112	110	108	112	110	108	107	106	105	104	103	101	100	99	98	98	96
2	110	106	103	100	108	105	102	99	102	99	97	99	97	95	96	95	93	92
3	106	101	97	94	104	100	96	93	97	94	92	95	93	90	93	91	89	88
4	102	97	92	89	101	95	91	88	93	90	87	92	89	86	90	87	85	84
5	99	92	88	84	97	91	87	84	90	86	83	88	85	83	87	84	82	81
6	95	89	84	81	94	88	83	80	86	83	80	85	82	79	84	81	79	78
7	92	85	80	77	91	85	80	77	83	79	77	82	79	76	81	78	76	75
8	89	82	77	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72
9	87	79	75	72	86	79	74	71	78	74	71	77	74	71	76	73	71	70
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1731514
5°	1347820
10°	561351
15°	237350
20°	162896
25°	130013
30°	120152
35°	98297
40°	20691
45°	4727
50°	1689
55°	1376
60°	789
65°	467
70°	289
75°	381
80°	0
85°	0



TEST NUMBER: P220936

CATALOG NUMBER: 9004-W1-FL-LED3090-S-WT-L3-UNV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	818.1	36.6
10°-20°	573.3	25.6
20°-30°	451.9	20.2
30°-40°	355.8	15.9
40°-50°	28.7	1.3
50°-60°	5.6	0.3
60°-70°	1.5	0.1
70°-80°	0.7	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1843.3	82.5
0°-40°	2199.1	98.4
0°-60°	2233.4	99.9
0°-90°	2235.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2235.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	14038	
5°	10886	818
15°	1859	573
25°	955	452
35°	653	356
45°	27	29
55°	6	6
65°	2	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P220936

CATALOG NUMBER: 9004-W1-FL-LED3090-S-WT-L3-UNV

CANDELA DISTRIBUTION (FULL):

	0°
0°	14037.9
1°	13844.8
2°	13443.4
3°	12820.9
4°	11969.3
5°	10885.6
6°	9634.2
7°	8282.3
8°	6955.9
9°	5620.8
10°	4481.9
11°	3572.9
12°	2913.7
13°	2446.9
14°	2108.5
15°	1858.7
16°	1671.1
17°	1533.9
18°	1429.3
19°	1329.6
20°	1241.0
21°	1167.6
22°	1102.1
23°	1044.7
24°	994.4
25°	955.3
26°	925.8
27°	903.4
28°	881.9
29°	862.7
30°	843.6
32.5°	795.7
35°	652.8
37.5°	389.5
40°	128.5
42.5°	38.3
45°	27.1
47.5°	19.2
50°	8.8
52.5°	8.0
55°	6.4
57.5°	4.8
60°	3.2
62.5°	1.6
65°	1.6



TEST NUMBER: P220936

CATALOG NUMBER: 9004-W1-FL-LED3090-S-WT-L3-UNV

CANDELA DISTRIBUTION (continued):

	0°
67.5°	0.8
70°	0.8
72.5°	0.8
75°	0.8
77.5°	0.8
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)