

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: LUMIERE

Report Number: G2-1802-569-4

Luminaire Tested: **203-SS-8LED4010-12-BK**

Test Date: 04/06/18

Test Information

Test Method: LM-79-08
Report Number: G2-1802-569-4
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1802-569-4)
Test Lab: INNOVATION CENTER(G2)
Test Date: 04/06/18
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 203-SS-8LED4010-12-BK
Description: CAMBRIA 203 LED LUMINAIRE, 8 WATT, 4000K CCT, 10 DEGREE SPOT OPTIC,
REGRESSED HOOD BLACK
Light Source: (1) SORAA 4000K 95 CRI 10°NSP LED
SM16-07-10D-940-03
Ballast/Driver: CHROMA POWER SUPPLY IN0004

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 298.5 lumens
Efficiency: N/A
Efficacy: 37.3 lumens/watt
Spacing Criteria (0/90/45): 0.21 / 0.21 / 0.19
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 8
Input Voltage (V): 12.0
Input Current (Ain): 0.709
Voltage Rise (V): NR
Power Factor: 0.9469
Total Harmonic Distortion (THDi): 27.5
Frequency (hertz): 60
Stabilization Time: 0.5 HR
Operation Time: 9 HR
Ambient Temperature (°C): 24.9
Test Distance: 25 FT



TEST NUMBER: G2-1802-569-4

CATALOG NUMBER: 203-SS-8LED4010-12-BK

Luminous Intensity Polar Plot

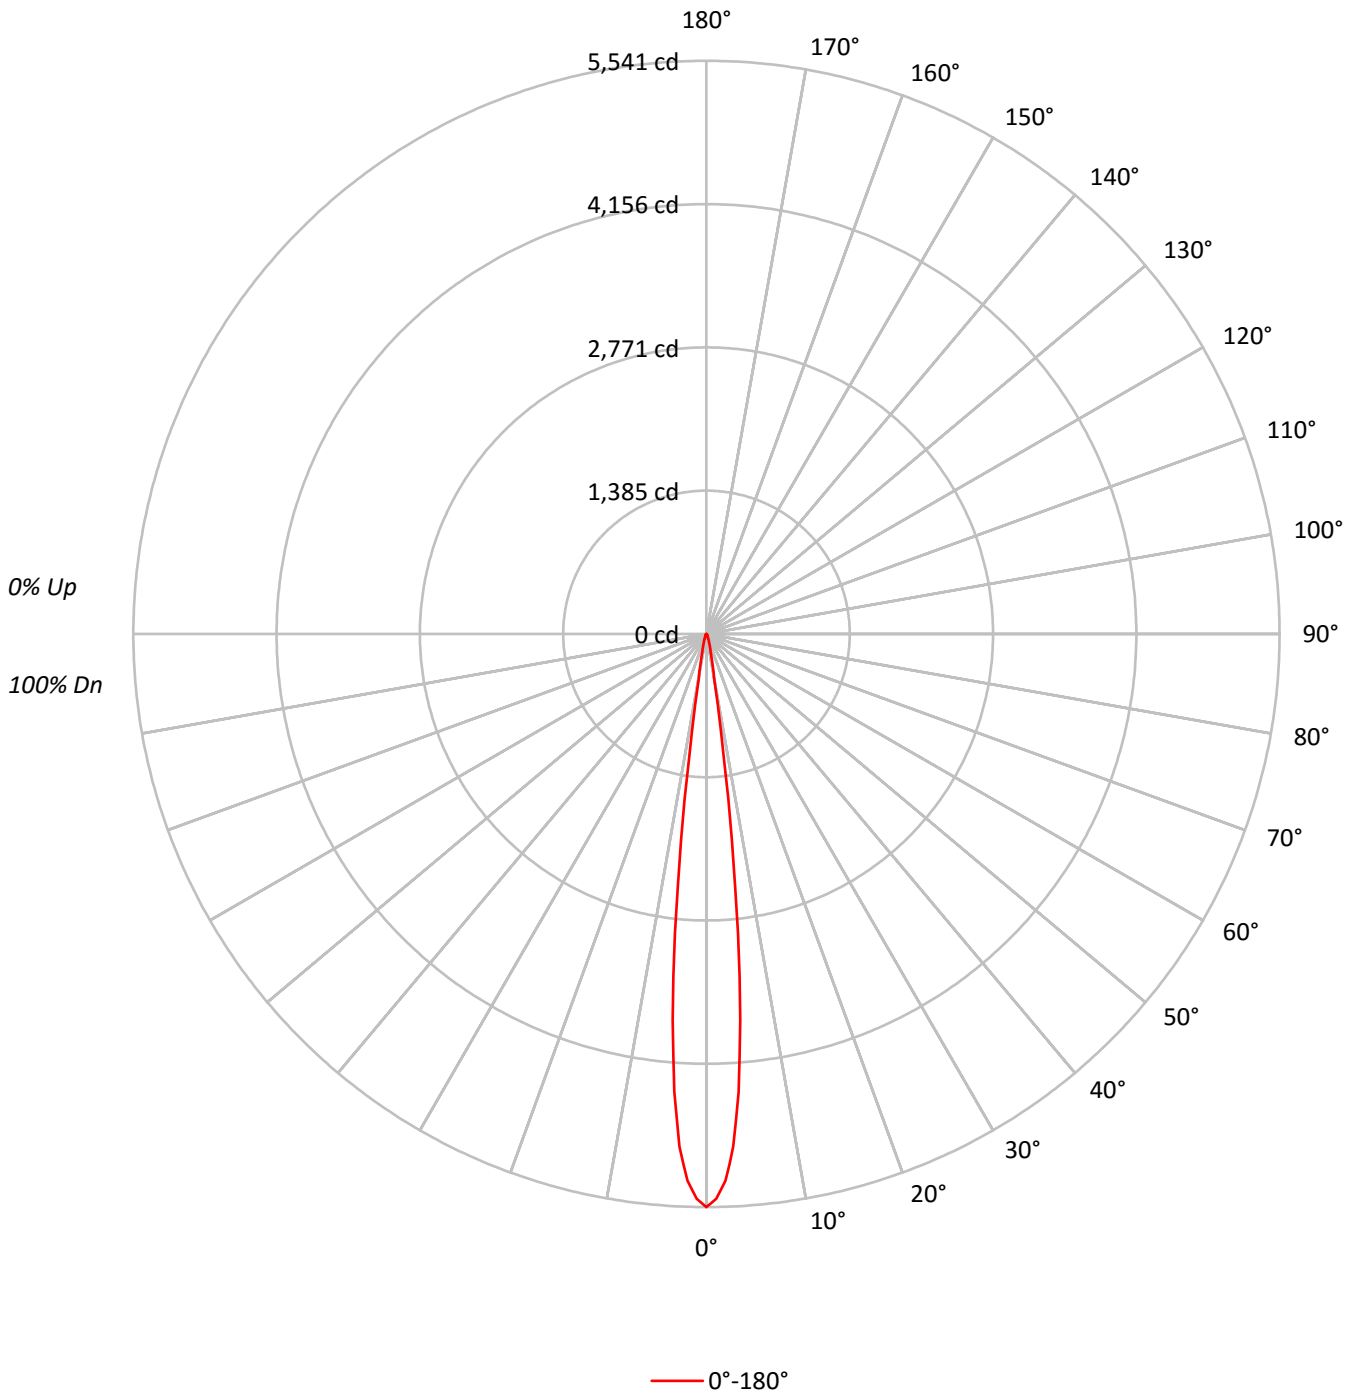



TEST NUMBER: G2-1802-569-4

CATALOG NUMBER: 203-SS-8LED4010-12-BK

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20				20				20			
RC	80				70					50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	116	114	113	111	114	112	111	109	108	107	106	105	104	103	101	101	100	98	98	98	98
2	113	110	108	106	111	109	106	105	106	104	102	103	101	100	100	99	98	97	97	97	97
3	111	107	104	102	109	106	103	101	103	101	99	101	99	98	99	98	97	95	95	95	95
4	108	104	101	99	107	103	100	98	101	99	97	100	98	96	98	96	95	94	94	94	94
5	106	102	99	96	105	101	98	96	100	97	95	98	96	95	97	95	94	93	93	93	93
6	105	100	97	95	104	99	96	94	98	96	94	97	95	93	96	94	93	92	92	92	92
7	103	98	95	93	102	98	95	93	97	94	92	96	94	92	95	93	92	91	91	91	91
8	101	97	94	92	101	96	94	92	95	93	91	95	93	91	94	92	91	90	90	90	90
9	100	95	93	91	99	95	92	90	94	92	90	94	92	90	93	91	90	89	89	89	89
10	99	94	91	90	98	94	91	90	93	91	89	93	91	89	92	90	89	88	88	88	88

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2733816
5°	1856250
10°	213422
15°	63337
20°	28352
25°	14698
30°	10255
35°	8432
40°	7085
45°	4884
50°	3838
55°	2581
60°	987
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: G2-1802-569-4

CATALOG NUMBER: 203-SS-8LED4010-12-BK

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	226.2	75.8
10°-20°	41.7	14.0
20°-30°	13.5	4.5
30°-40°	8.6	2.9
40°-50°	5.7	1.9
50°-60°	2.4	0.8
60°-70°	0.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	281.3	94.2
0°-40°	290.0	97.1
0°-60°	298.2	99.9
0°-90°	298.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	298.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5541	
5°	3748	226
15°	124	42
25°	27	13
35°	14	9
45°	7	6
55°	3	2
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: G2-1802-569-4

CATALOG NUMBER: 203-SS-8LED4010-12-BK

CANDELA DISTRIBUTION (FULL):

	0°
0°	5541
1°	5462
2°	5286
3°	4964
4°	4438
5°	3748
6°	2905
7°	2011
8°	1218
9°	697
10°	426
12.5°	202
15°	124
17.5°	87
20°	54
22.5°	35
25°	27
27.5°	22
30°	18
32.5°	15
35°	14
37.5°	12
40°	11
42.5°	9
45°	7
47.5°	6
50°	5
52.5°	3
55°	3
57.5°	2
60°	1
62.5°	1
65°	0
67.5°	0
70°	0
72.5°	0
75°	0
77.5°	0
80°	0
82.5°	0
85°	0
87.5°	0
90°	0

(END OF REPORT)