

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: METALUX

Report Number: P774890

Luminaire Tested: **SPHB-2436SE-M-L84050-CD-U (24K LUMEN, 5000K)**

Issue Date: 2/21/2024



**Test Information**

Test Method: LM-79-08  
Report Number: P774890  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2309-187-1)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: METALUX  
Catalog Number: SPHB-2436SE-M-L84050-CD-U (24K LUMEN, 5000K)  
Description: 24000 Lumen SPHB at 5000K CCT  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 24799.0 lumens  
Efficiency: N/A  
Efficacy: 153.1 lumens/watt  
Spacing Criteria (0/90/45): 1.28 / 1.21 / 1.27  
Luminous Opening: Rectangular (W 1' x L: 2.04' x H: 0')  
CIE Type: Direct

Input Watts (W): 162  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P774890

CATALOG NUMBER: SPHB-2436SE-M-L84050-CD-U (24K LUMEN, 5000K)

### Luminous Intensity Polar Plot

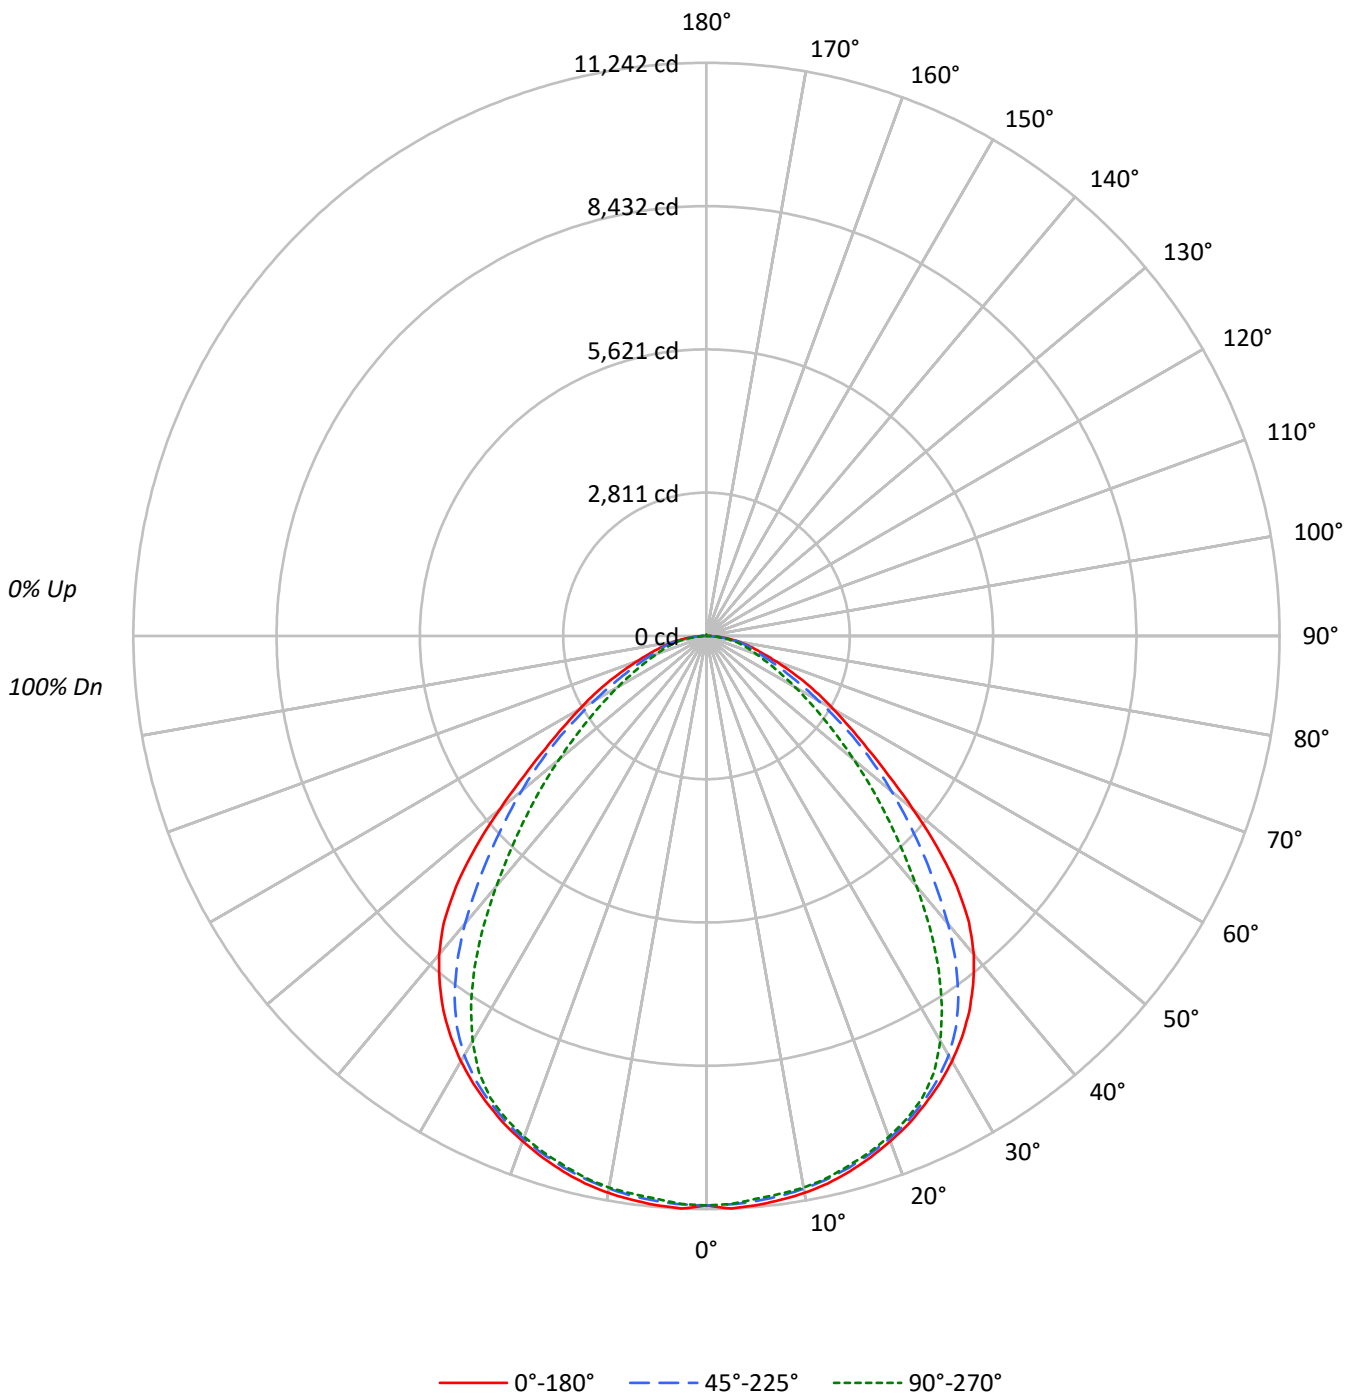



TEST NUMBER: P774890

CATALOG NUMBER: SPHB-2436SE-M-L84050-CD-U (24K LUMEN, 5000K)

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89					87				
2	102	94	88	83	99	92	87	82	89	84	80	86	82	79	83	80	77					75				
3	94	84	77	71	91	83	76	71	80	74	69	77	72	68	75	70	67					65				
4	86	76	68	62	84	74	67	61	72	65	60	70	64	60	68	63	59					57				
5	80	68	60	54	78	67	60	54	65	58	53	63	57	53	61	56	52					50				
6	74	62	54	48	73	61	53	48	59	52	47	58	52	47	56	51	47					45				
7	69	57	49	43	68	56	48	43	54	47	42	53	47	42	52	46	42					40				
8	65	52	44	39	63	51	44	38	50	43	38	49	43	38	48	42	38					36				
9	61	48	40	35	59	47	40	35	46	39	35	45	39	35	44	39	34					33				
10	57	44	37	32	56	44	37	32	43	36	32	42	36	32	41	36	31					30				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	58890	58890	58890
5°	59311	58902	58669
10°	59383	58938	58821
15°	59344	58932	58723
20°	59171	58882	58646
25°	58971	58621	58231
30°	58635	57832	55842
35°	57844	55444	51020
40°	56123	50721	44089
45°	51805	44599	37257
50°	43401	38899	30949
55°	35465	32935	25483
60°	30281	26713	21159
65°	26201	21729	18032
70°	22120	18877	16033
75°	19824	18325	15677
80°	19707	18374	15760
85°	17173	17004	13302



TEST NUMBER: P774890

CATALOG NUMBER: SPHB-2436SE-M-L84050-CD-U (24K LUMEN, 5000K)

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1058.0	4.3
10°-20°	3046.1	12.3
20°-30°	4624.1	18.6
30°-40°	5288.1	21.3
40°-50°	4581.8	18.5
50°-60°	3109.4	12.5
60°-70°	1788.4	7.2
70°-80°	952.8	3.8
80°-90°	308.7	1.2
90°-100°	8.8	0.0
100°-110°	2.8	0.0
110°-120°	2.9	0.0
120°-130°	3.9	0.0
130°-140°	5.5	0.0
140°-150°	6.2	0.0
150°-160°	5.7	0.0
160°-170°	4.1	0.0
170°-180°	1.5	0.0
0°-30°	8728.2	35.2
0°-40°	14016.3	56.5
0°-60°	21707.6	87.5
0°-90°	24757.5	99.8
90°-120°	14.5	0.1
90°-150°	30.1	0.1
90°-180°	41.0	0.2
0°-180°	24799.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	11170	11170	11170	11170	11170	
5°	11207	11105	11130	11105	11086	###
15°	10873	10773	10797	10769	10759	3068
25°	10138	10050	10077	10039	10010	4673
35°	8987	8850	8615	8116	7927	5606
45°	6948	6571	5982	5253	4997	5281
55°	3858	3880	3583	3012	2772	3516
65°	2100	1968	1742	1607	1446	2094
75°	973	958	900	824	770	1058
85°	284	292	281	232	220	306
90°	3	20	42	52	53	15
95°	2	3	4	4	4	1
105°	2	2	3	3	4	2
115°	2	3	3	3	4	2
125°	4	4	5	5	5	4
135°	7	7	7	8	8	5
145°	10	10	10	10	10	6
155°	12	12	12	12	12	5
165°	14	14	14	15	15	4
175°	15	15	16	16	17	1
180°	16	16	16	16	16	



TEST NUMBER: P774890

CATALOG NUMBER: SPHB-2436SE-M-L84050-CD-U (24K LUMEN, 5000K)

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	11170.0	11170.0	11170.0	11170.0	11170.0
2.5°	11241.7	11142.2	11160.4	11147.0	11154.7
5°	11207.2	11105.0	11129.8	11105.0	11085.8
7.5°	11157.5	11054.3	11078.2	11050.5	11037.1
10°	11092.5	10987.4	11009.4	10991.2	10987.4
12.5°	10998.8	10895.6	10917.6	10895.6	10893.7
15°	10872.6	10773.2	10797.1	10769.4	10758.9
17.5°	10718.7	10625.0	10654.7	10633.6	10622.2
20°	10546.6	10459.7	10495.0	10463.5	10453.0
22.5°	10362.1	10269.4	10303.8	10273.2	10255.1
25°	10137.5	10050.5	10077.2	10039.0	10010.3
27.5°	9898.5	9798.1	9814.3	9722.6	9660.4
30°	9631.7	9520.9	9499.8	9296.2	9172.9
32.5°	9332.5	9205.4	9108.8	8748.4	8591.6
35°	8987.4	8849.7	8614.6	8115.5	7927.2
37.5°	8597.4	8420.5	8022.8	7452.1	7189.2
40°	8154.7	7904.2	7369.8	6715.0	6406.2
42.5°	7623.2	7263.7	6665.3	5969.3	5672.9
45°	6948.2	6570.6	5981.7	5253.2	4997.0
47.5°	6142.3	5855.5	5341.2	4599.3	4362.3
50°	5291.5	5193.0	4742.7	4022.9	3773.4
52.5°	4504.7	4529.6	4161.5	3479.9	3245.6
55°	3858.4	3879.5	3583.1	3012.4	2772.4
57.5°	3321.2	3270.5	3034.4	2583.1	2365.2
60°	2871.8	2756.2	2533.4	2209.3	2006.7
62.5°	2478.0	2328.8	2108.9	1883.3	1695.0
65°	2100.3	1968.4	1741.8	1607.0	1445.5
67.5°	1742.8	1660.6	1464.6	1369.0	1222.7
70°	1435.0	1396.7	1224.6	1159.6	1040.1
72.5°	1184.5	1160.6	1052.6	983.7	901.5
75°	973.2	957.9	899.6	824.1	769.6
77.5°	811.6	789.7	753.3	688.3	643.4
80°	649.1	633.8	605.2	551.6	519.1
82.5°	463.7	463.7	451.2	404.4	374.8
85°	283.9	291.6	281.1	232.3	219.9
87.5°	103.2	114.7	129.1	127.1	125.2
90°	2.9	20.1	42.1	51.6	52.6
92.5°	1.0	3.8	6.7	10.5	9.6
95°	1.9	2.9	3.8	3.8	3.8
97.5°	1.9	1.9	3.8	3.8	3.8
100°	1.9	1.9	2.9	3.8	3.8
102.5°	1.0	1.9	2.9	3.8	3.8
105°	1.9	1.9	2.9	2.9	3.8
107.5°	1.9	1.9	2.9	2.9	2.9
110°	1.9	1.9	2.9	2.9	3.8



TEST NUMBER: P774890

CATALOG NUMBER: SPHB-2436SE-M-L84050-CD-U (24K LUMEN, 5000K)

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	1.9	1.9	2.9	2.9	2.9
115°	1.9	2.9	2.9	2.9	3.8
117.5°	2.9	2.9	2.9	3.8	3.8
120°	2.9	2.9	3.8	3.8	3.8
122.5°	3.8	3.8	3.8	3.8	3.8
125°	3.8	3.8	4.8	4.8	4.8
127.5°	4.8	4.8	4.8	4.8	5.7
130°	4.8	5.7	5.7	5.7	5.7
132.5°	5.7	6.7	6.7	6.7	6.7
135°	6.7	6.7	6.7	7.6	7.6
137.5°	7.6	7.6	7.6	7.6	7.6
140°	8.6	8.6	8.6	8.6	8.6
142.5°	8.6	9.6	9.6	9.6	9.6
145°	9.6	9.6	9.6	10.5	10.5
147.5°	10.5	10.5	10.5	10.5	10.5
150°	10.5	11.5	11.5	11.5	11.5
152.5°	11.5	11.5	11.5	12.4	12.4
155°	11.5	11.5	12.4	12.4	12.4
157.5°	12.4	12.4	13.4	13.4	13.4
160°	12.4	13.4	13.4	14.3	14.3
162.5°	13.4	13.4	14.3	14.3	14.3
165°	14.3	14.3	14.3	15.3	15.3
167.5°	14.3	14.3	15.3	15.3	16.3
170°	15.3	15.3	15.3	16.3	16.3
172.5°	15.3	15.3	15.3	16.3	16.3
175°	15.3	15.3	16.3	16.3	17.2
177.5°	15.3	15.3	16.3	17.2	17.2
180°	16.3	16.3	16.3	16.3	16.3

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

METALUX

Report Number: SP1-2309-187-6

Test Date: 10/10/2023

Luminaire Tested: SPHB-2436SE-M-UNV-L84050-CD-U (36K LUMEN 5000K)

Data in this report applies to families of products including SPHB-2436SE-M-UNV-L84050-CD-U (36K LUMEN 5000K).

Tested By:

Approved By:



NVLAP Lab Code: 200050-0

Cooper Lighting Solutions laboratories have been accredited by National Voluntary Laboratory Accreditation Program (NVLAP) that it adheres to the requirements of ISO/IEC 17025:2017 and appropriate IESNA test methods. This report must not be used to claim product certification, approval or endorsement by NVLAP, NIST or any agency of the Federal Government. Results contained in this report are valid for luminaire sample tested, as supplied by requestor and can affect the validity of the test results. Information related to the luminaire tested has been supplied by requestor. Report shall not be reproduced except in full without approval of Cooper Lighting Solutions Laboratory. Test performed at address noted above




**Test Information**

Test Method: LM-79-2019  
 Report Number: SP1-2309-187-6  
 Test Lab: COOPER LIGHTING SOLUTIONS  
 Photometer: SP1 - 76IN SPHERE  
 Measurement Geometry: 4π  
 Issue Date: 10/10/2023  
 Manufacturer: COOPER LIGHTING SOLUTIONS  
 Product Line: METALUX  
 Catalog Number: **SPHB-2436SE-M-UNV-L84050-CD-U (36K LUMEN 5000K)**  
 Description: SPHB SELECT, MEDIUM LENS, 36K LUMENS, 5000K

**Spectral Parameters**

CCT (K):	4957	CRI (Ra):	83.0	R9:	13.4
CIE u':	0.2117	R1:	81.6	R10:	70.8
CIE v':	0.4855	R2:	88.2	R11:	80.4
Duv:	0.0002	R3:	91.8	R12:	55.2
CIE x:	0.3463	R4:	82.0	R13:	83.4
CIE y:	0.3530	R5:	81.2	R14:	95.6
CIE z:	0.3007	R6:	82.2		
Peak Wavelength (nm):	452	R7:	88.1		
Dominant Wavelength (nm):	573	R8:	69.2		
Purity:	10				
Rf:	83				
Rg:	96.6				

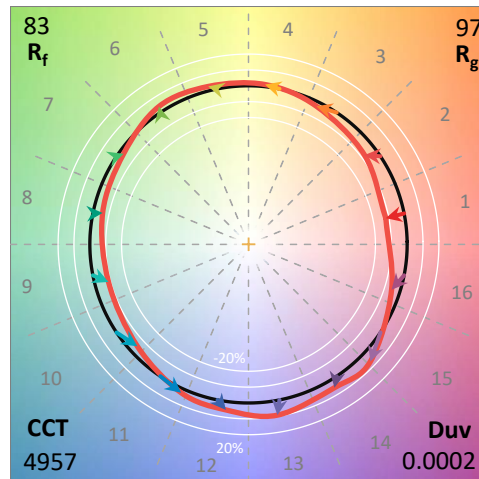

**Test Conditions**


Stabilization Time: 10M  
 Operation Time: 12H  
 Room Temperature (°C) / RH%: 25.8/38%  
 Sphere Temperature (°C): 24.2

REPORT NUMBER: SP1-2309-187-6


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	76INCH SPHERE IN0058	8/9/2023	2/9/2024
Power Meter	XITRON 2801 IN0071	11/29/2022	11/29/2023
AC Power Source	CHROMA 61603 IN0063	11/28/2022	11/28/2023
DC Power Source	AGILENT E3634A IN0208	11/28/2022	11/28/2023
Sphere Thermometer	ONSET IN0085	11/28/2022	11/28/2023
Room Thermometer	ONSET IN0046	11/28/2022	11/28/2023

REPORT NUMBER: SP1-2309-187-6

CIE 1931 Chromaticity Diagram

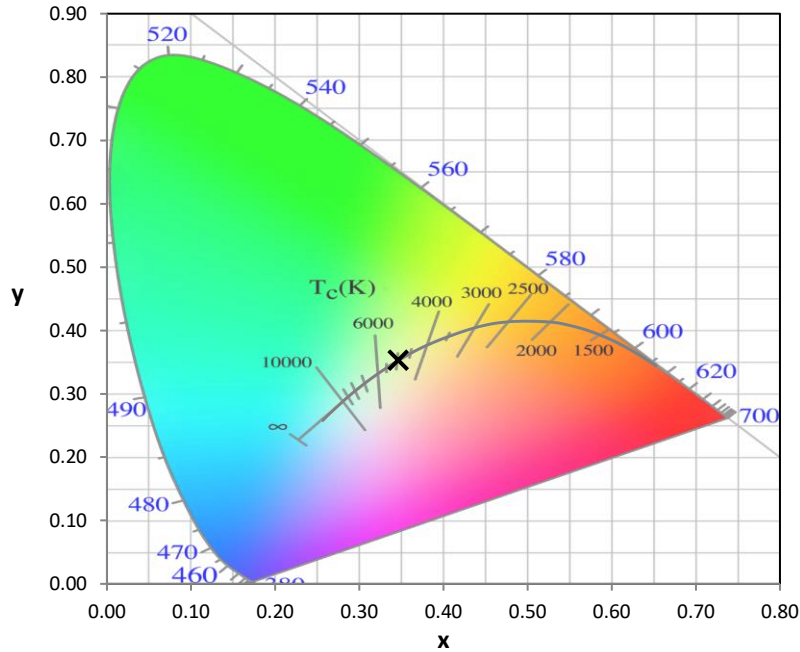


CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

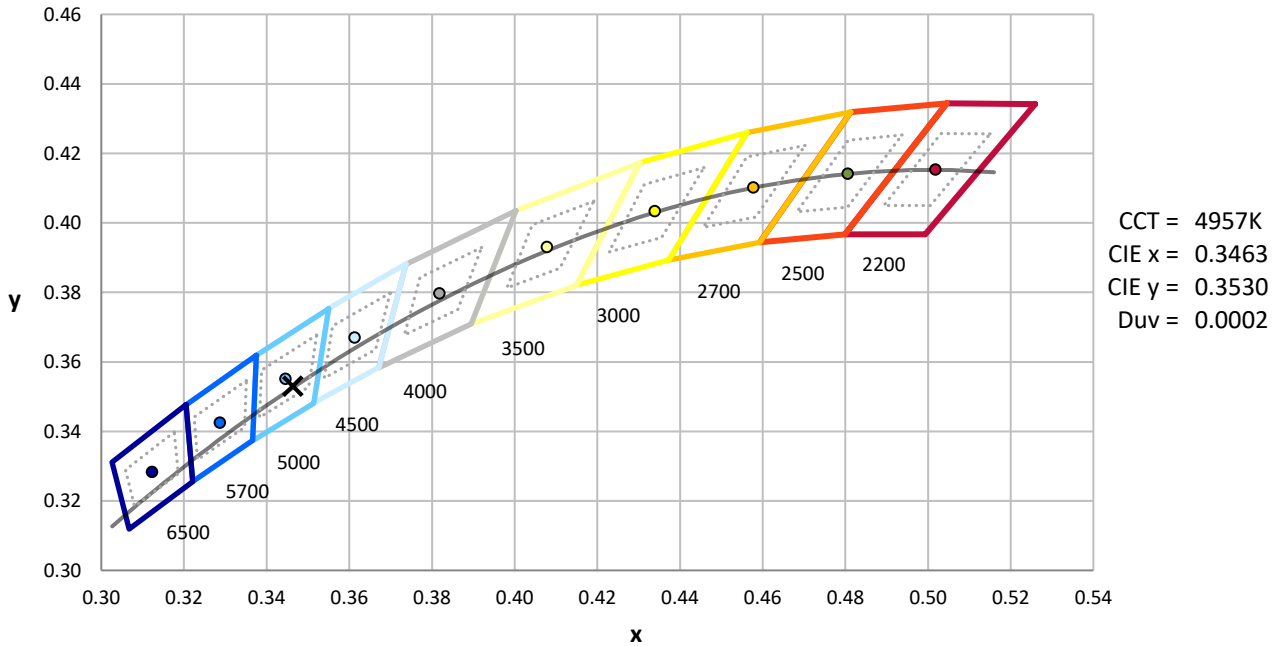

Point lies inside the ANSI 5000K 4-step quadrangle

REPORT NUMBER: SP1-2309-187-6

**Photopic Flux vs. Wavelength**

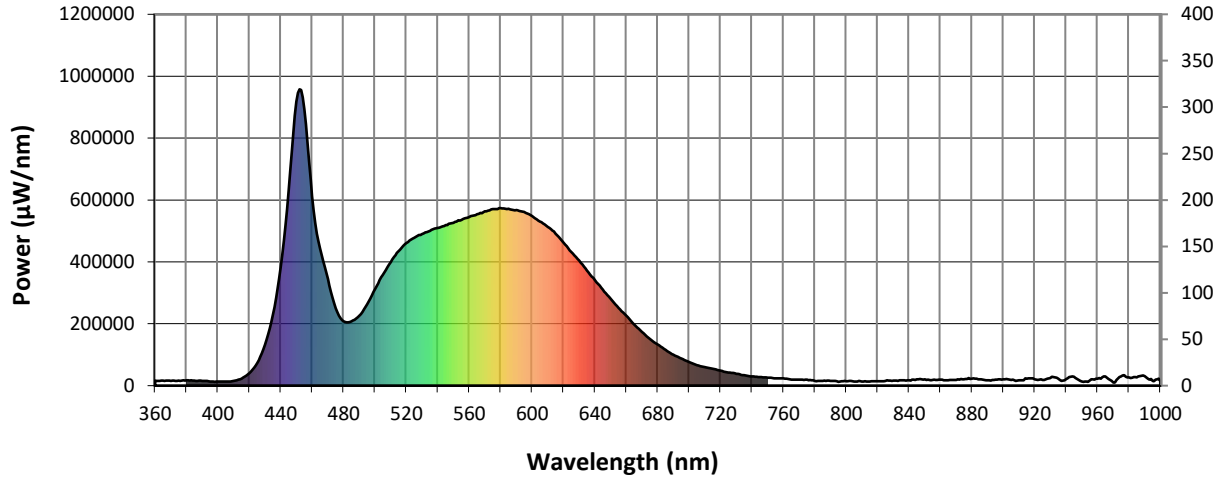


#####

λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)
360	16466	NR	490	226060	NR	620	461721	NR	750	25725	NR	880	22907	NR
365	15834	NR	495	262555	NR	625	431803	NR	755	23611	NR	885	20279	NR
370	15705	NR	500	311885	NR	630	403609	NR	760	23080	NR	890	16993	NR
375	16161	NR	505	357744	NR	635	372123	NR	765	19807	NR	895	19274	NR
380	17604	NR	510	398986	NR	640	341468	NR	770	19668	NR	900	19961	NR
385	15901	NR	515	433700	NR	645	309940	NR	775	19158	NR	905	18541	NR
390	15561	NR	520	460798	NR	650	281489	NR	780	15443	NR	910	17677	NR
395	13649	NR	525	477719	NR	655	251312	NR	785	15332	NR	915	22715	NR
400	12726	NR	530	489588	NR	660	226441	NR	790	15443	NR	920	20431	NR
405	12867	NR	535	500614	NR	665	197313	NR	795	12716	NR	925	18281	NR
410	14858	NR	540	509478	NR	670	174037	NR	800	14486	NR	930	24254	NR
415	22758	NR	545	518634	NR	675	150402	NR	805	13381	NR	935	22361	NR
420	40173	NR	550	526082	NR	680	133071	NR	810	13493	NR	940	21374	NR
425	73606	NR	555	535227	NR	685	115398	NR	815	13669	NR	945	28437	NR
430	132581	NR	560	544645	NR	690	99841	NR	820	13949	NR	950	12992	NR
435	230438	NR	565	553668	NR	695	87508	NR	825	15609	NR	955	16488	NR
440	382216	NR	570	563202	NR	700	76178	NR	830	16481	NR	960	22861	NR
445	630161	NR	575	570117	NR	705	66441	NR	835	17363	NR	965	29851	NR
450	918124	NR	580	573472	NR	710	60098	NR	840	16960	NR	970	10276	NR
455	893762	NR	585	571600	NR	715	54539	NR	845	20190	NR	975	29525	NR
460	612059	NR	590	567612	NR	720	48071	NR	850	20506	NR	980	26199	NR
465	443338	NR	595	561157	NR	725	42545	NR	855	18525	NR	985	27187	NR
470	344255	NR	600	547832	NR	730	38502	NR	860	19090	NR	990	30712	NR
475	249784	NR	605	530525	NR	735	33410	NR	865	17185	NR	995	15047	NR
480	207499	NR	610	513131	NR	740	29667	NR	870	18599	NR	1000	14588	NR
485	208029	NR	615	491003	NR	745	27521	NR	875	20800	NR			

REPORT NUMBER: SP1-2309-187-6

**Scotopic Flux vs. Wavelength**

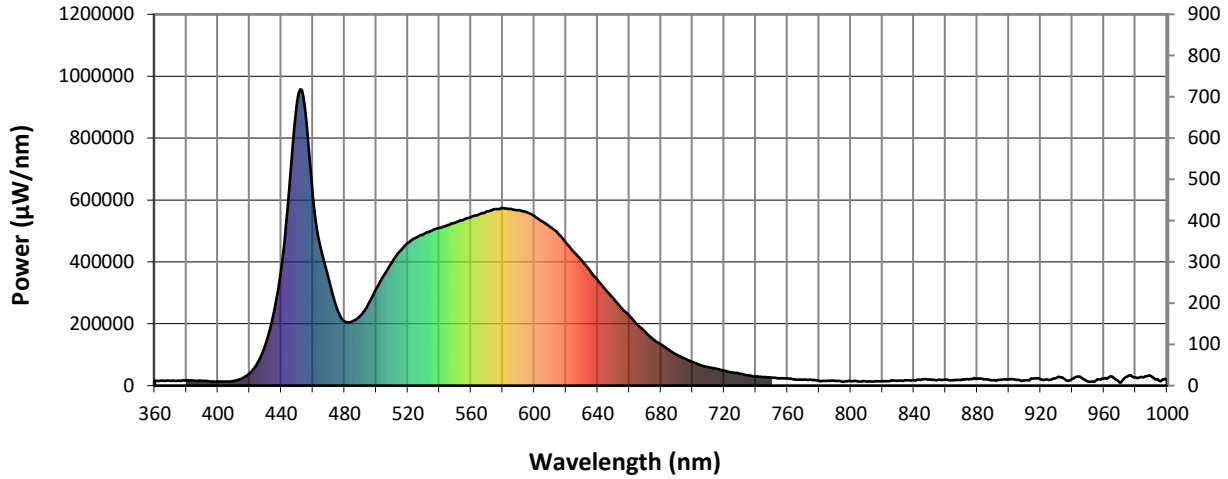


**Scotopic Lumens: 69332.4 S/P: 1.93**

λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)
360	16466	NR	490	226060	NR	620	461721	NR	750	25725	NR	880	22907	NR
365	15834	NR	495	262555	NR	625	431803	NR	755	23611	NR	885	20279	NR
370	15705	NR	500	311885	NR	630	403609	NR	760	23080	NR	890	16993	NR
375	16161	NR	505	357744	NR	635	372123	NR	765	19807	NR	895	19274	NR
380	17604	NR	510	398986	NR	640	341468	NR	770	19668	NR	900	19961	NR
385	15901	NR	515	433700	NR	645	309940	NR	775	19158	NR	905	18541	NR
390	15561	NR	520	460798	NR	650	281489	NR	780	15443	NR	910	17677	NR
395	13649	NR	525	477719	NR	655	251312	NR	785	15332	NR	915	22715	NR
400	12726	NR	530	489588	NR	660	226441	NR	790	15443	NR	920	20431	NR
405	12867	NR	535	500614	NR	665	197313	NR	795	12716	NR	925	18281	NR
410	14858	NR	540	509478	NR	670	174037	NR	800	14486	NR	930	24254	NR
415	22758	NR	545	518634	NR	675	150402	NR	805	13381	NR	935	22361	NR
420	40173	NR	550	526082	NR	680	133071	NR	810	13493	NR	940	21374	NR
425	73606	NR	555	535227	NR	685	115398	NR	815	13669	NR	945	28437	NR
430	132581	NR	560	544645	NR	690	99841	NR	820	13949	NR	950	12992	NR
435	230438	NR	565	553668	NR	695	87508	NR	825	15609	NR	955	16488	NR
440	382216	NR	570	563202	NR	700	76178	NR	830	16481	NR	960	22861	NR
445	630161	NR	575	570117	NR	705	66441	NR	835	17363	NR	965	29851	NR
450	918124	NR	580	573472	NR	710	60098	NR	840	16960	NR	970	10276	NR
455	893762	NR	585	571600	NR	715	54539	NR	845	20190	NR	975	29525	NR
460	612059	NR	590	567612	NR	720	48071	NR	850	20506	NR	980	26199	NR
465	443338	NR	595	561157	NR	725	42545	NR	855	18525	NR	985	27187	NR
470	344255	NR	600	547832	NR	730	38502	NR	860	19090	NR	990	30712	NR
475	249784	NR	605	530525	NR	735	33410	NR	865	17185	NR	995	15047	NR
480	207499	NR	610	513131	NR	740	29667	NR	870	18599	NR	1000	14588	NR
485	208029	NR	615	491003	NR	745	27521	NR	875	20800	NR			

REPORT NUMBER: SP1-2309-187-6

**Melanopic Flux vs. Wavelength**

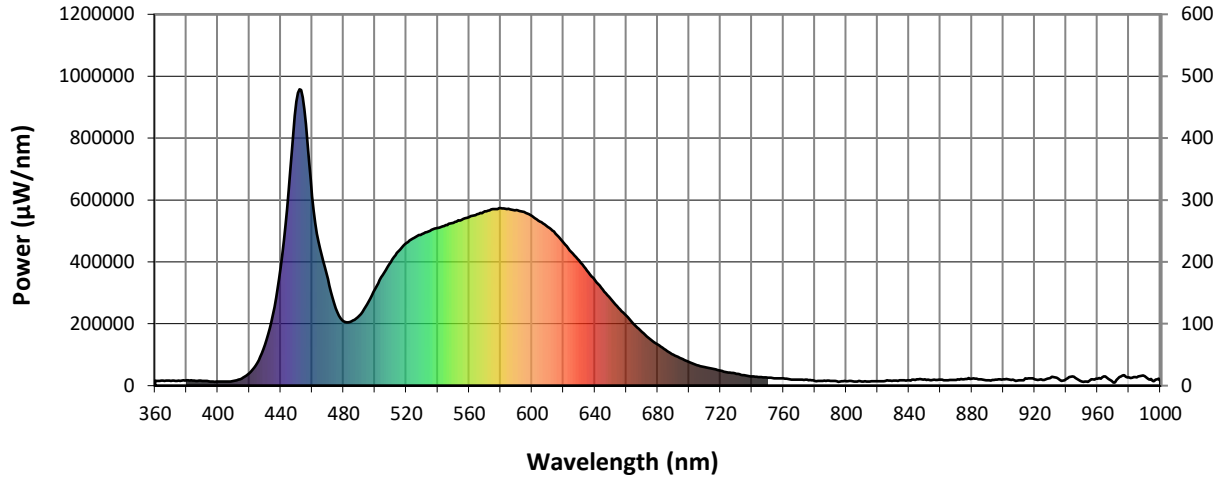

**Melanopic Lumens: 29078.2 M/P: 0.81**


λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)
360	16466	NR	490	226060	NR	620	461721	NR	750	25725	NR	880	22907	NR
365	15834	NR	495	262555	NR	625	431803	NR	755	23611	NR	885	20279	NR
370	15705	NR	500	311885	NR	630	403609	NR	760	23080	NR	890	16993	NR
375	16161	NR	505	357744	NR	635	372123	NR	765	19807	NR	895	19274	NR
380	17604	NR	510	398986	NR	640	341468	NR	770	19668	NR	900	19961	NR
385	15901	NR	515	433700	NR	645	309940	NR	775	19158	NR	905	18541	NR
390	15561	NR	520	460798	NR	650	281489	NR	780	15443	NR	910	17677	NR
395	13649	NR	525	477719	NR	655	251312	NR	785	15332	NR	915	22715	NR
400	12726	NR	530	489588	NR	660	226441	NR	790	15443	NR	920	20431	NR
405	12867	NR	535	500614	NR	665	197313	NR	795	12716	NR	925	18281	NR
410	14858	NR	540	509478	NR	670	174037	NR	800	14486	NR	930	24254	NR
415	22758	NR	545	518634	NR	675	150402	NR	805	13381	NR	935	22361	NR
420	40173	NR	550	526082	NR	680	133071	NR	810	13493	NR	940	21374	NR
425	73606	NR	555	535227	NR	685	115398	NR	815	13669	NR	945	28437	NR
430	132581	NR	560	544645	NR	690	99841	NR	820	13949	NR	950	12992	NR
435	230438	NR	565	553668	NR	695	87508	NR	825	15609	NR	955	16488	NR
440	382216	NR	570	563202	NR	700	76178	NR	830	16481	NR	960	22861	NR
445	630161	NR	575	570117	NR	705	66441	NR	835	17363	NR	965	29851	NR
450	918124	NR	580	573472	NR	710	60098	NR	840	16960	NR	970	10276	NR
455	893762	NR	585	571600	NR	715	54539	NR	845	20190	NR	975	29525	NR
460	612059	NR	590	567612	NR	720	48071	NR	850	20506	NR	980	26199	NR
465	443338	NR	595	561157	NR	725	42545	NR	855	18525	NR	985	27187	NR
470	344255	NR	600	547832	NR	730	38502	NR	860	19090	NR	990	30712	NR
475	249784	NR	605	530525	NR	735	33410	NR	865	17185	NR	995	15047	NR
480	207499	NR	610	513131	NR	740	29667	NR	870	18599	NR	1000	14588	NR
485	208029	NR	615	491003	NR	745	27521	NR	875	20800	NR			

REPORT NUMBER: SP1-2309-187-6





**TM-30-18**

**Summary**

$R_f = 83$   
 $R_g = 96.6$   
 $CIE R_a = 83.0$   
 $R_9 = 13.4$

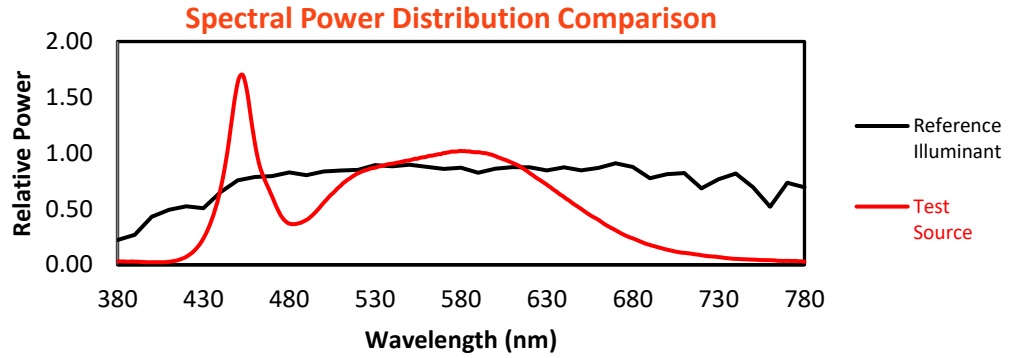

**Color Vector Graphics**

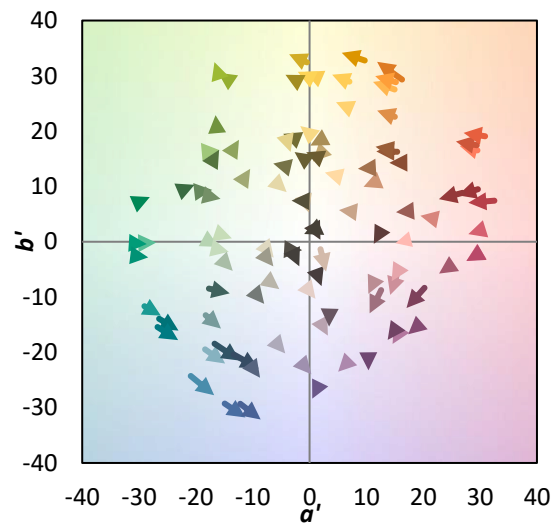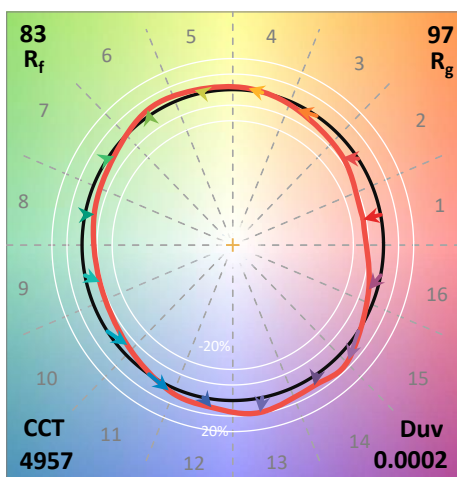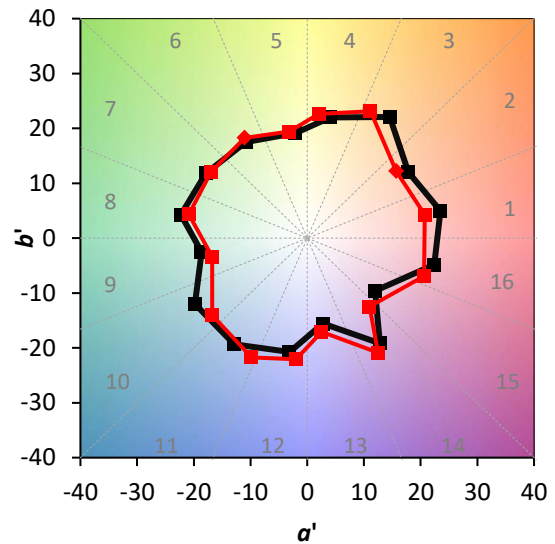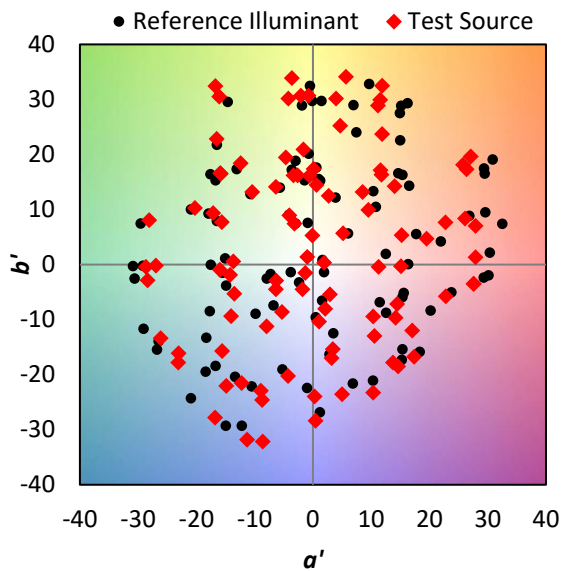


REPORT NUMBER: SP1-2309-187-6

**TM-30-18**

**Individual Sample Fidelity Index ( $R_{f,i}$ )**

CES01 = 85	CES26 = 78	CES51 = 94	CES76 = 69
CES02 = 60	CES27 = 93	CES52 = 94	CES77 = 78
CES03 = 30	CES28 = 88	CES53 = 89	CES78 = 69
CES04 = 69	CES29 = 83	CES54 = 90	CES79 = 89
CES05 = 47	CES30 = 96	CES55 = 88	CES80 = 86
CES06 = 50	CES31 = 85	CES56 = 85	CES81 = 85
CES07 = 40	CES32 = 77	CES57 = 84	CES82 = 94
CES08 = 39	CES33 = 92	CES58 = 84	CES83 = 95
CES09 = 29	CES34 = 81	CES59 = 91	CES84 = 89
CES10 = 73	CES35 = 89	CES60 = 90	CES85 = 80
CES11 = 56	CES36 = 84	CES61 = 87	CES86 = 80
CES12 = 62	CES37 = 87	CES62 = 83	CES87 = 84
CES13 = 42	CES38 = 93	CES63 = 83	CES88 = 89
CES14 = 74	CES39 = 98	CES64 = 76	CES89 = 80
CES15 = 71	CES40 = 95	CES65 = 75	CES90 = 90
CES16 = 46	CES41 = 99	CES66 = 72	CES91 = 72
CES17 = 49	CES42 = 87	CES67 = 70	CES92 = 68
CES18 = 56	CES43 = 86	CES68 = 75	CES93 = 80
CES19 = 71	CES44 = 99	CES69 = 80	CES94 = 66
CES20 = 64	CES45 = 92	CES70 = 70	CES95 = 73
CES21 = 85	CES46 = 91	CES71 = 63	CES96 = 84
CES22 = 77	CES47 = 95	CES72 = 88	CES97 = 91
CES23 = 91	CES48 = 88	CES73 = 63	CES98 = 86
CES24 = 90	CES49 = 90	CES74 = 91	CES99 = 77
CES25 = 71	CES50 = 94	CES75 = 65	



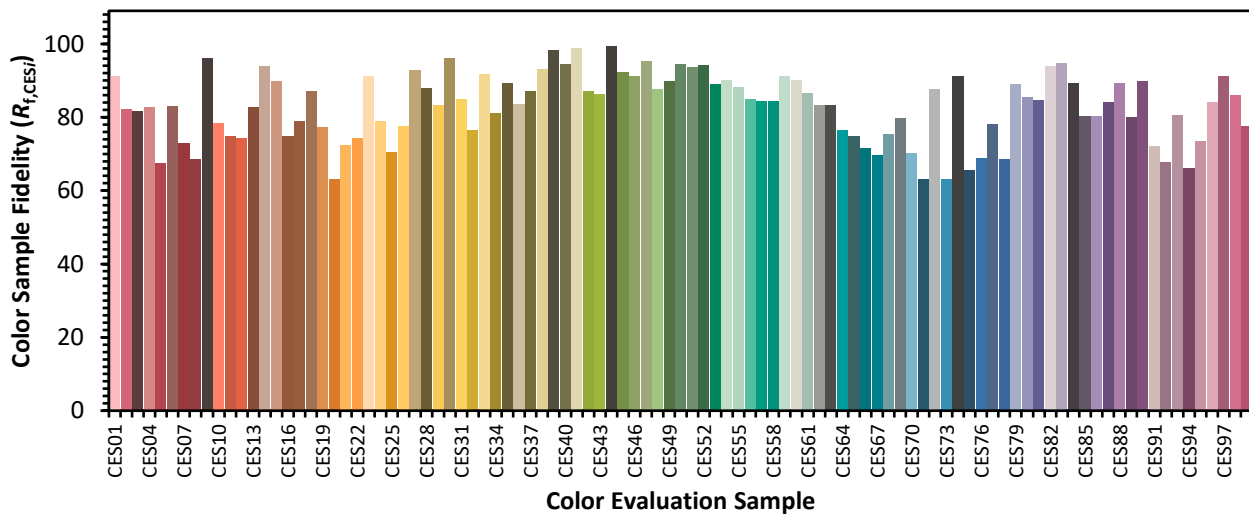




REPORT NUMBER: SP1-2309-187-6

**TM-30-18**



**Color Rendition by Hue-Angle Bin**

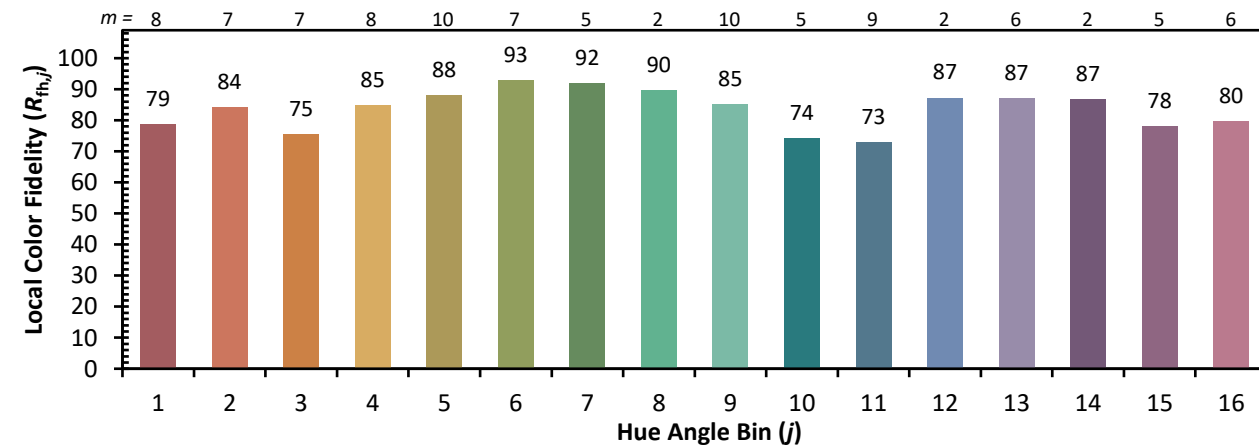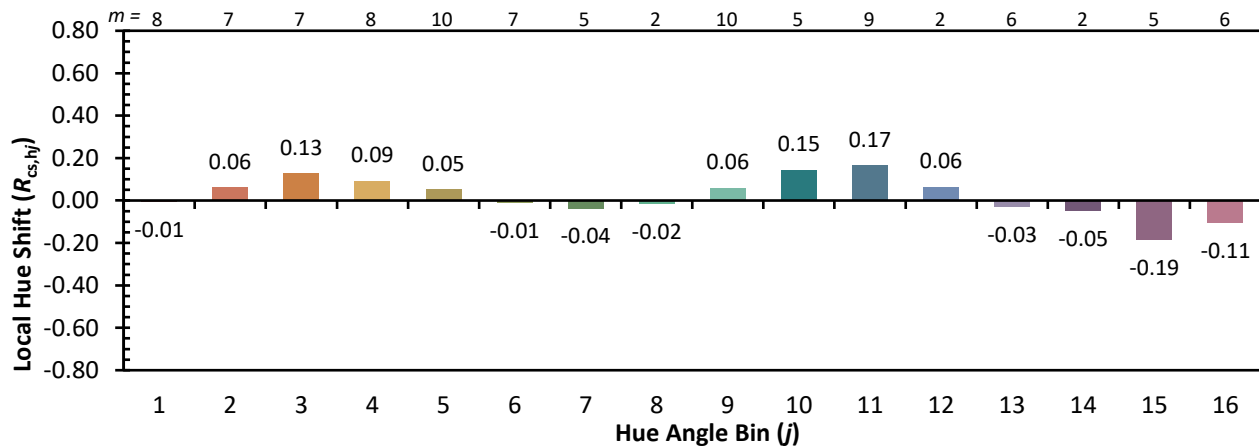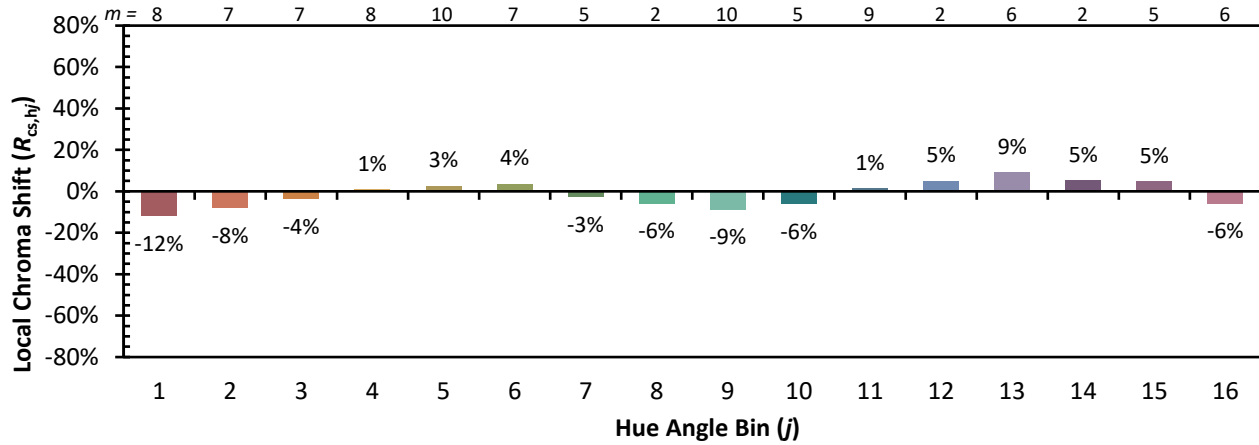

REPORT NUMBER: SP1-2309-187-6

**TM-30-18**

**Measure Comparisons**

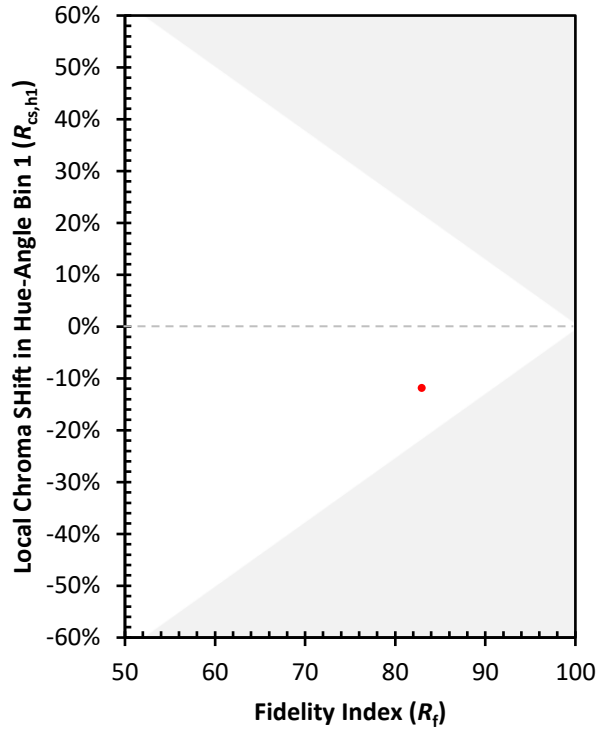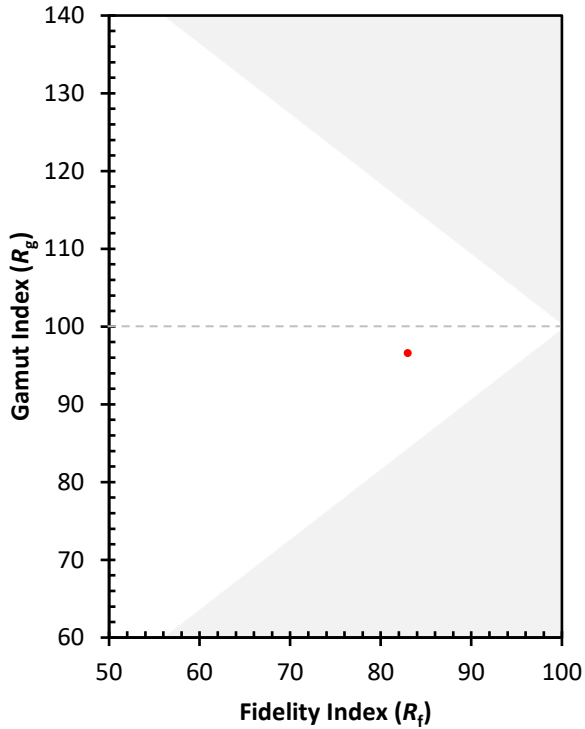

(END OF REPORT)