

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: METALUX

Report Number: P219457

Luminaire Tested: **SSLED-LD5-9-W-UNV-L840-CD1-SA23-U**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P219457
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P27263)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: METALUX
Catalog Number: SSLED-LD5-9-W-UNV-L840-CD1-SA23-U
Description: METALUX ROUND HIGH BAY STEELER LED WITH WIDE DISTRIBUTION LENS WITH Rev.G BOARD. LENS DIFFUSE 2407, 7.5% BLEND. SHROUD ACCESSORY INSTALLED. FIXTURE CENTERED TO LEDS
Light Source: (240) 4000K CCT, 80 CRI LEDS
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8773.6 lumens
Efficiency: N/A
Efficacy: 136.9 lumens/watt
Spacing Criteria (0/90/45): 1.7 / 1.7 / 1.49
Luminous Opening: Circular (Dia: 1.41' x H: 0')
CIE Type: Direct


Input Watts (W): 64.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P219457

CATALOG NUMBER: SSLED-LD5-9-W-UNV-L840-CD1-SA23-U

Luminous Intensity Polar Plot

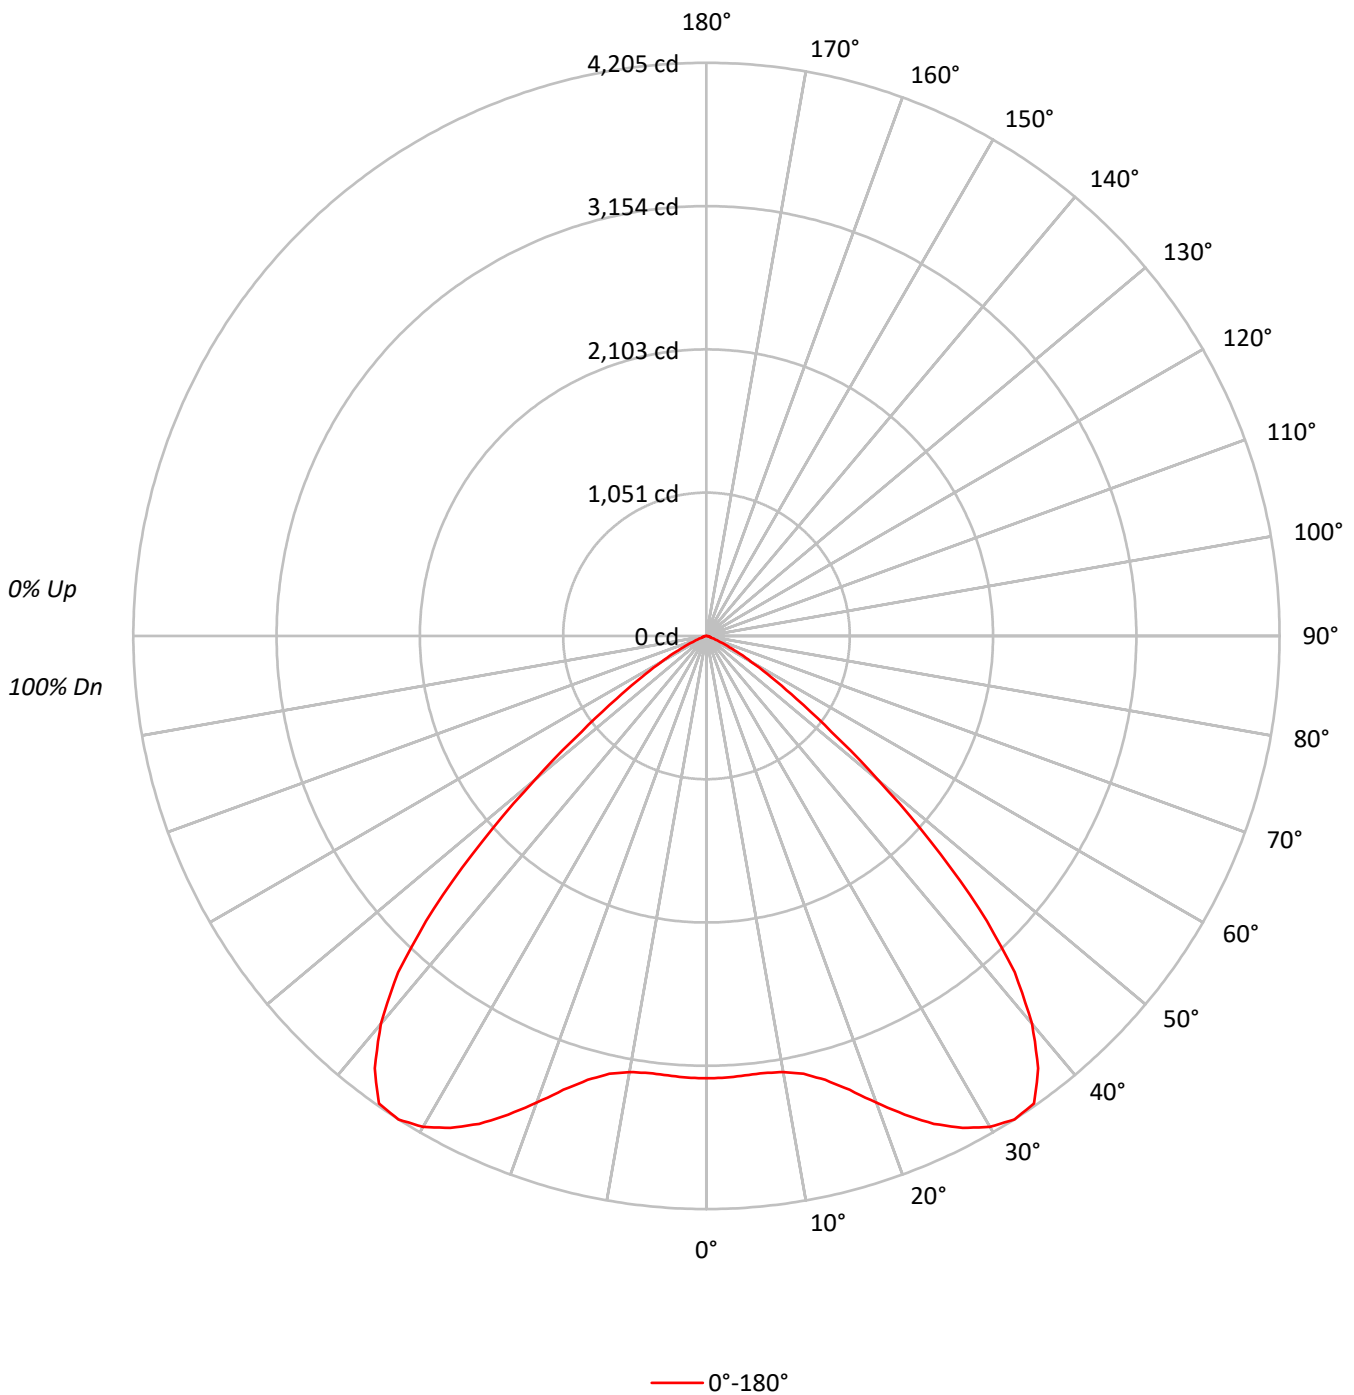



TEST NUMBER: P219457

CATALOG NUMBER: SSLED-LD5-9-W-UNV-L840-CD1-SA23-U

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	98	98	96	95	95	93	92	90
2	104	98	93	88	102	96	91	87	93	89	85	90	86	83	87	84	82	80
3	97	88	82	77	94	87	81	76	84	79	75	81	77	73	79	75	72	70
4	90	80	72	67	88	78	72	67	76	70	66	74	69	65	72	68	64	62
5	83	72	65	59	81	71	64	59	69	63	58	67	62	58	66	61	57	55
6	77	66	58	52	75	65	57	52	63	56	52	61	56	51	60	55	51	49
7	72	60	52	47	70	59	52	46	58	51	46	56	50	46	55	50	46	44
8	67	55	47	42	65	54	47	42	53	46	41	52	46	41	50	45	41	39
9	62	50	43	38	61	50	42	38	49	42	37	48	42	37	47	41	37	35
10	58	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	22367
5°	22391
10°	22741
15°	24059
20°	26722
25°	30040
30°	33103
35°	35249
40°	33432
45°	27602
50°	17608
55°	9668
60°	5234
65°	2458
70°	772
75°	602
80°	623
85°	664



TEST NUMBER: P219457

CATALOG NUMBER: SSLED-LD5-9-W-UNV-L840-CD1-SA23-U

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	309.2	3.5
10°-20°	969.4	11.0
20°-30°	1826.1	20.8
30°-40°	2559.0	29.2
40°-50°	2123.7	24.2
50°-60°	782.2	8.9
60°-70°	169.7	1.9
70°-80°	25.2	0.3
80°-90°	9.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3104.7	35.4
0°-40°	5663.7	64.6
0°-60°	8569.7	97.7
0°-90°	8773.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8773.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3245	
5°	3236	309
15°	3371	969
25°	3949	1826
35°	4189	2559
45°	2831	2124
55°	804	782
65°	151	170
75°	23	25
85°	8	9
90°	0	



TEST NUMBER: P219457

CATALOG NUMBER: SSLED-LD5-9-W-UNV-L840-CD1-SA23-U

CANDELA DISTRIBUTION (FULL):

	0°
0°	3244.6
2.5°	3243.5
5°	3235.8
7.5°	3233.9
10°	3248.8
12.5°	3289.1
15°	3371.2
17.5°	3491.9
20°	3642.6
22.5°	3800.6
25°	3949.4
27.5°	4069.0
30°	4158.7
32.5°	4205.1
35°	4188.6
37.5°	3997.3
40°	3715.1
42.5°	3347.4
45°	2831.3
47.5°	2228.5
50°	1641.9
52.5°	1156.1
55°	804.4
57.5°	563.3
60°	379.6
62.5°	250.8
65°	150.7
67.5°	82.1
70°	38.3
72.5°	27.2
75°	22.6
77.5°	18.8
80°	15.7
82.5°	12.7
85°	8.4
87.5°	4.2
90°	0.0

(END OF REPORT)