

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: METALUX

Report Number: P197359

Luminaire Tested: **8WSL-LD2-65-UNV-L840-CD1-U**

Issue Date: 3/3/2020



Test Information

Test Method: LM-79-08
Report Number: P197359
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P28104)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: METALUX
Catalog Number: 8WSL-LD2-65-UNV-L840-CD1-U
Description: 8FT. Linear Wavestream System, L840
Light Source: (476) 4000K CCT, 80 CRI LEDS
EL236N0119D840
Ballast/Driver: OSRAM
OT50W


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6536.0 lumens
Efficiency: N/A
Efficacy: 113.5 lumens/watt
Spacing Criteria (0/90/45): 1.32 / 1.18 / 1.35
Luminous Opening: Rectangular (W 0.5' x L: 7.6' x H: 0')
CIE Type: Direct

Input Watts (W): 57.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P197359
CATALOG NUMBER: 8WSL-LD2-65-UNV-L840-CD1-U

Luminous Intensity Polar Plot

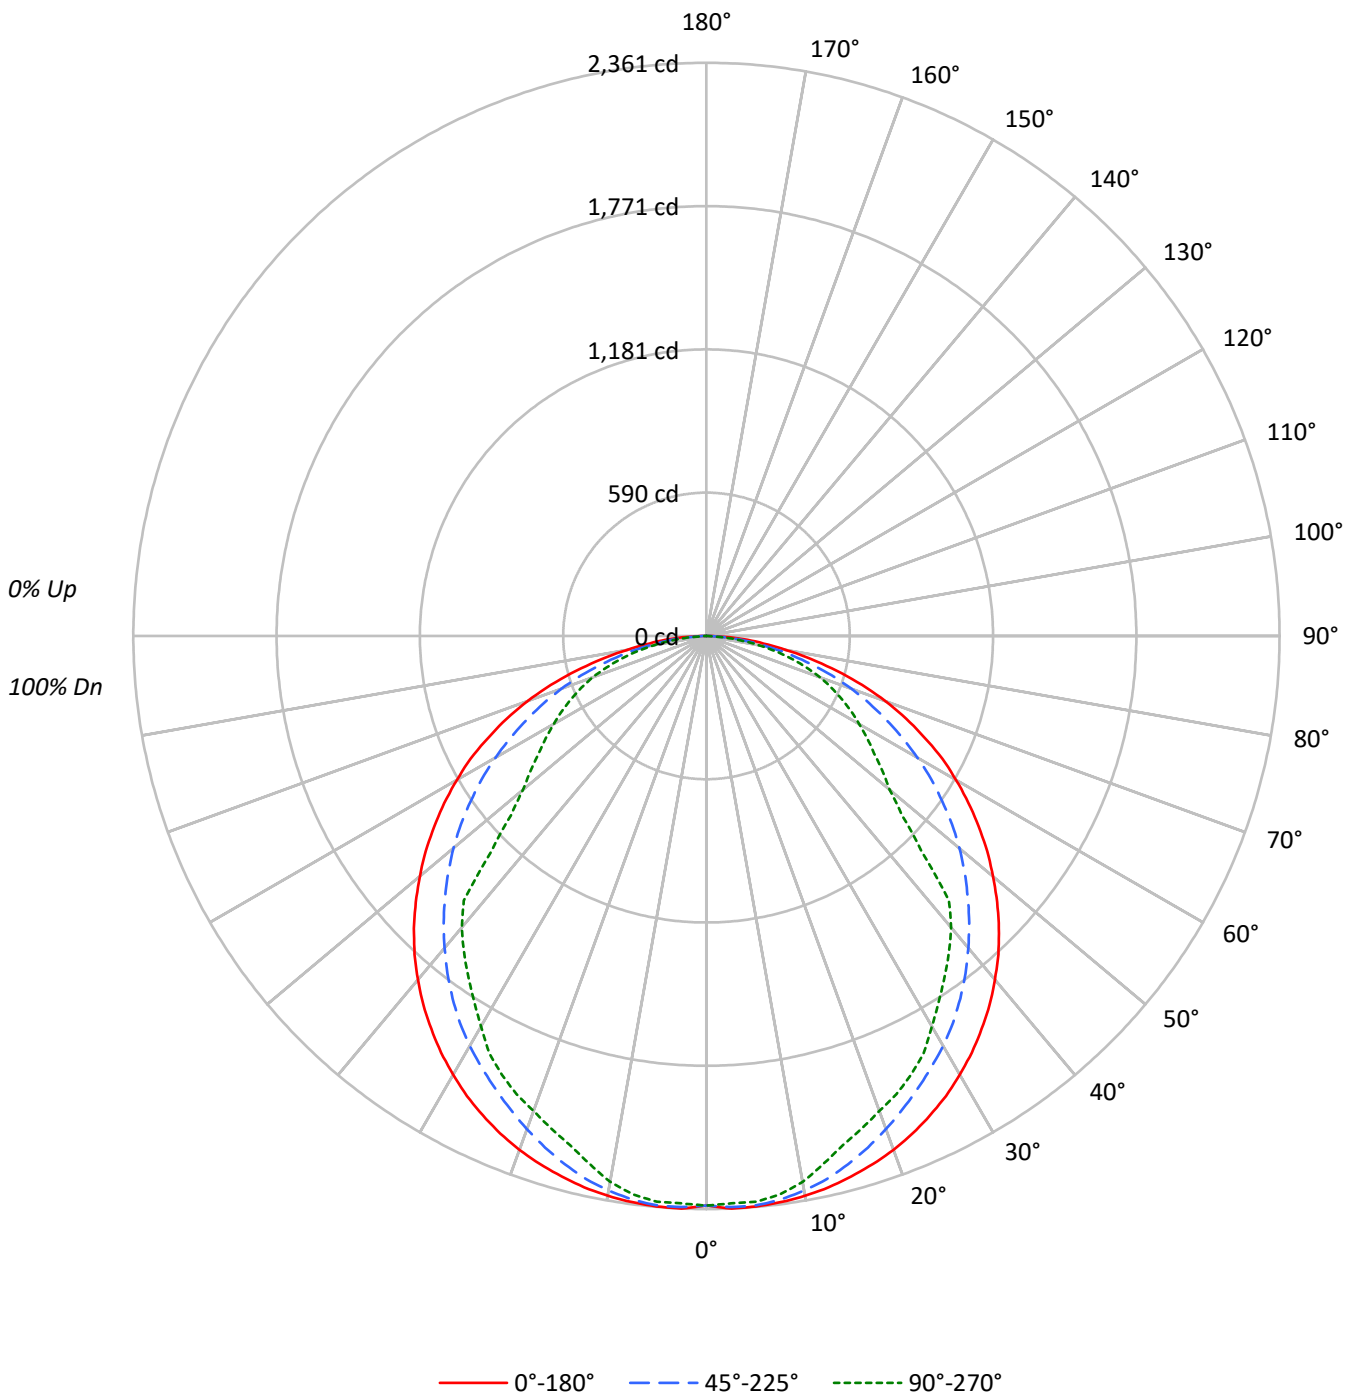



TEST NUMBER: P197359

CATALOG NUMBER: 8WSL-LD2-65-UNV-L840-CD1-U

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	104	100	96	106	102	98	94	97	94	91	93	91	88	90	88	86	84
2	99	90	84	78	96	89	82	77	85	80	75	82	77	73	79	75	72	70
3	90	79	71	65	88	78	70	64	75	68	63	72	67	62	70	65	61	59
4	82	70	62	55	80	69	61	54	67	59	54	64	58	53	62	57	52	50
5	76	63	54	47	74	62	53	47	60	52	46	58	51	46	56	50	45	43
6	70	57	48	41	68	56	47	41	54	46	41	52	45	40	51	45	40	38
7	65	51	43	36	63	51	42	36	49	42	36	48	41	36	46	40	35	33
8	60	47	38	33	59	46	38	32	45	37	32	44	37	32	42	36	32	30
9	57	43	35	29	55	42	35	29	41	34	29	40	34	29	39	33	29	27
10	53	40	32	27	52	39	32	26	38	31	26	37	31	26	36	30	26	24

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6646	6646	6646
5°	6708	6695	6652
10°	6736	6673	6568
15°	6759	6607	6366
20°	6792	6518	6277
25°	6812	6434	6231
30°	6825	6379	6075
35°	6834	6303	5915
40°	6836	6204	5797
45°	6826	6098	5015
50°	6794	5994	4345
55°	6759	5852	4165
60°	6725	5684	4116
65°	6638	5478	4116
70°	6501	5265	4119
75°	6082	4852	3999
80°	5432	4197	3563
85°	4989	3234	2600



TEST NUMBER: P197359

CATALOG NUMBER: 8WSL-LD2-65-UNV-L840-CD1-U

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	222.9	3.4
10°-20°	632.5	9.7
20°-30°	953.5	14.6
30°-40°	1144.8	17.5
40°-50°	1165.9	17.8
50°-60°	1023.2	15.7
60°-70°	795.9	12.2
70°-80°	473.4	7.2
80°-90°	123.9	1.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1808.8	27.7
0°-40°	2953.6	45.2
0°-60°	5142.8	78.7
0°-90°	6536.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6536.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2346	2346	2346	2346	2346	
5°	2359	2337	2355	2346	2340	225
15°	2305	2273	2253	2197	2171	651
25°	2180	2130	2058	2004	1994	1005
35°	1976	1914	1823	1736	1710	1237
45°	1704	1648	1522	1406	1252	1314
55°	1369	1328	1185	949	843	1224
65°	990	951	817	644	614	981
75°	556	528	443	359	365	588
85°	154	136	100	80	80	168
90°	0	0	0	0	0	



TEST NUMBER: P197359

CATALOG NUMBER: 8WSL-LD2-65-UNV-L840-CD1-U

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2346.1	2346.1	2346.1	2346.1	2346.1
2.5°	2361.2	2337.4	2354.7	2350.4	2339.6
5°	2359.1	2337.4	2354.7	2346.1	2339.6
7.5°	2352.6	2331.0	2341.8	2328.8	2320.1
10°	2341.8	2318.0	2320.1	2298.5	2283.4
12.5°	2326.6	2298.5	2292.0	2248.8	2227.2
15°	2305.0	2272.6	2253.1	2196.9	2170.9
17.5°	2281.2	2244.5	2209.9	2147.2	2127.7
20°	2253.1	2209.9	2162.3	2097.4	2082.3
22.5°	2218.5	2173.1	2110.4	2052.0	2043.4
25°	2179.6	2129.9	2058.5	2004.5	1993.6
27.5°	2136.4	2078.0	2004.5	1950.4	1937.4
30°	2086.6	2026.1	1950.4	1887.7	1857.4
32.5°	2034.7	1972.0	1889.8	1809.8	1781.7
35°	1976.3	1913.6	1822.8	1736.3	1710.4
37.5°	1915.8	1850.9	1753.6	1662.8	1641.2
40°	1848.8	1786.1	1677.9	1589.3	1567.7
42.5°	1779.6	1719.0	1602.3	1513.6	1479.0
45°	1703.9	1647.7	1522.3	1405.5	1252.0
47.5°	1623.9	1572.0	1442.3	1269.3	1092.0
50°	1541.7	1494.1	1360.1	1148.2	986.0
52.5°	1457.4	1414.1	1275.8	1042.2	912.5
55°	1368.7	1327.7	1184.9	949.2	843.3
57.5°	1280.1	1239.0	1098.4	864.9	784.9
60°	1187.1	1148.2	1003.3	787.1	726.5
62.5°	1096.3	1053.0	910.3	715.7	672.5
65°	990.3	951.4	817.3	644.4	614.1
67.5°	890.9	849.8	726.5	575.2	557.9
70°	784.9	743.8	635.7	503.8	497.3
72.5°	672.5	640.0	540.6	434.6	430.3
75°	555.7	527.6	443.3	358.9	365.4
77.5°	441.1	423.8	350.3	287.6	291.9
80°	333.0	320.0	257.3	214.1	218.4
82.5°	237.9	227.0	175.1	142.7	142.7
85°	153.5	136.2	99.5	80.0	80.0
87.5°	60.5	49.7	30.3	8.6	4.3
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)