

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: METALUX

Report Number: P258858

Luminaire Tested: **14CZ-LD5-39-S-UNV-L92765-W2A1-U-4500K**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P258858
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35112)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: METALUX
Catalog Number: 14CZ-LD5-39-S-UNV-L92765-W2A1-U-4500K
Description: CRUZE 1x4 TUNABLE WHITE LED TROFFER WITH SMOOTH LENS
Light Source: (168) 90 CRI LEDS TUNED AT 4500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3606.0 lumens
Efficiency: N/A
Efficacy: 114.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.26 / 1.35
Luminous Opening: Rectangular (W 1' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 31.527
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P258858

CATALOG NUMBER: 14CZ-LD5-39-S-UNV-L92765-W2A1-U-4500K

Luminous Intensity Polar Plot

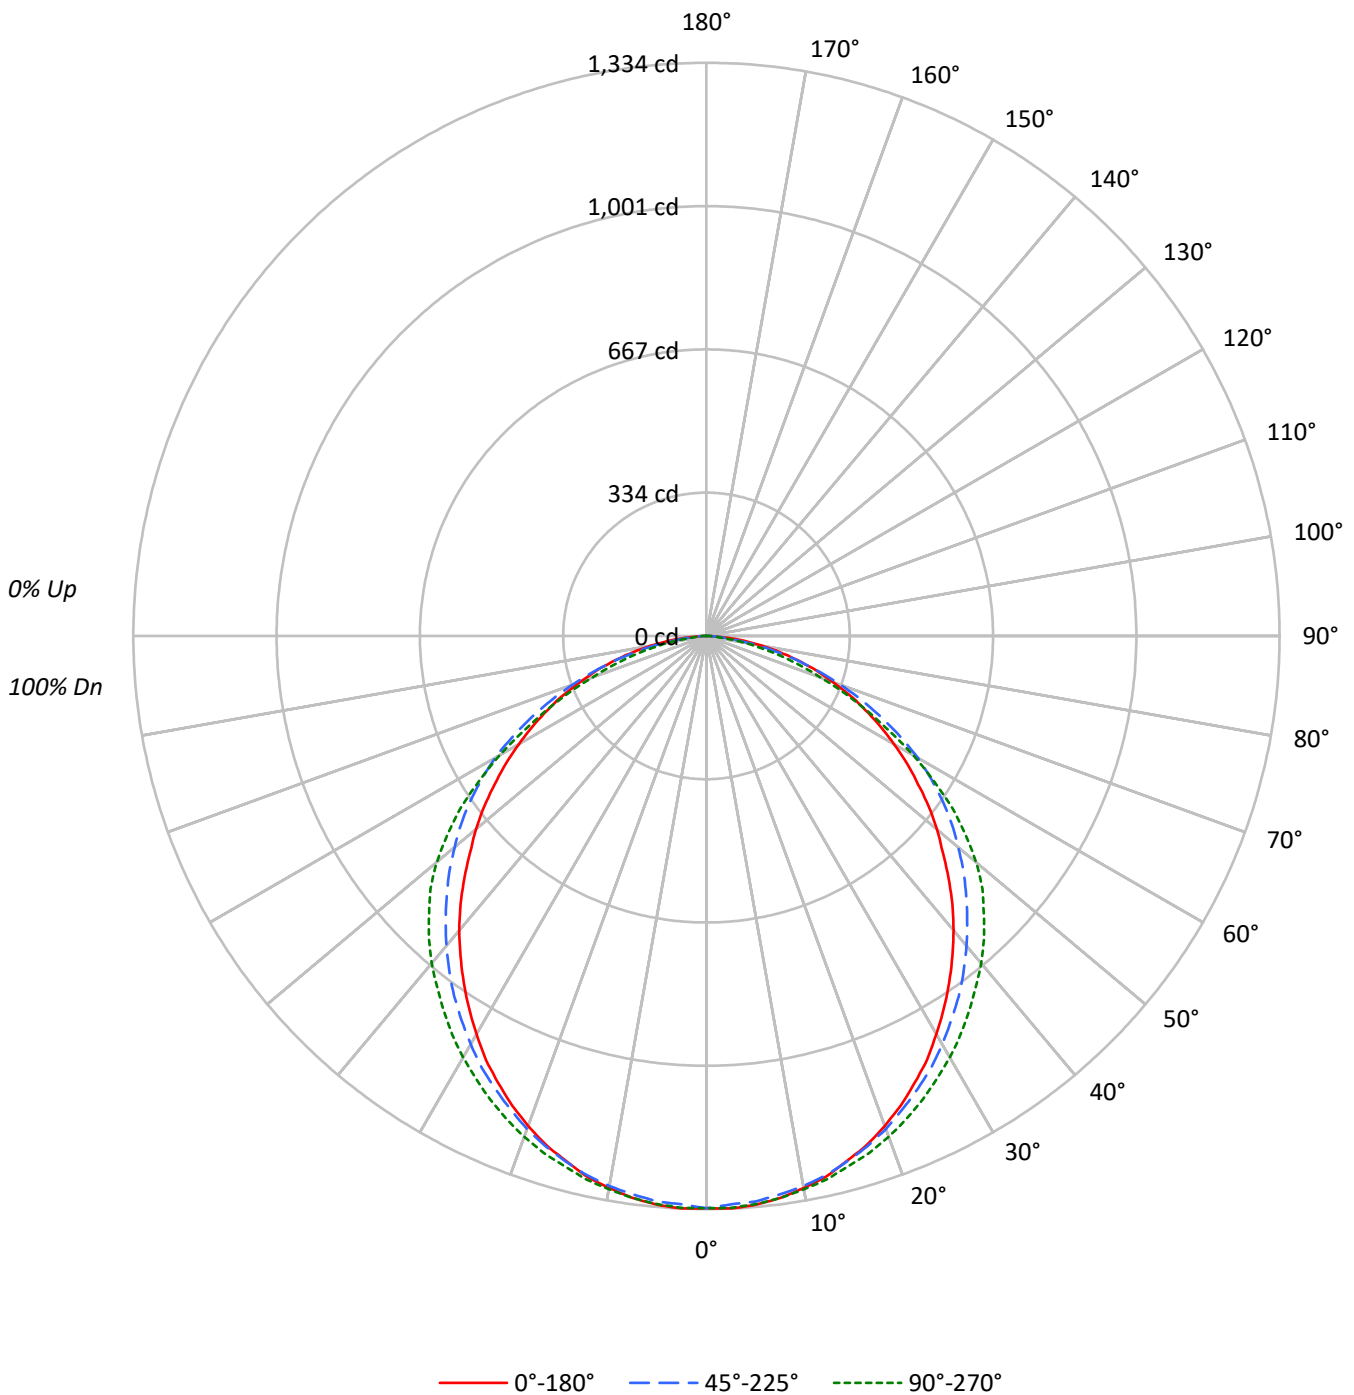



TEST NUMBER: P258858

CATALOG NUMBER: 14CZ-LD5-39-S-UNV-L92765-W2A1-U-4500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	105	100	97	106	102	98	95	98	95	92	94	92	89	91	89	87	85
2	99	91	85	79	97	89	83	78	86	81	76	83	78	75	80	76	73	71
3	91	80	72	66	88	79	71	65	76	69	64	73	68	63	70	66	62	60
4	83	71	63	56	81	70	62	56	67	60	55	65	59	54	63	58	53	51
5	76	64	55	48	74	63	54	48	60	53	47	58	52	47	57	51	46	44
6	71	57	48	42	69	56	48	42	55	47	42	53	46	41	51	45	41	39
7	65	52	43	37	64	51	43	37	50	42	37	48	42	37	47	41	36	34
8	61	47	39	33	59	47	39	33	45	38	33	44	38	33	43	37	32	31
9	57	44	35	30	56	43	35	30	42	35	30	41	34	30	40	34	29	28
10	53	40	32	27	52	40	32	27	39	32	27	38	31	27	37	31	27	25

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3585	3585	3585
5°	3589	3568	3585
10°	3565	3552	3574
15°	3523	3528	3559
20°	3474	3497	3552
25°	3407	3454	3535
30°	3325	3410	3520
35°	3236	3362	3500
40°	3144	3308	3494
45°	3033	3253	3473
50°	2933	3202	3431
55°	2820	3151	3279
60°	2715	3061	2992
65°	2599	2865	2630
70°	2452	2604	2225
75°	2288	2255	1838
80°	2018	1743	1345
85°	1587	843	744



TEST NUMBER: P258858

CATALOG NUMBER: 14CZ-LD5-39-S-UNV-L92765-W2A1-U-4500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	125.9	3.5
10°-20°	358.6	9.9
20°-30°	538.1	14.9
30°-40°	641.5	17.8
40°-50°	660.8	18.3
50°-60°	588.9	16.3
60°-70°	424.3	11.8
70°-80°	221.9	6.2
80°-90°	45.9	1.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1022.6	28.4
0°-40°	1664.1	46.1
0°-60°	2913.8	80.8
0°-90°	3606.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3606.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1332	1332	1332	1332	1332	
5°	1329	1326	1321	1329	1327	126
15°	1265	1266	1266	1279	1277	357
25°	1147	1154	1163	1186	1191	528
35°	985	998	1024	1057	1065	616
45°	797	815	855	903	913	615
55°	601	620	672	702	699	539
65°	408	423	450	429	413	404
75°	220	231	217	188	177	233
85°	51	45	27	24	24	61
90°	0	0	0	0	0	



TEST NUMBER: P258858

CATALOG NUMBER: 14CZ-LD5-39-S-UNV-L92765-W2A1-U-4500K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1332.1	1332.1	1332.1	1332.1	1332.1
2.5°	1333.7	1330.5	1324.0	1332.1	1332.1
5°	1328.8	1325.6	1320.8	1328.8	1327.2
7.5°	1319.2	1316.0	1311.2	1320.8	1319.2
10°	1304.7	1303.1	1299.9	1309.6	1308.0
12.5°	1288.7	1287.1	1285.5	1295.1	1295.1
15°	1264.6	1266.2	1266.2	1279.0	1277.4
17.5°	1242.1	1243.7	1245.3	1261.4	1261.4
20°	1213.2	1214.8	1221.2	1238.9	1240.5
22.5°	1182.6	1184.2	1192.3	1213.2	1216.4
25°	1147.3	1153.7	1163.3	1185.8	1190.7
27.5°	1111.9	1116.7	1132.8	1158.5	1161.7
30°	1070.1	1079.8	1097.5	1126.4	1132.8
32.5°	1028.4	1039.6	1060.5	1092.6	1100.7
35°	985.0	997.8	1023.5	1057.3	1065.3
37.5°	940.0	951.2	983.4	1018.7	1030.0
40°	895.0	906.2	941.6	981.8	994.6
42.5°	846.8	862.9	898.2	943.2	956.1
45°	797.0	814.7	854.8	903.0	912.7
47.5°	745.6	764.8	811.4	859.7	870.9
50°	700.6	718.3	764.8	811.4	819.5
52.5°	652.4	668.4	719.9	758.4	760.0
55°	601.0	620.2	671.7	702.2	699.0
57.5°	554.4	570.4	620.2	636.3	626.7
60°	504.5	519.0	568.8	570.4	556.0
62.5°	456.3	470.8	509.4	498.1	480.4
65°	408.1	422.6	449.9	429.0	413.0
67.5°	361.5	374.4	390.5	363.1	347.1
70°	311.7	329.4	331.0	298.9	282.8
72.5°	268.3	278.0	274.8	244.2	229.8
75°	220.1	231.4	216.9	188.0	176.8
77.5°	175.1	183.2	163.9	136.6	128.5
80°	130.2	135.0	112.5	91.6	86.8
82.5°	88.4	88.4	64.3	49.8	45.0
85°	51.4	45.0	27.3	24.1	24.1
87.5°	17.7	11.2	11.2	11.2	11.2
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)