

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: METALUX

Report Number: P263481

Luminaire Tested: **24CZ-LD5-45SE-SQP-UNV-L92765-W2A1-U-5700K**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P263481
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P25695)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: METALUX
Catalog Number: 24CZ-LD5-45SE-SQP-UNV-L92765-W2A1-U-5700K
Description: CRUZE 2x4 TUNABLE WHITE LED TROFFER WITH SQP LENS
Light Source: (168) 90 CRI LEDS TUNED AT 5700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2828.0 lumens
Efficiency: N/A
Efficacy: 78.6 lumens/watt
Spacing Criteria (0/90/45): 1.27 / 1.31 / 1.42
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 35.991
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P263481

CATALOG NUMBER: 24CZ-LD5-45SE-SQP-UNV-L92765-W2A1-U-5700K

Luminous Intensity Polar Plot

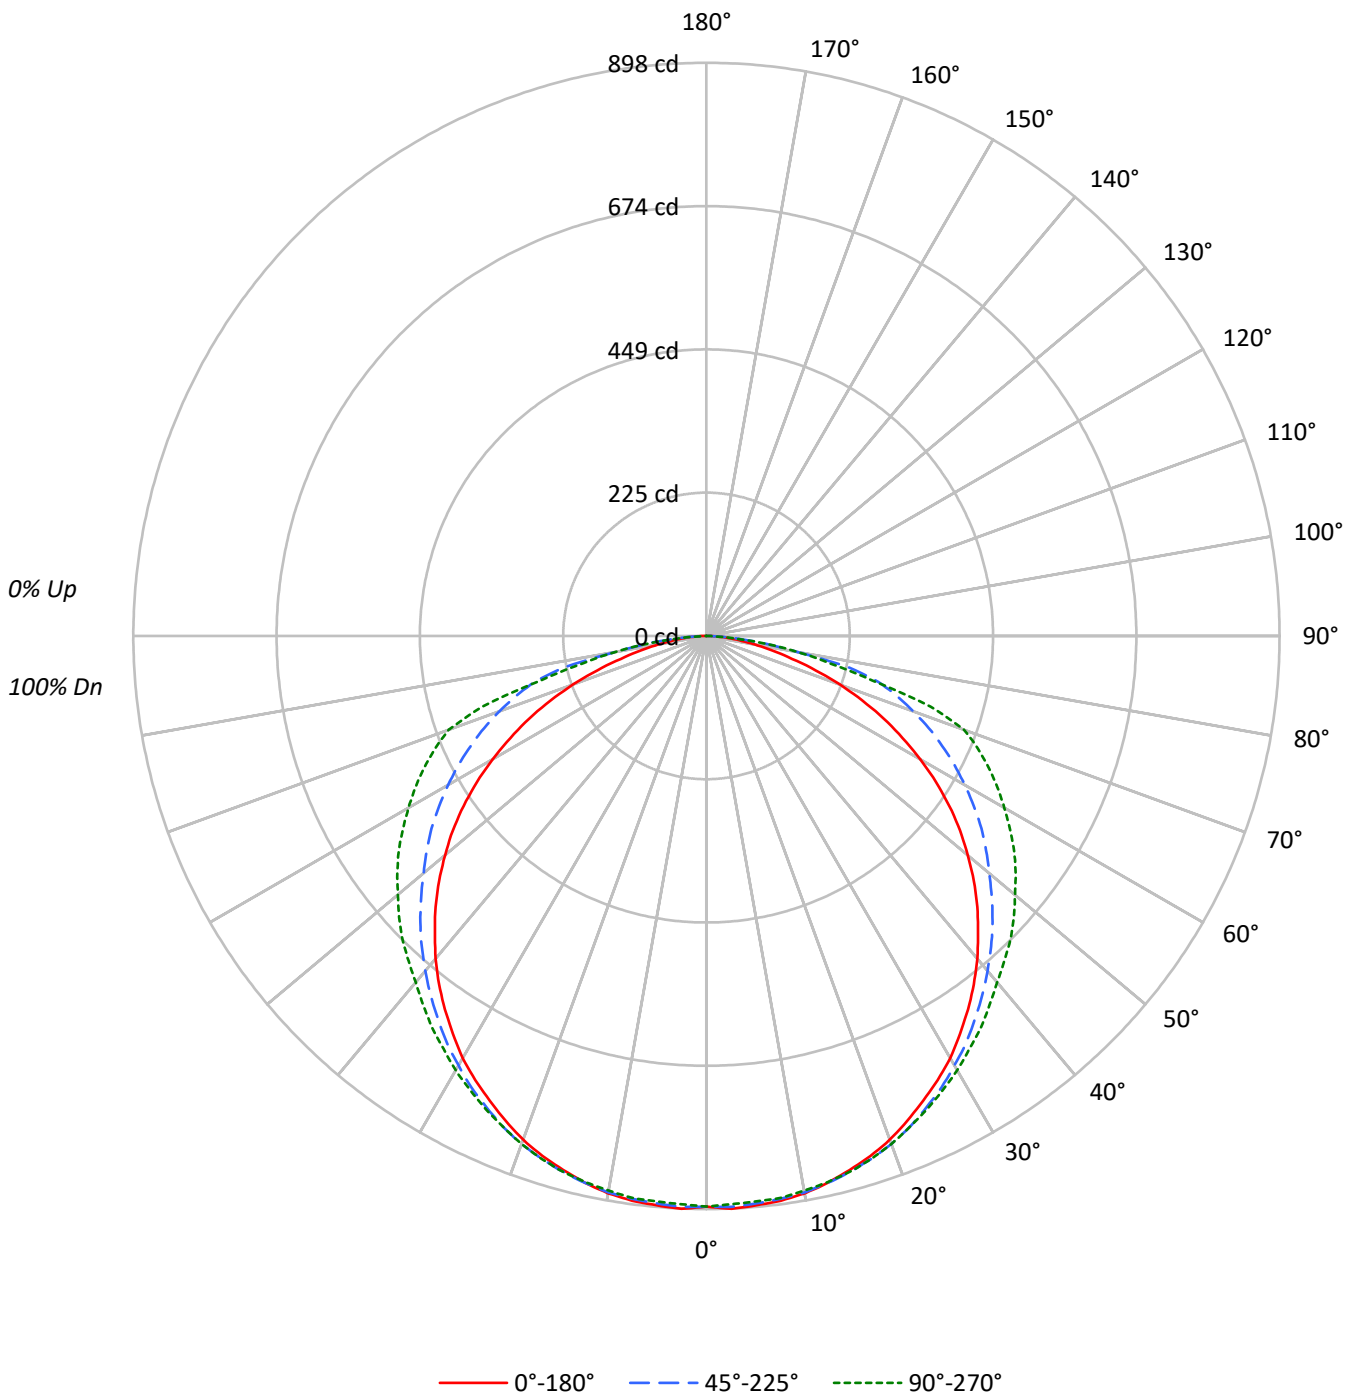



TEST NUMBER: P263481

CATALOG NUMBER: 24CZ-LD5-45SE-SQP-UNV-L92765-W2A1-U-5700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20			20				20			20	
RC	80				70				50			30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	
1	108	103	98	94	105	101	97	93	96	93	90	92	90	87	89	87	84	82	82	
2	98	89	82	76	95	87	80	75	83	78	73	80	75	71	77	73	70	67	67	
3	89	78	69	62	86	76	68	62	73	66	60	70	64	59	67	63	58	56	56	
4	81	68	59	52	79	67	58	52	64	57	51	62	56	50	60	54	50	47	47	
5	74	61	51	45	72	60	51	44	57	50	44	55	49	43	54	48	43	41	41	
6	68	55	45	39	66	54	45	38	52	44	38	50	43	38	48	42	37	35	35	
7	63	49	40	34	62	49	40	34	47	39	34	45	39	33	44	38	33	31	31	
8	59	45	36	30	57	44	36	30	43	35	30	42	35	30	40	34	29	28	28	
9	55	41	33	27	54	41	33	27	39	32	27	38	32	27	37	31	27	25	25	
10	51	38	30	24	50	37	30	24	36	29	24	35	29	24	35	28	24	22	22	

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1203	1203	1203
5°	1209	1205	1202
10°	1211	1209	1205
15°	1207	1211	1211
20°	1203	1213	1213
25°	1193	1210	1214
30°	1187	1207	1221
35°	1173	1204	1231
40°	1160	1203	1244
45°	1142	1206	1281
50°	1119	1211	1321
55°	1090	1234	1381
60°	1042	1258	1450
65°	977	1298	1553
70°	873	1356	1690
75°	722	1450	1397
80°	589	1120	1132
85°	474	744	699



TEST NUMBER: P263481

CATALOG NUMBER: 24CZ-LD5-45SE-SQP-UNV-L92765-W2A1-U-5700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	84.9	3.0
10°-20°	245.0	8.7
20°-30°	374.4	13.2
30°-40°	458.0	16.2
40°-50°	490.0	17.3
50°-60°	469.2	16.6
60°-70°	396.9	14.0
70°-80°	251.6	8.9
80°-90°	57.9	2.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	704.3	24.9
0°-40°	1162.3	41.1
0°-60°	2121.6	75.0
0°-90°	2828.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2828.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	894	894	894	894	894	
5°	895	891	892	891	890	85
15°	866	865	869	869	869	245
25°	803	803	815	818	818	371
35°	714	719	733	744	749	447
45°	600	611	634	660	673	463
55°	464	479	526	570	589	414
65°	307	336	408	463	488	302
75°	139	196	279	278	269	151
85°	31	47	48	44	45	37
90°	0	0	0	0	0	



TEST NUMBER: P263481

CATALOG NUMBER: 24CZ-LD5-45SE-SQP-UNV-L92765-W2A1-U-5700K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	894.0	894.0	894.0	894.0	894.0
2.5°	898.4	894.0	895.4	894.0	891.1
5°	895.4	891.1	892.5	891.1	889.6
7.5°	892.5	888.1	889.6	888.1	888.1
10°	886.7	882.3	885.2	883.8	882.3
12.5°	877.9	875.0	877.9	876.5	876.5
15°	866.2	864.8	869.2	869.2	869.2
17.5°	854.5	853.1	858.9	858.9	858.9
20°	839.9	838.5	847.2	847.2	847.2
22.5°	822.4	820.9	832.6	832.6	832.6
25°	803.4	803.4	815.1	818.0	818.0
27.5°	784.4	784.4	797.6	802.0	802.0
30°	764.0	764.0	777.1	783.0	785.9
32.5°	739.1	742.1	756.7	764.0	766.9
35°	714.3	718.7	733.3	743.5	749.4
37.5°	688.0	692.4	709.9	721.6	728.9
40°	660.3	666.1	685.1	699.7	708.5
42.5°	629.6	638.4	660.3	679.3	690.9
45°	600.4	610.6	634.0	660.3	673.4
47.5°	568.2	579.9	606.2	639.8	653.0
50°	534.6	546.3	578.5	616.4	631.0
52.5°	501.0	514.2	552.2	593.1	610.6
55°	464.5	479.1	525.9	569.7	588.7
57.5°	426.5	444.1	496.7	543.4	563.9
60°	387.1	409.0	467.4	517.1	539.0
62.5°	346.2	372.5	438.2	490.8	514.2
65°	306.8	336.0	407.6	463.1	487.9
67.5°	264.4	300.9	376.9	436.8	460.1
70°	222.0	264.4	344.7	406.1	429.5
72.5°	179.7	230.8	312.6	368.1	368.1
75°	138.8	195.7	279.0	277.5	268.8
77.5°	105.2	163.6	229.3	195.7	197.2
80°	76.0	131.5	144.6	144.6	146.1
82.5°	51.1	100.8	93.5	92.0	94.9
85°	30.7	46.7	48.2	43.8	45.3
87.5°	14.6	16.1	13.1	8.8	8.8
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)