

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: METALUX

Report Number: P880717

Luminaire Tested: **22CZ2-34VHE-SQR-B2750-W2D-2700K**

Issue Date: 10/2/2024

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



Test Information

Test Method: LM-79-08
Report Number: P880717
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P475230)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 10/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: METALUX
Catalog Number: 22CZ2-34VHE-SQR-B2750-W2D-2700K
Description: 2X2 3400 LUMEN CRUZE TROFFER WITH BIO UP LEDS AT 2700K CCT AND SQR LENS

Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3230.0 lumens
Efficiency: N/A
Efficacy: 119.6 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.31 / 1.37
Luminous Opening: Rectangular (W 1.92' x L: 1.98' x H: 0')
CIE Type: Direct

Input Watts (W): 27
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P880717

CATALOG NUMBER: 22CZ2-34VHE-SQR-B2750-W2D-2700K

Luminous Intensity Polar Plot

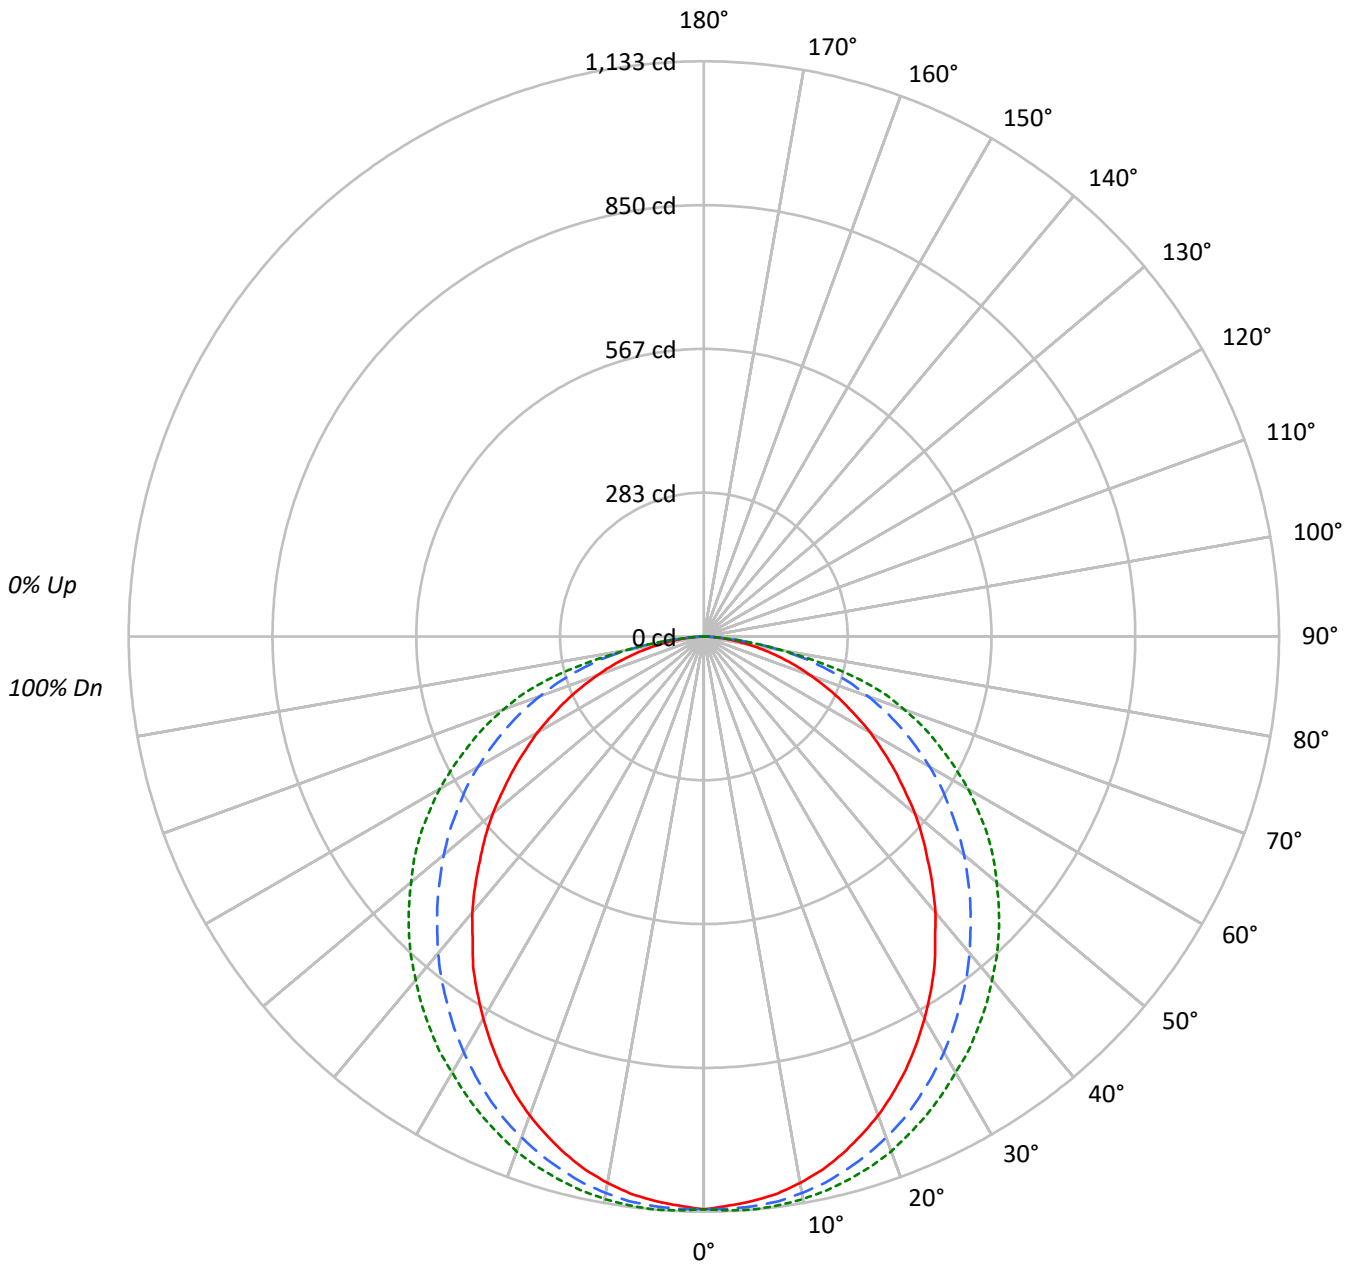



TEST NUMBER: P880717

CATALOG NUMBER: 22CZ2-34VHE-SQR-B2750-W2D-2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|--|--|--|--|---|
| RF | 20 | | | | | 20 | | | | | 20 | | | | | 20 | | | | | 20 | | | | | |
| RC | 80 | | | | | 70 | | | | | 50 | | | | | 30 | | | | | 10 | | | | | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 | | | | | |
| RCR | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | | | | | | |
| 1 | 109 | 104 | 99 | 95 | 106 | 101 | 97 | 94 | 97 | 94 | 91 | 93 | 91 | 88 | 90 | 87 | 85 | 83 | | | | | | | | |
| 2 | 99 | 90 | 83 | 77 | 96 | 88 | 82 | 76 | 85 | 79 | 75 | 81 | 77 | 73 | 78 | 75 | 71 | 69 | | | | | | | | |
| 3 | 90 | 79 | 71 | 64 | 87 | 77 | 70 | 63 | 74 | 68 | 62 | 72 | 66 | 61 | 69 | 64 | 60 | 58 | | | | | | | | |
| 4 | 82 | 70 | 61 | 54 | 80 | 68 | 60 | 54 | 66 | 59 | 53 | 64 | 57 | 52 | 61 | 56 | 51 | 49 | | | | | | | | |
| 5 | 75 | 62 | 53 | 46 | 73 | 61 | 53 | 46 | 59 | 51 | 46 | 57 | 50 | 45 | 55 | 49 | 45 | 43 | | | | | | | | |
| 6 | 70 | 56 | 47 | 41 | 68 | 55 | 47 | 40 | 53 | 46 | 40 | 52 | 45 | 40 | 50 | 44 | 39 | 37 | | | | | | | | |
| 7 | 64 | 51 | 42 | 36 | 63 | 50 | 42 | 36 | 48 | 41 | 35 | 47 | 40 | 35 | 46 | 39 | 35 | 33 | | | | | | | | |
| 8 | 60 | 46 | 38 | 32 | 58 | 46 | 37 | 32 | 44 | 37 | 32 | 43 | 36 | 31 | 42 | 36 | 31 | 29 | | | | | | | | |
| 9 | 56 | 43 | 34 | 29 | 55 | 42 | 34 | 29 | 41 | 34 | 28 | 40 | 33 | 28 | 39 | 33 | 28 | 26 | | | | | | | | |
| 10 | 53 | 39 | 31 | 26 | 51 | 39 | 31 | 26 | 38 | 31 | 26 | 37 | 30 | 26 | 36 | 30 | 26 | 24 | | | | | | | | |

AVERAGE LUMINANCE (cd/sqm):

| | 0° | 45° | 90° |
|-----|------|------|------|
| 0° | 3202 | 3202 | 3202 |
| 5° | 3179 | 3209 | 3227 |
| 10° | 3150 | 3207 | 3242 |
| 15° | 3099 | 3193 | 3252 |
| 20° | 3032 | 3171 | 3259 |
| 25° | 2947 | 3139 | 3254 |
| 30° | 2848 | 3099 | 3250 |
| 35° | 2745 | 3054 | 3261 |
| 40° | 2629 | 3016 | 3271 |
| 45° | 2504 | 2978 | 3298 |
| 50° | 2396 | 2951 | 3323 |
| 55° | 2268 | 2927 | 3375 |
| 60° | 2149 | 2915 | 3411 |
| 65° | 2007 | 2892 | 3438 |
| 70° | 1843 | 2848 | 3484 |
| 75° | 1665 | 2773 | 3360 |
| 80° | 1427 | 2456 | 2530 |
| 85° | 1146 | 1446 | 1146 |



TEST NUMBER: P880717

CATALOG NUMBER: 22CZ2-34VHE-SQR-B2750-W2D-2700K

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 107.0 | 3.3 |
| 10°-20° | 305.8 | 9.5 |
| 20°-30° | 459.4 | 14.2 |
| 30°-40° | 547.8 | 17.0 |
| 40°-50° | 566.4 | 17.5 |
| 50°-60° | 520.7 | 16.1 |
| 60°-70° | 414.6 | 12.8 |
| 70°-80° | 253.3 | 7.8 |
| 80°-90° | 55.0 | 1.7 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 872.2 | 27.0 |
| 0°-40° | 1420.0 | 44.0 |
| 0°-60° | 2507.1 | 77.6 |
| 0°-90° | 3230.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 3230.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | 22.5° | 45° | 67.5° | 90° | Flux |
|-----|------|-------|------|-------|------|------|
| 0° | 1128 | 1128 | 1128 | 1128 | 1128 | |
| 5° | 1116 | 1119 | 1127 | 1131 | 1133 | 106 |
| 15° | 1055 | 1067 | 1087 | 1102 | 1107 | 297 |
| 25° | 941 | 964 | 1003 | 1030 | 1039 | 433 |
| 35° | 792 | 826 | 882 | 928 | 941 | 494 |
| 45° | 624 | 668 | 742 | 802 | 822 | 482 |
| 55° | 458 | 509 | 592 | 659 | 682 | 410 |
| 65° | 299 | 350 | 431 | 491 | 512 | 296 |
| 75° | 152 | 196 | 253 | 297 | 306 | 162 |
| 85° | 35 | 43 | 44 | 38 | 35 | 41 |
| 90° | 0 | 0 | 0 | 0 | 0 | |



TEST NUMBER: P880717

CATALOG NUMBER: 22CZ2-34VHE-SQR-B2750-W2D-2700K

CANDELA DISTRIBUTION (FULL):

| | 0° | 22.5° | 45° | 67.5° | 90° |
|-------|---------------|---------------|---------------|---------------|---------------|
| 0° | 1128.3 | 1128.3 | 1128.3 | 1128.3 | <i>1128.3</i> |
| 2.5° | 1122.2 | 1123.6 | 1128.3 | 1131.4 | <i>1131.4</i> |
| 5° | <i>1116.0</i> | <i>1119.1</i> | <i>1126.7</i> | <i>1131.4</i> | <i>1133.0</i> |
| 7.5° | 1106.9 | 1111.5 | 1122.2 | 1128.3 | <i>1130.0</i> |
| 10° | 1093.1 | 1099.3 | 1113.0 | 1122.2 | <i>1125.2</i> |
| 12.5° | 1076.2 | 1085.4 | 1102.3 | 1114.6 | <i>1117.5</i> |
| 15° | 1054.9 | 1067.0 | 1086.8 | 1102.3 | <i>1106.9</i> |
| 17.5° | 1030.2 | 1045.5 | 1070.2 | 1088.5 | <i>1094.6</i> |
| 20° | 1004.0 | 1019.5 | 1050.2 | 1071.5 | <i>1079.2</i> |
| 22.5° | 973.5 | 993.4 | 1028.7 | 1053.3 | <i>1059.4</i> |
| 25° | 941.4 | 964.3 | 1002.6 | 1030.2 | <i>1039.4</i> |
| 27.5° | 906.0 | 933.7 | 975.0 | 1008.9 | <i>1016.5</i> |
| 30° | 869.2 | 898.3 | 945.9 | 982.7 | <i>991.9</i> |
| 32.5° | 830.8 | 864.7 | 915.2 | 956.6 | <i>969.0</i> |
| 35° | 792.5 | 826.3 | 881.5 | 927.7 | <i>941.4</i> |
| 37.5° | 748.0 | 787.9 | 849.4 | 896.9 | <i>913.6</i> |
| 40° | 709.8 | 748.0 | 814.2 | 866.2 | <i>883.1</i> |
| 42.5° | 666.8 | 708.3 | 777.4 | 833.9 | <i>853.9</i> |
| 45° | 623.9 | 668.4 | 742.0 | 801.8 | <i>821.8</i> |
| 47.5° | 584.0 | 628.4 | 705.2 | 768.2 | <i>787.9</i> |
| 50° | 542.7 | 588.7 | 668.4 | 732.8 | <i>752.7</i> |
| 52.5° | 498.3 | 548.8 | 631.6 | 696.0 | <i>719.0</i> |
| 55° | 458.4 | 508.9 | 591.7 | 659.2 | <i>682.3</i> |
| 57.5° | 416.9 | 469.1 | 555.0 | 619.4 | <i>640.9</i> |
| 60° | 378.7 | 429.2 | 513.7 | 576.4 | <i>601.0</i> |
| 62.5° | 337.2 | 389.3 | 472.1 | 533.5 | <i>556.6</i> |
| 65° | 298.9 | 349.5 | 430.8 | 490.6 | <i>512.0</i> |
| 67.5° | 260.5 | 311.4 | 387.7 | 444.7 | <i>469.1</i> |
| 70° | 222.2 | 273.0 | 343.3 | 398.7 | <i>420.0</i> |
| 72.5° | 188.7 | 233.1 | 300.4 | 351.1 | <i>371.1</i> |
| 75° | 151.9 | 196.3 | 252.9 | 297.3 | <i>306.5</i> |
| 77.5° | 118.0 | 157.9 | 205.5 | 225.3 | <i>228.6</i> |
| 80° | 87.3 | 118.0 | 150.3 | 154.8 | <i>154.8</i> |
| 82.5° | 58.1 | 81.2 | 93.5 | 94.9 | <i>93.5</i> |
| 85° | 35.2 | 42.9 | 44.4 | 38.4 | <i>35.2</i> |
| 87.5° | 12.1 | 12.1 | 7.6 | 4.5 | <i>1.6</i> |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | <i>0.0</i> |



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180° - - 45°-225° - - - - 90°-270°







(END OF REPORT)